

(12) UK Patent Application (19) GB (11) 2 283 306 (13) A

(43) Date of A Publication 03.05.1995

(21) Application No 9321998.8	(51) INT CL <sup>6</sup> F25D 3/10 7/00
(22) Date of Filing 26.10.1993	(52) UK CL (Edition N ) F4H HG13
(71) Applicant(s) Stanley Kee Man Kwok Flat H, Sixteenth Floor, 168 Sai Lau Kok Street, Tsuen Fung Centre, Tsuen Wan, New Territories, Hong Kong	(56) Documents Cited GB 2017287 A GB 2005000 A GB 1531647 A GB 1003769 A GB 0469753 A EP 0250863 A2 WO 83/02562 A1 US 4129432 A
(72) Inventor(s) Stanley Kee Man Kwok	(58) Field of Search UK CL (Edition L ) F4H HG13 H3 INT CL <sup>5</sup> F25D
(74) Agent and/or Address for Service Lloyd Wise, Tregear & Co Norman House, 105-109 Strand, LONDON, WC2R 0AE, United Kingdom	

(54) Cooling apparatus

(57) Cooling apparatus comprises a reservoir (100) for compressed, preferably liquified, gas, the reservoir being connected to tubing (130) arranged to be disposed in an article of clothing adjacent to the skin of a user.

A solenoid (230) is provided for opening a valve (240) between the reservoir (100) and the tubing (130) to allow pressurized gas to evaporate and escape from the reservoir along tube (130). As the gas evaporates it cools due to latent heat of evaporation thus providing a cooling effect to the user due to heat transfer through the walls of tubing. A control device (200) is provided for regulating the output of cooling gas in dependence on temperature.

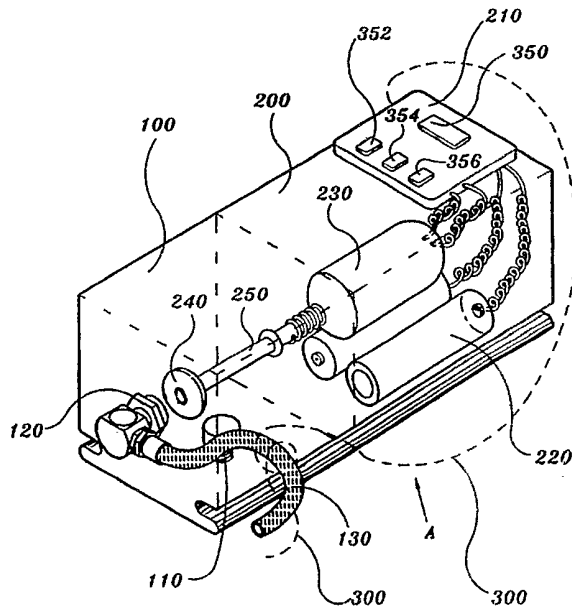


Fig. 1

GB 2 283 306 A

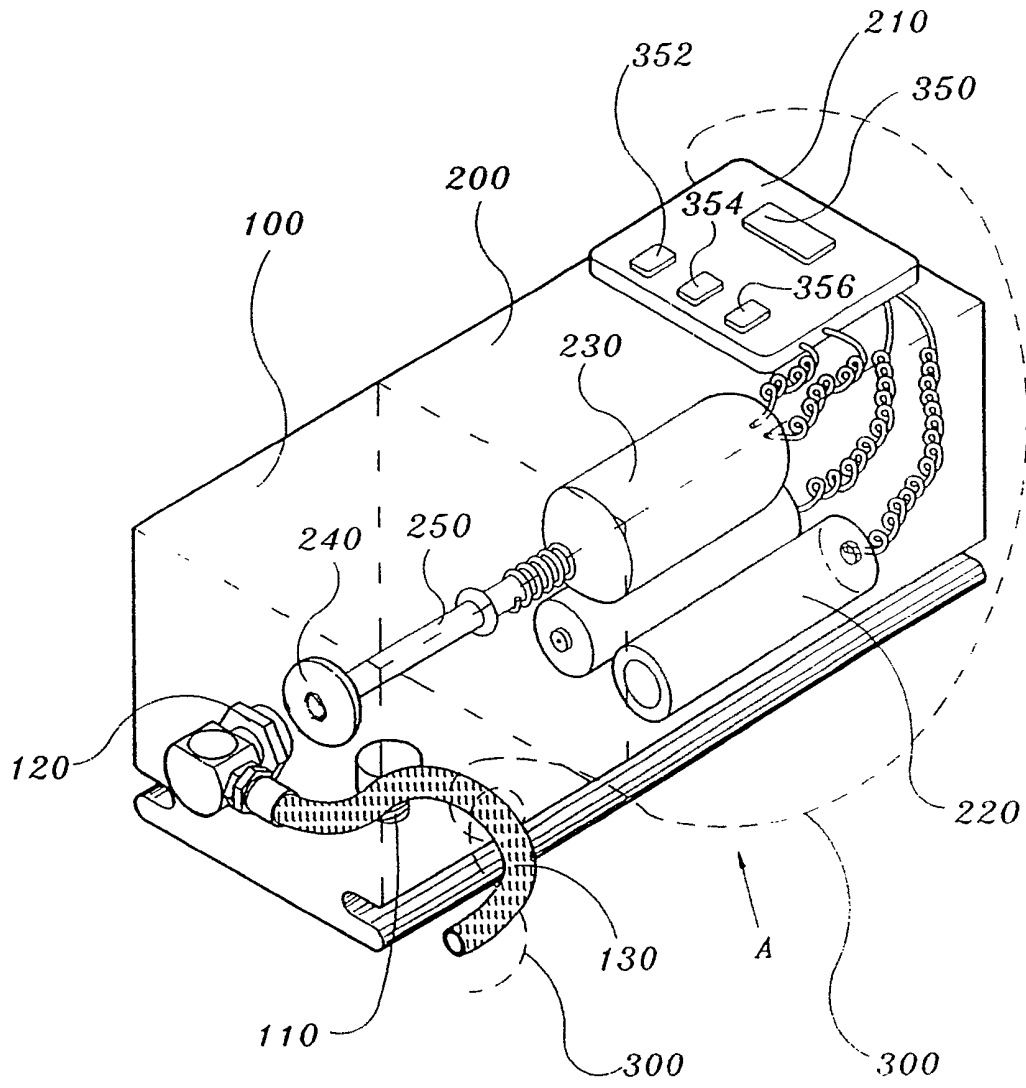
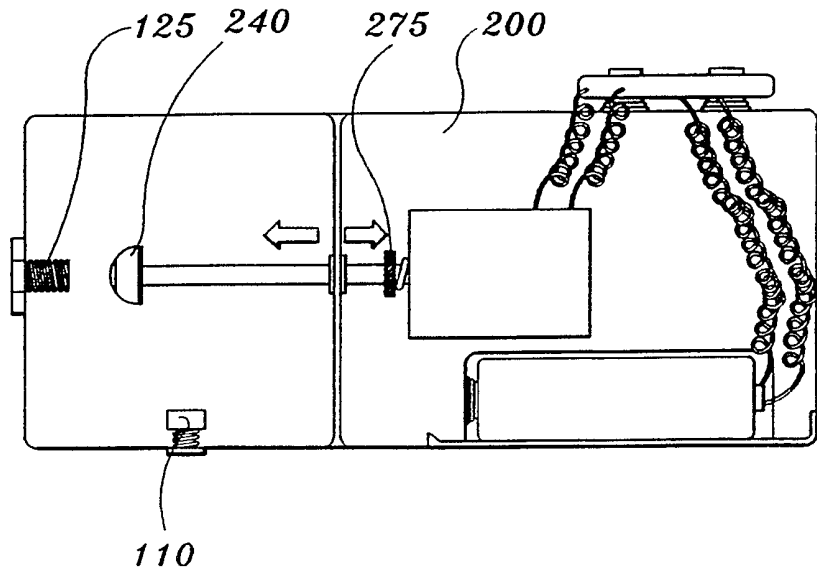
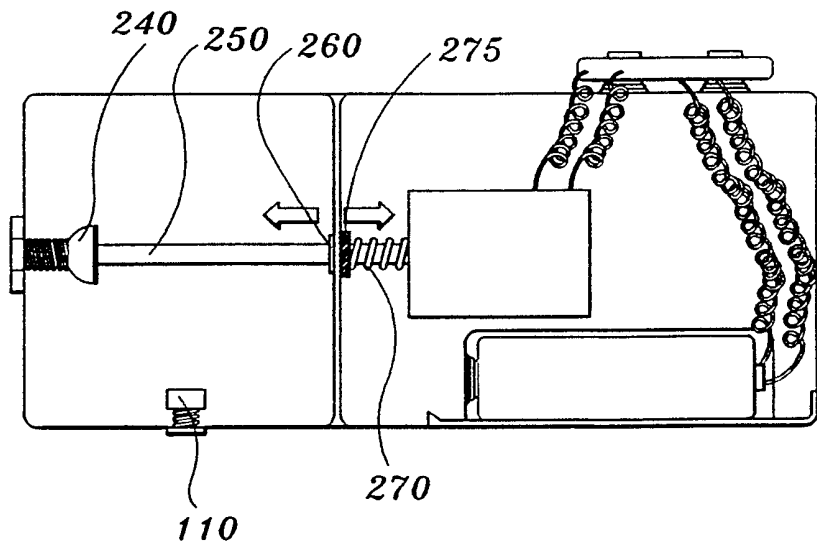


Fig. 1



*Fig. 2a*



*Fig. 2b*

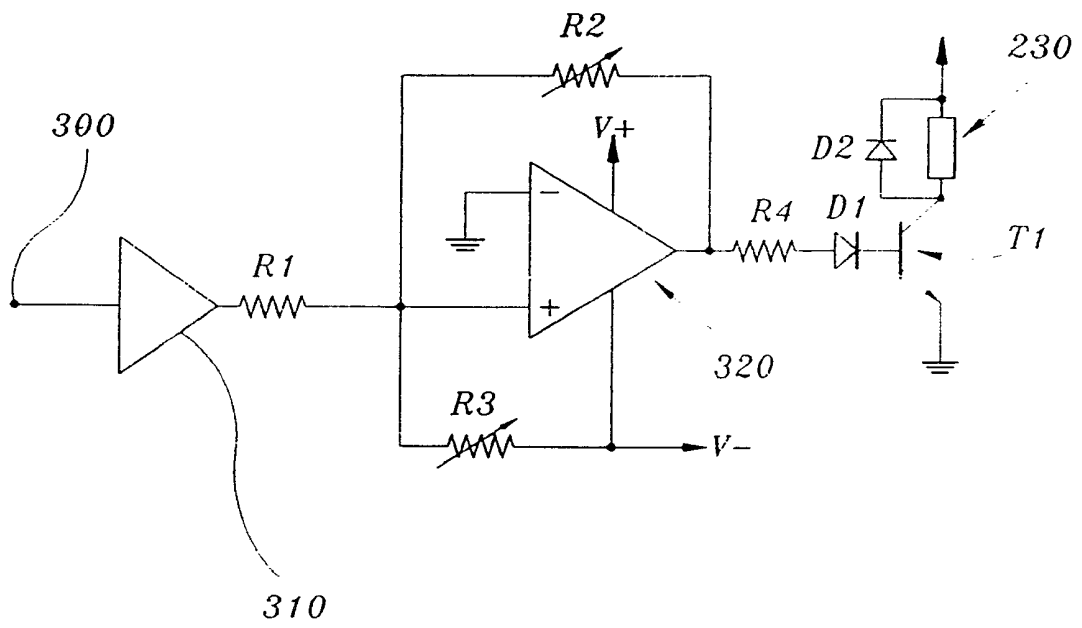


Fig. 3

COOLING APPARATUS

This invention relates to cooling apparatus more specifically but not exclusively, to apparatus to cooling  
5 articles of clothing.

It is often necessary for the individual, particularly in a hot climate, to employ external means to keep cool, for example by using a portable fan. It is an object of the  
10 invention to provide a improved apparatus for cooling the individual.

According to the invention there is provided cooling apparatus comprising a reservoir for containing gas under  
15 pressure, temperature controlled valve means for releasing the gas from the reservoir; and means connected to the valve means for conducting the released gas to a region to be cooled thereby.

20 In the described embodiment as gas is released from the reservoir, the gas will expand to ambient pressure and as the gas expands it cools due to latent heat of evaporation thus providing a cooling effect to the user due to heat transfer through the conducting means.

25

Preferably the cooling apparatus of the invention is

portable and is of sufficiently small size to be concealed within or attached to the user's clothing, with the conducting means preferably being in the form of a heat conductive tube which may be applied the body, for example  
5 in the neck region or may be threaded or otherwise engaged with clothing, for example in pockets formed in the material of a shirt or embedded on the inner surface of the sole of a shoe. Preferably, the compressed gas is in  
10 liquified form such as liquid nitrogen and means are provided for refilling the gas cigarette from a replenishment canister in similar manner to the way a gas lighter is recharged with butane.

A embodiment of the invention will now be described by way  
15 of example with reference to the accompanying drawings in which:

Figure 1. is a schematic "transparent" perspective view showing an embodiment of the invention.

20

Figure 2. is a side view in the direction of arrow A of Figure 1 showing a valve open and Figure 2B is a view similar to Figure 2A showing the valve closed.

25

Figure 3. is a schematic diagram of the temperature control

circuitry of the embodiment of Figures 1 and 2.

With reference to the drawings an embodiment of the invention is shown which comprises a reservoir 100 for containing a compressed, preferably liquified gas e.g. nitrogen, the reservoir 100 having a filling\refilling inlet 110 which includes a one-way inlet valve of conventional construction and, an outlet 120 connected to a tube 130 open at its free end (not shown).

10

The reservoir 100 is connected to a control unit 200 which houses a temperature and regulation circuit 210, a battery power supply 220 and valve actuating solenoid 230. The solenoid 230 is connected to a neoprene rubber valve member 240 via an actuator 250 which in response to actuation of the solenoid moves from the position shown in figure 2A in which the valve member is distant from a hollow bush 125 forming part of outlet 120 and which forms a valve seat to a position shown in Figure 2B in which the valve member 240 effects a seal against bush 125. The actuator 250 passes through the wall of the reservoir 100 via a neoprene seal 260 and actuator 250 is biased in the sealing position shown in figure 2B by means of a spring 270 disposed between the solenoid 230 and a reaction member 275 connected to the actuator 250.

25

The temperature control circuit 210 shown in more detail in Figure 3. The circuit is connected to a temperature sensor, for example a thermo couple wire 300 which may be wound around a part of tube 130 as shown or disposed inside or on the surface of the control unit 200. A signal from the temperature sensor 300 is fed to a temperature voltage converter 310 and then to a comparator circuit 320. The comparator circuit 320 is biased by resistors R1-R4 and includes two variable resistors R2 and R3 which set upper and lower temperature threshold levels for the comparator 320 which will provide a high, ON signal when the upper threshold temperature is reached and provide a low OFF signal when the lower threshold temperature is reached. The signal from the comparator is fed via a diode D1 to a solenoid driving transistor T1 which when receiving the high ON signal from the comparator 320 actuates the solenoid 230.

The circuit 210 includes a display 350 for displaying current temperature or upper\lower threshold temperatures and keys for 352-356 for switching the device on and off and for adjusting the threshold temperatures.

The tube 130 may be initially of heat insulating material protected by metal braid leading to a tube of plastics material such as PVC which is positioned in an item of



clothing so as to lie adjacent to the skin. For example, the tube may be placed within the collar of a shirt, the lining of a jacket adjacent the shoulders, in the inside sole of a shoe at the surface or in articles of underwear.

5 The reservoir 100 and control unit 200 can be of a size depending on the application. For example they could be the size of a personal stereo\cassette player and clipped to the belt, connected to the tubes in the clothing by means of a detachable connector or, for applications for  
10 use in footwear the reservoir and control circuit could be implanted in the heel of a shoe. In some applications, for example in sports clothing, in which excess heat is usually present, leading to problems such as athletes foot, the device may be arranged to be permanently on once actuated  
15 thus eliminating the need for temperature control circuitry. The invention is equally applicable for use in headgear.

Preferably, the reservoir may be replenished by use of a  
20 master cylinder engaging with the reservoir through the refilling nipple 110, one-way valve being engageable by the cylinder in a similar manner to the way in which a cigarette lighter may be refilled with LPG from such a cylinder.

25

In use, when a temperature above the upper temperature

threshold is sensed by the temperature control circuitry, the solenoid 230 acts to move the valve member 240 away from bush 125 thus opening the valve. As the gas in the reservoir is held in liquid form under pressure, this will expand through the open valve and be transported through tubing 300. As the gas expands, it gives off latent heat of evaporation cooling itself considerably. As the cool gas circulates through tube 300, heat is transferred through the walls of the tube to the user thus providing a cooling effect.

The invention has been described above with reference to one embodiment. However, this is not to be construed as limitative. For example, although the thermo couple and temperature control circuit has been shown, this may be omitted in order to reduce weight and cost, with the user switching the device on and off as required. Furthermore, although the power supply has been shown as two cylindrical "pen lite" batteries, other power supplies may be used and, in particular, button-shaped nickel cadmium or lithium batteries may be used.

CLAIMS

1. Cooling apparatus comprising a portable reservoir for containing a gas under pressure;  
valve means for releasing the gas from the reservoir;  
5 means for connection to a user or to an article of clothing and connected to the valve means, for conducting the released gas to a region to be cooled thereby.
- 10 2. Apparatus as claimed in claim 1 wherein the reservoir is for containing a liquified gas
3. Apparatus as claimed in claim 2 wherein when the liquified gas is nitrogen.
- 15 4. Apparatus as claimed in any one of the preceding claims wherein the conducting means is adapted to be disposed in an article of clothing, footwear or head gear.
- 20 5. Cooling apparatus as claimed in claim 4 wherein the conducting means is formed from tubing.
- 25 6. Cooling apparatus as claimed in any one of the proceeding claims wherein the valve means is temperature controlled.

7. Apparatus as claimed in claim 6 wherein the temperature controlled valve means comprises a valve member adapted to seat against an outlet of the reservoir and a solenoid connected to a temperature controller including a temperature sensor for actuating the solenoid to open the valve once the sensed temperature increases beyond a predetermined threshold.
- 5
8. Apparatus as claimed in claim 7 wherein the valve is closed once the temperature descends beyond a further threshold lower than the predetermined threshold.
- 10
9. Apparatus as claimed in claim 7 or claim 8 wherein the temperature sensor comprises a thermistor.
- 15
10. Apparatus as claimed in any of claims 7 to 9 wherein the temperature sensor is disposed adjacent to the conducting means.
- 20
11. Apparatus as claimed in any one of the preceding claims wherein the apparatus is portable.
12. Apparatus as claimed in any one of the preceding claims wherein the apparatus is disposed within an article of footwear.
- 25

13. Cooling apparatus substantially as hereinbefore described with reference to the accompanying drawings.

<b>Relevant Technical Fields</b>	Search Examiner M C MONK
(i) UK Cl (Ed.L) F4H (H3 HG13)	Date of completion of Search 1 DECEMBER 93
(ii) Int Cl (Ed.5) F25D	
<b>Databases (see below)</b>	Documents considered relevant following a search in respect of Claims :- ALL
(i) UK Patent Office collections of GB, EP, WO and US patent specifications.	
(ii)	

**Categories of documents**

- |   |   |
|---|---|
| <b>X:</b> Document indicating lack of novelty or of inventive step.   | <b>P:</b> Document published on or after the declared priority date but before the filing date of the present application.        |
| <b>Y:</b> Document indicating lack of inventive step if combined with one or more other documents of the same category. | <b>E:</b> Patent document published on or after, but with priority date earlier than, the filing date of the present application. |
| <b>A:</b> Document indicating technological background and/or state of the art.   | <b>&amp;:</b> Member of the same patent family; corresponding document.   |

Category	Identity of document and relevant passages	Relevant to claim(s)
X	GB 2017287 A (CHERBLAND) whole document	1-3, 11
X	GB 2005000 A (KURIO-MEDIKARU) whole document	1-3, 5, 6, 11
X	GB 1531647 (GREGORY) whole document	1-3, 6, 11
X	GB 1003769 (GARRETT) whole document	1-6, 11
X	GB 469753 (NYAULD) whole document	1-3, 5, 11
X	US 4129432 (GARWALL) whole document	1-3, 5, 6, 11
X	EP 0250863 A2 (GRIESHAM) whole document	1-3, 5, 6
X	WO 83/02562 A1 (LIFE SUPPORT) example of a body suit	4, 5

**Databases:**The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).