

(19)



(11)

**EP 1 417 077 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**11.04.2007 Bulletin 2007/15**

(51) Int Cl.:  
**B25F 1/00 (2006.01) B26B 11/00 (2006.01)**

(21) Application number: **02752831.4**

(86) International application number:  
**PCT/US2002/025753**

(22) Date of filing: **13.08.2002**

(87) International publication number:  
**WO 2003/015994 (27.02.2003 Gazette 2003/09)**

(54) **MULTI-TASKING UTILITY TOOL**

MEHRZWECKWERKZEUG

OUTIL MULTI-USAGE

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
 IE IT LI LU MC NL PT SE SK TR**

- **MANSOURI-CHAFIK, Idriss**  
**Santa Clara, CA 95050 (US)**
- **POWERS, Russell, D.**  
**Seatac, WA 98188 (US)**

(30) Priority: **13.08.2001 US 312131 P**  
**26.06.2002 US 184303**  
**12.08.2002 US 218388**

(74) Representative: **Howe, Steven**  
**Lloyd Wise**  
**Commonwealth House,**  
**1-19 New Oxford Street**  
**London WC1A 1LW (GB)**

(43) Date of publication of application:  
**12.05.2004 Bulletin 2004/20**

(60) Divisional application:  
**07004527.3**

- (56) References cited:
- |                         |                         |
|-------------------------|-------------------------|
| <b>DE-A- 19 623 167</b> | <b>US-A- 1 368 944</b>  |
| <b>US-A- 2 980 996</b>  | <b>US-A- 3 657 812</b>  |
| <b>US-A- 4 635 309</b>  | <b>US-A- 4 890 387</b>  |
| <b>US-A- 5 025 520</b>  | <b>US-A- 5 402 575</b>  |
| <b>US-A- 5 450 775</b>  | <b>US-A- 5 557 818</b>  |
| <b>US-A- 5 711 194</b>  | <b>US-A- 5 809 600</b>  |
| <b>US-A- 5 813 121</b>  | <b>US-A- 5 887 306</b>  |
| <b>US-A- 5 957 601</b>  | <b>US-B1- 6 276 014</b> |
| <b>US-B1- 6 363 614</b> | <b>US-B1- 6 467 114</b> |

(73) Proprietor: **Wampum LLC**  
**Ca 95032 (US)**

- (72) Inventors:
- **JOHNSON, Ronald, L.**  
**San Jose, CA 95120 (US)**
  - **HEBERT, Raphael, V.**  
**San Jose, CA 95112 (US)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 417 077 B1**

## Description

### Field of the Invention:

**[0001]** The present invention relates to the field of hand held tools. More specifically, the present invention relates to the field of a multi-tasking tool having a replaceable knife blade cartridge and replaceable capsuled instruments.

### Background of the Invention:

**[0002]** In the existing world of tools many different types of cutting tools are available. One of these cutting tools is a box cutting tool or an Exacto knife. The knife portion in the box cutting knife is sufficiently sharp such that the knife will easily cut through material. Therefore, many carpenters and tool users mark where the material is to be cut before using the Exacto knife to cut the material. Also, when using such a knife to open boxes, a writing instrument is useful to input markings on the box regarding the contents of the box. Thus, the user must keep a pen or marker nearby when using a box cutting knife. Although box cutting knives are very popular, the knife blade is very sharp and therefore dangerous. Box cutting knives have a knife switch on the top of the body which slides between an extended and a retracted position. When the knife switch is in the retracted position, the knife itself is contained within the body of the tool. However, when the user wants to use the knife, he or she pushes the knife switch forward to the extended position, whereby the knife extends out a front slot. Box cutting knives do not have a safety mechanism which automatically causes the knife to retract within the body of the cutting tool when not in use. Thus, a user may easily cut herself if not paying attention to the knife blade.

**[0003]** US Patent No. 5 813 121 discloses an automatically retractable utility knife including a blade carrier with an integrally moulded return spring.

**[0004]** US Patent No. 5 887 306 discloses a utility tool according to the preamble of claim 1.

### Summary of the Invention

**[0005]** According to the present invention, a utility tool comprises a body having a first end and a second end. The first end and the second end are positioned on opposite ends of the body. A removable blade cartridge unit is provided in the body. A cutting tool is positioned within the blade cartridge and is configured to extend out from the first end. A first tool is provided, being selectively and removably coupled to at least one end of the body.

**[0006]** In a preferred example the utility tool further includes a knife switch that is coupled to the cutting tool, wherein the knife switch allows the cutting tool to slidably extend out and retract within the utility tool. A second tool may be coupled on the end of the body opposite of the first instrument. The second tool extends out from the

second end when the housing member is in the extended position. The first tool may be a writing instrument and the second tool may be a marking instrument. The utility tool may further comprise a container that is integrally formed within the utility tool for housing one of the ends of the cartridge unit positioned within the utility tool. The utility tool can include a track that is positioned along the utility tool, wherein the cartridge unit is coupled to the track and moveable along the track.

**[0007]** The utility tool may further comprise a spring mechanism that is coupled to the knife switch. The spring mechanism biases the knife blade to the retracted position. The second tool may be configured to be selectively coupled to the first tool. The second tool may be a measuring instrument such as a retractable tape measure, level, compass, or bar code scanner. The second tool is alternatively an illuminating instrument. The blade cartridge may include a leaf member which engages and disengages the blade cartridge from the blade cartridge bay by a snap fit. The blade cartridge can further comprise a first blade member; and a second blade member which is in communication and positioned substantially parallel to the first blade member. The blade cartridge includes a recess slot which is located between the first blade member and the second blade member. The recess is for housing the knife blade. The blade cartridge includes a thin film of material that is configured over a knife slot which is in communication with the recess slot. The knife blade pierces the thin film when moving initially from the retracted position to the extended position. The utility tool can further comprise a clip that is coupled to the body.

**[0008]** The utility tool may comprise a body that has a substantially cylindrical shape. The blade cartridge body may further comprise a first blade member and a second blade member. The second blade member is in communication and is positioned substantially parallel to the first blade member. The recess slot is located between the first blade member and the second blade member. The blade cartridge body includes a thin film of material that is configured over the knife slot such that the knife blade pierces the thin film when moving initially from the closed position to the open position. The blade cartridge bay may further comprise a guide spring, wherein the guide spring urges the knife blade to retract to the closed position. The knife blade moves between the closed position to the open position only when the blade cartridge is engaged within the blade cartridge bay. The cartridge can further comprise a safety spring for applying a first force to the guide assembly when the blade cartridge is disengaged from the blade cartridge bay. The knife blade is prevented from moving when the first force is applied to the guide assembly. The guide spring applies a second force to the guide assembly, wherein the knife blade is allowed to move between the closed position and the open position when the second force is applied. The guide assembly further comprises a knife switch coupled to the knife blade.

**[0009]** Other features and advantages of the present invention will become apparent after reviewing the detailed description of the preferred and alternative embodiments set forth below.

#### Brief Description of the Drawings

#### **[0010]**

Figure 1 illustrates a perspective view of an embodiment of a utility tool;

Figure 2 illustrates an exploded view of the utility tool of Figure 1;

Figure 3 illustrates a perspective view of the knife compartment of the utility tool of Figure 1;

Figure 4A illustrates a top view of the utility tool of Figure 1;

Figure 4B illustrates a side view of the utility tool of Figure 1;

Figure 5 illustrates a perspective view of an embodiment of the knife compartment in accordance with the present invention;

Figure 6A illustrates a perspective view of the embodiment of the utility tool of Figure 5;

Figure 6B illustrates a perspective view of the embodiment of the utility tool of Figure 5;

Figure 7 illustrates a perspective view of the pen capsule 202 of the embodiment of Figure 5;

Figure 8 illustrates a perspective view of the highlighter capsule 204 of the embodiment of Figure 5;

Figure 9A illustrates a perspective view of the blade cartridge of the embodiment;

Figure 9B illustrates a cut out view of the blade cartridge tabs coupled with the knife compartment ribs of the embodiment;

Figure 10A illustrates a perspective view of the blade cartridge of an alternative embodiment in accordance with the present invention;

Figure 10B illustrates a perspective, cut-away view of the blade cartridge of the alternative embodiment of Figure 10A;

Figure 11 illustrates a perspective cut-away view of the knife compartment of the present invention;

Figure 12 illustrates a perspective view of the knife compartment of the present invention; and,

Figure 13 illustrates a perspective cut away view of an alternative blade cartridge of the present invention.

#### Detailed Description of the Preferred Embodiment

**[0011]** Reference will now be made in detail to the preferred and alternative embodiments of the invention, examples of which are illustrated in the accompanying drawings. While the invention will be described in conjunction with the embodiments, it will be understood that they are not intended to limit the invention to these embodiments. On the contrary, the invention is intended to cover alternatives, modifications and equivalents, which is included within the scope of the invention as defined by the appended claims. Furthermore, in the following detailed description of the present invention, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it should be noted that the present invention is able to be practised without these specific details. In other instances, well known methods, procedures and components have not been described in detail as not to unnecessarily obscure aspects of the present invention.

**[0012]** Figure 1 illustrates a perspective view of a utility tool 100. Figure 2 illustrates an exploded view of the utility tool 100. Figure 3 illustrates a perspective view of the knife compartment of the utility tool. Figure 4A illustrates a top view of the utility tool, and Figure 4B illustrates a side view of the utility tool.

**[0013]** The utility tool 100, generally shown in Figure 1, comprises a body 102, a knife compartment 104, a rotatable cartridge unit 106 having a highlighting marker 110 and a pen 112. The highlighting marker 110 and/or the pen 112 are covered by the cap 114. In addition, the utility tool 100, as shown in Figure 2, contains a knife 126, a pin 118, an interior cap 128, a knife switch 116 with an attached spring feature 130, a platform 117 and knife blade 126.

**[0014]** As shown in Figures 4A and 4B, the body 102 or housing of the tool 100 has a top surface 102A, a bottom surface 102B, a right side 102C, a left side 102D, a rear 102E and a front 102F (Figure 2). Although, the body 102 is made of these two pieces, it should be understood alternatively that the body 102 is made of any appropriate number of pieces, including only one piece. As shown in Figures 2 and 4A, the body 102 includes a notch 103 on the top surface 102A of each side which is located midway between the end 102E and the front 102F of the body 102. Figure 1 shows that the body 102 also includes a cartridge slot 122 which is defined as the space between the end 102E and notch 103. The cartridge slot 122 is also defined as the space between the top surface 102A and the bottom surface 102B, as discussed in more detail below.

**[0015]** The knife compartment 104, as shown in Figures 2 and 3, comprises a right side 104A and a left side 104B, wherein the left side 104B and the right side 104A both have a corresponding top surface 104C. The knife compartment 104 includes a front face 104F which is positioned opposite of the end 102F of the body 102. Although the knife compartment 104 is discussed as being separate from the body 102, alternatively, the body 102 and the knife compartment 104 are one integral component of the tool 100. The knife compartment 104 is coupled to the body 102, such that the right side 104A of the knife compartment 104 is configured to be positioned adjacent to the right side 102D of the body 102. Similarly, the left side 104B of the knife compartment 104 is configured to be positioned adjacent to the left side 102D of the body 102.

**[0016]** The knife compartment 104 includes a rounded portion 134 and an aperture 132 in the right side 104A and the left side 104B of the knife compartment 104. The rounded portion 134 is configured to be located near the bottom surface 102B of the body 102. The right side 104A and the left side 104B of the knife compartment 104 are coupled together by a pin 118 which fits into the apertures 132 in the rounded portion 134 of the knife compartment 104. The knife compartment 104, when coupled to the body 102, forms the tool 100. The rounded portion 134 of the knife compartment 104 is positioned underneath the front surface 102F of the body 102 when the knife compartment 104 is coupled to the body 102.

**[0017]** The knife compartment 104 couples to the body 102 by a friction fit, wherein the distance between the inside walls of the knife compartment 104 is slightly smaller than the distance between the right side 102C and left side 102D of the body 102. Alternatively, the pin 118 maintains the friction fit between the knife compartment 104 and body 102 by holding the right side 104A and the left side 104B of the knife compartment 104 together. Alternatively, other means for holding the right side 104A and the left side 104B together are used. Alternatively, the knife compartment 104 is coupled to the body 102 by screws, snap fit or other means that allows the user to open the knife compartment 104 to remove or exchange knife blades 126. The knife compartment 104 rotates about the pin 118 when moving between the open and closed position.

**[0018]** The front face 104F of the knife compartment 104, shown in Figure 3, extends from the top surface 104C downward to the rounded portion 134. A knife slot 108 runs along the front face 104F of the knife compartment 104. The knife switch 116 (Figure 1) is configured to allow the knife or knife blade 126 to be retractable, such that the knife 126 slides between a retracted position and an extended position. The knife 126 is within the knife compartment 104 when in the retracted position, as shown in Figure 1. Likewise, the knife 126 penetrates out of the knife slot 108 when the knife 126 is in the extended position, as shown in Figures 4A and 4B.

**[0019]** In an alternate embodiment, the top surface

104C of the knife compartment 104 has an indented rectangular groove 120 for housing the knife switch 116, as shown in Figure 1. The knife switch 116 and the attached support platform 117 are coupled to a spring feature 130 which attaches to the body 102, whereby the spring feature 130 urges the knife switch 116 to the retracted position. Thus, the knife switch 116 prevents the knife 126 from unintentionally being left in the extended position. In this case, the knife 126 is easily replaceable from the knife compartment 104. As described above, the knife compartment 104 rotates about the pin 118 between the closed and open position. When the knife compartment 104 is in the open position, both the knife blade 126 and the knife switch 116 are exposed. As shown in Figure 2, the knife switch 116 is coupled to a support platform 117 which engages the knife blade 126. Specifically, the support platform 117 includes two engaging pins 117A which are configured to engage the knife blade 126, in which the pins 117A fit within the knife blade notches 127. When the knife compartment 104 is in the open position and the knife switch 116 as well as the knife blade 126 is exposed, the user removes the worn out knife blade 126 by disengaging the knife blade notches 127 from the engaging pins 117A. The user then inserts a new knife blade 126 by coupling the engaging pins 117A within the knife blade notches 127. Alternatively, the knife switch 116 with the knife blade 126, attached as one unit, may be completely removed and replaced with another unit containing a new knife switch 116 and knife blade 126. Thus, the knife 126 would be easily changeable with a minimum amount of contact with the knife 126 itself.

**[0020]** As described above, the body 102 has a cartridge slot 122 which is defined as the space from the top surface 102A to the bottom surface 102B of the body 102. The slot 122 has a rectangular shape and passes from the end 102E midway to the notch 103. Both of the inside walls 140 of the body 102 include a track 142 for housing a knob or knob member 138 extending from the cartridge unit 106, as will be discussed in more detail below. Alternatively, only one of the inside walls 140 of the body 102 includes a track 142 for housing the knob 138. The distance of the cartridge slot 122 from the end 102E to the notch 103 is less than the distance between the ends 107A and 107B of the cartridge unit 106. The track 142 allows the cartridge unit 106 to traverse along the body 102 from an inward or first position which is represented as the narrow portion 142A of the track 142, to an outward or second position which is represented as the wide portion 142B of the track 142, as will be discussed below.

**[0021]** The cartridge unit 106 or housing shown in Figures 1 and 2 has a substantially rectangular shape. The cartridge unit 106 has a left side 106A and a right side 106B as well as two ends, shown as 107A and 107B. The ends 107A and 107B are configured to be positioned to face away from one another, in which each end 107A, 107B of the cartridge unit 106 has a tool. As shown in Figures 1 and 2, the tool is a marking instrument, such

as a pen 112 and a highlighter 110, where the pen 112 extends out from the end 107A and the highlighter 110 extends out from the end 107B. Thus, the pen 112 extends out from the cartridge unit 106 in a direction opposite from the marker 110. Alternatively, the cartridge unit 106 is configured to have other instruments, such as a retractable tape measure, flashlight, compass, level, bar code scanner or other accessory, extending out from the ends 107A and 107B.

**[0022]** As shown in Figure 2, the cartridge unit 106 also has a knob 138 which extends out perpendicularly from the center of both the left side 106A and the right side 106B of the cartridge unit 106. Alternatively, the knob 138 is configured to extend out from only one side of the cartridge unit 106 or extend out from a position other than the center of the cartridge unit 106. The knob 138 allows the cartridge unit 106 to rotate about an axis extending through the knob 138.

**[0023]** The cartridge unit 106 is positioned within the cartridge slot 122. The knob 138 extending from each side of the cartridge unit 106 fits in the track 142 located integrally within the cartridge slot 122. As described above, the cartridge unit 106 is rotatable about the knob 138. Thus, a user rotates the cartridge unit 106 such that the desired end of the cartridge unit 106 faces out from the end 102E of the tool 100. When the desired end of the cartridge unit 106 is in the exposed position or faces out from the end 102E of the tool 100, the end opposite of the desired end is contained within the body 102. For example, if a user desires to use the end 107A having the pen 112, she will rotate the cartridge unit 106 such that the end 107A faces out the rear 102E of the tool 100. As discussed above, the ends 107A and 107B of the cartridge unit 106 are positioned opposite of one another. Thus, the end 107B of the cartridge unit 106 having the highlighting marker 110 is contained within the body 102 of the tool 100 when the end 107A is facing out from the rear 102E of the tool 100. The tool 100 includes an interior cap 128 within the body 102 for providing a cover for and storing the end of the cartridge unit 106 that is not in the exposed position. Thus, in the example, the highlighting marker 110 would be contained within the interior cap 128.

**[0024]** The cartridge unit 106 is removable, such that replacement cartridges are useable with the tool 100. In the alternate embodiment, the cartridge unit 106 is removed from the body 102 by moving the knob member 138 to the wide portion 142B of the track 142. Once the knob member 138 is positioned at the wide portion 142B, the user slightly twists or bends the cartridge unit 106 such that the one or more knob members 138 is no longer within the wide portion 142B. Once the knob member 138 is no longer within the wide portion 142B of the track 142, the user can easily remove the cartridge unit 106 from the body 102. Similarly, to insert a cartridge unit 106, the user slightly twists or bends the cartridge unit 106 until the one or more knob members 138 are positioned within the wide portion 142B. Alternatively, the car-

tridge unit 106 is inserted or removed from the body 102 by applying a force on the inside walls 140 of the body 102 such that the walls 140 slightly move away from each other. Causing the walls 140 to move away from each other allows the knob member 138 enough clearance to be inserted into or removed from the wide portion 142B of the track 142.

**[0025]** In an alternate embodiment, to assemble the tool 100, the left side 102D and the right side 102C of the body 102 are snapped together by a snap tight fit. Alternatively, the sides 102C and 102D of the body 102 are assembled together by other means, such as adhesive, screw, or other equivalent. The interior cap 128 is placed between the sides 102C and 102D of the body 102 and held within the body 102 when the sides are snapped together. The cartridge unit 106 is coupled to the body 102, by inserting the knob 138 into the wide portion 142B of the track 142 located within the inside walls 140 of the cartridge slot 122. The knife compartment 104 is coupled to the body 102 by a snap fit, such that the rounded portion 134 of the knife compartment 104 is positioned substantially near to the front end 102F of the body. Alternatively, the knife compartment 104 couples to the body 102 by other means, such as adhesive, screw, or other equivalent.

**[0026]** The knife compartment 104 is assembled by coupling the right side 104A and the left side 104B together by a snap fit. The right side 104A and the left side 104B of the knife compartment 104 are held together by the cover pin 118 which fits within the aperture 132 that extends through each side of the knife compartment 104. Alternatively, the knife compartment 104 is assembled together by other means, such as adhesive, screw, or other equivalent. Also, the knife switch 116 is placed within the knife compartment 104, such that the grooved portion of the knife switch 116 protrudes out from the switch groove 120. As described above, the knife switch 116 is coupled to a platform 117 which includes the two engaging members 117A. The engaging members 117A are coupled to the notches 127 of the knife blade 126. Thus, when the knife switch 116 moves to the extended position, the knife blade 126 is exposed through the knife slot 108. On the other hand, when the knife switch 116 moves to the retracted position, the knife blade 126 is within the knife compartment 104. The platform 117 couples to the spring 130 which attaches to a stationary point within the tool 100. The spring 130 biases the knife switch 116 to the retracted position within the knife compartment 104 of the tool 100 and prevents the knife blade 126 from being unintentionally left in the extended position.

**[0027]** To use the knife portion of the tool 100, a user simply presses the knife switch 116 toward the front end 104F of the knife compartment 104. The knife switch 116 allows the knife 126 to slidably move from the retracted position to the extended position, because the knife 126 is coupled to the platform. The knife blade 126 stays in the extended position as long as pressure is applied by the user. Alternatively, a switch or locking mechanism

may be used to lock the knife 126 in the extended position. As stated above, the knife switch 116 biases the knife 126 toward the retracted position, to prevent the knife 126 from being unintentionally left in the extended position.

**[0028]** A user also uses the cartridge unit 106 in the tool 100 to mark items as the user desires. As stated above, the cartridge unit 106 has two ends, 107A and 107B, each having a different tool, respectively a pen 112 and a highlighter marker 110. If the user wants to use the pen 112, she pulls the cartridge unit 106 out along the track 142 toward the end 102E. As stated above, the length of the slot 122 is less than the distance between the ends 107A and 107B of the cartridge unit 106. Thus, once the cartridge unit 106 is substantially near or in the outer portion 142B of the track 142, there is enough distance to allow the cartridge unit 106 to rotate. The ability for the cartridge unit 106 to rotate allows the end 107A of the cartridge unit 106 to face out from the end 102E of the tool 100. When the end 107A of the cartridge unit 106 faces out the rear of the tool 100, the user pushes the cartridge unit 106 along the track 142 away from the end 102E of the body 102, until the end 107B is contained within the body 102. Thus, the cartridge unit is locked, and the end 107B of the cartridge unit 106 having the highlighting marker 110 will be contained within the body 102 when the end 107A is facing out the rear 102E of the tool 100. As stated above, the tool 100 includes an interior cap 128 within the body 102 for storing the end 107 of the cartridge unit 106 that is not in the exposed position. Thus, in the alternate example, the highlight marker 110 would be contained within the interior cap 128.

**[0029]** Similarly, if the user chooses to use the highlighter marker 110, she pulls the cartridge unit 106 out along the track 142 toward the end 102E such that the cartridge unit 106 has enough clearance within the slot 122 to rotate. At this point, the knob 138 of the cartridge unit 106 is substantially near or in the outer portion 142B of the track 142. The user then rotates the cartridge unit 106 such that the end 107B having the highlighting marker 110 faces out from the end 102E of the tool 100. The user then pushes the cartridge unit 106 along the track 142 away from the end 102E of the body 102, until the end 107A is contained within the body 102. Thus, the cartridge unit 106 is locked, and the end 107A of the cartridge unit 106 having the pen 112 will be contained within the body 102 of the tool 100 when end 107B is facing out the rear 102E of the tool 100. As noted above, the cartridge unit 106 alternatively has one or more of an array of tools which extend out from ends 107A and 107B, such as a retractable tape measure, flashlight, compass, level or other accessory. In addition, the tool 100 of the present invention can be made of a soft elastomeric overmolding material. Alternatively, the tool 100 is made of any rigid material, such as hard plastic, metal, stainless steel, or other equivalent.

**[0030]** Figure 5 illustrates a perspective view of the

preferred embodiment of the utility tool in accordance with the present invention. Generally, the utility tool 200 includes a pen capsule 202, a highlighter capsule 204, a knife compartment 206, a pocket clip 208 as well as a blade cartridge 210 having a knife blade switch 212 and two blade cartridge leaves 214.

**[0031]** Figure 6A illustrates a perspective view of the preferred embodiment of the utility tool of the present invention. In particular, Figure 6A illustrates a more detailed view of the knife compartment 206 which includes the blade cartridge 210. The knife compartment 206 has a generally cylindrical shape and two ends 220, 224 in which the end 220 includes a blade slot 222 and the end 224 receives the highlighter capsule 204 and/or the pen capsule 202, as will be described in detail below. It should be noted that the end 220 of the knife compartment 206 is also preferably configured to receive the pen capsule 202 (not shown).

**[0032]** As shown in Figure 6A, the blade cartridge 210 contains a knife blade 216 and is preferably removable from the utility tool 200 as will be discussed below. The blade cartridge 210 couples to the knife compartment 206 by fitting within the blade cartridge bay 218, which is defined as the space within the knife compartment 206 that is exposed on the outer surface of the knife compartment (Figure 12). The leaves 214 on both sides of the blade cartridge 210 press against the inside walls of the blade cartridge bay 218, thereby securing the blade cartridge 210 to the blade cartridge bay 218. The blade cartridge 210 also includes a knife switch 212 coupled to the knife blade 216 which moves between a first position and a second position. As shown in Figure 6A, the knife switch 212 is in a position such that the knife blade 216 is extending out of the blade slot 222. In contrast, Figure 5 illustrates the knife switch 212 in a position that the knife blade 216 does not extend out of the blade slot 222.

**[0033]** Figure 7 illustrates a perspective view of the pen capsule 202 of the preferred embodiment of the present invention. The pen capsule 202 has a pen tip 226 which is retractable within the pen capsule 202. Although this discussion preferably refers to the capsule 202 as a pen capsule, it is understood that the capsule 202 is alternatively any other appropriate type of writing tool, including, but not limited to a marker, highlighter and pencil. In addition, the pen capsule 202 includes a coupling end 228 which engages to the highlighter capsule 204, as shown in Figures 5 and 6A-B. Also, the coupling end 228 allows the pen capsule 202 to be engaged to either of the ends 220 or 224 of the knife compartment 206 (Figure 6B). The coupling end 228 of the pen capsule 202 preferably provides a friction fit with either the highlighter capsule 204 or the ends 220, 224. Alternatively, the coupling end 228 engages the highlighter capsule 204 or the ends 220, 224 by screwing the coupling end 228 thereto or any other known methods.

**[0034]** Figure 8 illustrates a perspective view of the highlighter capsule 204 of the preferred embodiment of the present invention. The highlighter capsule 204 pref-

erably has a highlighter tip marker 232. Although this discussion refers to the capsule 204 as a highlighter capsule, it is understood that the capsule 204 is alternatively any other type of tool. For instance, the capsule 204 is alternatively another writing tool, including but not limited to a pen or pencil. Alternatively, the capsule 204 is a measuring tool such as a retractable tape measure, flashlight, compass, level, bar code scanner or other accessory. In addition, the highlighter capsule 204 includes a coupling end 233 which engages to the pen capsule 202 (Figure 5). Also, the coupling end 230 engages the highlighter capsule 204 to the end 224 of the knife compartment 206. It is preferred that the coupling end 230 screws to the end 224, although any other appropriate coupling means may be used.

**[0035]** Figure 9A illustrates a perspective view of the blade cartridge 210 of the preferred embodiment of the present invention. Preferably, the blade cartridge 210 includes a blade cartridge body 234 having a track groove 238 as well as a guide window 252, a knife switch 212, a knife blade 216 within, a pair of leafs 214 and a guide mechanism 250. Alternatively, the blade cartridge 210' (Figure 10A) includes the above components as well as a safety spring 248 as discussed below.

**[0036]** The blade cartridge 210 shown in Figure 9A includes a blade cartridge body 234 having two body sides 234A, 234B. Each body side 234A, 234B is coupled to one another to form the blade cartridge body 234, whereby the body sides 234A, 234B are generally parallel to each other. The body sides 234A, 234B are formed from one molded plastic piece and stamped to form the blade cartridge body 234. Alternatively, the body sides 234A, 234B are separate pieces that are coupled to one another to form the blade cartridge body 234. Each body side 234A, 234B has a respective top surface 242A, 242B, whereby coupling the body sides 234A, 234B to one another forms a combined top surface 242.

**[0037]** The top surface 242 of the blade cartridge body 234 includes a track groove 238 which allows the knife switch 212 to laterally move between the first and second position when the blade cartridge 210 is in an active state. The blade cartridge 210 is configured to be in an active and a non-active state preferably for safety reasons. When the blade cartridge 210 is in the active state, the knife 216 is able to laterally move between the first and second position. In contrast, the knife 216 is not able to laterally move between the first and second position when the blade cartridge 210 is in the non-active state. The top surface 242 of the blade cartridge body 234 preferably includes two tab members 244 located on each end of the blade cartridge body 234. The tab members 244 serve as barriers for the knife switch 212, such that the knife switch 212 does not move past the tab members 244 when the blade cartridge 210 is in the active state. Details regarding the active state and non-active state of the blade cartridge 210 will be discussed in more detail below.

**[0038]** The blade cartridge 210 also includes a recess

236 which is defined as a space in between the body side 234A and the body side 234B. The recess 236 houses the knife blade 216 and preferably passes along the entire length of the blade cartridge body 234. The blade cartridge body 234 preferably includes a knife slot 246 located on each end of the blade cartridge body 234, wherein the knife slot 246 is in communication with the recess 236. Alternatively, a knife slot 246 is located at only one end of the blade cartridge body 234. The knife slot 246 is also in communication with the blade slot 222 (Figure 6A). The knife blade 216 moves along the recess 236 between a closed or retracted position and an open or extended position, whereby the knife blade 216 extends out through the knife slot 246 and the blade slot 222 (Figure 6A) when in the extended position. The knife blade 216 is coupled to the knife switch 212, as shown in Figure 9A, in which the knife switch 212 laterally moves along the track groove 238 between the first position and the second position, whereby the knife blade 216 correspondingly moves between the retracted and the extended positions. Alternatively, the knife switch 212 only moves laterally towards one end whereby the knife blade 212 moves in that same one direction.

**[0039]** In addition, the blade cartridge 210 preferably includes two leafs 214 which secure the blade cartridge 210 within the blade cartridge bay 218. Alternatively, the blade cartridge 210 has only one leaf 214. Each leaf 214, shown in Figures 9A and 10A, is configured to provide a snap fit engagement between the blade cartridge 210 and the interior walls of the blade cartridge bay 218. In inserting the blade cartridge 210 into the blade cartridge bay 218, each leaf 214 snaps and secures the blade cartridge 210 into place, as illustrated in Figures 6A-B. The friction fit between the leaf 214 and its respective inner wall, as shown in Figures 6A-B, secures the blade cartridge 210 to the blade cartridge bay 218. In disengaging the blade cartridge 210 from the blade cartridge bay 218, each of the leafs 214 are actuated toward each other to create enough clearance to allow the user to pull the blade cartridge 210 out of the blade cartridge bay 218. Each leaf 214 is preferably made of the same material as the blade cartridge body 234A, 234B and has a spring-like characteristic. It should be noted that securing of the blade cartridge 210 to the blade cartridge bay 218 is not limited to the above discussion and may alternatively encompass other assembly types.

**[0040]** The blade cartridge 210 is configured to be in an active state and a non-active state. When the alternative embodiment is in the non-active state, the knife switch 212 is set within the stop groove, as shown in Figure 10A, and is unable to move laterally in any direction. Preferably, the blade cartridge 210 is in the non-active state when the blade cartridge 210 is not engaged within the blade cartridge bay 218 (Figure 6A) of the knife compartment 206. Preferably, once the blade cartridge 210 is engaged within the blade cartridge bay 218 (Figure 6A) of the knife compartment 206, the blade cartridge is placed into the active state. When the blade cartridge

210 is in the active state, the knife switch 212 is able to move along the track groove 238, whereby the knife switch 212 preferably drives the knife blade 216 to move between the retracted and extended positions.

**[0041]** The details of the active state and the non-active state of the blade cartridge 210 will now be discussed in conjunction with Figures 9-13. The preferred embodiment of the blade cartridge 210, shown in Figure 9A, includes two tabs 272B formed integrally within the blade cartridge body 234B. Although not shown in Figure 9A, it is preferred that the two tabs 272A (not shown) are also integrally formed within the blade cartridge body 234A. Specifically, one end of tab 272A, 272B, shown in Figure 9A as the top end, is attached to the corresponding blade cartridge body 234A, 234B, respectively. The other end of tab 272A, 272B, shown in Figure 9A as the bottom end, is configured such that the bottom ends slant inward toward each other. The bottom ends of the tabs 272A and 272B are configured to preferably lock to each other, whereby the tab notch 273 (Figure 10B) restricts forward movement of the knife blade 216. This locked configuration thereby prevents the knife blade 216 from moving laterally in either direction along the blade cartridge 210 when the blade cartridge 210 is in the non-active state or is not engaged within the blade cartridge bay 218. However, the tabs 272A, 272B are configured such that the bottom ends separate and move rotate away from each other when the blade cartridge 210 is engaged within the blade cartridge bay 218, as shown in Figure 9B.

**[0042]** Figure 9B illustrates a cut out view of one of the blade cartridge tabs 272 coupled with the tab separator 278 of the preferred embodiment of the present invention. As shown in Figure 9B, the inner surface of the tab 272 includes a tab notch 273 which protrudes therefrom. Figure 9B also shows a tab separator 278, which is configured to be within the knife compartment 206 (not shown). It is preferred that the knife compartment of the present invention includes a tab separator 278 on each side to engage the corresponding tabs 272A, 272B. The tab separator 278 has a separator groove shown in Figure 9B as reference numeral 279, whereby the tab notch 273 fits within the separator groove 279. The separator groove 279 engages the tab notch 273 and forces the tab 272 away from the tab 272 located on the other side of the blade cartridge when the blade cartridge 210 is inserted within the blade cartridge bay 218. The movement of the tabs 272A, 272B away from one another puts the blade cartridge 210 in the active state, because the tab notches 273 no longer restrict forward movement of the knife blade 216.

**[0043]** The alternative embodiment of the blade cartridge body 234 includes a stop groove 240 (Figure 11) located on the top surface 242 of the blade cartridge body 234 and located midway along the track groove 238. The stop groove 240 (Figure 11) is of sufficient size such that the knife switch 212 is able to completely fit within the stop groove 240 (Figure 10A) when the blade cartridge 210 is in the non-active state. Figure 10B illustrates a

perspective, cut-away view of the blade cartridge of the embodiment in accordance with the present invention. The blade cartridge 210 includes a guide assembly or mechanism 250 which places the blade cartridge 210 in the active and non-active states as well as drives the knife switch 212 and the knife blade 216 between the retracted and extended positions. The guide mechanism 250 is a component of the knife switch 212 itself and includes two boss members 250A (Figure 10A) and 250B (Figure 10B). Alternatively, the guide mechanism 250 is a separate piece and includes only one boss member, whereby the guide mechanism 250 is coupled to the knife switch 212. Either of the boss members 250A, 250B registers through a blade aperture, which is defined as the space shown as reference number 254 in Figure 10. As shown in Figure 10A, the boss member 250A preferably registers through the guide window 252 of the blade cartridge 210, whereby the boss member 250A is capable of moving laterally in either direction along the guide window 252 when the blade cartridge 210 is in the active state.

**[0044]** As shown in Figure 10A, the safety spring 248 within the guide window 252 functions to place the blade cartridge 210' in the non-active state when the blade cartridge 210 is not coupled to the knife compartment 206. Both sides 234A, 234B of the blade cartridge 210 include a safety spring 248. Alternatively, only one side of the blade cartridge 210 includes a safety spring 248. In the non-active state, the safety spring 248 applies a default downward force on the boss member 250A, such that the guide mechanism itself 250 is also pressed downward. This causes the knife switch 212 to be confined within the stop groove 240 (Figure 11). In addition, the guide mechanism 250 includes a guide bar 266 which is shown in Figure 10 as being located underneath the knife switch 212. In the non-active state, the guide bar 266 rests on the stop groove ledges 268, shown in Figure 10 and lodged in between the stop groove ledges 268. As a result, the knife switch 212 and the knife blade 216 are prevented from moving in a lateral direction when in the non-active state. The safety spring 248 is made of molded plastic, which is the same as the blade cartridge 210 itself. Alternatively, the safety spring 248 is made of any other resilient material having spring-like characteristics.

**[0045]** Figure 11 illustrates a perspective cut-away view of the knife compartment of the present invention. Figure 12 illustrates a perspective view of the knife compartment of the present invention. As shown in Figure 11, the knife compartment 210 includes a guide spring 256 located inside the knife compartment 206. The guide spring 256 has a fixed end 258 which is permanently attached to an inside surface 264 of the knife compartment 210 and an engaging end 260 which registers with a lateral groove 262, as shown in Figures 11 and 12. As shown in Figures 11 and 12, the lateral groove 262 is formed within the side of the knife compartment 206 and allows the guide spring 256 to move laterally along the length of the lateral groove 262. The guide mechanism



250 (Figure 9) is coupled to the guide spring 256, whereby the guide spring 256 places the blade cartridge 210 in the active/non-active state as well as provides smooth lateral motion of the guide mechanism 250 along the track groove guide 270, as illustrated in Figure 13. To address safety issues with the tool 200, the guide spring 256 automatically urges the guide mechanism 250, and thus the knife blade 216, to the first and retracted positions. Therefore, the knife blade 216 will stay in the extended position only when the user urges the knife switch 216 toward the second position. Otherwise, the guide spring 256 will urge the knife blade 216 to retract inside the knife compartment 206, when the user is not pushing the knife switch 216 toward the second position. Alternatively, the knife blade 216 is not spring urged to the retracted position by the guide spring 256.

**[0046]** In the alternative embodiment, the guide spring 256 places the blade cartridge 210 in the active/non-active state. The engaging end 260 of the guide spring 256 has a "U" shaped receptor, whereby the boss member 250B fits within the "U" shaped receptor of the engaging end 260, as shown in Figure 13. The guide spring 256 is configured to rest at a position in which the boss member 250B automatically fits within the "U" shape of the guide spring's 256 engaging end 260 when the blade cartridge 210 is inserted within the blade cartridge bay 218 (Figure 12). The guide spring 256 is also positioned at a predetermined height within the knife compartment 210 such that the guide spring 256 applies an upward force to the guide mechanism 250. This upward force from the guide spring 256 places the blade cartridge 210 into the active state by exceeding the opposing downward force applied by the safety spring 248 to the guide mechanism 250.

**[0047]** Figure 13 illustrates a perspective cut away view of the blade cartridge of the alternate embodiment of the present invention. As discussed above, the blade cartridge 210 is put into the active state when the blade cartridge 210 is inserted into the blade cartridge bay 218 (Figure 12) of the knife compartment 206. Figure 13 presents the inner workings of the blade cartridge 210 in the active state. As discussed above, the blade cartridge 210 is in the non-active state due to the force applied to the guide mechanism 250 by the safety spring 248. As stated above in the alternative embodiment, the guide spring 256 is positioned at a predetermined height within the knife compartment 206 to apply an upward force to the guide mechanism 250. This upward force is sufficient to overcome the opposing downward force applied by the safety spring 248 in the alternative embodiment. As shown in Figure 13, in the active state, the guide mechanism bar 266 is lifted off the stop groove ledges 268 and placed in communication with the track groove guide 270. Also, the knife switch 212 is lifted from the stop groove 240 and able to move laterally along the track groove 238. Thus, the guide mechanism bar 266 fits within the track groove guide 270 and allows the guide mechanism 250 to move between the first and second positions. It should be noted that although the guide mechanism 250

applies an upward force in the alternative embodiment, it is not limited to an upward force. Thus, the guide mechanism 250 alternatively applies a downward force, which is opposite of an upward force applied by the safety spring 248.

**[0048]** It is preferred that the blade cartridge 210 of the present invention be easily disposable. As shown in Figure 9A, a thin rib 274 is preferably configured within the guide window 252 of the blade cartridge 210 and initially molded to the blade cartridge body 232B. As shown in Figure 9A, the thin rib 274 is initially attached to the blade cartridge body 234B and positioned in an upright manner toward the "N" for "New" position. The thin rib 274 is configured to be detached or disengaged from the blade cartridge body 234 when a guide arm 276 pushes the thin rib 274 from the upright or "N" position to the "U" position. This occurs after the knife blade 216 is activated and pressed in the direction of the thin rib 274 for the first time. In other words, the guide arm forces the thin rib 274 into the used position 253 after the first use of the knife blade 216. Preferably, the guide window 252 includes a thin rib 274 on each end. Alternatively, the thin rib 274 is attached on only one end of the guide window 252. As stated above, the knife blade 216 preferably moves laterally in either direction in the blade cartridge 210 wherein the knife blade 216 extends out either knife slot of the blade cartridge 210. Therefore, both ends of the blade cartridge 210 and knife blade 216 can be used. Once one side of the knife blade 216 becomes dull or no longer usable, the blade cartridge 210 can be removed and re-inserted such that the non-used knife slot is positioned to be in communication with the blade slot 222. Once the other side of the knife blade 216 is dull or no longer usable, the user will know to dispose of the blade cartridge 210 because both thin ribs 274 will have been moved into the used position 253.

**[0049]** Alternatively, a thin film of material (not shown) covers the knife slot 246 (Figure 9) of the blade cartridge 210, whereby the thin film (not shown) is pierced by the knife blade 212 after the first use of the knife blade 212. The knife slot 246 on each end of the blade cartridge body 234 includes the thin film of material (not shown). Alternatively, the thin film of material is placed on only one of the knife slots 246. As stated above, the knife blade 216 moves laterally in either direction in the blade cartridge 210 wherein the knife blade 216 extends out either knife slot of the blade cartridge 210. Therefore, both ends of the blade cartridge 210 and knife blade 216 can be used. Once one side of the knife blade 216 becomes dull or no longer usable, the blade cartridge 210 can be removed and re-inserted such that the non-used knife slot is positioned to be in communication with the blade slot 222. Once the other side of the knife blade 216 is dull or no longer usable, the user will know to dispose of the blade cartridge 210 because both thin films of material will have been already pierced.

**[0050]** The preferred assembly of the tool of the present invention will now be discussed. The knife com-

partment 206 is assembled by coupling the two sides of the knife compartment together. The highlighter cap 204 is then coupled to the end 224 of the knife compartment 206. The pen cap 202, as shown in Figure 5, couples to the highlighter cap 204. The blade cartridge 210 is inserted into the blade cartridge bay 218, whereby the leafs 214 provide a snap fit engagement within the blade cartridge bay 218.

**[0051]** The preferred operation of the tool of the present invention will now be discussed. The user places a blade cartridge 210 which is in the non-active state within the blade cartridge bay 218. Once the blade cartridge 210 is engaged within the blade cartridge bay 218, the guide mechanism 250 fits within the U-shaped receptor 260 of the guide spring 256. In addition, the tabs 272A, 272B are forced apart from each other by engaging with the corresponding tab separators 278, thereby placing the blade cartridge 210 in the active state. To remove the blade cartridge 210, the user presses the leafs 214 toward each other, thereby allowing sufficient clearance to pull the blade cartridge 210 out of engagement with the knife compartment 206. As stated above, the pen cap 202 can also be coupled to the end 220 of the knife compartment 206. Once coupled, the user is able to rotate the pen cap 202 to expose the pen tip.

**[0052]** The present invention has been described in terms of specific embodiments incorporating details to facilitate the understanding of the principles of construction and operation of the invention. Such reference herein to specific embodiments and details thereof is not intended to limit the scope of the claims appended hereto. It will be apparent to those skilled in the art that modifications may be made in the embodiment chosen for illustration without departing from the scope of the invention.

## Claims

### 1. A utility tool comprising:

a body having a first end and a second end, wherein the first end (220) and the second end (224) are positioned on opposite ends of the body; and,  
a first tool (202, 204) coupled to one of the first end (220) or the second end (224) of the body, a removable blade cartridge (210) is positioned within the body, wherein a cutting tool (216) within the removable blade cartridge (210) is configured to slidably extend out from the first end (220),

### characterised in that:

the first tool (202, 204) may be selectively coupled to the first (220) or second (224) end of the body removed from the body and selectively coupled to the other of the first (220) and second

(224) end of the body.

2. The utility tool according to claim 1, wherein the removable blade cartridge further comprises a knife switch coupled to the cutting tool, wherein the knife switch allows the cutting tool to slidably move between an extended position and a retracted position with respect to the body.
3. The utility tool according to claim 2, wherein the knife switch is able to move the cutting tool from the retracted position to the extended position only when the blade cartridge is engaged within the body.
4. The utility tool according to claim 2 or claim 3, comprising a spring mechanism coupled to the knife switch for biasing the cutting tool to the retracted position.
5. The utility tool according to any one of the preceding claims, further comprising a second tool configured to be selectively coupled to the first tool.
6. The utility tool according to claim 5, wherein the second tool is further configured to be selectively coupled to both the first end and the second end of the body.
7. The utility tool according to any one of the preceding claims, wherein the first tool is a writing instrument.
8. The utility tool according to claim 5 or any claim dependent thereon wherein the second tool is a writing instrument or a measuring instrument or an illuminating instrument.
9. The utility tool according to claim 8, wherein the second tool is a measuring instrument comprising one of a retractable tape measure, level, compass and bar code scanner.
10. The utility tool according to any one of the preceding claims, wherein the body includes a blade cartridge bay for receiving the removable blade cartridge.
11. The utility tool according to claim 10, wherein the blade cartridge includes a leaf member for engaging and disengaging the blade cartridge from the blade cartridge bay by a snap fit.
12. The utility tool according to any one of the preceding claims, wherein the blade cartridge comprises:
  - a. a first blade member; and
  - b. a second blade member in communication and positioned substantially parallel to the first blade member, wherein a recess slot is located between the first blade member and the second

blade member for housing the cutting tool, the blade cartridge including a thin film of material configured over a knife slot in communication with the recess slot such that the cutting tool pierces the thin film when moving initially from the retracted position to the extended position.

13. The utility tool according to any one of the preceding claims, further comprising a clip coupled to the body.
14. The utility tool according to any one of the preceding claims, wherein the body has a substantially cylindrical shape.
15. The utility tool according to any one of the preceding claims, wherein the body includes a blade cartridge bay within.
16. The utility tool according to claim 15, wherein the blade cartridge bay further comprises a guide spring, wherein the guide spring urges the cutting tool to retract to a closed position.

#### Patentansprüche

1. Mehrzweckwerkzeug, umfassend:

einen Körper, der ein erstes Ende und ein zweites Ende aufweist, wobei das erste Ende (220) und das zweite Ende (224) an einander gegenüberliegenden Enden des Körpers positioniert sind; und  
ein erstes Werkzeug (202, 204), das entweder an das erste Ende (220) oder an das zweite Ende (224) des Körpers gekoppelt ist,  
eine herausnehmbare Klingenkassette (210), die im Inneren des Körpers positioniert ist, wobei ein Schneidewerkzeug (216) im Inneren der herausnehmbaren Klingenkassette (210) so ausgeführt ist, dass es aus dem ersten Ende (220) ausfahrbar ist;

#### dadurch gekennzeichnet, dass:

das erste Werkzeug (202, 204) wahlweise an das erste (220) oder zweite (224) Ende des Körpers gekoppelt werden kann, von dem Körper entfernt werden kann und wahlweise an das andere des ersten (220) und zweiten (224) Endes des Körpers gekoppelt werden kann.

2. Mehrzweckwerkzeug nach Anspruch 1, wobei die herausnehmbare Klingenkassette ferner einen Messerschalter umfasst, der an das Schneidewerkzeug gekoppelt ist, wobei der Messerschalter dem Schneidewerkzeug erlaubt, zwischen einer ausgefahrenen Position und einer eingefahrenen Position

in Bezug auf den Körper hin- und herzugleiten.

3. Mehrzweckwerkzeug nach Anspruch 2, wobei der Messerschalter nur dann in der Lage ist, das Schneidewerkzeug aus der eingefahrenen Position in die ausgefahrene Position zu schieben, wenn die Klingenkassette in dem Körper eingerastet ist.
4. Mehrzweckwerkzeug nach Anspruch 2 oder Anspruch 3, umfassend einen Federmechanismus, der an den Messerschalter gekoppelt ist, um das Schneidewerkzeug durch Vorspannung in die eingefahrene Position zu ziehen.
5. Mehrzweckwerkzeug nach einem der vorhergehenden Ansprüche, ferner umfassend ein zweites Werkzeug, das so ausgeführt ist, dass es wahlweise an das erste Werkzeug gekoppelt werden kann.
6. Mehrzweckwerkzeug nach Anspruch 5, wobei das zweite Werkzeug ferner so ausgeführt ist, dass es wahlweise sowohl an das erste Ende als auch an das zweite Ende des Körpers gekoppelt werden kann.
7. Mehrzweckwerkzeug nach einem der vorhergehenden Ansprüche, wobei das erste Werkzeug ein Schreibinstrument ist.
8. Mehrzweckwerkzeug nach Anspruch 5 oder einem davon abhängigen Anspruch, wobei das zweite Werkzeug ein Schreibinstrument oder ein Messinstrument oder ein Beleuchtungsinstrument ist.
9. Mehrzweckwerkzeug nach Anspruch 8, wobei das zweite Werkzeug ein Messinstrument ist, das entweder ein einziehbares Maßband, eine Wasserwaage, einen Kompass oder ein Barcode-Lesegerät umfasst.
10. Mehrzweckwerkzeug nach einem der vorhergehenden Ansprüche, wobei der Körper ein Klingenkassettenfach aufweist, um die herausnehmbare Klingenkassette aufzunehmen.
11. Mehrzweckwerkzeug nach Anspruch 10, wobei die Klingenkassette ein Blatteil aufweist, um die Klingenkassette durch eine Schnappverriegelung in dem Klingenkassettenfach einrasten zu lassen und sie aus ihm zu befreien.
12. Mehrzweckwerkzeug nach einem der vorhergehenden Ansprüche, wobei die Klingenkassette umfasst:
- a) ein erstes Klingenteil; und
  - b) ein zweites Klingenteil, das mit dem ersten Klingenteil in Verbindung steht und im Wesentlichen parallel zu diesem positioniert ist, wobei

sich zwischen dem ersten Klingenteil und dem zweiten Klingenteil eine Kerbe befindet, um das Schneidewerkzeug aufzunehmen, wobei die Klingenkassette eine dünne Materialschicht aufweist, die über einem Messerschlitze angebracht ist, der mit der Kerbe in Verbindung steht, so dass das Schneidewerkzeug die dünne Schicht durchbohrt, wenn es anfangs aus der eingefahrenen Position in die ausgefahrene Position fährt.

13. Mehrzweckwerkzeug nach einem der vorhergehenden Ansprüche, ferner umfassend eine Klammer, die an den Körper gekoppelt ist.
14. Mehrzweckwerkzeug nach einem der vorhergehenden Ansprüche, wobei der Körper eine im Wesentlichen zylindrische Form hat.
15. Mehrzweckwerkzeug nach einem der vorhergehenden Ansprüche, wobei der Körper in seinem Inneren ein Klingenkassettenfach aufweist.
16. Mehrzweckwerkzeug nach Anspruch 15, wobei das Klingenkassettenfach ferner eine Führungsfeder umfasst, wobei die Führungsfeder das Schneidewerkzeug zwingt, in eine geschlossene Position einzufahren.

## Revendications

1. Outil utilitaire comportant :

un corps ayant une première extrémité et une seconde extrémité, dans lequel la première extrémité (220) et la seconde extrémité (224) sont positionnées sur des extrémités opposées du corps, et un premier outil (202, 204) assemblé avec la première extrémité (220) ou la seconde extrémité (224) du corps, une cartouche à lame amovible (210) positionnée à l'intérieur du corps, dans laquelle un outil de coupe (216) à l'intérieur de la cartouche à lame amovible (210) est configuré pour sortir de manière coulissante à partir de la première extrémité (220),

### caractérisé en ce que :

le premier outil (202, 204) peut être assemblé de manière sélective avec la première (220) ou seconde (224) extrémité du corps retirée du corps et peut être assemblé de manière sélective avec l'autre extrémité parmi la première (220) et seconde (224) extrémité du corps.

2. Outil utilitaire selon la revendication 1, dans lequel la cartouche à lame amovible comporte également un curseur de couteau assemblé avec l'outil de coupe, dans lequel le curseur de couteau permet à l'outil de coupe de se déplacer de manière coulissante entre une position sortie et une position rentrée par rapport au corps.
3. Outil utilitaire selon la revendication 2, dans lequel le curseur de couteau peut déplacer l'outil de coupe de la position rentrée à la position sortie uniquement lorsque la cartouche à lame est en prise à l'intérieur du corps.
4. Outil utilitaire selon la revendication 2 ou la revendication 3, comportant un mécanisme à ressort relié au curseur de couteau pour rappeler l'outil de coupe jusqu'à la position rentrée.
5. Outil utilitaire selon l'une quelconque des revendications précédentes, comportant également un second outil configuré pour être assemblé de manière sélective avec le premier outil.
6. Outil utilitaire selon la revendication 5, dans lequel le second outil est également configuré pour être assemblé de manière sélective à la fois avec la première extrémité et avec la seconde extrémité du corps.
7. Outil utilitaire selon l'une quelconque des revendications précédentes, dans lequel le premier outil est un instrument d'écriture.
8. Outil utilitaire selon la revendication 5 ou une revendication quelconque dépendante de celle-ci, dans lequel le second outil est un instrument d'écriture ou un instrument de mesure ou un instrument d'éclairage.
9. Outil utilitaire selon la revendication 8, dans lequel le second outil est un instrument de mesure comportant un élément parmi un mètre à ruban rétractable, un niveau, un compas et un lecteur de codes à barres.
10. Outil utilitaire selon l'une quelconque des revendications précédentes, dans lequel le corps inclut un réceptacle de cartouche à lame pour recevoir la cartouche à lame amovible.
11. Outil utilitaire selon la revendication 10, dans lequel la cartouche à lame inclut un élément formant taquet pour mettre en prise la cartouche à lame avec le réceptacle de cartouche à lame par un encliquetage, et pour libérer celle-ci.
12. Outil utilitaire selon l'une quelconque des revendications précédentes, dans lequel le corps inclut un réceptacle de cartouche à lame pour recevoir la cartouche à lame amovible.

cations précédentes, dans lequel la cartouche à lame comporte :

- a. un premier élément de lame, et
  - b. un second élément de lame en communication avec le premier élément de lame et positionné sensiblement parallèle à celui-ci, dans lequel une fente d'évidement est positionnée entre le premier élément de lame et le second élément de lame pour recevoir l'outil de coupe, la cartouche à lame incluant un mince film de matériau configuré au-dessus d'une fente de couteau en communication avec la fente d'évidement de telle sorte que l'outil de coupe perce le film mince lorsqu'il se déplace initialement de la position rentrée à la position sortie. 5
- 10
- 15
13. Outil utilitaire selon l'une quelconque des revendications précédentes, comportant également une pince assemblée avec le corps. 20
14. Outil utilitaire selon l'une quelconque des revendications précédentes, dans lequel le corps a une forme sensiblement cylindrique. 25
15. Outil utilitaire selon l'une quelconque des revendications précédentes, dans lequel l'intérieur du corps inclut un réceptacle de cartouche à lame.
16. Outil utilitaire selon la revendication 15, dans lequel le réceptacle de cartouche à lame comporte également un ressort de guidage, dans lequel le ressort de guidage pousse l'outil de coupe pour le rentrer jusqu'à une position fermée. 30


35

40

45

50

55

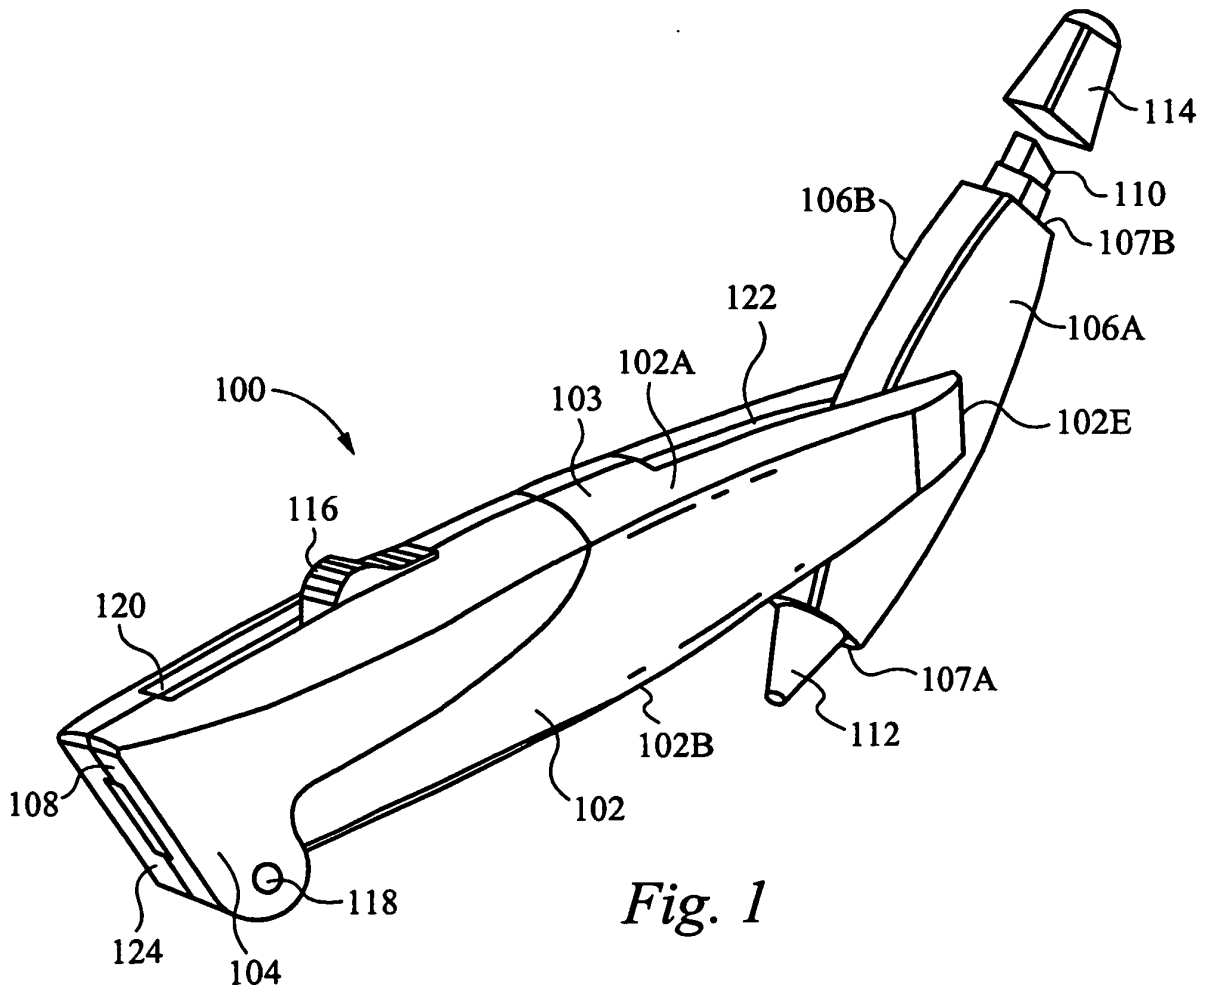

*Fig. 1*


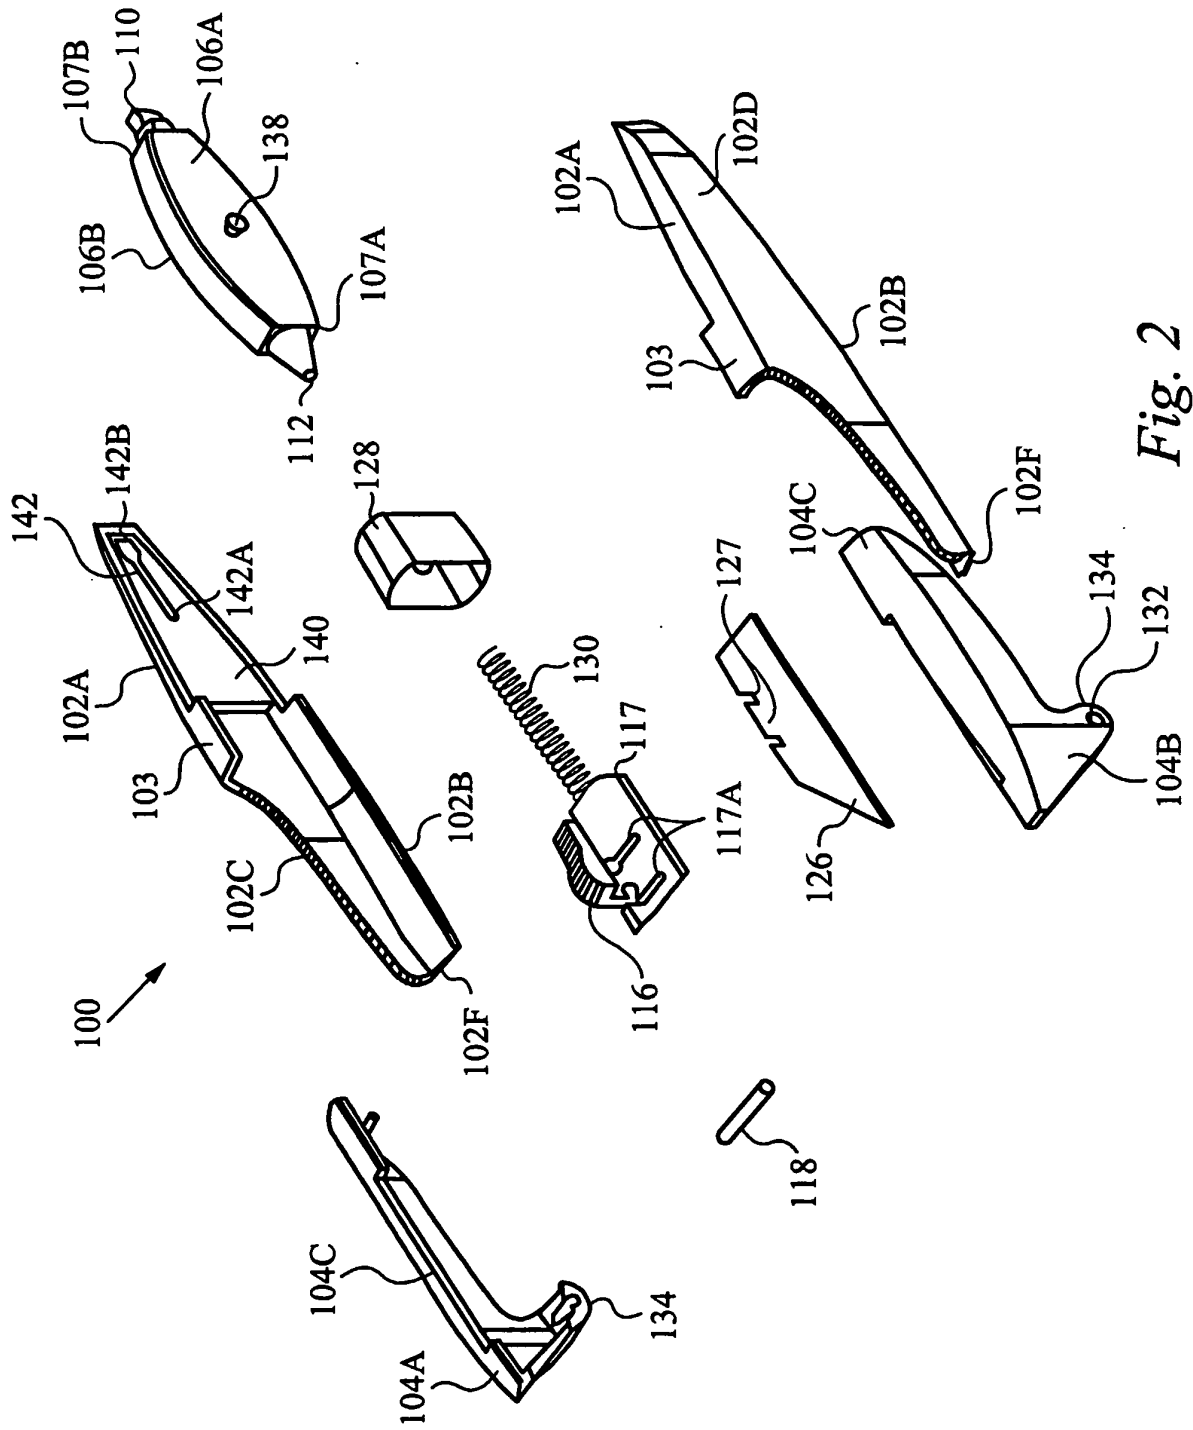


Fig. 2

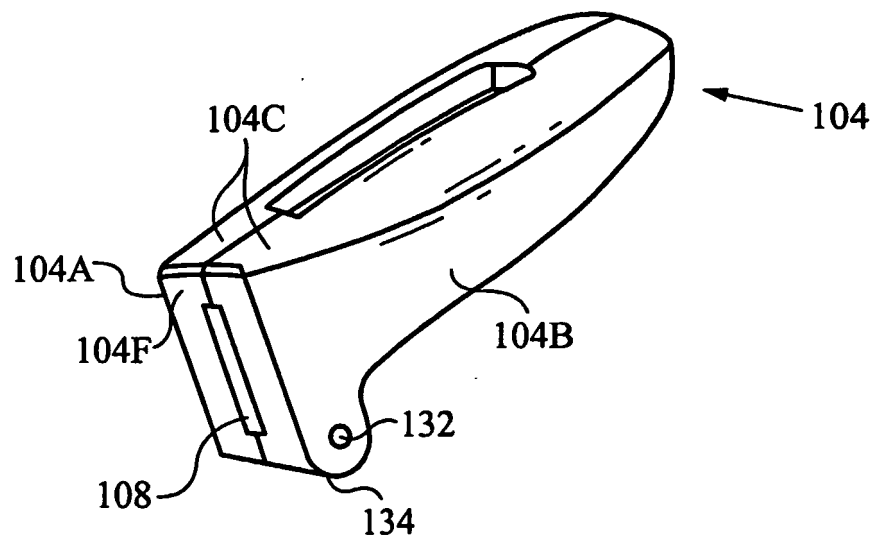

*Fig. 3*



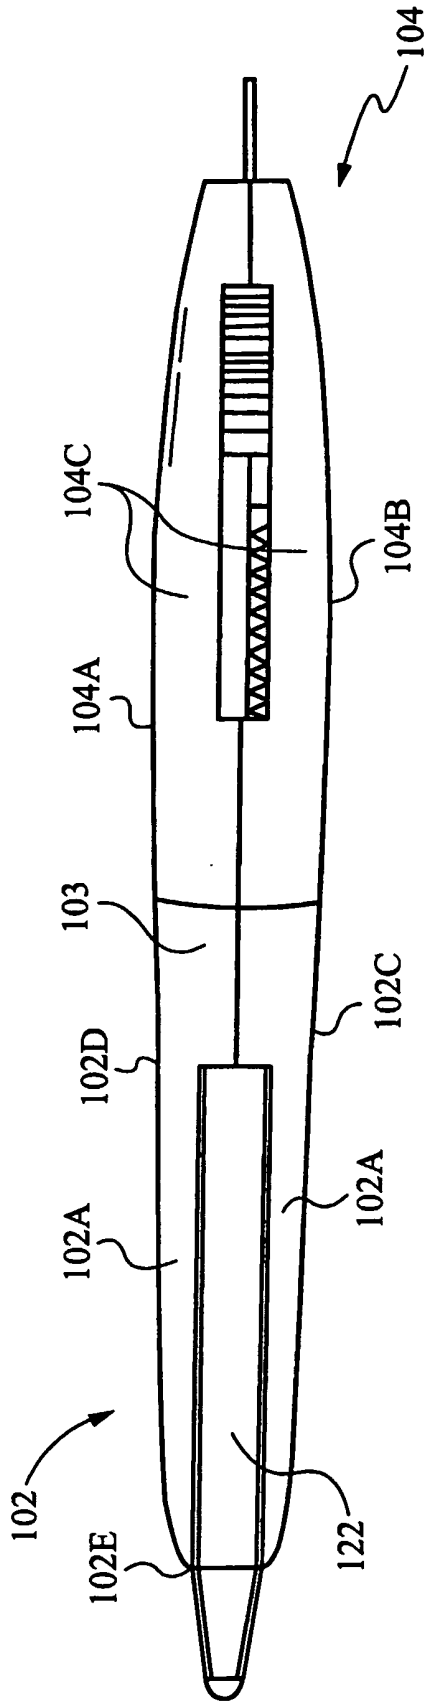


Fig. 4A



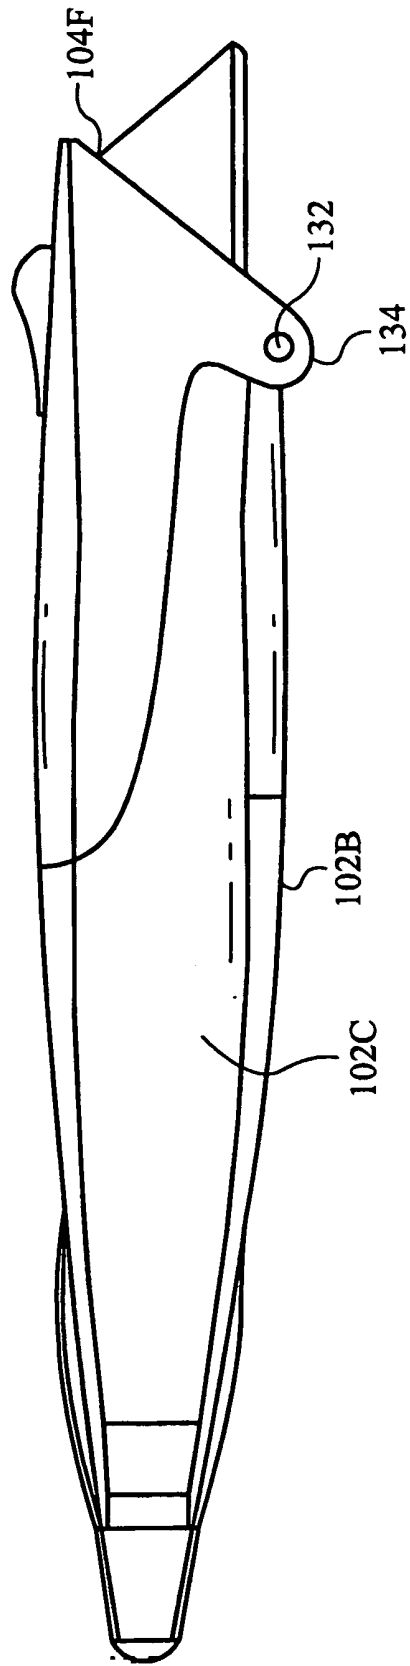


Fig. 4B




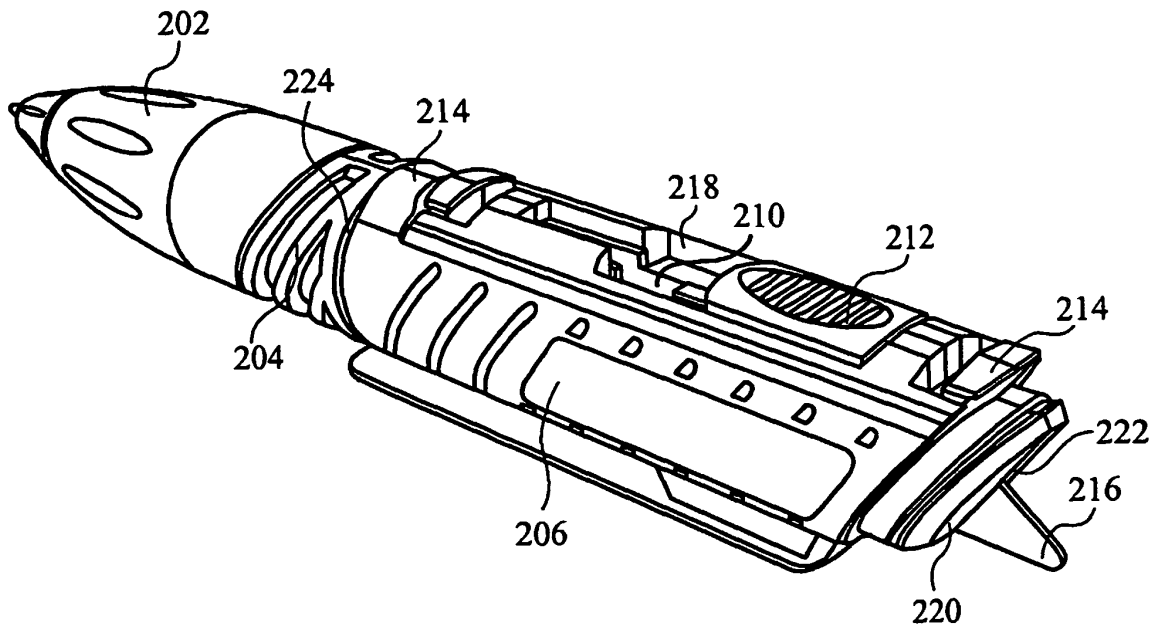


*Fig. 6A*

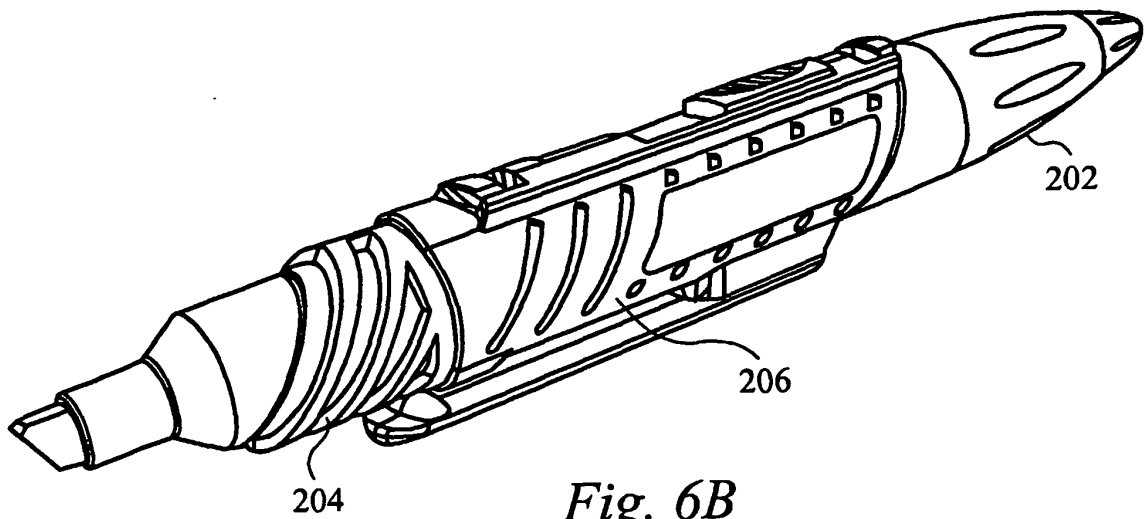

*Fig. 6B*

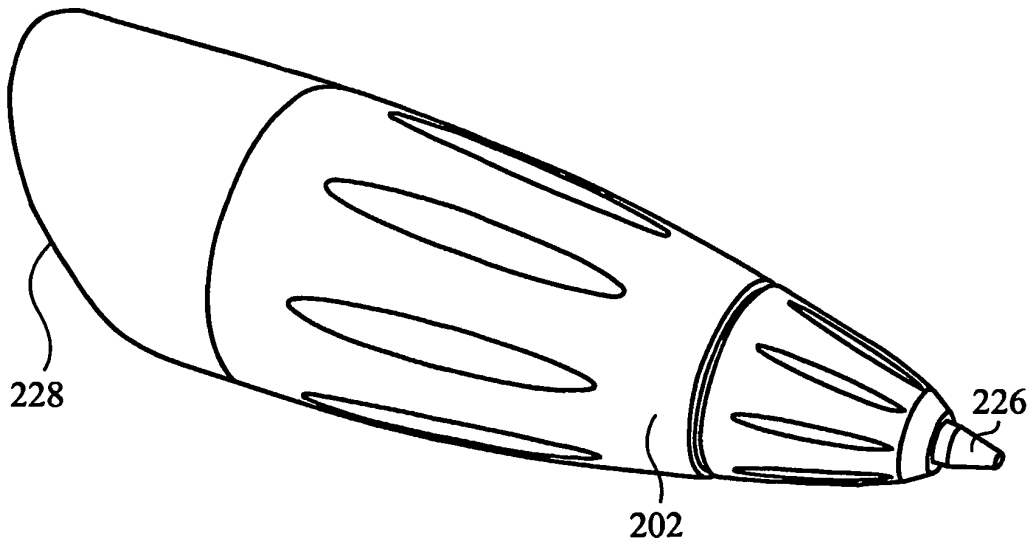

*Fig. 7*

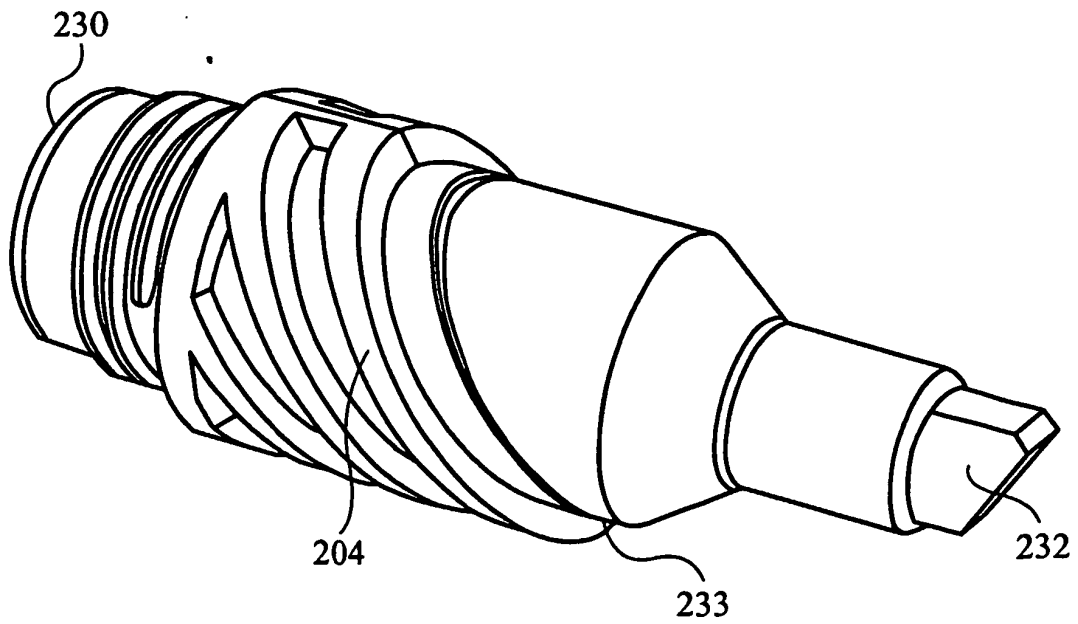

*Fig. 8*



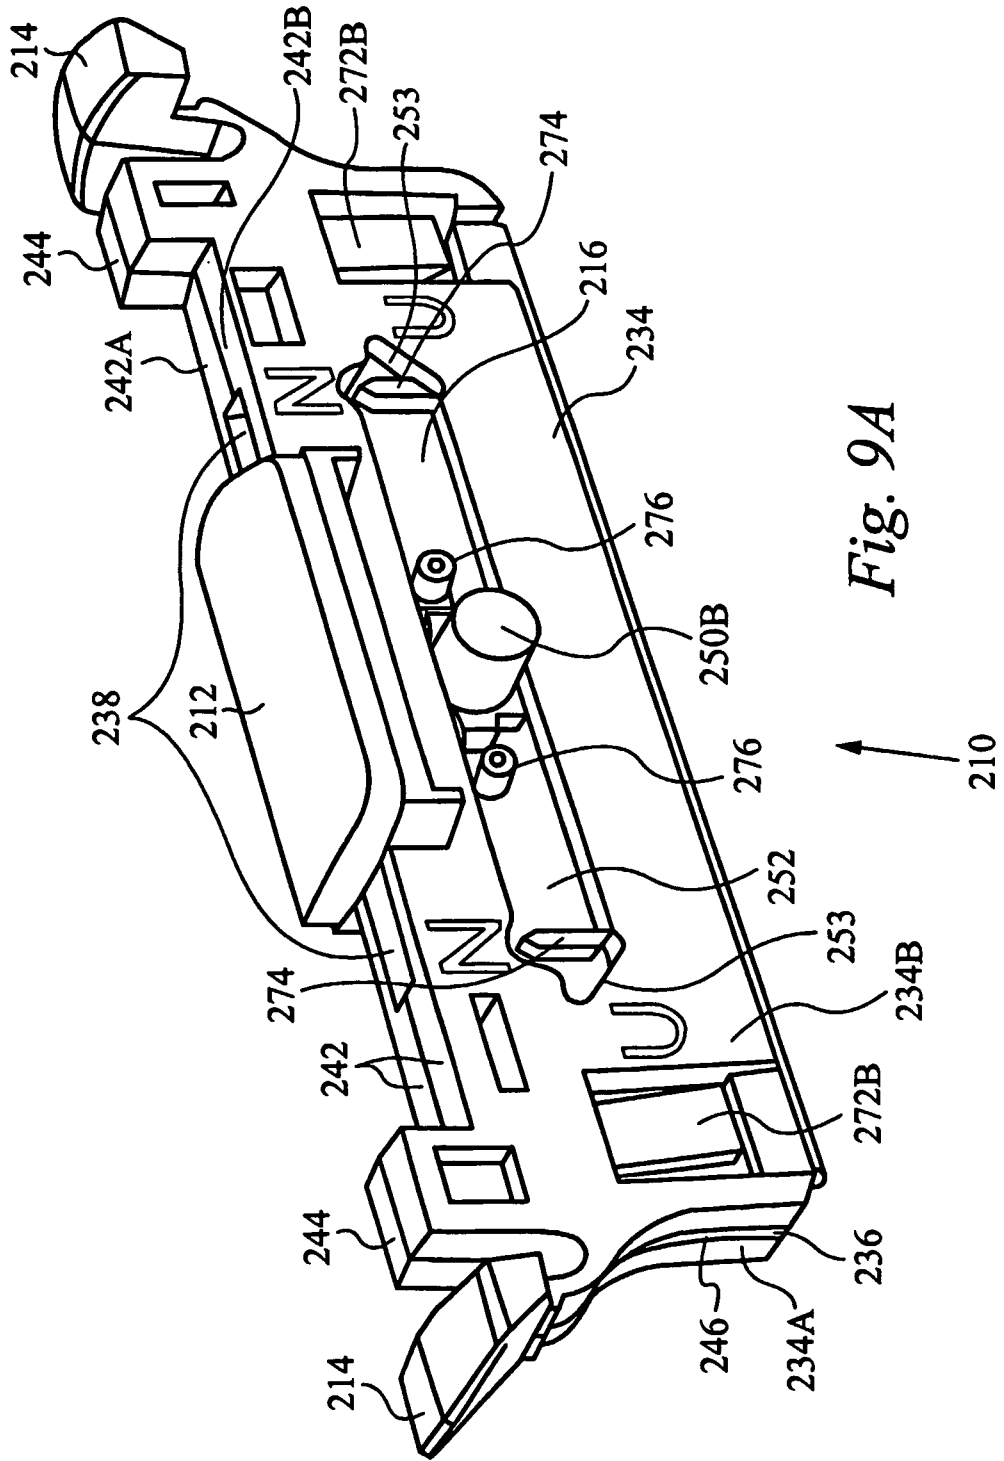



Fig. 9A

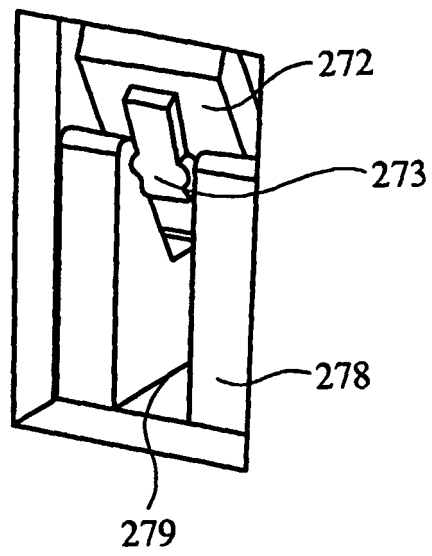

*Fig. 9B*

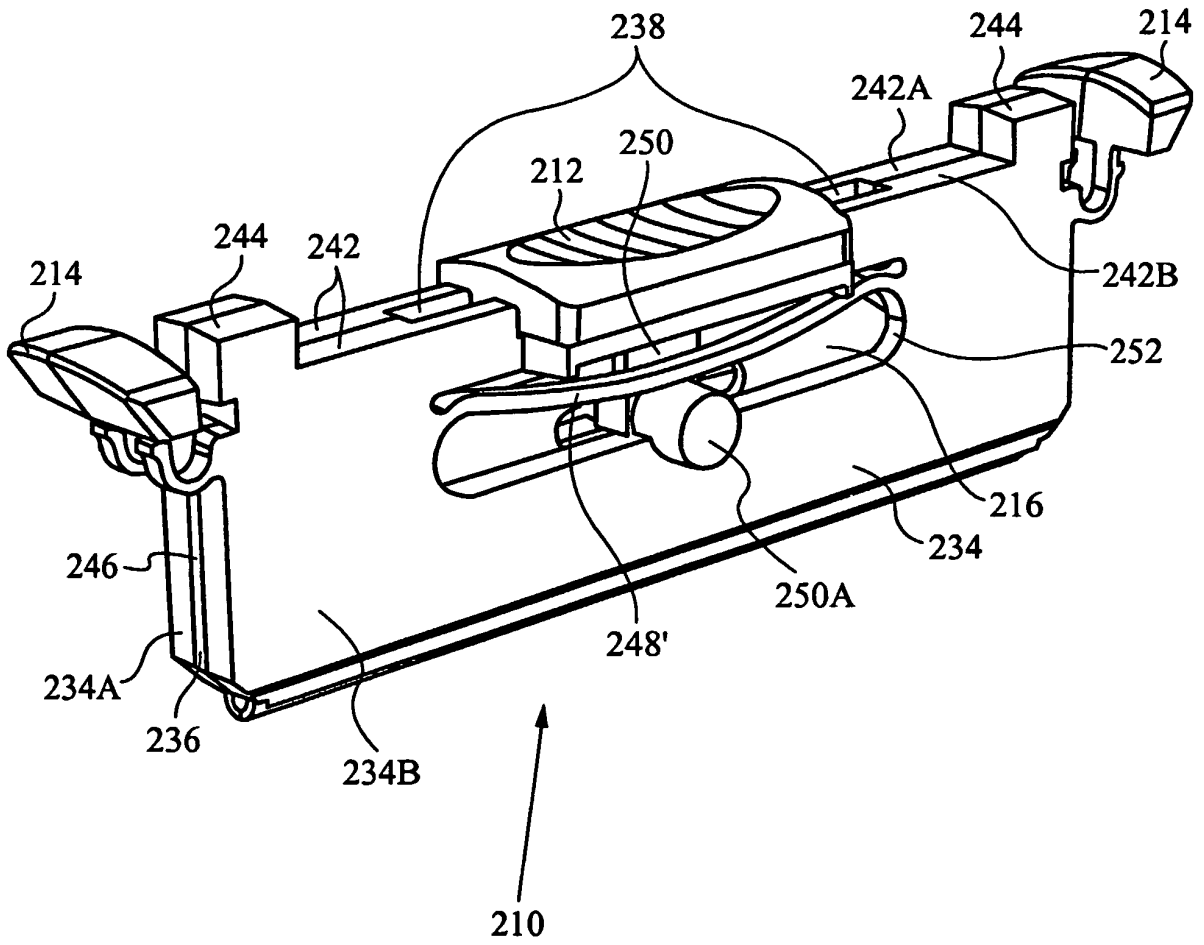


*Fig. 10A*

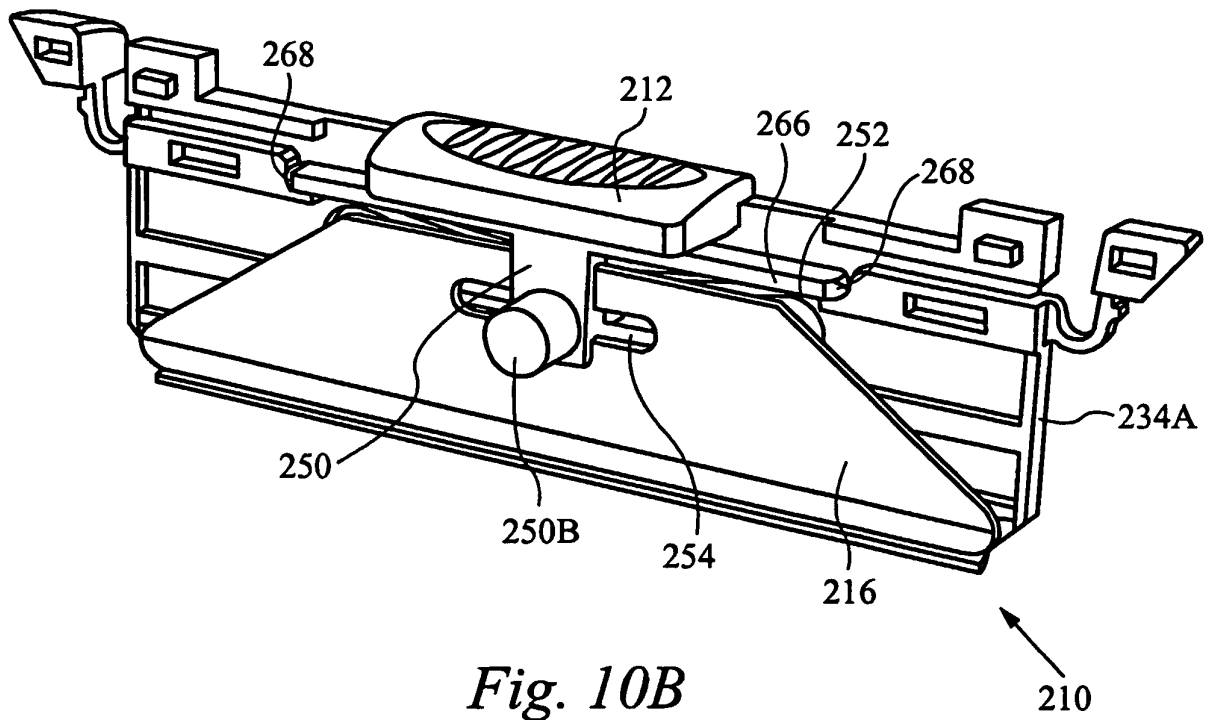


*Fig. 10B*




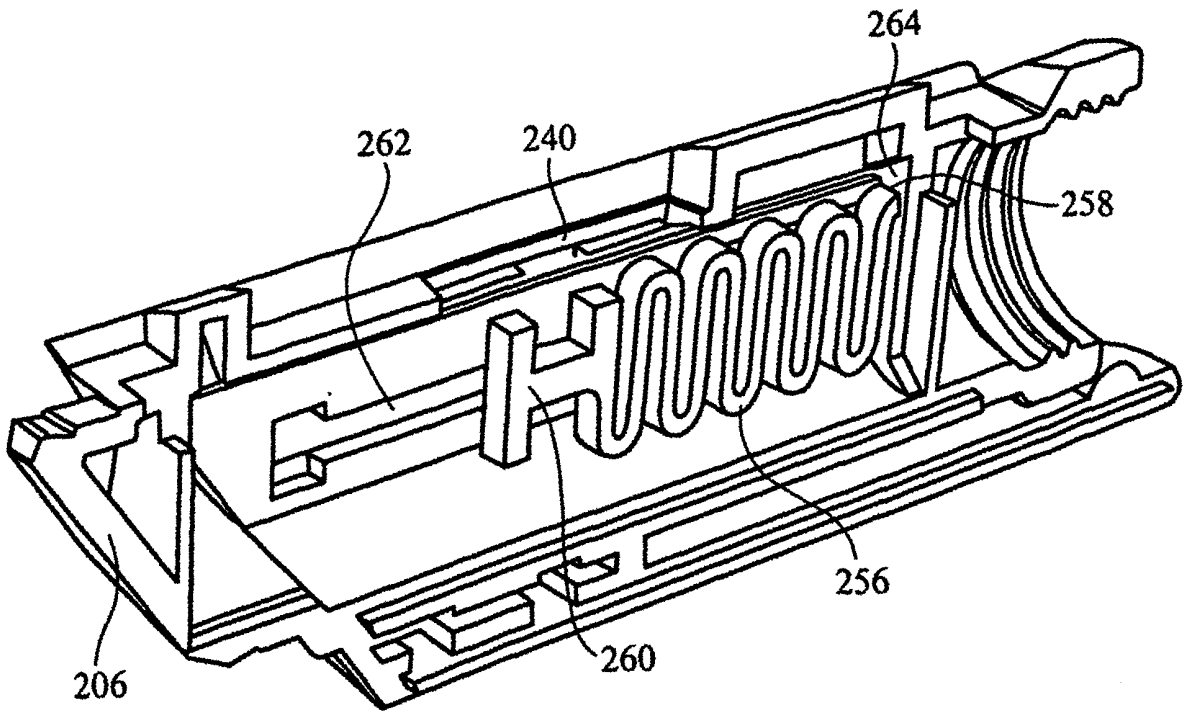

*Fig. 11*

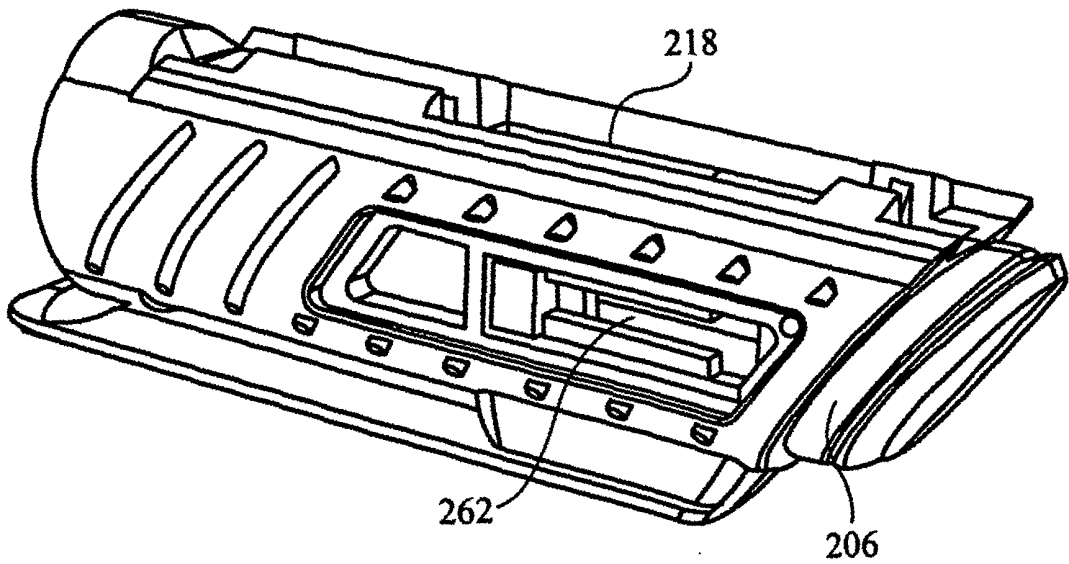

*Fig. 12*

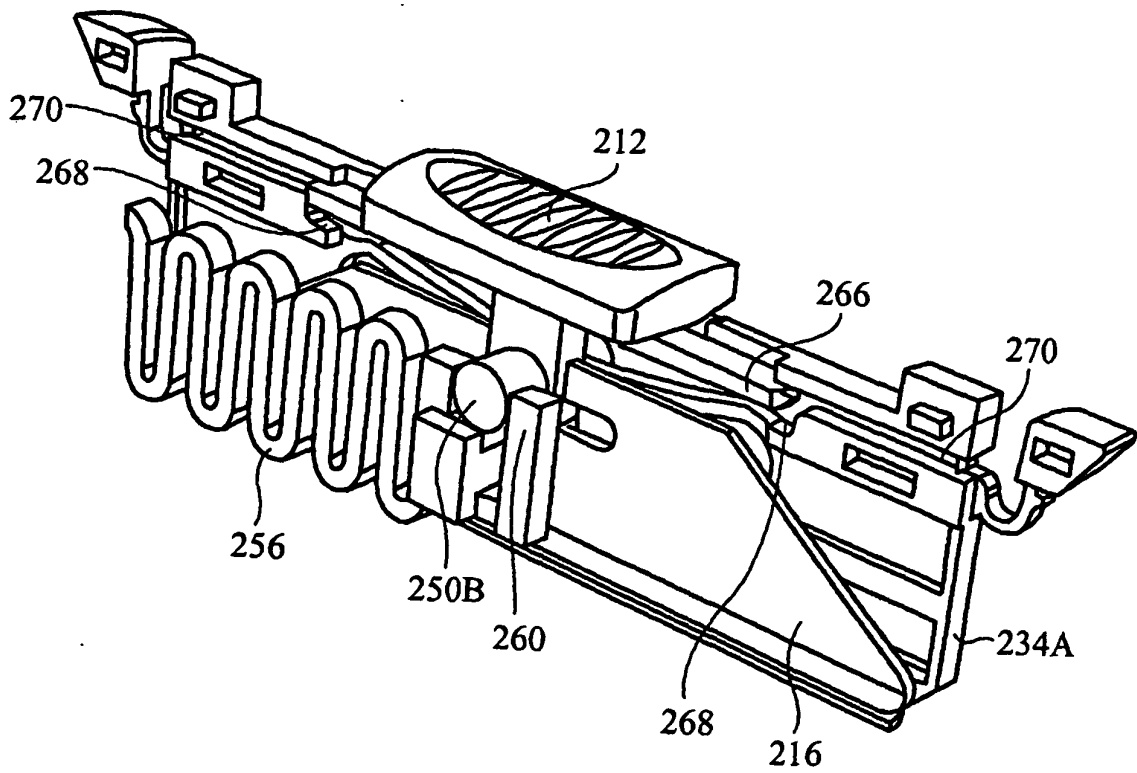

*Fig. 13*