




(12) **DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2017/09/29  
(87) Date publication PCT/PCT Publication Date: 2018/03/15  
(85) Entrée phase nationale/National Entry: 2019/03/11  
(86) N° demande PCT/PCT Application No.: US 2017/054275  
(87) N° publication PCT/PCT Publication No.: 2018/049429

(51) Cl.Int./Int.Cl. *B65D 71/42* (2006.01),  
*B65B 17/02* (2006.01), *B65B 67/00* (2006.01),  
*B65D 71/50* (2006.01)  
(71) Demandeur/Applicant:  
WESTROCK PACKAGING SYSTEMS, LLC, US  
(72) Inventeurs/Inventors:  
KOOO, LINH L., US;  
GREY, CASEY P., US;  
ZACHERLE, MATTHEW E., US  
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : PLAQUE D'APPLICATEUR, APPAREIL ET PROCEDE  
(54) Title: APPLICATOR PLATE, APPARATUS AND METHOD

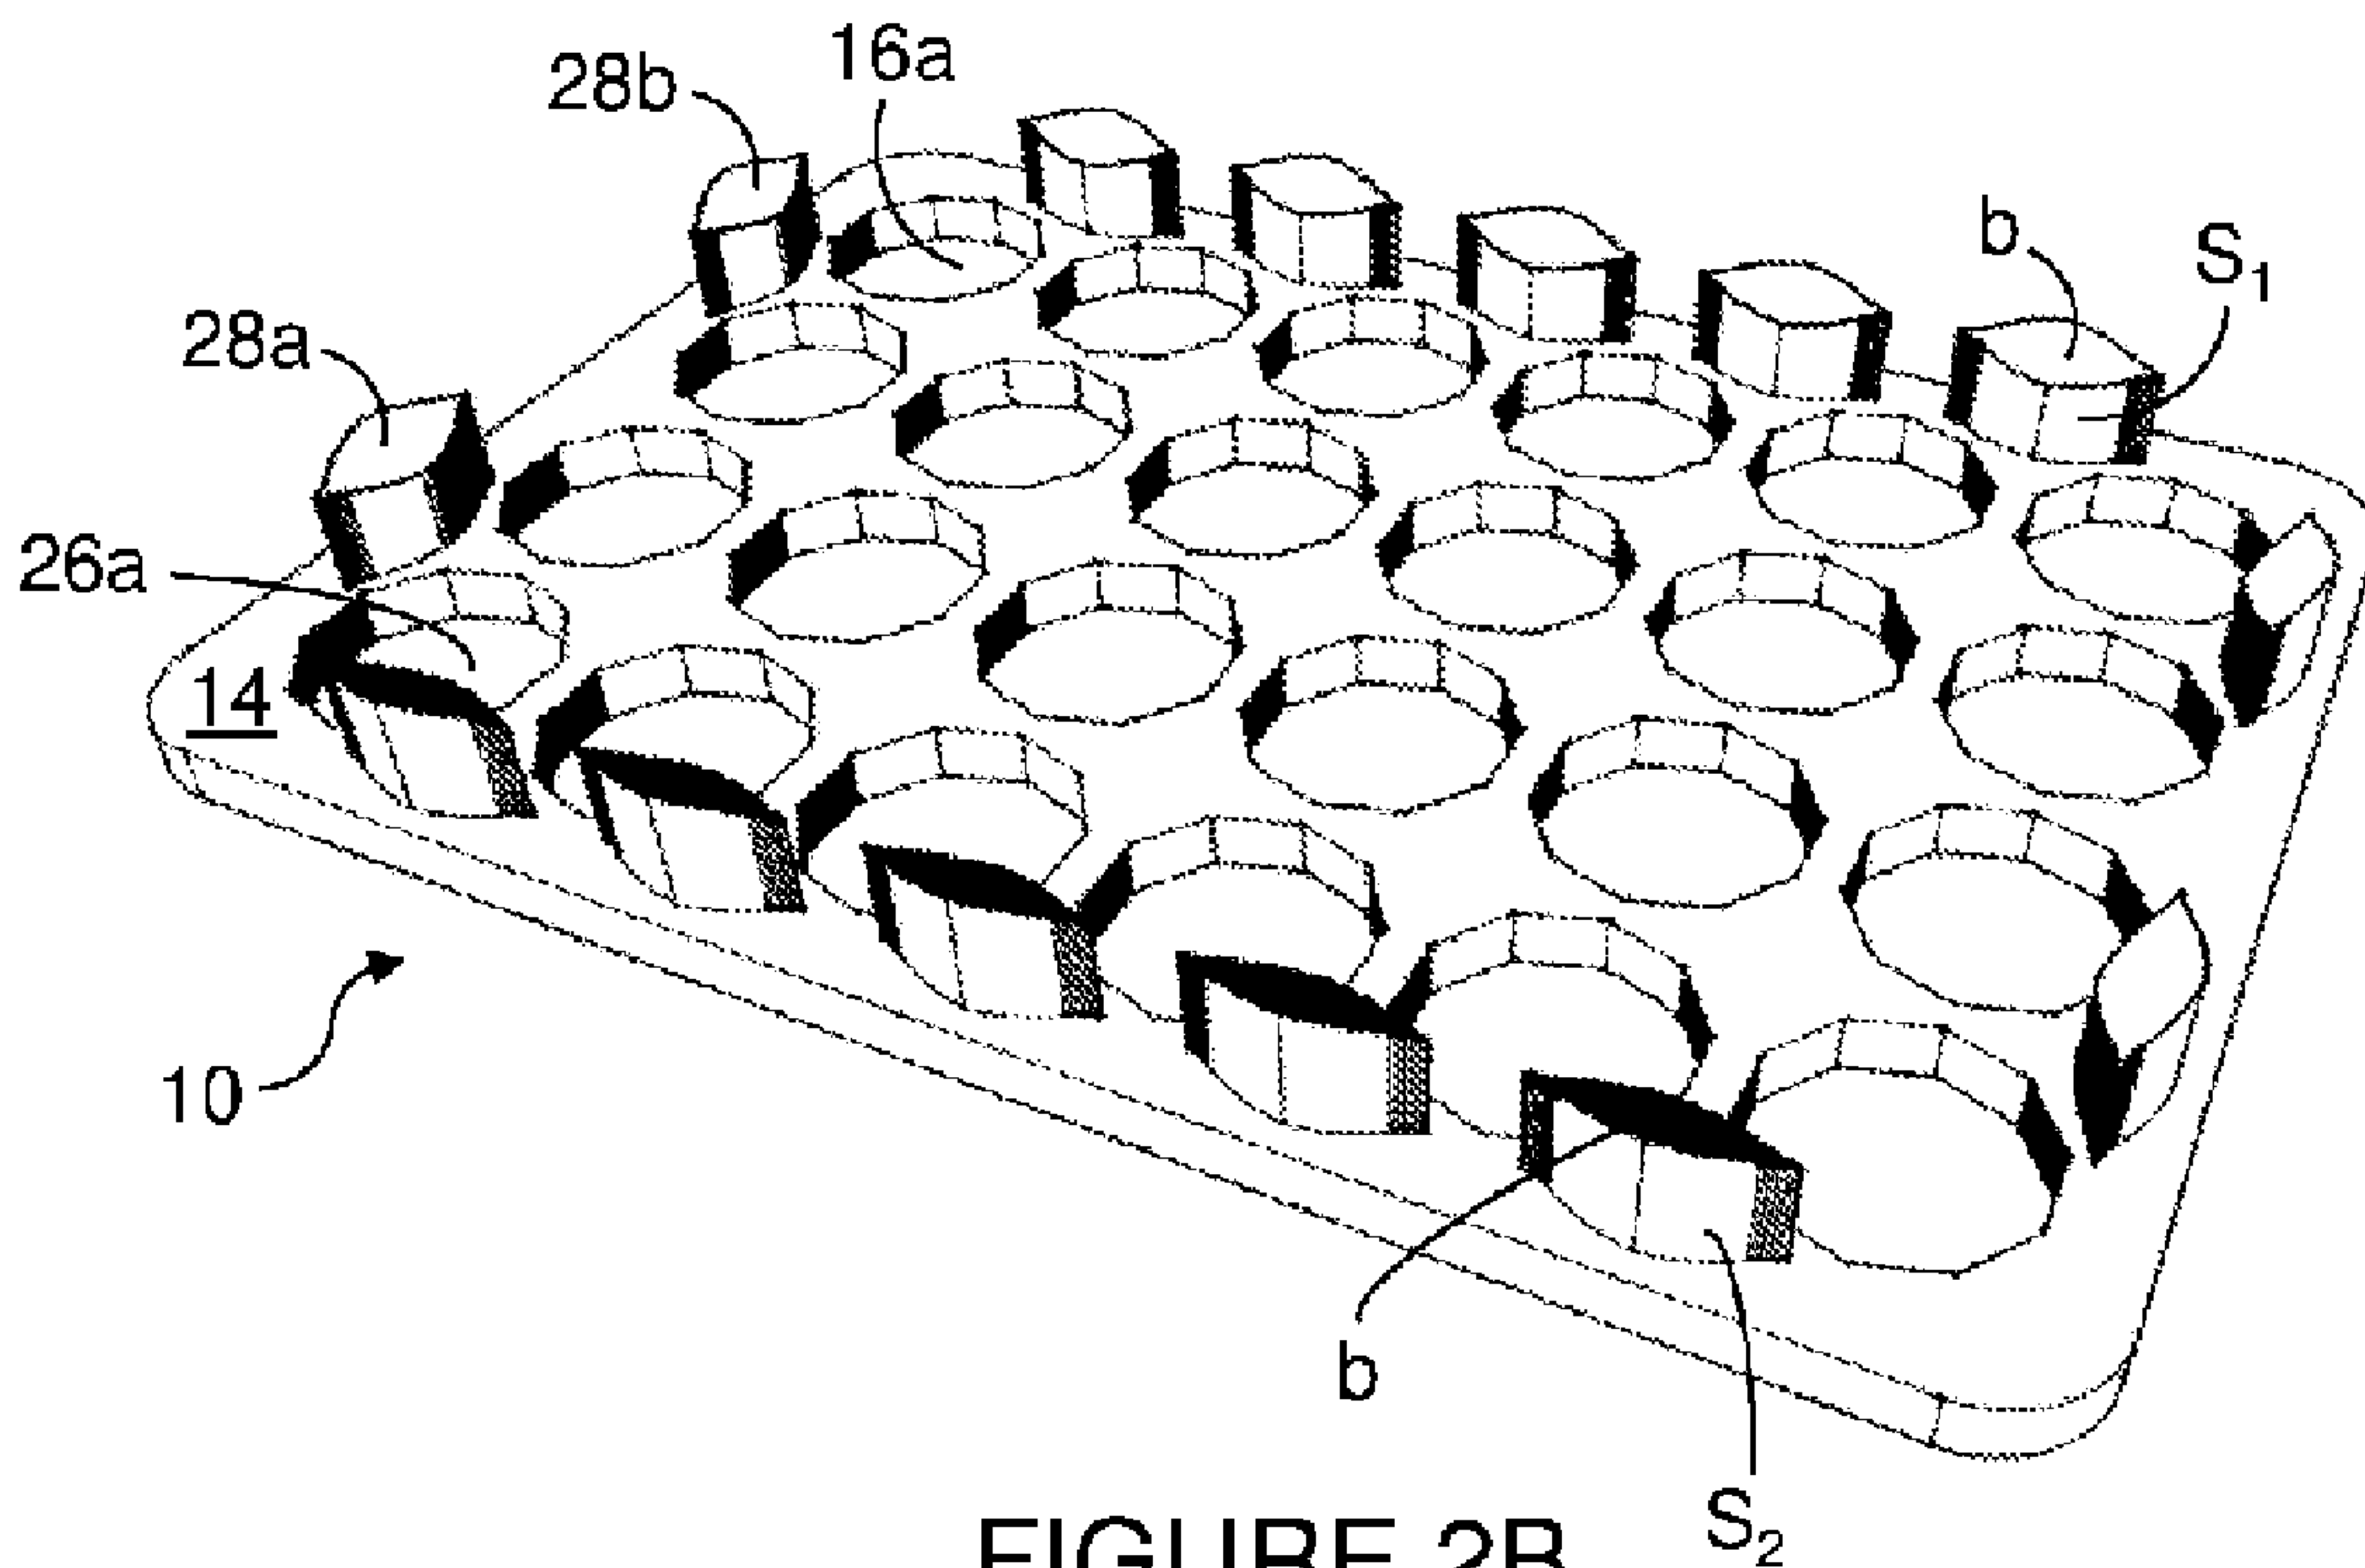

(57) **Abrégé/Abstract:**

Aspects of the invention relate to an applicator plate (10) for use in an apparatus (80) for attaching a set of frangibly adjoined top engaging clips (110) to a group of articles 'C'. The applicator plate (10) having a generally planar body; and a plurality of apertures (16a-26f) within the body. Each aperture (16a-26f) has a series of internal walls (16i-16x) arranged such that each aperture (16a-26f) has a polygonal shape.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(43) International Publication Date  
15 March 2018 (15.03.2018)(10) International Publication Number  
**WO 2018/049429 A4**

## (51) International Patent Classification:

*B65D 71/42* (2006.01)      *B65D 71/50* (2006.01)  
*B65B 17/02* (2006.01)      *B65B 67/00* (2006.01)

## (21) International Application Number:

PCT/US2017/054275

## (22) International Filing Date:

29 September 2017 (29.09.2017)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

62/393,344      12 September 2016 (12.09.2016) US

(71) Applicant: WESTROCK PACKAGING SYSTEMS, LLC [US/US]; 504 Thrasher Street, Norcross, Georgia 30071 (US).

(72) Inventors: KOOC, Linh L.; 403 W 29th Street, Richmond, Virginia 23225 (US). GREY, Casey P.; 601 1/2 N. 30th Street, Richmond, Virginia 23223 (US). ZACHERLE, Matthew E.; 1148 Joliette Road, Chesterfield, Virginia 23235 (US).

(74) Agent: SUZUKI, Tsugihiko et al.; WestRock Company, 501 South 5th Street, Richmond, Virginia 23219-0501 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: APPLICATOR PLATE, APPARATUS AND METHOD

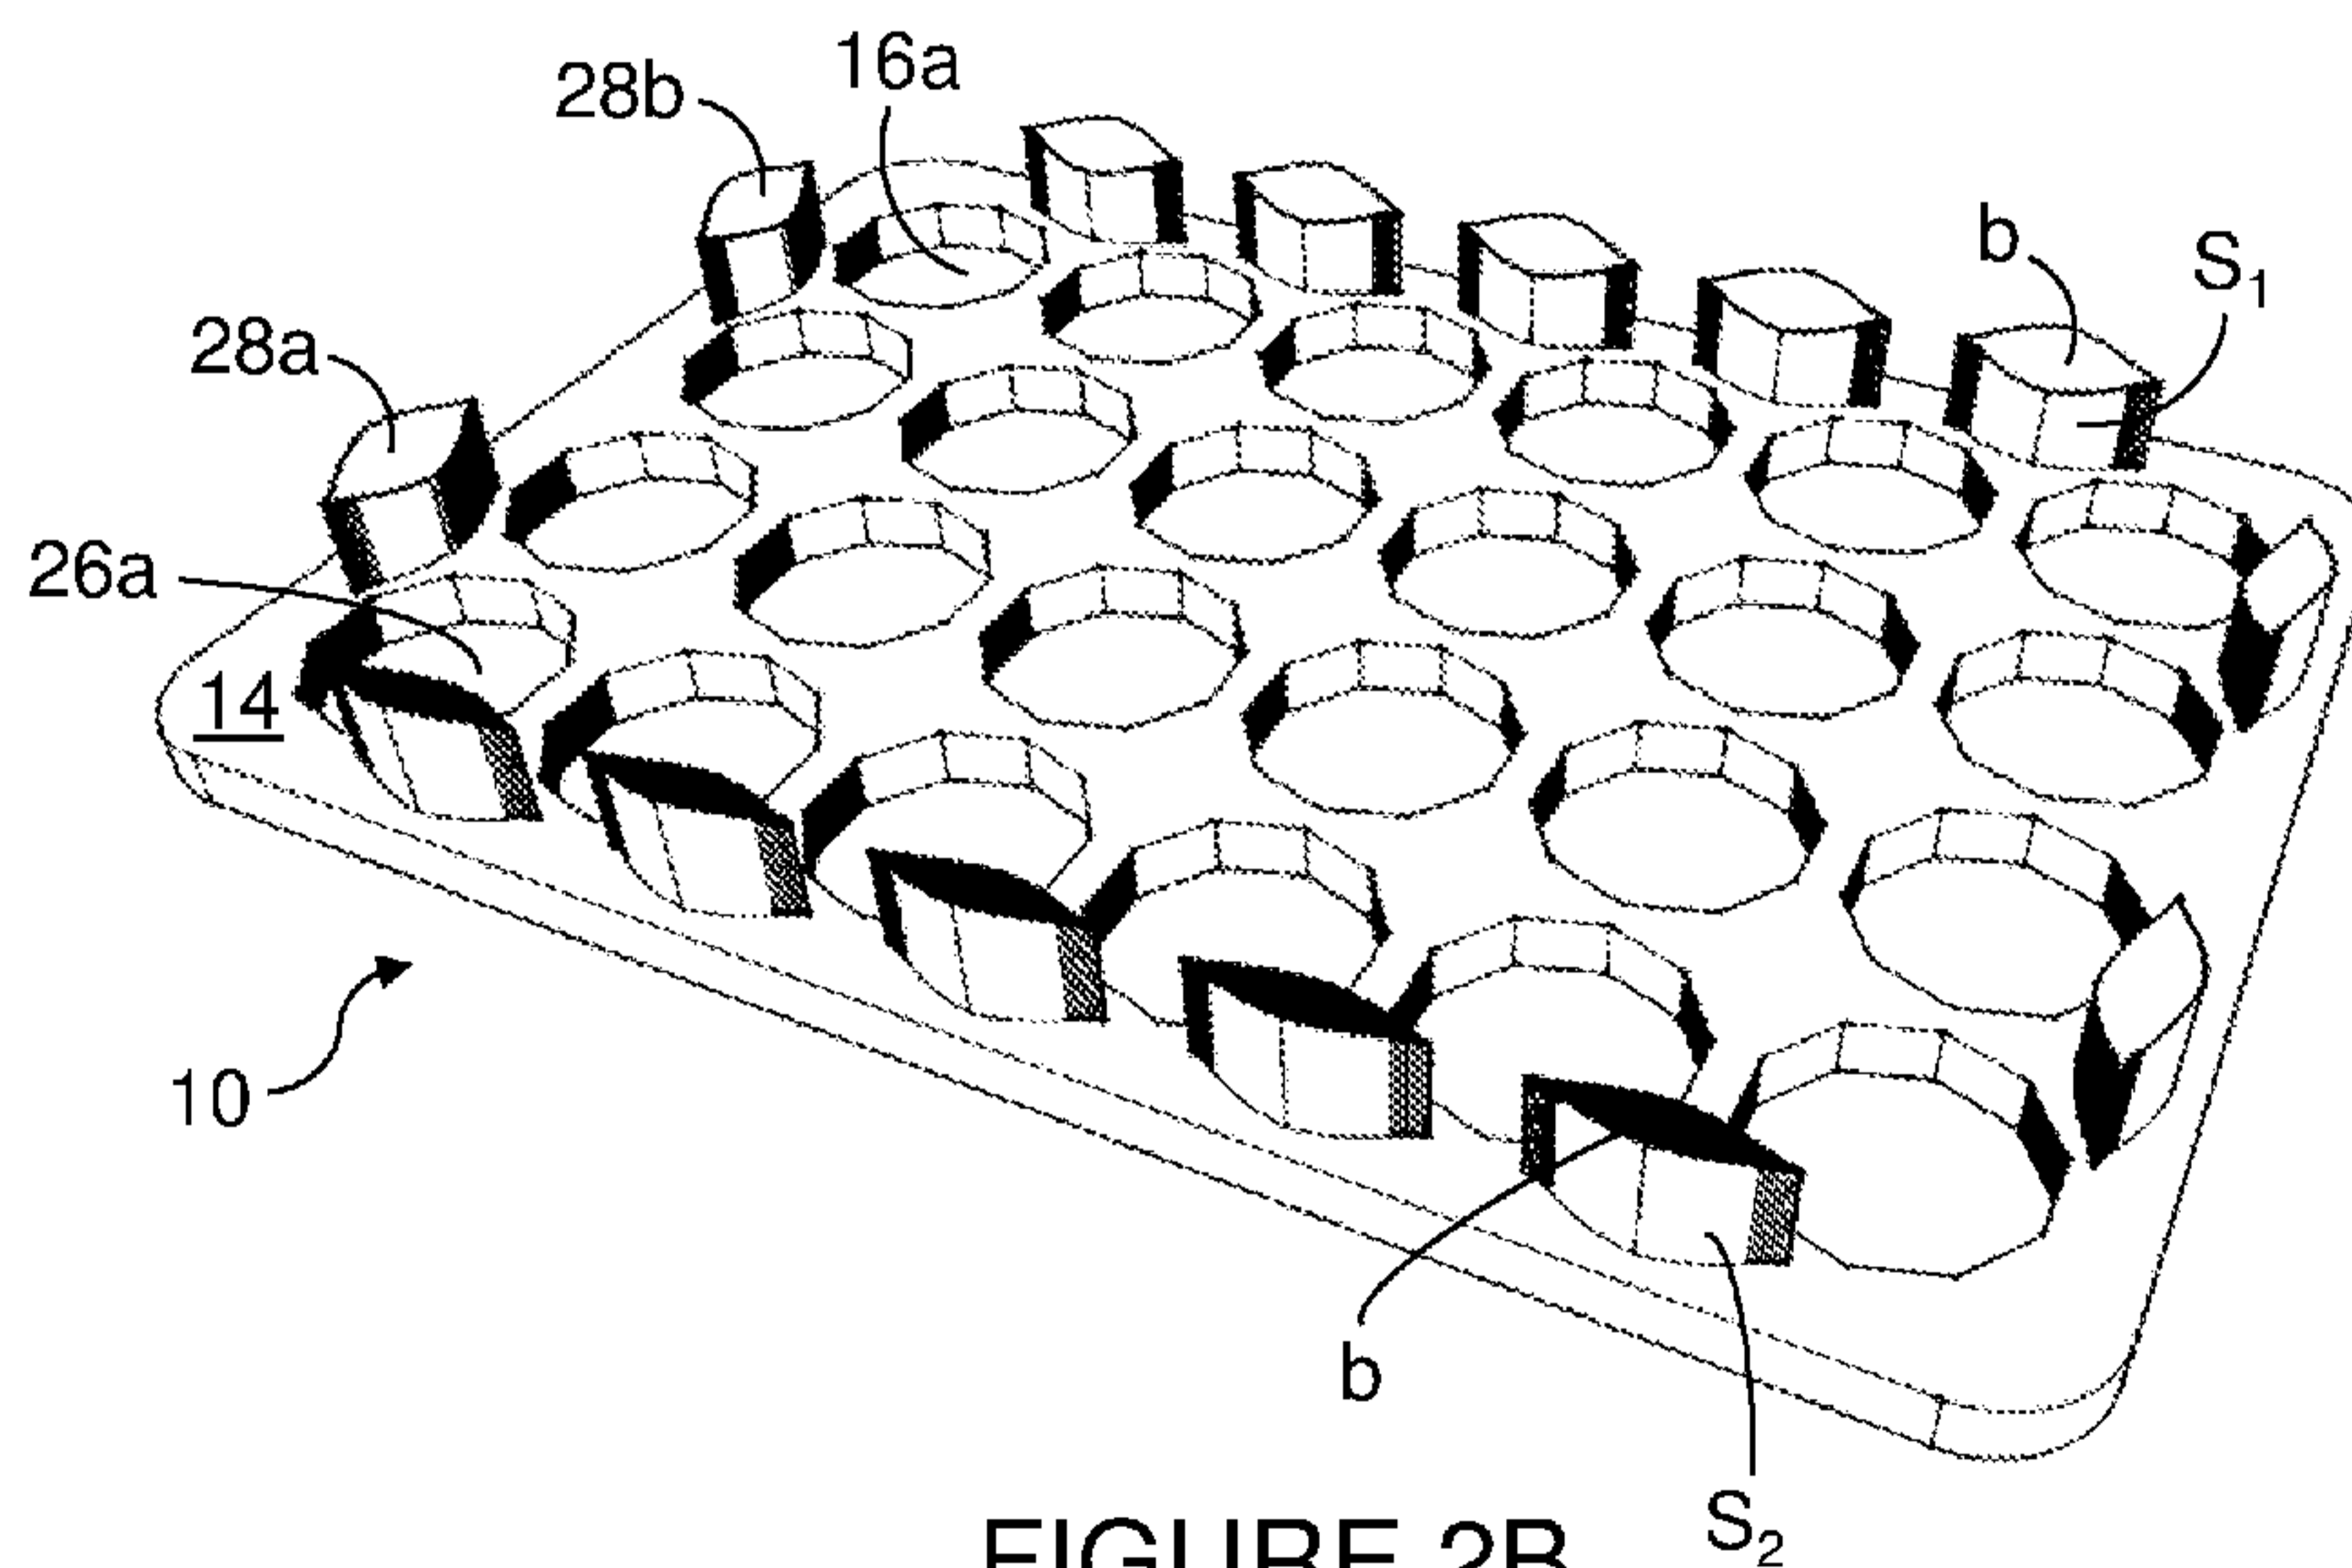


FIGURE 2B

(57) Abstract: Aspects of the invention relate to an applicator plate (10) for use in an apparatus (80) for attaching a set of frangibly adjoined top engaging clips (110) to a group of articles 'C'. The applicator plate (10) having a generally planar body; and a plurality of apertures (16a-26f) within the body. Each aperture (16a-26f) has a series of internal walls (16i-16x) arranged such that each aperture (16a-26f) has a polygonal shape.

[Continued on next page]

**WO 2018/049429 A4** 

---

**Published:**

- *with international search report (Art. 21(3))*
- *with amended claims (Art. 19(1))*
- *with information concerning request for restoration of the right of priority in respect of one or more priority claims (Rules 26bis.3 and 48.2(b)(vii))*

**Date of publication of the amended claims:**

14 June 2018 (14.06.2018)

## APPLICATOR PLATE, APPARATUS AND METHOD

## FIELD OF THE INVENTION

The present invention relates to an applicator plate for use in an apparatus for attaching one  
5 or more clips to a group of articles and more specifically, but not exclusively to an applicator  
plate comprising a plurality of apertures each having a series of internal walls arranged such  
that each aperture has a polygonal shape for forming the one or more clips to the group of  
articles. Even more specifically, but not exclusively, the present invention relates to an  
applicator plate for attaching a set of frangibly adjoined clips to a group of articles, the  
10 applicator plate arranged such that the frangible connection between adjoined clips is broken  
to form a series of separate clips and separate groups of articles. Furthermore, the invention  
relates to an apparatus comprising the applicator plate and to a method of forming groups of  
articles.

15

## BACKGROUND OF THE INVENTION

In the field of packaging it is often required to provide consumers with a package comprising  
multiple primary product containers. The primary product containers may be held together by  
a top engaging carrier such that a group of articles can be selected and transported as a  
20 single unit. One such top engaging carrier is formed from plastic and comprises a series of  
linked rings. The rings fit over the rimmed edges of cans and groups of cans can be held  
together using such plastic rings. Disadvantages of such plastic rings are that the plastic  
cannot easily be printed on in order to provide additional marketing, branding and  
promotional indicia; the plastic is not readily recyclable; and the plastic rings have been  
25 associated with health risks to wildlife.

In order to provide an improvement in this field, the present applicant has invented a new top  
engaging clip for grouped articles (which is the subject of a separate patent application) and  
an apparatus suitable for attaching the new top engaging carrier.

30

## SUMMARY OF INVENTION

According to a first aspect there is provided an applicator plate for use in an apparatus for  
attaching one or more top engaging clips to a group of articles. The applicator plate having:  
a generally planar body; and a plurality of apertures within the body, wherein each aperture  
has a series of internal walls arranged such that each aperture of said plurality of apertures  
has a polygonal shape.

Optionally, an upper surface of said generally planar body is flat.

Optionally, each aperture has ten internal walls arranged such that the aperture has a decagon shape.

Optionally, the applicator plate further comprises at least one peg depending from a lower surface of said generally planar body.

Optionally, the plurality of apertures are arranged in a matrix of rows and columns wherein said at least one peg depends from a location to the end or side of the matrix of apertures.

Optionally, the at least one peg has a flat base and two side walls, wherein the two side walls meet at a first end of the peg, wherein the two side walls meet at a second end of the peg, wherein between the first and second ends the two side walls each curve outwardly away from the first and second ends, and wherein the peg has a substantially leaf-shaped cross-section.

Optionally, the plurality of apertures comprises twenty-four apertures arranged in four columns and six rows.

5

Optionally, the at least one peg comprises fourteen pegs, two pegs at each end of the four columns and five pegs at each side of the six rows.

Optionally, each peg is positioned adjacent to two apertures of the matrix.

Optionally, the applicator plate comprises a series of apertures or recesses through which an alignment peg, of an apparatus with which the applicator plate is used, may pass.

According to another aspect, there is provided an apparatus for attaching a set of frangibly adjoined top engaging clips to a group of articles, the apparatus comprising:

- (i) an applicator plate according to any of the relevant preceding paragraphs;
- (ii) a base plate for receiving a group of articles; and
- (iii) a reciprocating element coupled to the applicator plate and/or base plate and being operable to provide relative movement of the applicator plate and base plate toward one another and away from one another.

Optionally, the apparatus comprises a top plate coupled to the reciprocating element, wherein the reciprocating element is operable to move the top plate towards the base plate.

Optionally, the applicator plate is associated with the top plate and moves towards the base plate with the top plate.

Optionally, the applicator plate is structured and arranged to locate and form a set of frangibly adjoined top engaging clips onto a group of articles positioned on the base plate and is structured and arranged to break the frangible connection between adjoined engaging clips of the set in order to form a discrete number of clipped together groups of articles.

Optionally, a grouping component is provided and is structured and arranged for receiving a group of articles and for maintaining the group of articles as an organized group.

Optionally, the grouping component comprises four sides, a base and an open top and wherein a group of cans can be deposited on said base and retained by the four side walls.

Optionally, the reciprocating element comprises a handle, lever arm and coil spring coupled together such that depression of the handle causes the spring to contract which causes the applicator plate to be lifted up away from the grouping component.

Optionally, the apparatus further comprises a drive means for moving the reciprocating element up and down.

5

Optionally, the applicator plate is releasably attachable to the apparatus.

Optionally, the applicator plate is releasably attachable to the top plate.

Optionally, the top plate comprises at least one alignment peg.

According to yet a further aspect, there is provided a method of attaching one or more top engaging clips to a group of articles, the method comprising:

(i) receiving a group of articles and maintaining the group of articles as an organized group;

- (ii) providing an applicator plate according to any of the relevant preceding paragraphs; and
- (iv) locating and forming the one or more clips onto the group of articles thereby forming one or more clipped together groups of articles.

Optionally, the one or more top engaging clips comprises a set of frangibly adjoined top engaging clips and the step of locating and forming the set of frangibly adjoined top engaging clips breaks the frangible connection between adjoined top engaging clips of the set and thereby forms a discrete number of clipped together groups of articles.

Optionally, the method further comprises:

- (i) associating the set of frangibly adjoined top engaging clips with a lower surface of the applicator plate; and
- (ii) moving the applicator plate and set of frangibly adjoined top engaging clips down towards the group of articles

5 Within the scope of this application it is envisaged that the various aspects, embodiments, examples, features and alternatives set out in the preceding paragraphs, in the claims and/or in the following description and drawings may be taken independently or in any combination thereof. For example, features described in connection with one embodiment are applicable to all embodiments unless there is incompatibility of features.

#### BRIEF DESCRIPTION OF THE DRAWINGS

10 Exemplary embodiments of the invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is a plan view of an upper surface of an applicator plate for use in an apparatus for attaching a set of adjoined top engaging clips to a group of articles, such as cans, according to a first embodiment of the invention;

Figure 2A is a plan view of a lower surface of the applicator plate of Figure 1;

15 Figure 2B is a perspective view of the lower surface and side edge of the applicator plate of Figures 1 and 2;

Figure 3 is a plan view from above of a set of adjoined top engaging clips, each top engaging clip of the set for attaching an array of articles together in a group, for example a 2 x 3 arrangement of cans in a single group;

20 Figure 4 is a perspective view from above of an apparatus for attaching a set of adjoined

top engaging clips, such as that shown in Figure 3, to a group of articles, the apparatus comprising the applicator plate of Figures 1 to 2B;

Figure 5 is a perspective view from below of a portion of the apparatus of Figure 4 showing the set of adjoined top engaging clips on a lower surface of the applicator plate and  
5 a grouped arrangement of cans ready to have the set of clips applied thereto for forming into four separate 2 x 3 groups of cans;

Figure 6A is a perspective view from above of the applicator plate and a grouped arrangement of articles, wherein the applicator plate is aligned above the group in readiness for applying the set of adjoined top engaging clips;

10 Figure 6B is a perspective view from above of the applicator plate disposed on top of the grouped arrangement of articles of Figure 6, showing that the applicator plate is applying the set of adjoined top engaging clips;

Figure 7A is a perspective view from the side of the apparatus of Figures 4 and 5 showing the applicator plate and a grouped arrangement of articles, wherein the applicator  
15 plate is aligned above the group in readiness for applying the set of adjoined top engaging clips;

Figure 7B is a perspective view from the side of the apparatus of Figures 4 and 5 showing that the applicator plate is applying the set of adjoined top engaging clips;

20 Figure 8 is a perspective view from above of the apparatus of Figures 4, 5, 7A and 7B, showing a grouping component for receiving the group of cans and for maintaining the group of cans as an organised group removed from the remainder of the apparatus;

Figure 9 is a perspective view from below of a portion of a group of cans showing the applicator plate aligned with and disposed on top of the article group and showing the set of adjoined clips in the process of being applied to the group; and

25 Figure 10 is a perspective view from the side of an apparatus according to various embodiments showing an applicator plate and a grouped arrangement of articles, wherein the applicator plate is aligned above the group in readiness for attaching the set of adjoined top engaging clips to the article group.



## DETAILED DESCRIPTION OF EMBODIMENTS OF THE PRESENT INVENTION

Detailed descriptions of specific embodiments of the applicator plates, apparatus and methods are disclosed herein. It will be understood that the disclosed embodiments are merely examples of the way in which certain aspects of the invention can be implemented and do not represent an exhaustive list of all of the ways the invention may be embodied. As used herein, the word “exemplary” is used expansively to refer to embodiments that serve as illustrations, specimens, models, or patterns. Indeed, it will be understood that the applicator plates, apparatus and methods described herein may be embodied in various and alternative forms. The figures are not necessarily to scale and some features may be exaggerated or minimised to show details of particular components. Well-known components, materials or methods are not necessarily described in great detail in order to avoid obscuring the present disclosure. Any specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one skilled in the art to variously employ the invention.

15

Referring to Figure 3 there is shown a plan view from above of a blank 110 that forms a set of top engaging clips 112a, 112b, 112c, 112d frangibly adjoined by frangible connections 22, 24. The blank 110 is to be attached as a single unit to a grouped arrangement of articles 88 (see Figures 4, 5, 6A, 6B for example). Each top engaging clip 112a, 112b, 112c, 112d of the set is to be attached to an optional 2 x 3 arrangement of articles and separated from the other top engaging clips 112a, 112b, 112c, 112d to form four separate groups of arranged articles (not shown per se). Beneficially, in some arrangements, an apparatus 80 disclosed herein, automatically breaks the frangible connections 22, 24 between the top engaging clips 112a, 112b, 112c, 112d of the set of frangibly adjoined top engaging clips 112a, 112b, 112c, 112d such that the apparatus applies a single blank 110 to a grouped arrangement of articles 88 and forms four smaller groups of articles each joined by a top engaging clip 112a, 112b, 112c, 112d.

20

25

In order to aid the understanding of the applicator plates 10, apparatus 80 and methods which are the subject of the present application, the set 110 of frangibly adjoined top engaging clips 112a, 112b, 112c, 112d will be further described with reference to Figure 3.

30

In the embodiments detailed herein, the terms “clip”, “carton” and “carrier” refer, for the non-limiting purpose of illustrating the various features of the invention, to a container for engaging and grouping articles, such as primary product containers. It is contemplated that the teachings of the invention can be applied to various product containers, which may or may not be tapered and/or cylindrical. Exemplary containers include bottles (for example

35

metallic, glass or plastics bottles), cans (for example aluminium cans), tins, pouches, packets and the like.

The blank 110 is formed from a sheet of suitable substrate. It is to be understood that, as  
5 used herein, the term "suitable substrate" includes all manner of foldable sheet material such as paperboard, corrugated board, cardboard, plastic, combinations thereof, and the like. It should be recognised that one or other numbers of blanks may be employed, where suitable, for example, to provide the carrier structure described in more detail below.

10 The packaging structures or cartons described herein may be formed from a sheet material such as paperboard, which may be made of or coated with materials to increase its strength. An example of such a sheet material is tear-resistant NATRALOCK® paperboard made by WestRock Company. It should be noted that the tear resistant materials may be provided by  
15 more than one layer, to help improve the tear-resistance of the package. Typically, one surface of the sheet material may have different characteristics to the other surface. For example, the surface of the sheet material that faces outwardly from a finished package may be particularly smooth and may have a coating such as a clay coating or other surface treatment to provide good printability. The surface of the sheet material that faces inwardly  
20 may, on the other hand, be provided with a coating, a layer, a treatment or be otherwise prepared to provide properties such as one or more of tear-resistance, good glue-ability, heat sealability, or other desired functional properties.

In the illustrated embodiment, the blank 110 is configured to form a set of four clips 112a,  
122b, 112c, 112d for grouping, coupling or otherwise linking together an exemplary  
25 arrangement of exemplary articles 'C'. In the embodiment illustrated in Figure 3, each of the four clips 112a, 122b, 112c, 112d holds together, in a grouped arrangement, six articles arranged in three rows of two articles each. The articles 'C' are beverage cans having a rim or chimed upper edge. Accordingly, the blank 110 is configured to be formed over a large grouped arrangement of articles 88. In the illustrated embodiment, the arrangement is a 6 x  
30 4 matrix or array; in the illustrated embodiment four columns and six rows of articles are provided for a grouped arrangement 88 of twenty-four cans 'C'. In this illustrated embodiment, the blank 110 may employ four clips 112a, 112b, 112c, 112d in a 3 x 2 matrix or array, each being frangibly connected to at least two other blanks 112b, 112c, 112d, 112a by means of frangible connections 22, 24 and separating apertures A9. Alternatively, the  
35 blank 110 can be configured to form a carrier for packaging other types, number and size of articles and/or for packaging articles in a different arrangement or configuration to that shown herein.

Referring to Figure 3, the blank 110 comprises four top engaging clips 112a, 112b, 112c, 112d, each having a main panel for forming a top wall or engaging panel of the clip 112a, 112b, 112c, 112d.

5

Each main panel includes at least one article retention structure R1, R2, R3, R4, R5, R6. In the embodiment of Figure 3 each main panel comprises a plurality of article retention structures R1, R2, R3, R4, R5, R6, specifically six article retention structures R1, R2, R3, R4, R5, R6 arranged in 2 x 3 matrix or array.

10

Each of the article retention structures R1, R2, R3, R4, R5, R6 is substantially similar in construction and only one article retention structure will therefore be described in detail. It being understood that in other embodiments, the blank 110 may comprise more than one article retention structure having a different size, format, configuration and/or structure compared to that shown and the applicator plate may be adapted accordingly to accommodate such clips.

15

Each article retention structure comprises an aperture A1. A plurality of article engaging tabs ti, tii, tiii, tiv, tv, tvi, tvii, tviii, tix, tx (ti-tx) are arranged about the periphery of the aperture A1.

20

Each tab ti-tx is hinged to the main panel 12 by a fold line 17. Each tab ti-tx is spaced apart from its adjacent neighbours by a cutaway or recess 18. In this way each tab ti-tx comprises a first side edge 19 and a second side edge 21. Each tab ti-tx comprises a free end edge 23 opposing the hinged end edge 17. The free end edges 23 form engaging edges for retaining an article 'C', or at least a portion thereof, within the aperture A1. In other embodiments, the number, size, format, and/or arrangement of tabs may differ from that described here. For example, the aperture A1 may not have a uniform configuration; may not be symmetrical; may have a different number of tabs; may include one or more tabs of a different size; and/or may have an irregular shape. The applicator plate may be adapted accordingly to accommodate such clips.

25

30

Each of the recesses 18 comprises a curvilinear portion 20. In the illustrated embodiment the recesses 18 comprise a rounded end. That is to say the curvilinear portion 20 can be defined by a portion of the circumference of a notional circle. A portion of the recess 18 may be defined by a segment of a circle. A further portion of the recess 18 may be defined by a trapezoid; the trapezoid may be an isosceles trapezoid. The trapezoid has convergent side edges 19, 21. Each tab ti-tx may be hinged to the main panel 12 by a straight fold line 17

35

which straight fold line 17 is in tangential contact, or intersects, with the rounded end 20 of the adjacent recess 18.

The curvilinear portion 20 or rounded end of the cutaway 18 may reduce the likelihood of tears propagating in the main panel 12 from the cutaway 18.

In the illustrated embodiment each article retention structure R1 comprises ten tabs  $t_i$ - $t_x$  arranged about the periphery of the aperture A1. The article retention structure R1 defines a notional circle. The circle C1 is defined by the vertices of a first polygon defined by the fold lines 17 of the tabs  $t_i$ - $t_x$ . In the illustrated embodiment the first polygon is a decagon, or ten sided polygon; in other embodiments, other polygons having more or less sides may be employed. Each of the sides 17 of the first polygon are of equal length.

The free end edges 23 of the tabs  $t_i$ - $t_x$  define a second polygon. The tabs  $t_i$ - $t_x$  have a height defined between the free end edge 23 and the hinged edge 17. In the illustrated embodiment the first polygon is a decagon, or ten sided polygon; in other embodiments other polygons having more or less sides may be employed. The second polygon comprises the same number of sides as the first polygon. Each of the sides of the second polygon is of equal length. In other embodiments, the sides of the first and/or second polygon may not each have an equal length and the sides may have one or more lengths; and/or the number of sides may differ from that illustrated.

The main panels 112a, 112b, 112c, 112d each comprise a matrix or array of article retention apertures R1 – R6, in a  $Y \times Z$  arrangement, where  $Y$  indicates the number of rows of articles 'C' and  $Z$  indicates the number of columns of articles 'C'.

In the embodiment illustrated in Figure 3 the articles 'C' are arranged in a 3 x 2 matrix. The width of the main panel 12 may be equal to twice the maximum width of the article 'C'. The length L of the main panel 12 may be equal to thrice the maximum width of the article 'C'.

The diameter of the notional circle may be less than the maximum diameter of an article 'C' and greater than the (smaller) diameter of the chime, cap or flange of the article 'C'.

The main panel 12 may optionally comprise a handle structure. The handle structure may comprise a first handle aperture A7 and a second handle aperture A8. The first handle aperture A7 is struck from the main panel 12 and is located in a region disposed centrally

between four article retention structures R1, R2, R3, R4. The second handle aperture A8 is struck from the main panel 12 and is located in a region disposed centrally between four article retention structures R3, R4, R5, R6. The first handle aperture A7 may be defined in part by a cushioning tab hinged to the main panel 112a, 112b, 112c, 112d by a fold line. The  
5 second handle aperture A8 may be of similar construction.

The main panel 112a, 112b, 112c, 112d may optionally comprise one or more pull tabs T1. The pull tabs T1 may be located substantially at the corners of the main panel 112a, 112b, 112c, 112d. The pull tabs T1 may be substantially triangular in shape. The pull tabs T1 may  
10 be arranged to extend the main panel 12 beyond the footprint of the group of articles C1a, C2a, C1b, C2b, C1c, C2c being packaged; in this way a user may more readily disengage the carrier or clip 112a, 112b, 112c, 112d from a group of articles C1a, C2a, C1b, C2b, C1c, C2c.

15 The main panel 112a, 112b, 112c, 112d optionally includes at least a paperboard substrate and a tear resistant layer laminated together. It optionally includes an adhesive layer between the paperboard substrate and the tear resistant layer. The material of the paperboard substrate may be selected from any conventional paperboard, for example, ranging in weight upwardly from about 10 pt., preferably from about 11 pt. to about 14 pt. An  
20 example of such a substrate is a 12-point SBS board or CNK board manufactured by WestRock Company. The paperboard substrate may be a bleached or unbleached board. The board may be coated on at least one side, optionally the side opposite the lamination, with a conventional coating selected for compatibility with the printing method and board composition.

25 The tear resistant layer may be disposed over the uncoated side of the paperboard substrate and may be formed of polymeric material and secured to the substrate. The tear resistant layer imparts toughness to the laminate structure. Suitable tear resistant materials may include, but not be limited to, tear resistant laminated sheet material, e.g., NATRALOCK®,  
30 which may include a layer of an n-axially oriented film, e.g. MYLAR®, which is a bi-axially oriented polyester, oriented nylon, cross-laminated polyolefin or high density polyolefin. The orientation and cross-laminated structure of these materials contribute to the tear resistant characteristic. Also, tear resistance may be attributed to the chemical nature of the tear resistant material such as extruded metallocene-catalyzed polyethylene (mPE).

35 Alternatively, the tear resistant layer may be a layer of linear low-density polyethylene (LLDPE). In embodiments where linear low-density polyethylene (LLDPE) or mPE is used, it

is not necessary to incorporate an adhesive layer. Other suitable materials having a high level of tear resistance may also be used.

The adhesive layer may be formed of polyolefin material such as a low density polyethylene (LDPE). The adhesive layer may be placed between the substrate and the tear resistant layer to secure the tear resistant layer to the substrate.

Turning now to the apparatus 80 and applicator plate 10 used therein for constructing the blank 110 into a carrier containing groups of articles, reference is made to Figure 4. In Figure 4 there is a perspective view of an apparatus 80 capable of accepting an input of primary products, such as, but not limited to, bottles or cans, hereinafter referred to as articles 'C'.

The apparatus 80 is for attaching a set of adjoined top engaging clips 110 to a group of articles 88, such as cans 'C'. The apparatus comprises an applicator plate 10 (see Figures 1, 2A and 2B) which is described in further detail below. The apparatus 80 is used in conjunction with a grouping component 86 (see Figures 5, 6B, 7B and 8) structured and arranged for receiving a group of articles 88 and for maintaining the group of articles 88 as an organized group. The grouping component 86 is optionally a tertiary packaging carton which may optionally be formed from corrugated board and which may be removed from the apparatus with the clipped together cans. Alternatively, the grouping component may be a tray that is used to collect individual cans 'C' leaving a canning line (not shown) and group them together into a set 88 of cans 'C'. The apparatus also comprises a reciprocating element 84 and a base plate 78. The reciprocating element 84 is optionally coupled to the applicator plate 10, is positioned relative to the base plate 78, and is operable to move the applicator plate 10 down towards the base plate 78 and up away from the base plate 78.

The applicator plate 10 is structured and arranged to locate and form the set of frangibly adjoined top engaging clips 110 onto a group of articles 88 positioned on, in or within the grouping component 86 and is structured and arranged to break the frangible connections 22, 24 between adjoined engaging clips 112a, 112b, 112c, 112d of the set in order to form a discrete number of clipped together groups of articles. In this illustrated arrangement four discrete groups of six articles, each clipped together in a 2 x 3 arrangement are formed.

As shown, in Figures 5, 6B, 7B and 8 the grouping component 86 comprises four sides, a base, and an open top. A grouped arrangement of articles 88 can be deposited on the base and retained by the four side walls. In other embodiments it is envisaged that the grouping

component 86 may take a variety of structures, configurations and forms suitable for facilitating the placement of a group of articles 88 thereon and suitable for maintaining the articles 88 in an organized group. In this way, when the apparatus 80 is operational and the applicator plate 10 is lowered down onto the tops of the articles 'C' and is located thereon, the articles 'C' cannot and do not move, and their relative locations are not disturbed, thus enabling the applicator plate 10 to locate and/or form the set of frangibly connected top gripping clips 110.

The reciprocating element 84 comprises a handle 'H', a lever arm 98 and a coil spring 90 coupled together such that movement of the handle 'H' causes the spring 90 to contract or extend which causes the top plate 82 and applicator plate 10 (coupled thereto) to be lifted up away from or moved down towards the base plate 78. The handle 'H' may be coupled by via one or more handle arms 92a, 92b to a lower end of the coil spring 90. An upper end of the coil spring 90 may be coupled to a first end of the lever arm 98. The lever arm 98 may pivot about a central fulcrum. A second end of the lever arm 98 may be coupled to a rod 96 and the rod 96 may be coupled to a top plate 82. The applicator plate 10 may be releasably attachable to the apparatus 80. Optionally, the applicator plate 10 may be releasably attachable to the top plate 82. In this way when a clip or set of frangibly connected clips having a different arrangement of apertures is used to group a number of articles in an arrangement differing from that shown in Figure 3, such that an applicator plate having a matching configuration or similarly shaped apertures is required, the new applicator plate can be substituted for the original applicator plate 10 without having to replace the entire apparatus 80. The applicator plate 10 may also be referred to as an "applicator mould" since it is a component that is structured and arranged to mould and form the top gripping clip onto the group of articles 88.

The apparatus 80 may comprise a drive means for moving the reciprocating element 82 up and down, thus avoiding manual articulation using a handle (which would not be required). Such an arrangement may incorporate a motor, a piston and/or other suitable electro mechanical components to facilitate automated lifting and lowering of the applicator plate 10. However, in the present operation, the apparatus is manually operated.

The applicator plate 10 which may optionally be utilized in the apparatus 80 for attaching a set of frangibly adjoined top engaging clips 110 to a group of articles 88 is best shown in Figures 1, 2A and 2B. The applicator plate 10 has a generally planar body and comprises a plurality of apertures 16a to 24f formed within the body. The plurality of apertures 16a-24f is optionally arranged in a matrix matching the arrangement of apertures A1 provided in the set

of top engaging clips 110. Accordingly, in this embodiment and for use with a top engaging clip 110 such as that shown in Figures 3 and 4, the applicator plate 10 comprises a four column by six row arrangement of apertures 16a, 16b, 16c, 16d, 16e, 16f, 18a, 18b, 18c, 18d, 18e, 18f, 20a, 20b, 20c, 20d, 20e, 20f and 26a, 26b, 26c, 26d, 26e, 26f (herein referred to collectively as 16a - 26f). In other embodiments or arrangements, the applicator plate 10 may have a different number and/or different arrangement of articles.

Each aperture (16a – 26f) within the applicator plate 10 is formed entirely through the depth of the applicator plate 10. Each aperture 16a – 26f comprises a series of internal walls arranged such that each aperture 16a – 26f has shape, size, configuration and relative location that cooperates with the arrangement of article retention structure R1, R2, R3, R4, R5, R6. Accordingly, in this optional illustrated arrangement, each aperture 16a – 26f has a polygonal cross-sectional shape. Optionally, each aperture 16a – 26f has ten evenly sized and evenly angled internal walls 16i-16x arranged such that each aperture 16a – 26f has a decagon shape.

An upper surface 12 of the generally planar body of the applicator plate 10 is optionally flat and optionally smooth. In other arrangements the upper surface 12 may comprise attachment means for coupling the applicator plate 10 to the top plate 82 of the reciprocating component 84. In some arrangements the applicator plate 10 also serves as the top plate 82 and is directly coupled to the reciprocating component 84.

The applicator plate 10 may additionally comprise at least one alignment peg (referred to herein simply as “peg”) 28a, 28b, 28c, 28d, 30a, 30b, 30c, 30d, 30e, 32a, 32b, 32c, 32d, 32e, depending from the lower surface 14 of said generally planar body. This is best seen in Figures 2A and 2B. Optionally, the at least one peg 28a - 32e has a flat base ‘b’ and two side walls S1, S2. The at least one peg 28a-32e is symmetrical. The two side walls S1, S2 meet at a first end of the at least one peg 28a-32e. The two side walls S1, S2 meet at a second end of the at least one peg 28a-32e and between the first and second ends the two side walls S1, S2 each curve outwardly away from the first and second ends. Optionally, the at least one peg 28a-32e has a substantially leaf-shaped cross-section.

As described above the plurality of apertures 16a – 26f are arranged in a matrix of rows and columns. Four columns of apertures 16, 18, 20, 26 each comprise six rows of apertures a, b, c, d, e, f each. Apertures 16a, 18a, 20a, 26a define a first end of the matrix of apertures 16a – 26f; apertures 16a, 16b, 16c, 16d, 16e, 16f define a first side of the matrix of apertures 16a – 26f; apertures 16f, 18f, 20f, 26f; define a second end of the matrix of apertures 16a – 26f;



and apertures 32a, 32b, 32c, 32d, 32e, 32f define a second side of the matrix of apertures 16a – 26f.

The at least one peg 28a-32e hangs down or depends from the lower surface 14. The pegs 28a -32e may be positioned at a location along the first or second end of the matrix of apertures 16a-26f. The pegs 28a -32e may be positioned at a location along the first or second side of the matrix of apertures 16a-26f. Optionally, each peg 28a-32e is positioned adjacent to two apertures 16a-26f of the matrix. Each peg 28a-32e may be shaped to fit in the gap between the lower edges of two internal walls of one aperture and the lower edges of two internal walls of another adjacent aperture. For example, a peg 28b located along a first end of the matrix of apertures 16a-26f, fits between the lower edges of internal walls 16i and 16ii of aperture 16a; and the lower edges of internal walls 18ix and 18viii of aperture 18a (see Figure 2A).

In the illustrated arrangement each peg 28a-32e comprises fourteen pegs 28a-32e. The arrangement of fourteen pegs 28-32e comprises two pegs 28a, 28b; 28c, 28d at each end of the four columns of apertures and five pegs 30a, 30b, 30c, 30d, 30e; 32a, 32b, 32c, 32d, 32e at each of the first and second sides of the matrix of apertures 16a-26f. The applicator plate may be constructed from a single member or may be made from one or more components and further optionally may be formed from multiple cooperative components and may have, for example, a modular structure.

The shape, size and location of the alignment pegs 28a-32e enables the pegs to fit closely between two adjacent articles of the group of articles 88 (see Figures 6B and 9). In this way as the applicator plate 10 is lowered towards the group of articles 88, the pegs 28a-32e, locate in gaps between two adjacent articles (see for example peg 28c between articles C3f and C4f in Figure 9). Together the pegs 28a-32e arranged around the perimeter of the group or articles 88 ensure that as well as being held by the grouping component 86 at a bottom end, the articles 88 are held in a correct position and carefully aligned with the incoming applicator plate 10.

Turning to the construction of the top engaging clips and grouped articles from the blank 110, the following method may be employed. Firstly, a group of articles 88 is received and optionally maintained as an organized group of articles. This may be achieved with the assistance of the grouping component 86. An applicator plate 10, as described above may be provided and may be associated with the set of frangibly adjoined top engaging clips 110 and top plate 82. More specifically, the set of frangibly adjoined top engaging clips 110 may

be associated with a lower surface 14 of the applicator plate 10. The set of frangibly adjoined top engaging clips 110 may be associated with a lower surface 14 of the applicator plate 10 by means of vacuum suction, temporary mechanical attachment or by other suitable means. Then the applicator plate 10 and associated set of frangibly adjoined top engaging clips 110 are moved down towards the group of articles 88 by actuation of the reciprocating element 84 of the apparatus 80; then the arrangement of pegs 28a-32e are located around the articles to ensure proper alignment between the applicator plate 10, clip 110 and group 88; and then the set of frangibly adjoined top engaging clips 110 are located, pressed onto and formed onto the group of articles 88. In pressing and forming the top engaging clips 110 onto the group of articles, the frangible connection 24 between adjoined top engaging clips 112a, 112b, 112c, 112d is broken, thus automatically forming a discrete number of clipped together groups of articles. Alternatively, the set of frangibly adjoined top engaging clips 110 may be located directly on top of the grouped arrangement of articles; and a lower surface 14 of the applicator plate 10 may become associated with the set of frangibly adjoined top engaging clips 110 only once the applicator plate 10 has been moved down onto the group of articles 88.

The apparatus facilitates the relative movement of the blank 110, applicator plate and article group in an aligned manner. Optionally, the blank 110 and applicator plate 10 are lowered with respect to the group of articles 88 such that each of the plurality of apertures 16a – 26f of the applicator plate 10 and such that each article retention structure R1, R2, R3, R4, R5, R6 of each top engaging clip 112a, 112b, 112c, 112d of the blank 110 is aligned with a respective article 'C' in the group of articles 88. Furthermore, the applicator plate 10 is aligned with the set of frangibly adjoined top engaging clips 110 such that an internal wall 16i-16x of each polygonal aperture 16a – 26f is aligned with a fold line 17 of a corresponding article retention structure R1, R2, R3, R4, R5, R6 of a top engaging clip 112a, 112b, 112c.

By relative movement of the article group 88 and applicator plate 10 and blank 110, upper portions of each article 'C' passes through the main panel of each top engaging clip 112a, 112b, 112c, 112d. As the internal walls 16i-16x of each aperture 16a-26f of the applicator plate 10 move down against the article tops 'C', the tabs ti-tx of each of the article retention structures R1, R2, R3, R4, R5, R6 are folded out of the plane of the main panel and engage beneath the chime or flange of an article 'C'. The depth of the applicator plate 10 is sufficient to ensure that the tabs ti-tx of each of the article retention structures R1, R2, R3, R4, R5, R6 are folded and fully engage with each article 'C'. In this way the tabs ti-tx grip or hold the articles 'C' and prevent or inhibit the articles 'C' from unintentionally separating from the main panel of each top engaging clip 112a, 112b, 112c, 112d. It will be recognized that

- 16 -

whereas the apparatus 80 provides a moving top plate 82, that holds and moves the applicator plate 10 and blank 110 down towards the article group 88, in other arrangements, the base plate 78 housing the article group 88 may move upwardly towards a top plate 82 holding the applicator plate 10 and blank 110. In yet further non-illustrated arrangements,  
5 both the top plate 82 and base plate 78 may move towards each other.

Another optional feature of the top engaging clips 112a, 112b, 112c, 112d is that the main panels are each defined by a perimeter to which no other part of the top engaging clip 112a, 112b, 112c, 112d is connected. That is to say the top engaging clip 112a, 112b, 112c, 112d  
10 is free of connection to other panels for example, but not limited to, side or end wall panels which in other carriers extend about the sides of the article group. The perimeter of the main panel 12 is therefore defined in its entirety by free, cut or unhinged edges. The perimeter of the main panel may be folded at an angle relative to the rest of the main panel, by virtue of the folding of the polygonal arrangement of tabs ti-tx of the article retention structures R1,  
15 R2, R3, R4, R5, R6 and their engagement beneath the chime or flange of an article 'C'. Accordingly, the frangible connections 22, 24 are broken and the set of frangibly adjoined top engaging clips 110 is automatically broken into four separate top engaging clips 112a, 112b, 112c, 112d thus forming four separate groups of articles.

20 Referring now to Figure 10, there is shown an alternative embodiment of the present invention. In the second illustrated embodiment, like numerals have, where possible, been used to denote like parts, albeit with the addition of the prefix "200" to indicate that these features belong to the second embodiment. The alternative embodiment shares many common features with the first embodiment and therefore only the differences from the  
25 embodiment illustrated in Figures 1 to 9 will be described in any greater detail.

In Figure 10 the apparatus 280 again comprises top plate 282 that moves downwardly towards a group of articles 288 held within a grouping component 286 on a base plate 278. However, in this arrangement, the top plate 282 comprises a series of pegs 228a-232e and  
30 the applicator plate 210 comprises a series of recesses or apertures through which the series of pegs 228a-232e may pass. In this way, as the top plate 282 is lowered towards the article group 288, the pegs 228a-232e ensure both correct positioning and retain the position of the group of articles 88, and the applicator plate 210. The pegs may be removable to accommodate different articles, different article group sizes and/or different article group  
35 configurations.

It can be appreciated that various changes may be made within the scope of the present invention, for example, the size and shape of the panels and apertures may be adjusted to accommodate articles of differing size or shape. In other embodiments of the invention it is envisaged that the set of frangibly adjoined clips may be replaced by a single clip for a single  
5 group of articles.

It will be recognized that as used herein, directional references such as "top", "bottom", "front", "back", "end", "side", "inner", "outer", "upper" and "lower" do not necessarily limit the respective panels to such orientation, but may merely serve to distinguish these panels from  
10 one another.

As used herein, the terms "hinged connection" and "fold line" refer to all manner of lines that define hinge features of the blank, facilitate folding portions of the blank with respect to one another, or otherwise indicate optimal panel folding locations for the blank. A fold line is  
15 typically a scored line, an embossed line, or a debossed line. Any reference to hinged connection or fold line should not be construed as necessarily referring to a single fold line only; indeed, it is envisaged that hinged connection can be formed from any one or more of the following, a short slit, a frangible line or a fold line without departing from the scope of the invention.

20

As used herein, the term "severance line" refers to all manner of lines that facilitate separating portions of the substrate from one another or that indicate optimal separation locations. Severance lines may be frangible or otherwise weakened lines, tear lines, cut  
lines, or slits.

25

It should be understood that hinged connection, severance lines and fold lines can each include elements that are formed in the substrate of the blank including perforations, a line of perforations, a line of short slits, a line of half-cuts, a single half-cut, a cut line, an interrupted  
cut line, slits, scores, any combination thereof, and the like. The elements can be  
30 dimensioned and arranged to provide the desired functionality. For example, a line of perforations can be dimensioned or designed with degrees of weakness to define a fold line and/or a severance line. The line of perforations can be designed to facilitate folding and resist breaking, to facilitate folding and facilitate breaking with more effort, or to facilitate breaking with little effort.

## AMENDED CLAIMS

received by the International Bureau on 23 April 2018 (23.04.2018)

## CLAIMS

## CLAIMS

1. An applicator plate for use in an apparatus for attaching a set of frangibly adjoined top engaging clips to a group of articles, the applicator plate having:
  - a generally planar body; and
  - a plurality of apertures within the body, the applicator plate further comprising at least one peg depending from a lower surface of said generally planar body.
2. An applicator plate according to claim 1 wherein an upper surface of said generally planar body is flat.
3. An applicator plate according to claim 1 or 2 wherein each aperture has ten internal walls arranged such that the aperture has a decagon shape.
4. (Cancelled).
5. An applicator plate according to claim 1 wherein the plurality of apertures are arranged in a matrix of rows and columns wherein said at least one peg depends from a location to the end or side of the matrix of apertures.
6. An applicator plate according to claim 1 wherein the at least one peg has a flat base and two side walls, wherein the two side walls meet at a first end of the peg, wherein the two side walls meet at a second end of the peg, wherein between the first and second ends the two side walls each curve outwardly away from the first and second ends, and wherein the peg has a substantially leaf-shaped cross-section.
7. An applicator plate according to claim 6 wherein the plurality of apertures comprises twenty four apertures arranged in four columns and six rows.
8. An applicator plate according to claim 1 wherein the at least one peg comprises fourteen pegs, two pegs at each end of the four columns and five pegs at each side of the six rows.
9. An applicator plate according to claim 8 wherein each peg is positioned adjacent to two apertures of the matrix.

10. An applicator plate according to claim 1, 2 or 3 wherein the applicator plate comprises a series of apertures or recesses through which an alignment peg, of an apparatus with which the applicator plate is used, may pass.
11. An apparatus for attaching a set of frangibly adjoined top engaging clips to a group of articles, the apparatus comprising:
  - (i) an applicator plate according to any of claims 1 to 10;
  - (ii) a base plate for receiving a group of articles; and
  - (iii) a reciprocating element coupled to the applicator plate and/or base plate and being operable to provide relative movement of the applicator plate and base plate toward one another and away from one another.
12. An apparatus according to claim 11 wherein the apparatus comprises a top plate coupled to the reciprocating element, wherein the reciprocating element is operable to move the top plate towards the base plate.
13. An apparatus according to claim 11 wherein the applicator plate is associated with the top plate and moves towards the base plate with the top plate.
14. An apparatus according to claim 13 wherein the applicator plate is structured and arranged to locate and form the set of frangibly adjoined top engaging clips onto a group of articles positioned on the base plate and is structured and arranged to break the frangible connection between adjoined engaging clips of the set in order to form a discrete number of clipped together groups of articles.
15. An apparatus according to claim 13 or 14 wherein a grouping component is provided and is structured and arranged for receiving a group of articles and for maintaining the group of articles as an organized group.
16. An apparatus according to claim 15 wherein the grouping component comprises four sides, a base and an open top and wherein a group of cans can be deposited on said base and retained by the four side walls.

17. An apparatus according to any of claims 11 to 16 wherein the reciprocating element comprises a handle, lever arm and coil spring coupled together such that depression of the handle causes the spring to contract which causes the applicator plate to be lifted up away from the grouping component.
18. An apparatus according to claim 17 further comprising a drive means for moving the reciprocating element up and down.
19. An apparatus according to any of claims 11 to 18 wherein the applicator plate is releasably attachable to the apparatus.
20. An apparatus according to claim 12 wherein the applicator plate is releasably attachable to the top plate.
21. An apparatus according to claim 12 wherein the top plate comprises at least one alignment peg.
22. A method of attaching one or more top engaging clips to a group of articles, the method comprising:
  - (i) receiving a group of articles and maintaining the group of articles as an organized group;
  - (ii) providing an applicator plate according to any of claims 1 to 10; and
  - (iii) locating and forming the one or more clips onto the group of articles thereby forming one or more clipped together groups of articles.
23. A method according to claim 22 wherein the one or more top engaging clips comprises a set of frangibly adjoined top engaging clips and the step of locating and forming the set of frangibly adjoined top engaging clips breaks the frangible connection between adjoined top engaging clips of the set and thereby forms a discrete number of clipped together groups of articles.
24. A method according to claim 22 or 23 further comprising:
  - (a) associating the set of frangibly adjoined top engaging clips with a lower surface of the applicator plate; and

- (b) moving the applicator plate and set of frangibly adjoined top engaging clips down towards the group of articles.



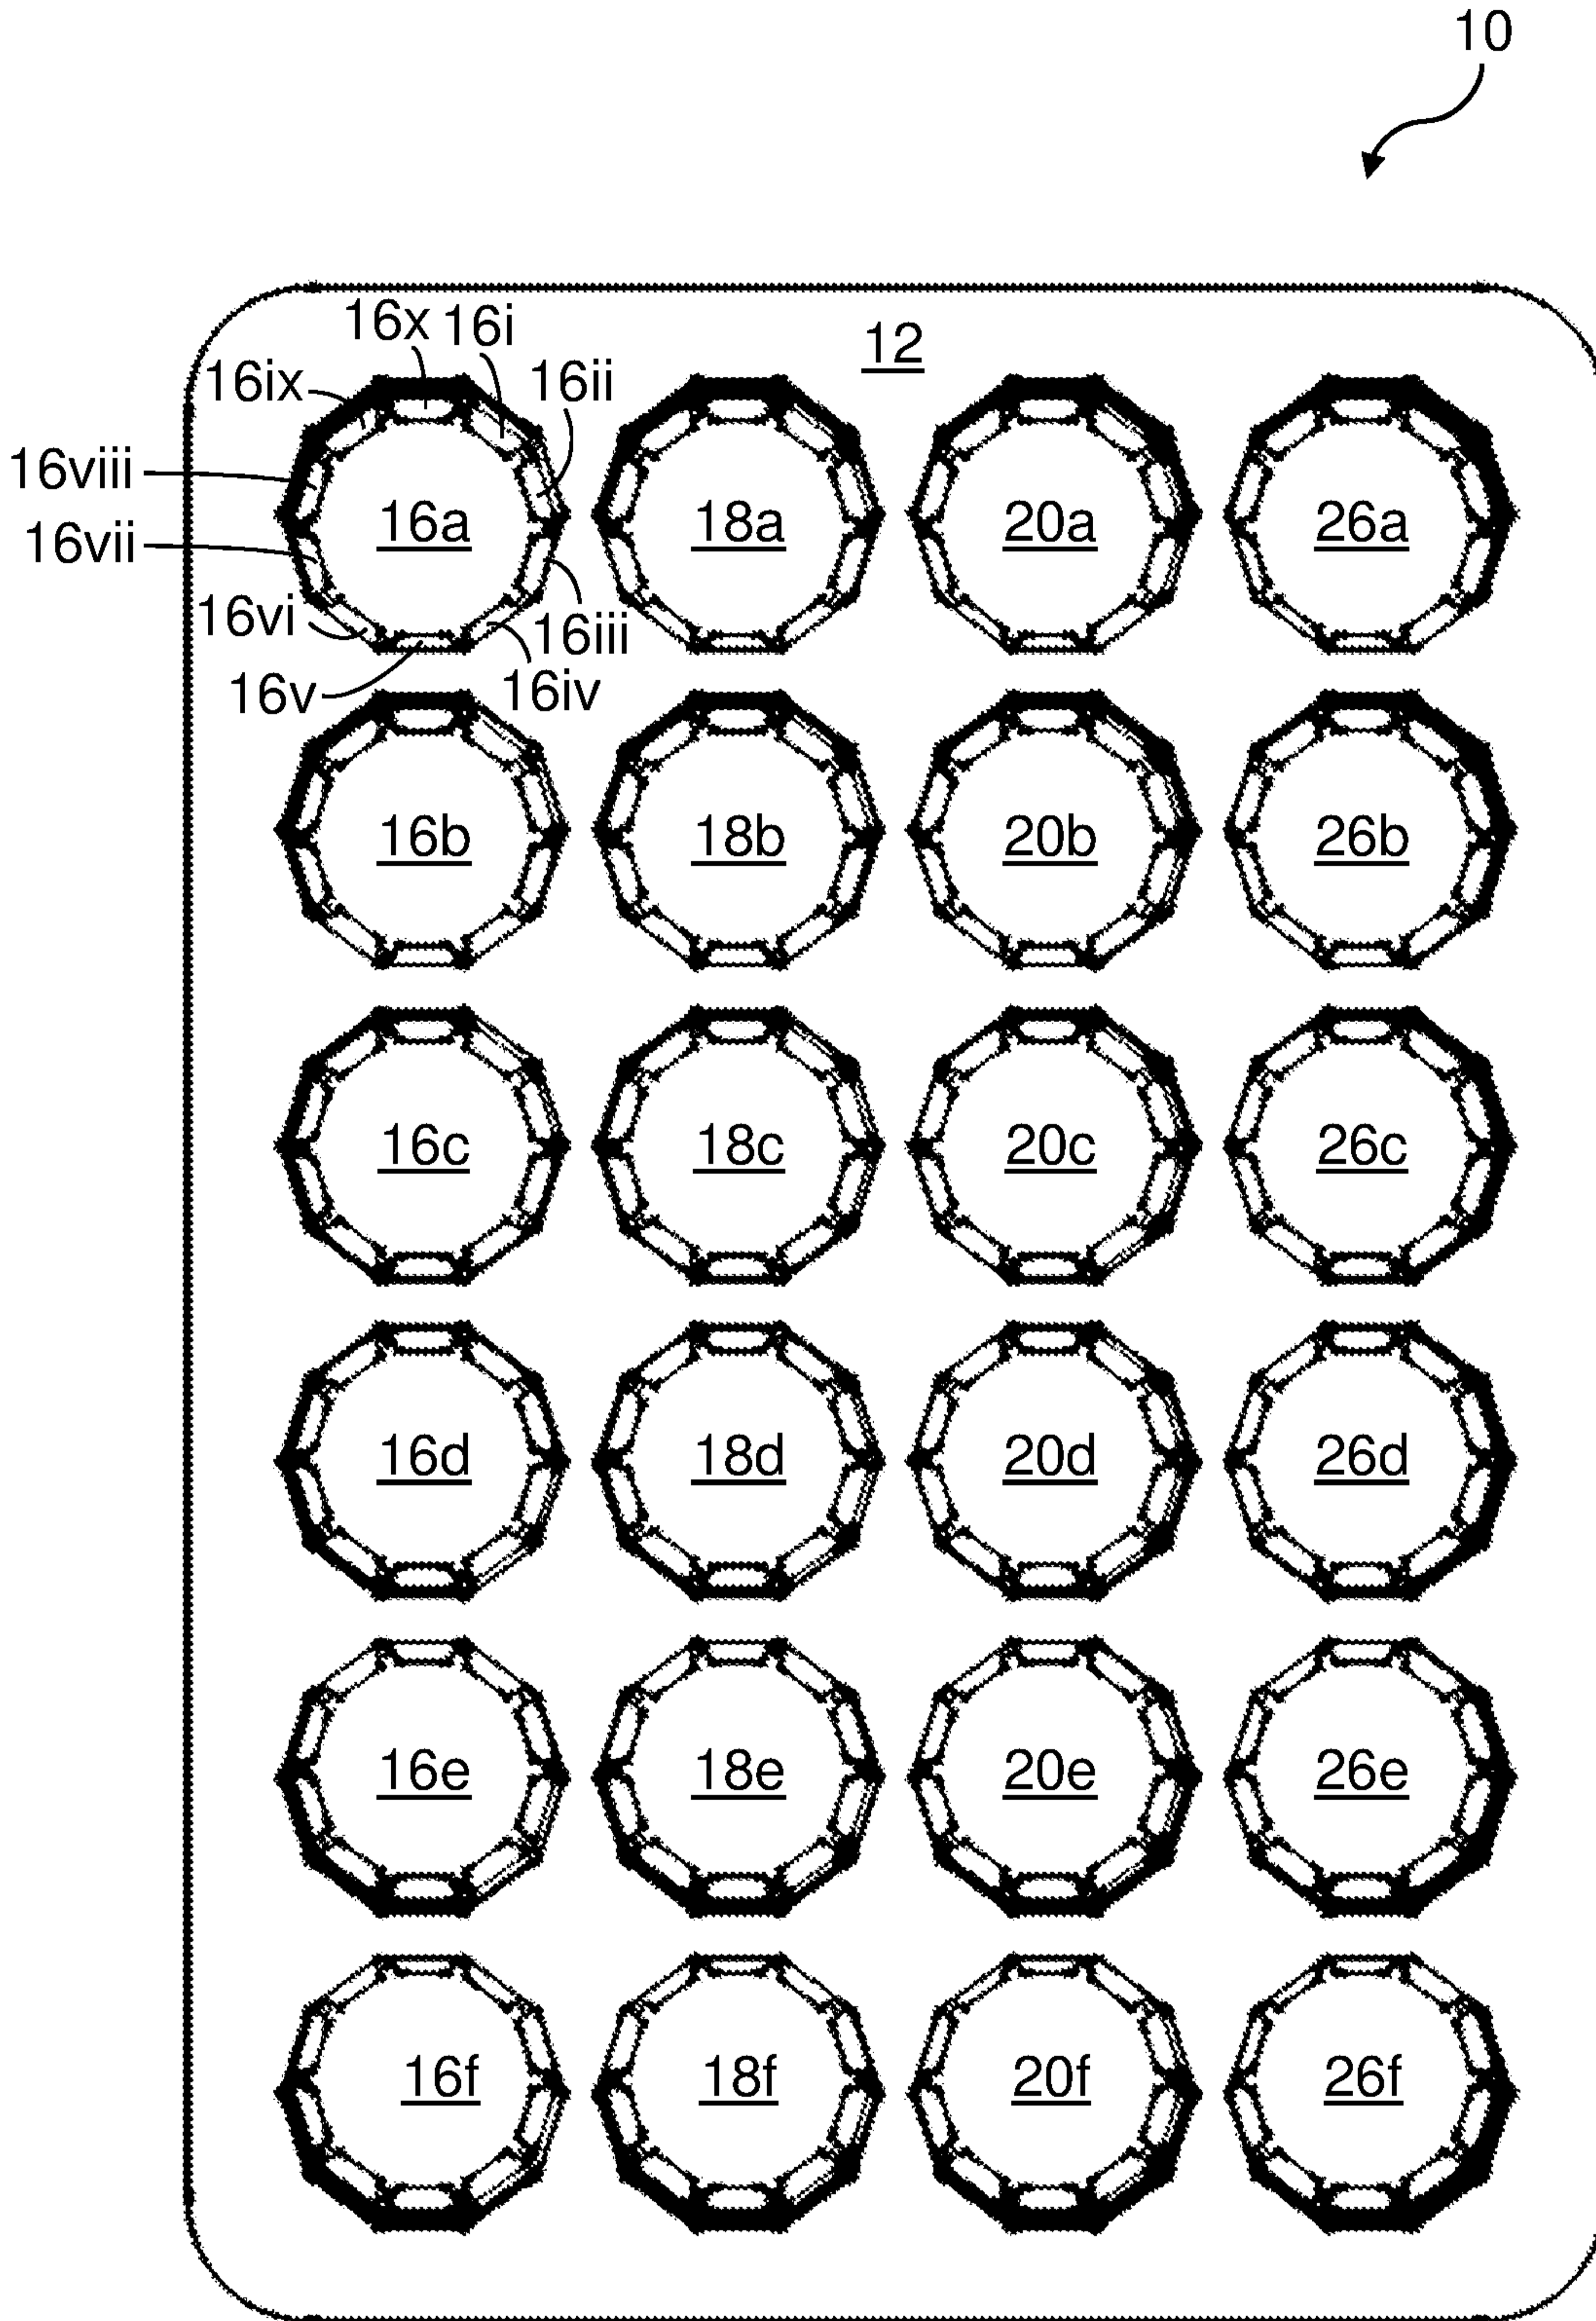


FIGURE 1

2/10

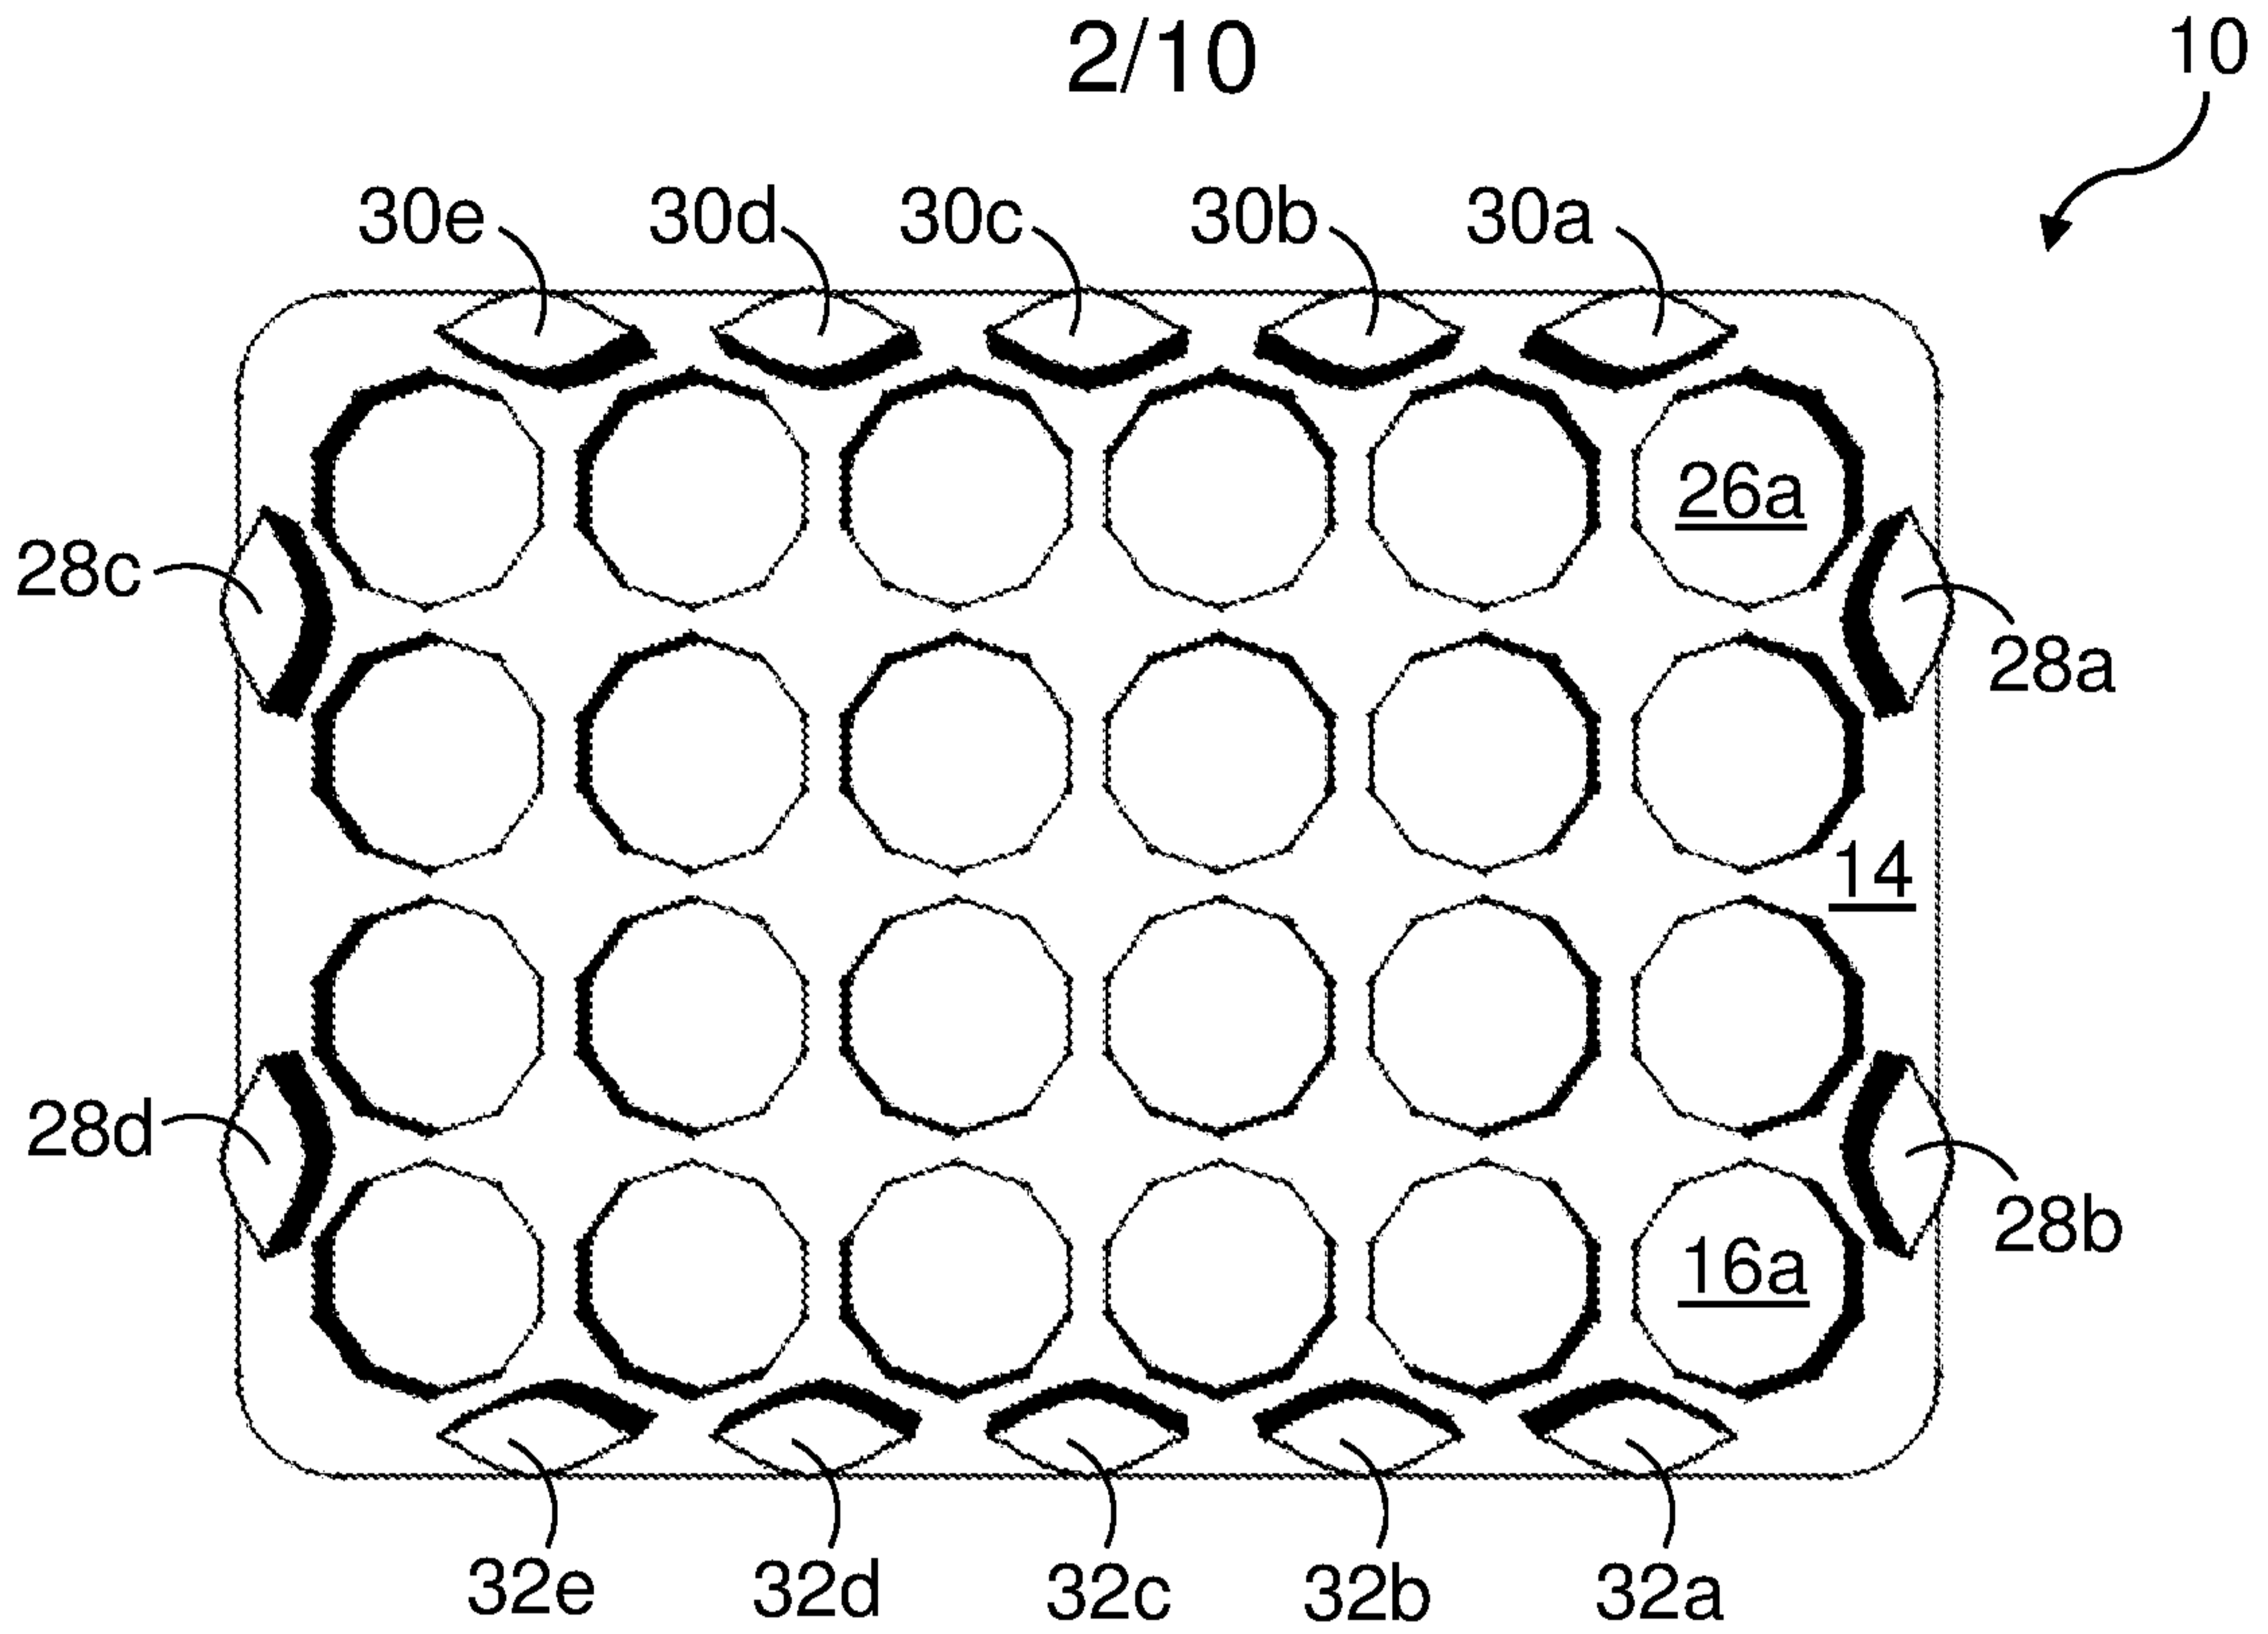


FIGURE 2A

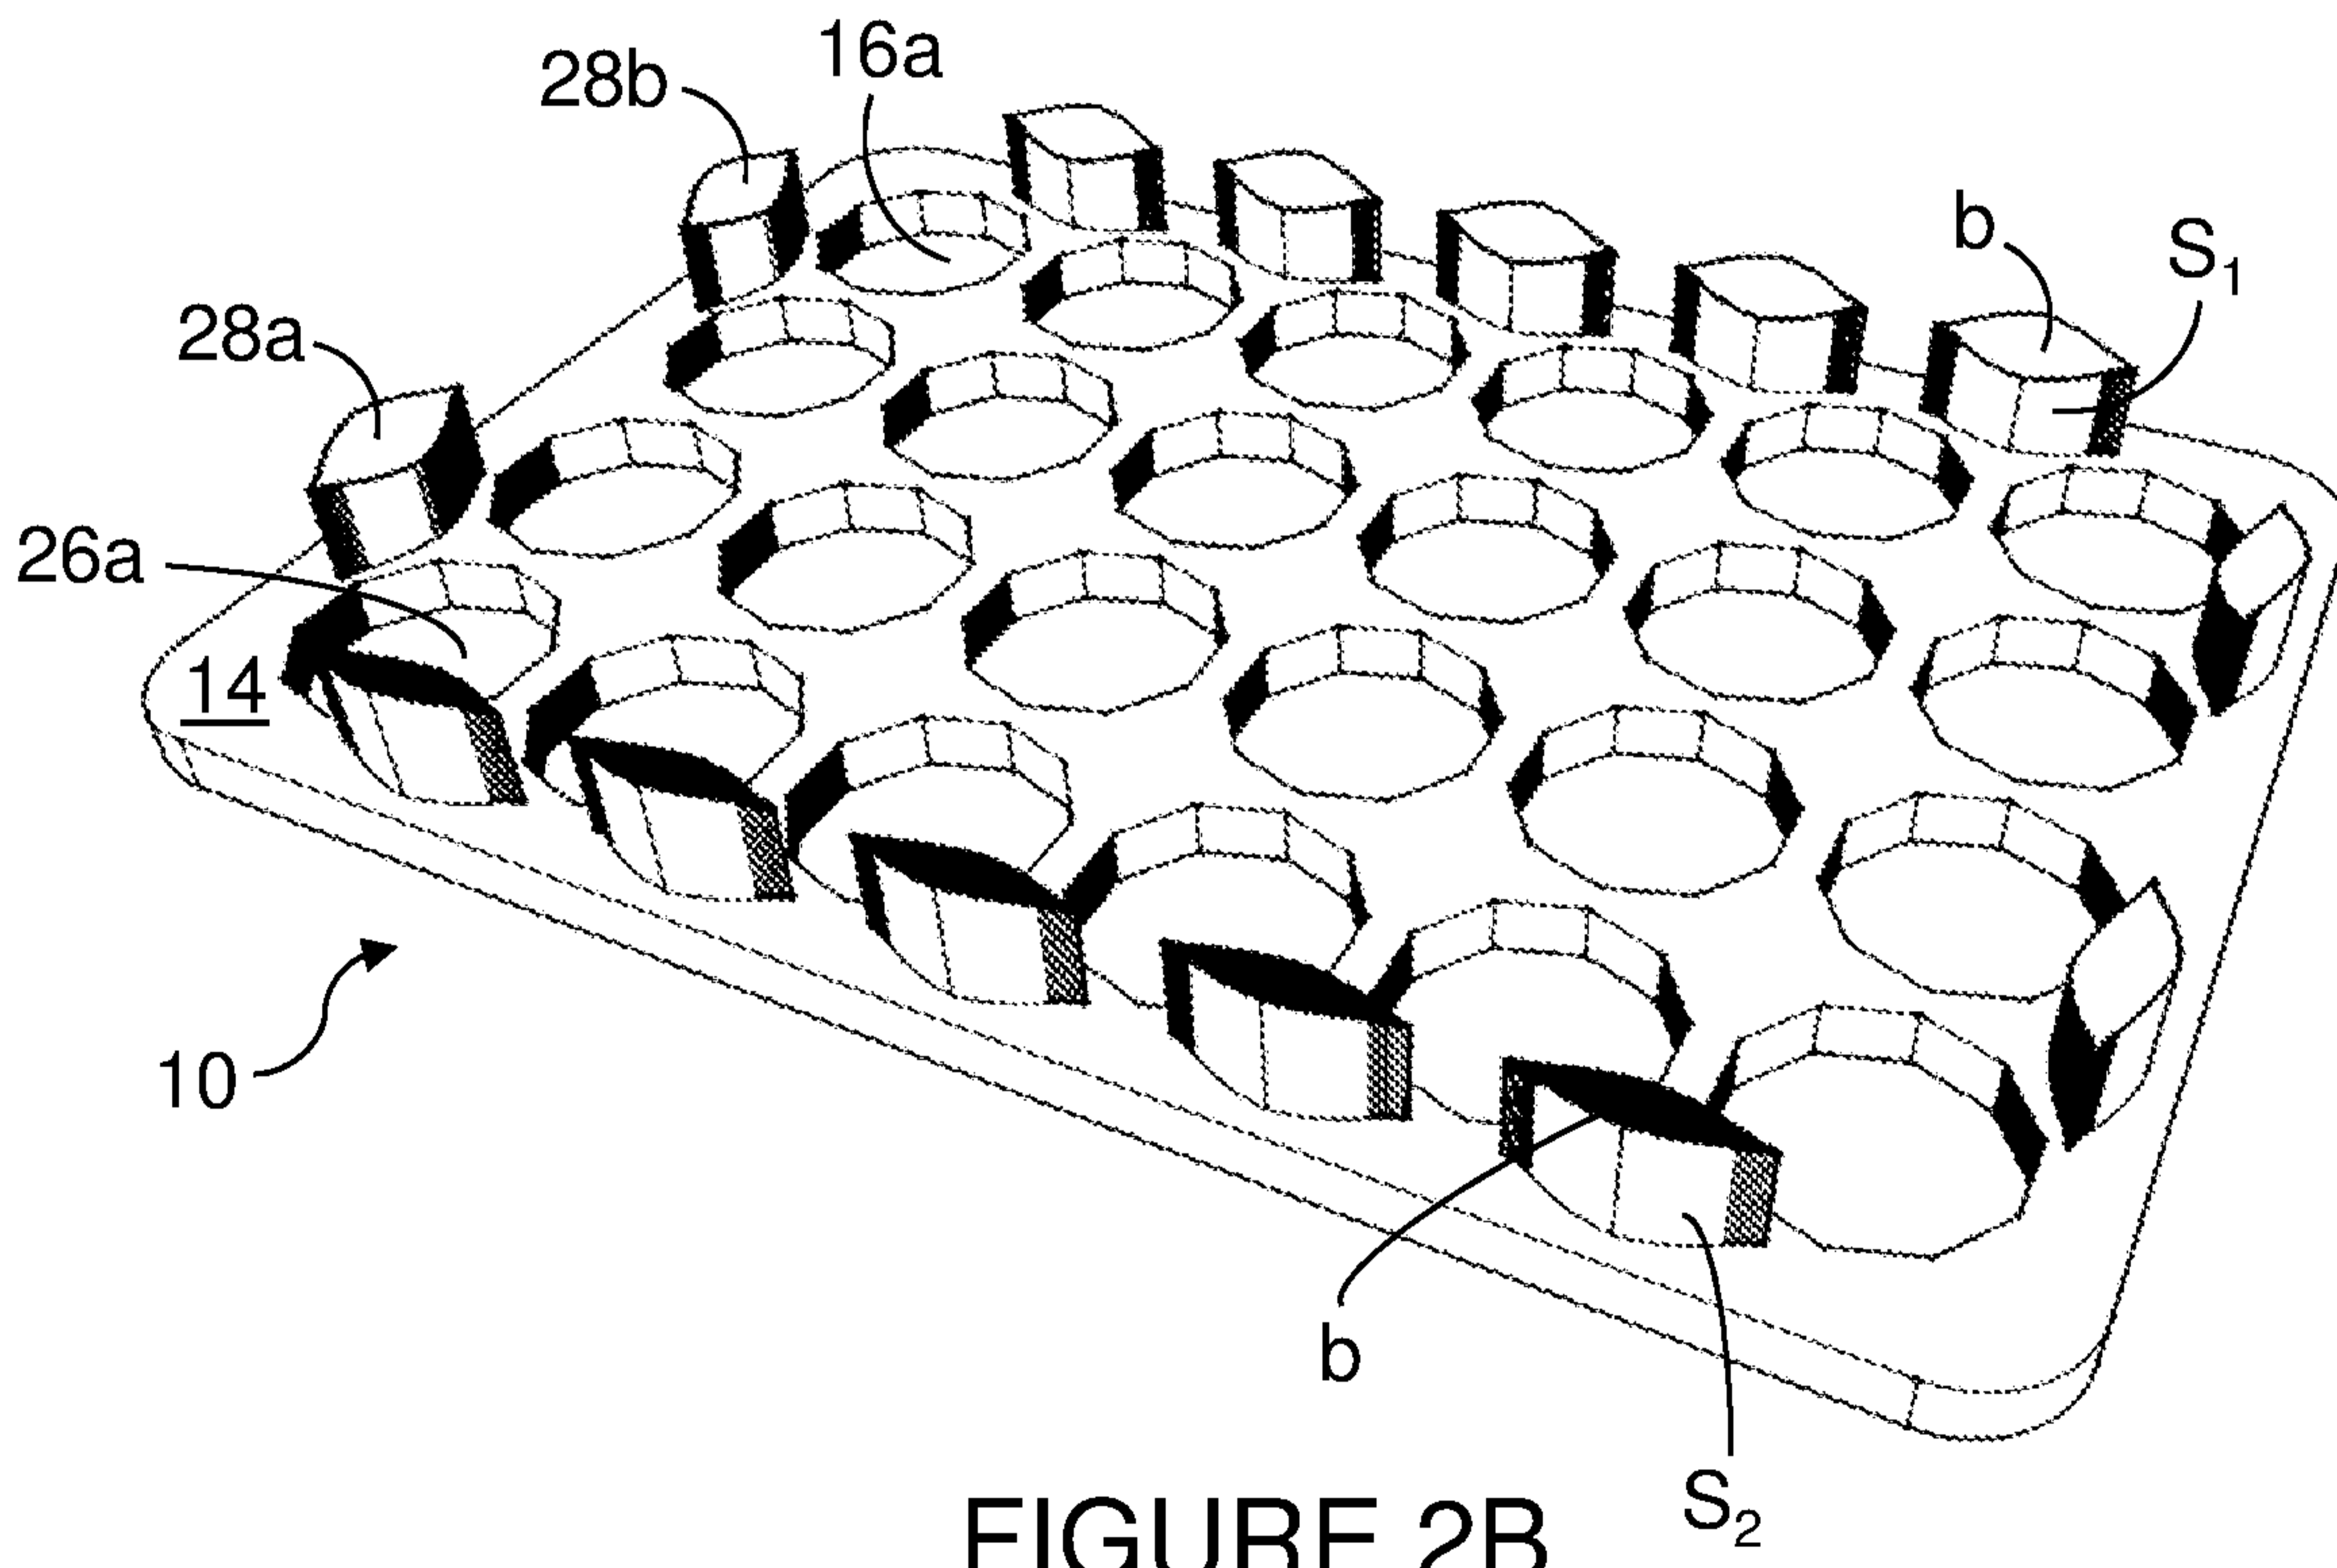


FIGURE 2B

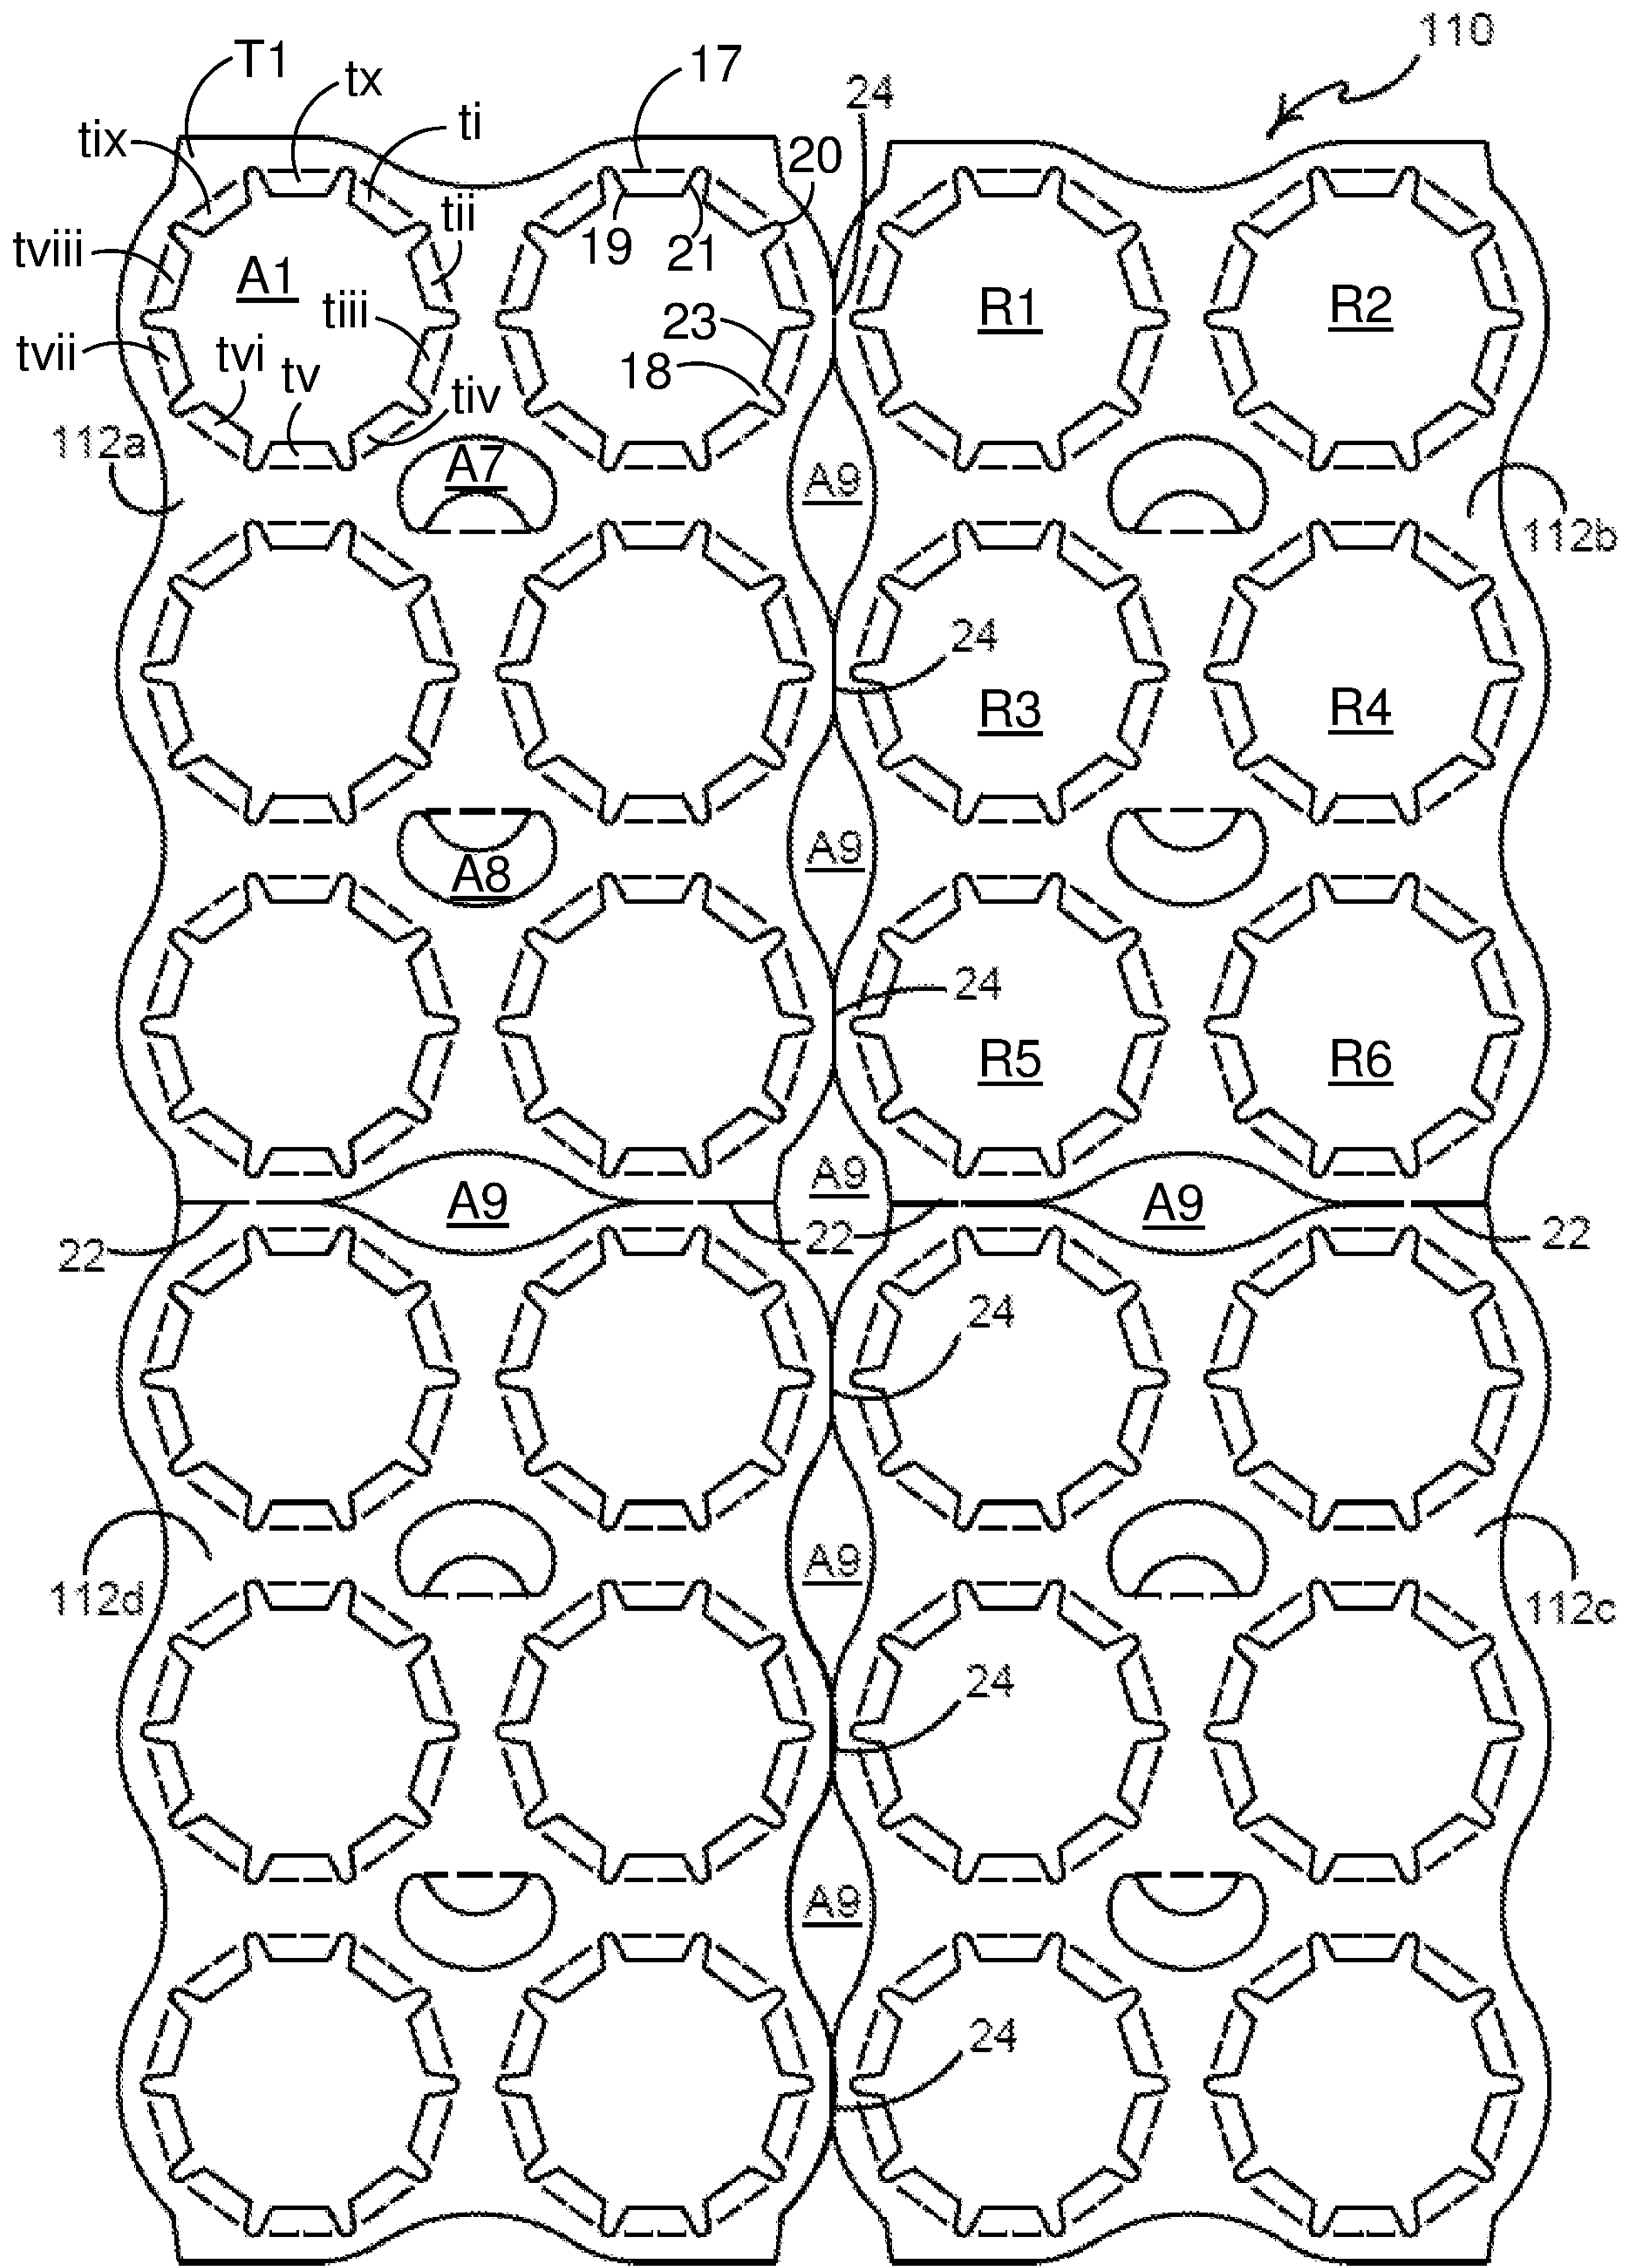


FIGURE 3

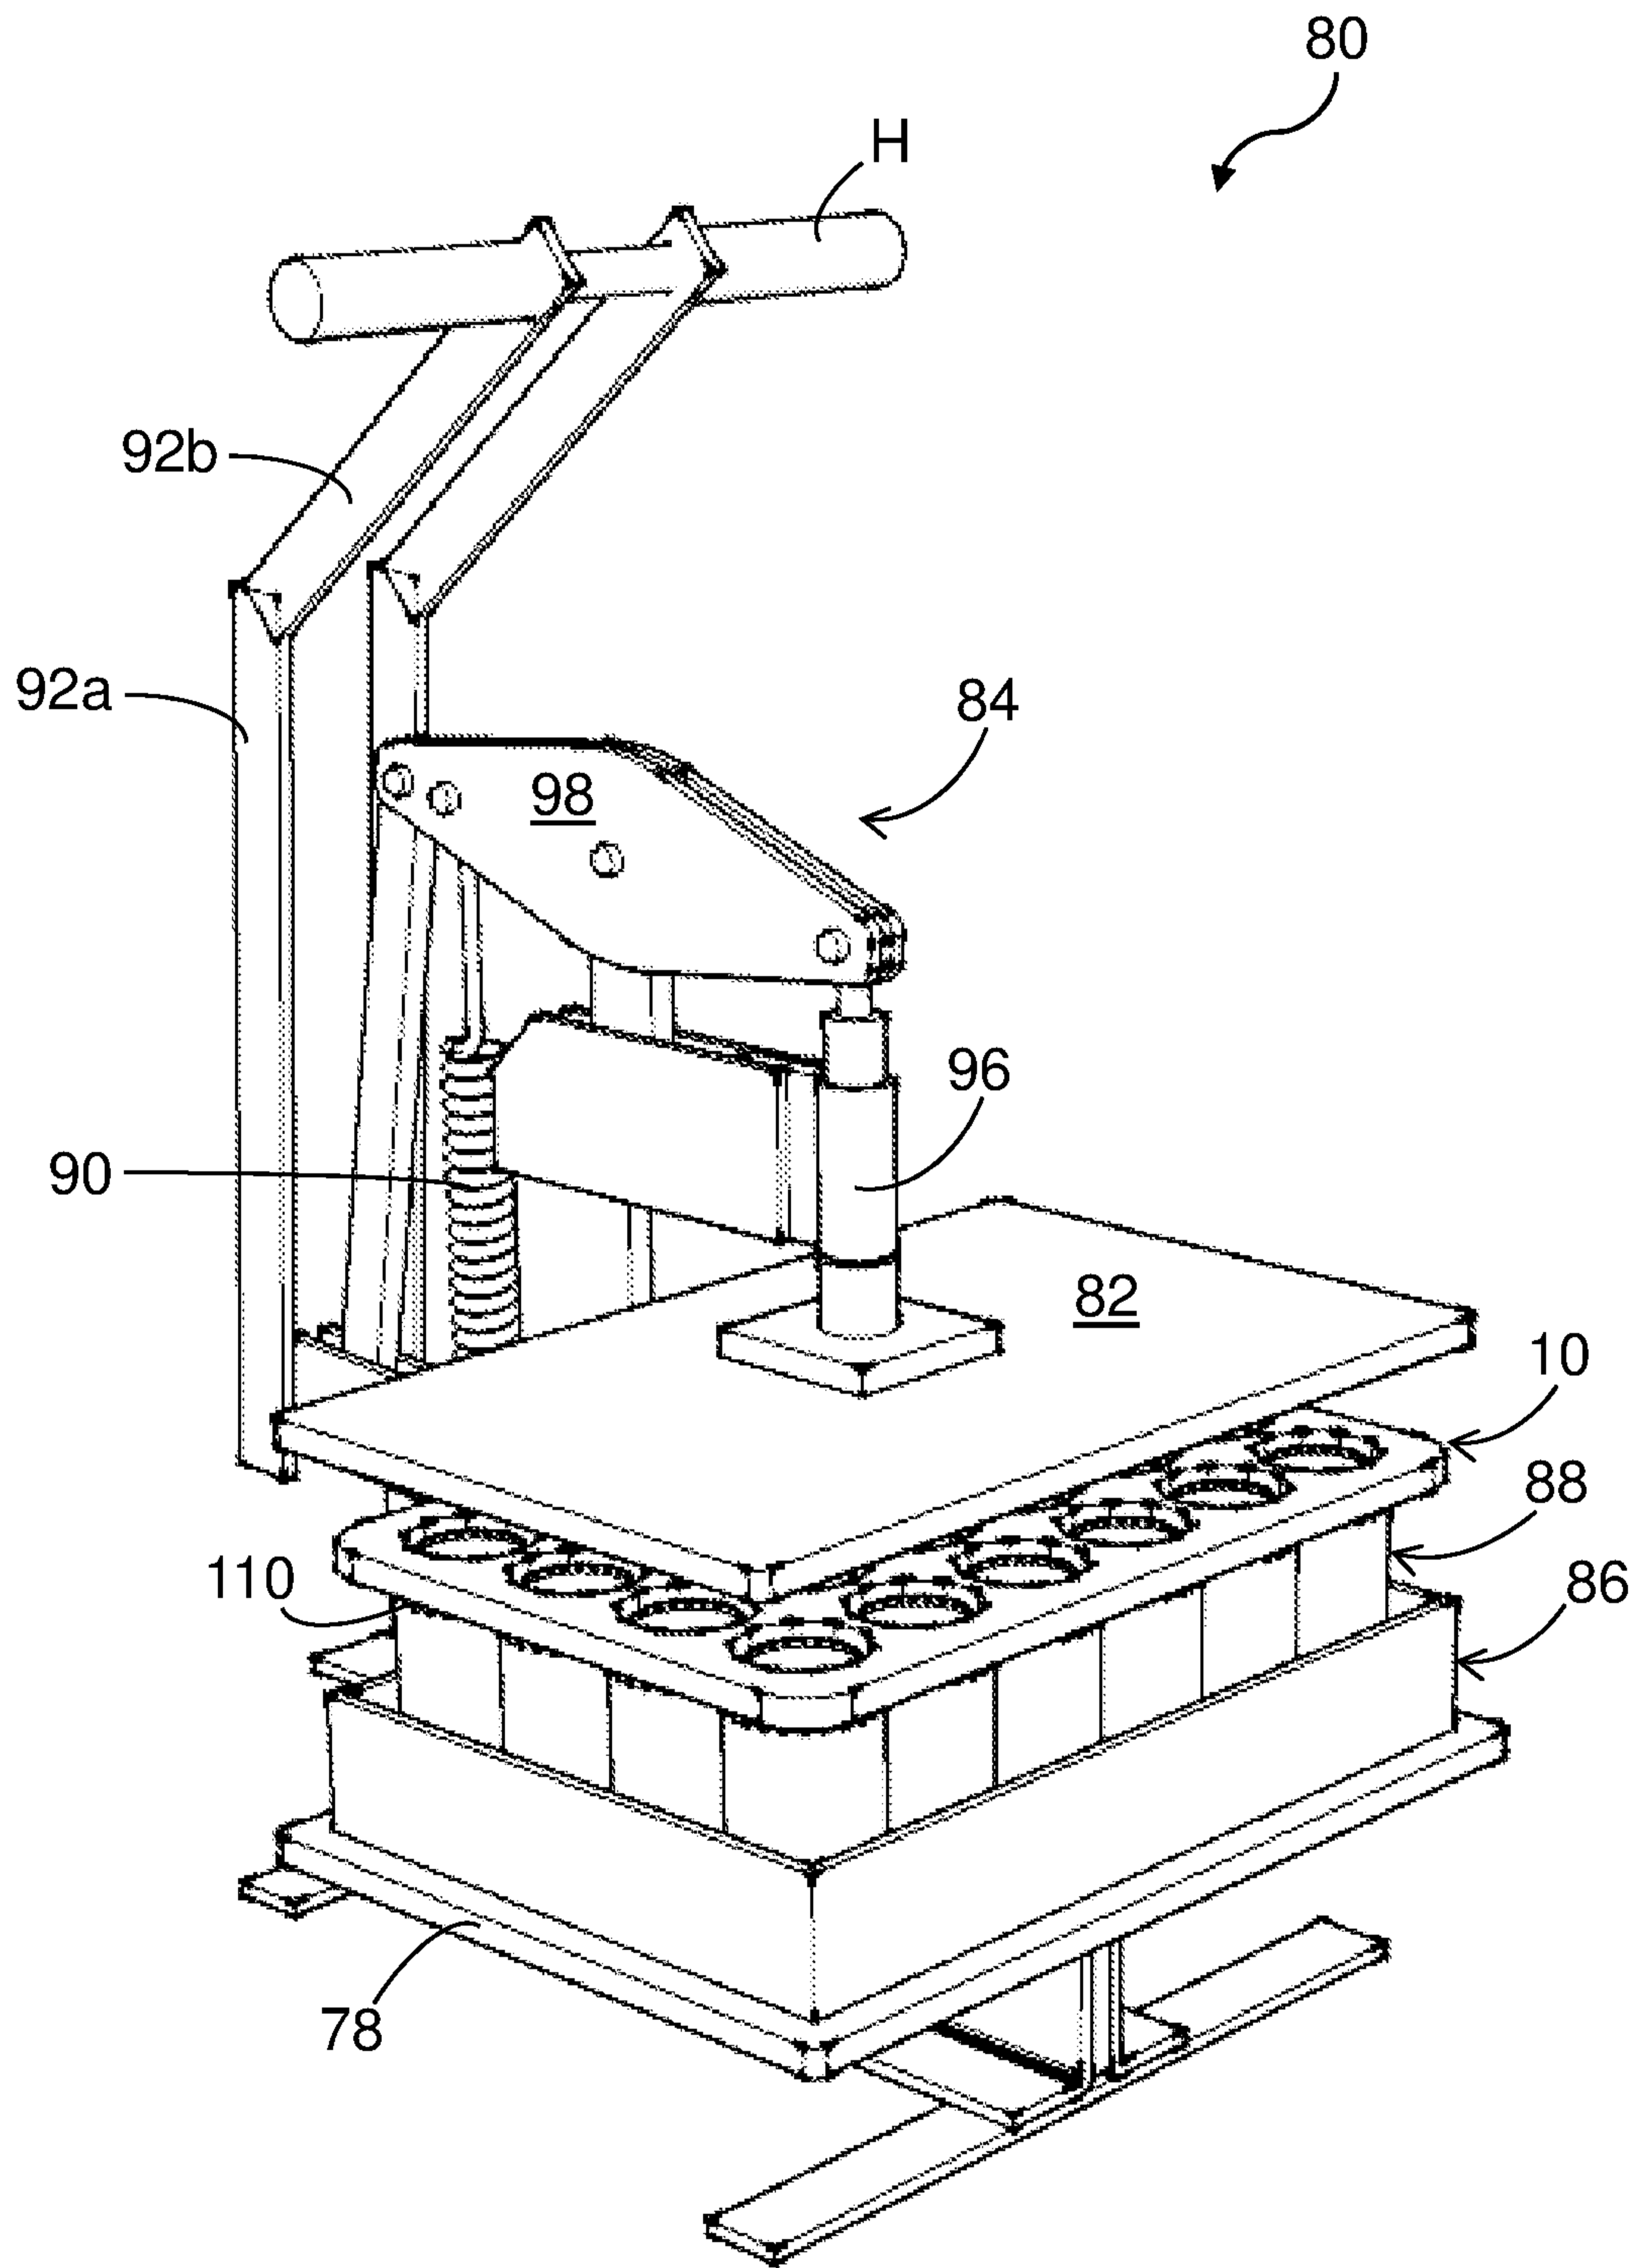


FIGURE 4

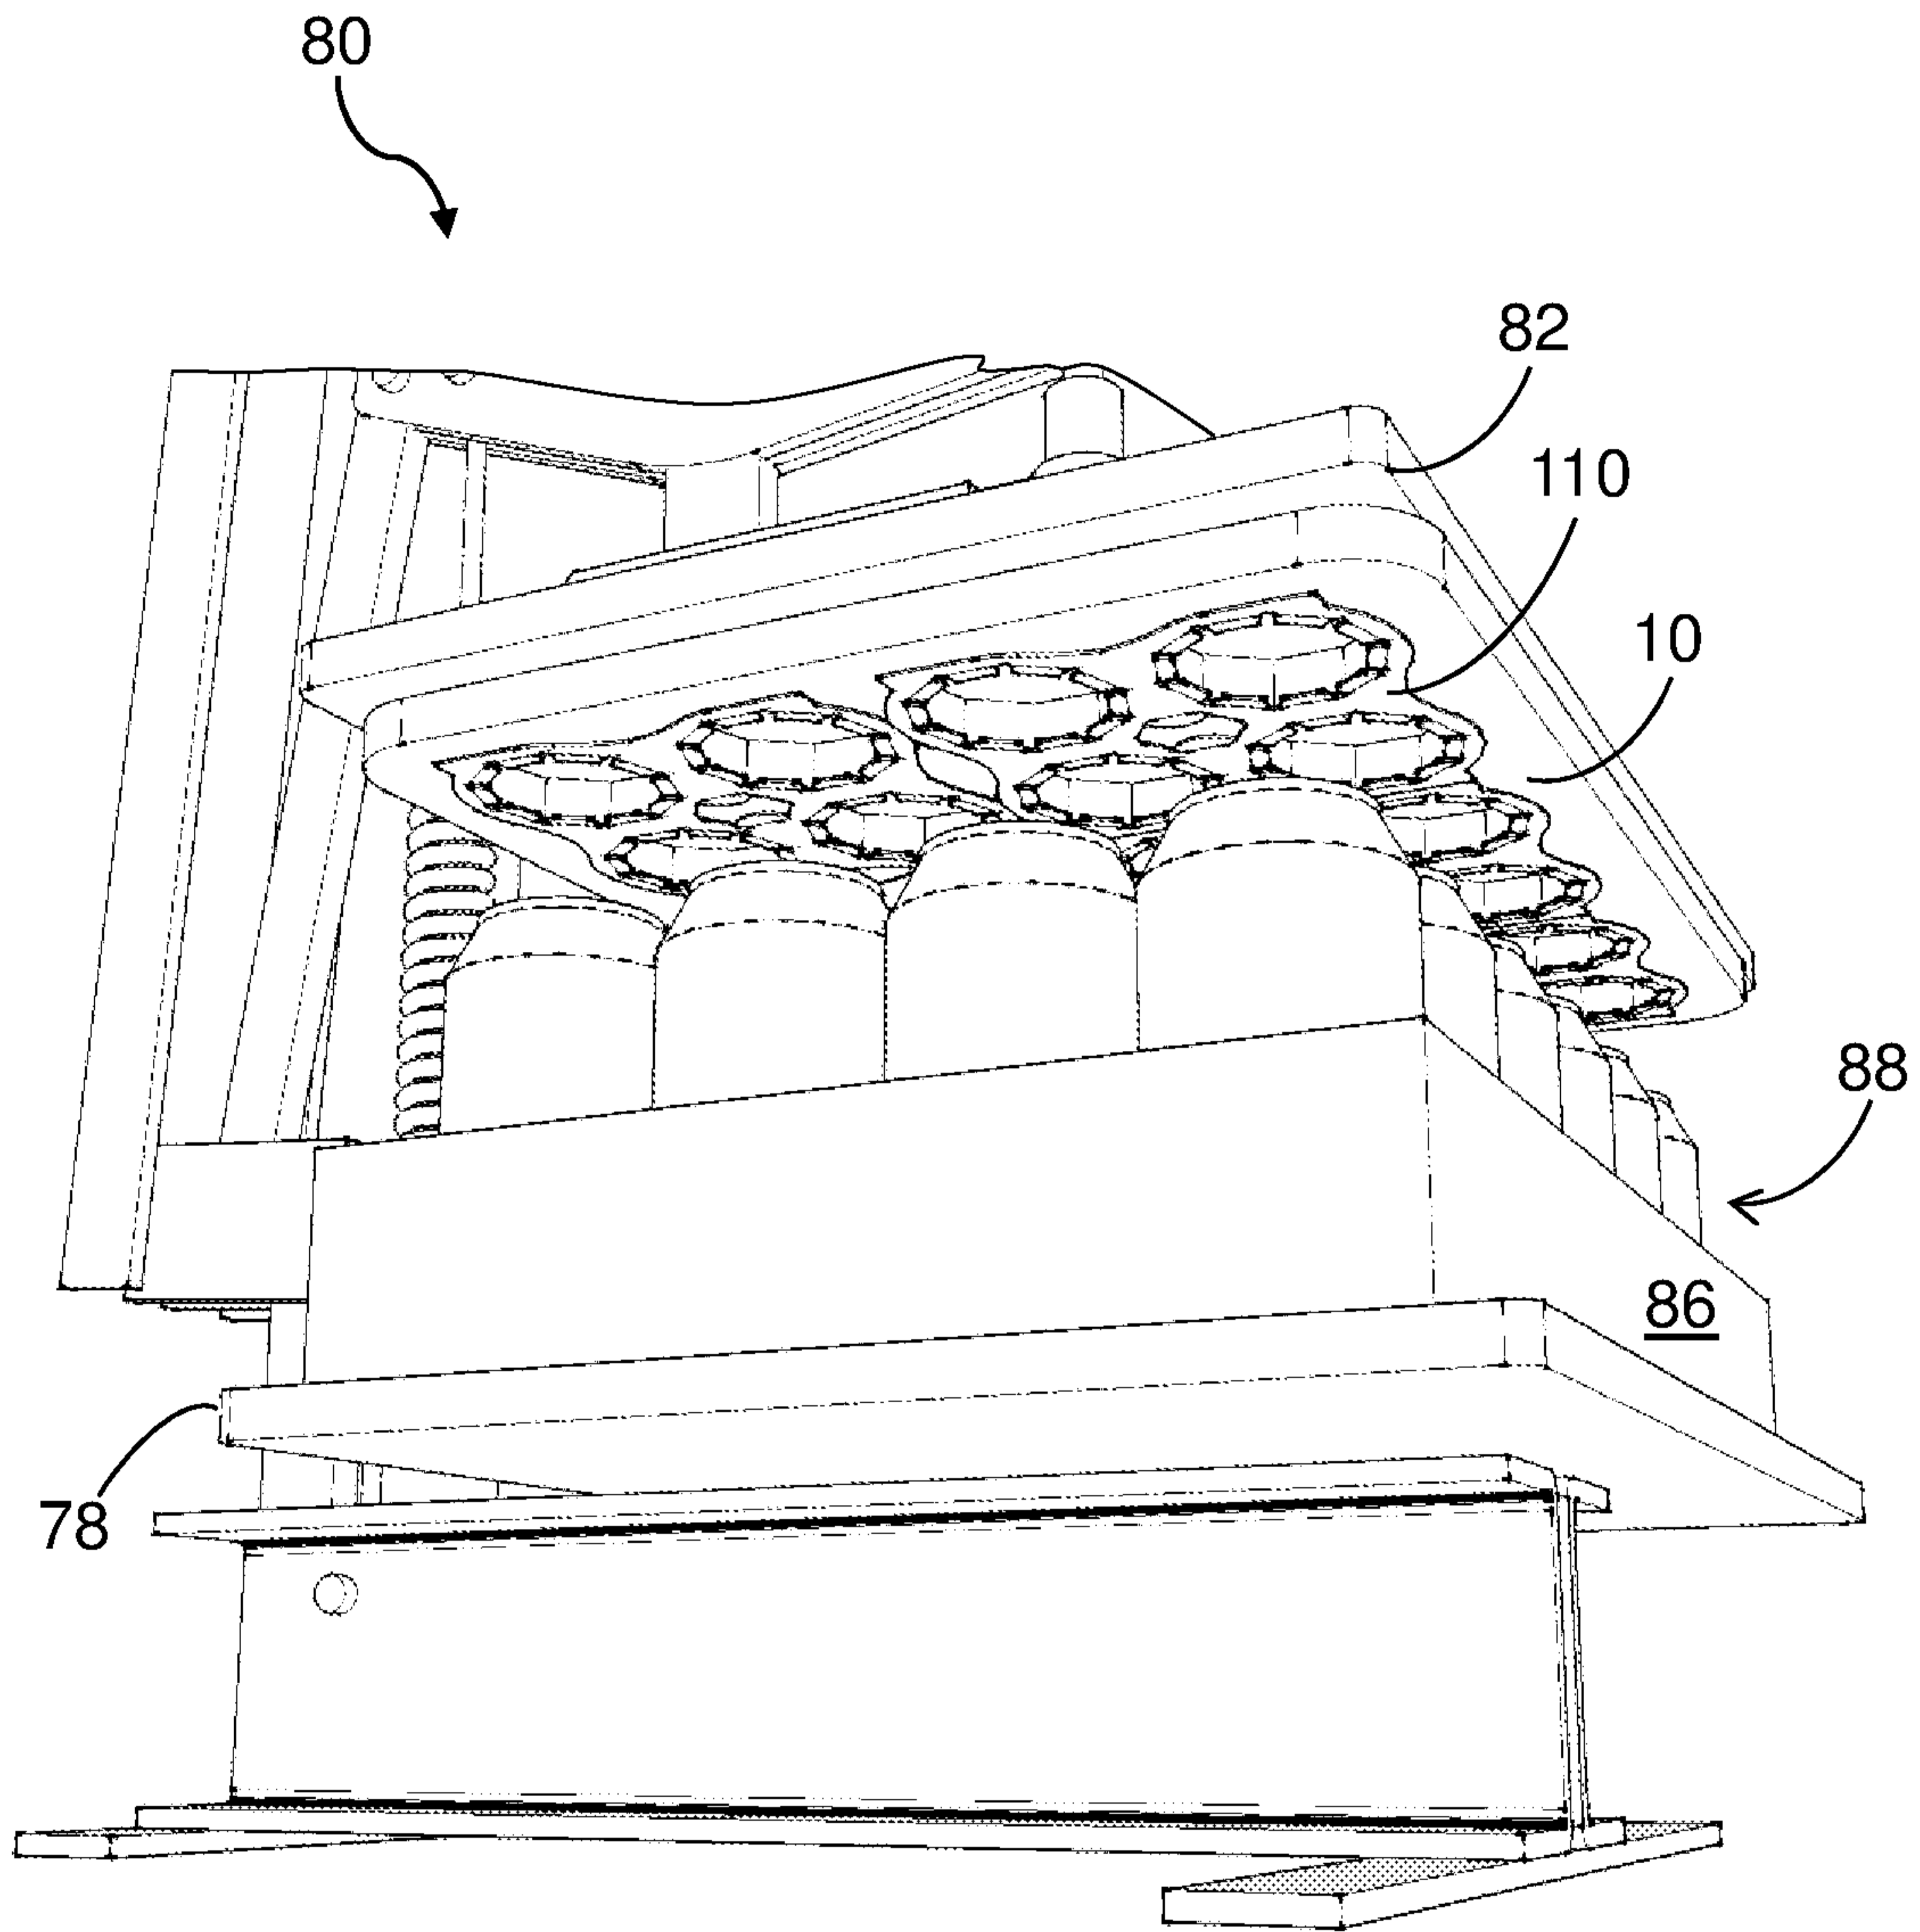


FIGURE 5

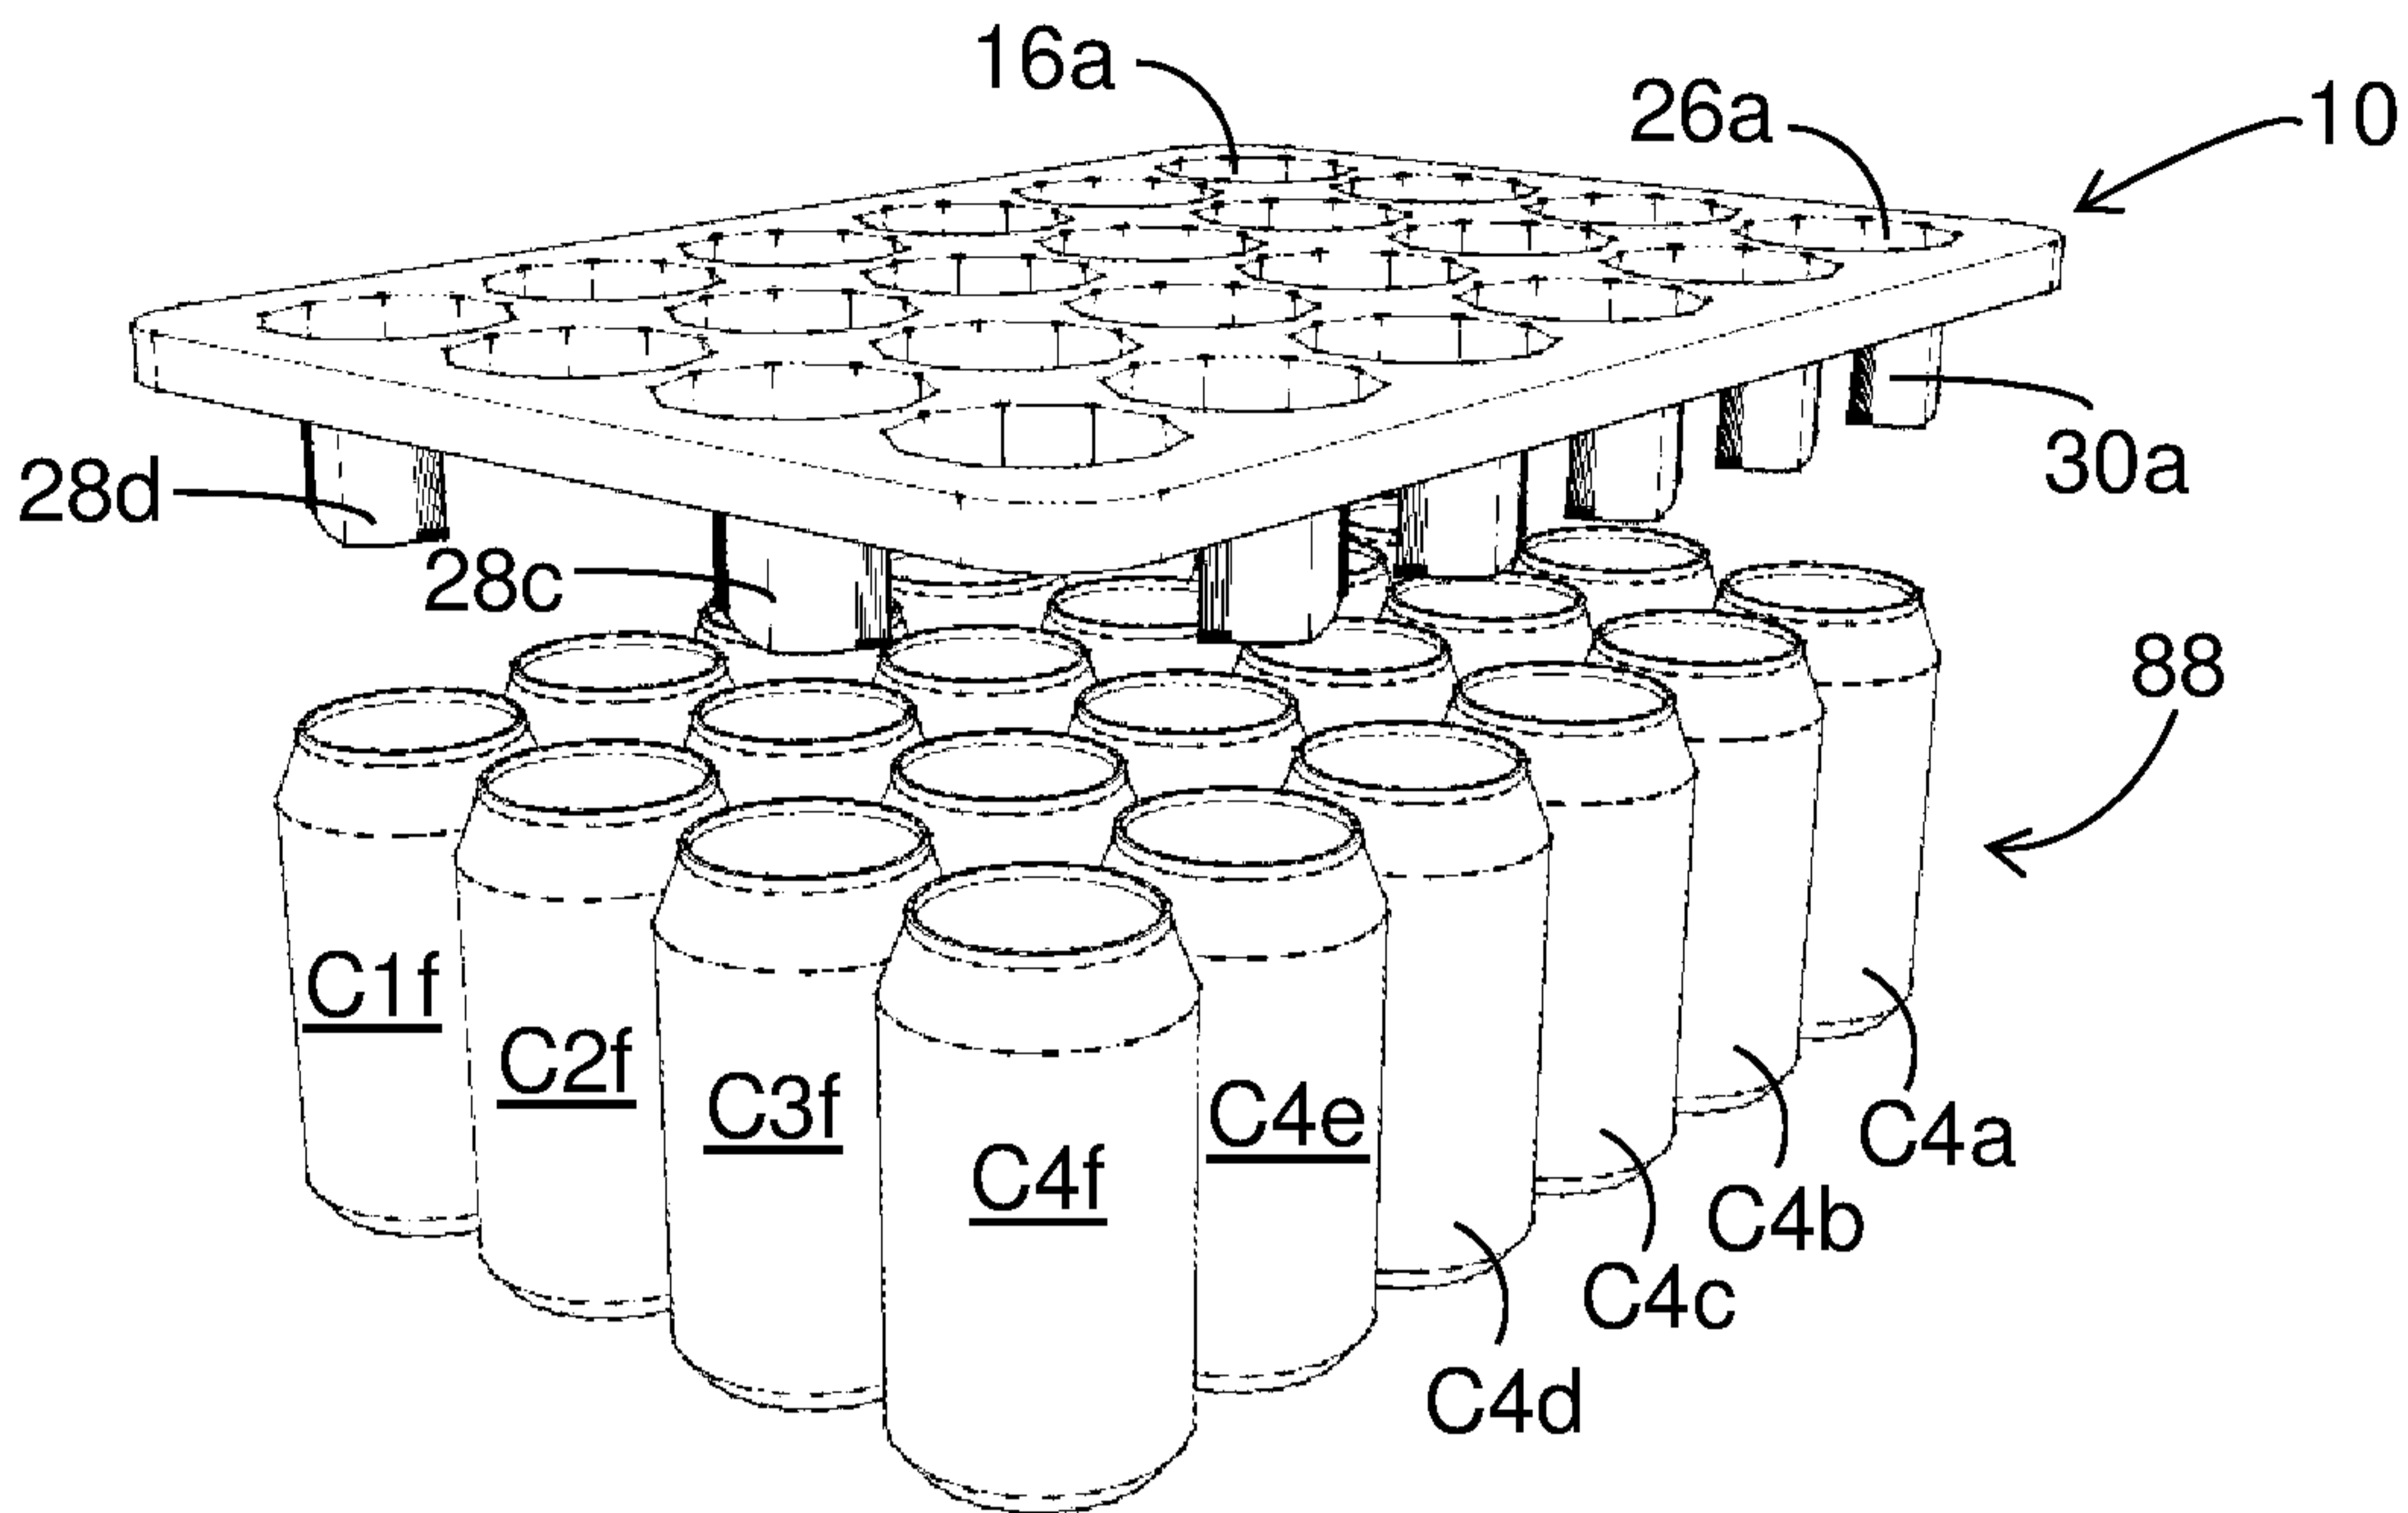


FIGURE 6A

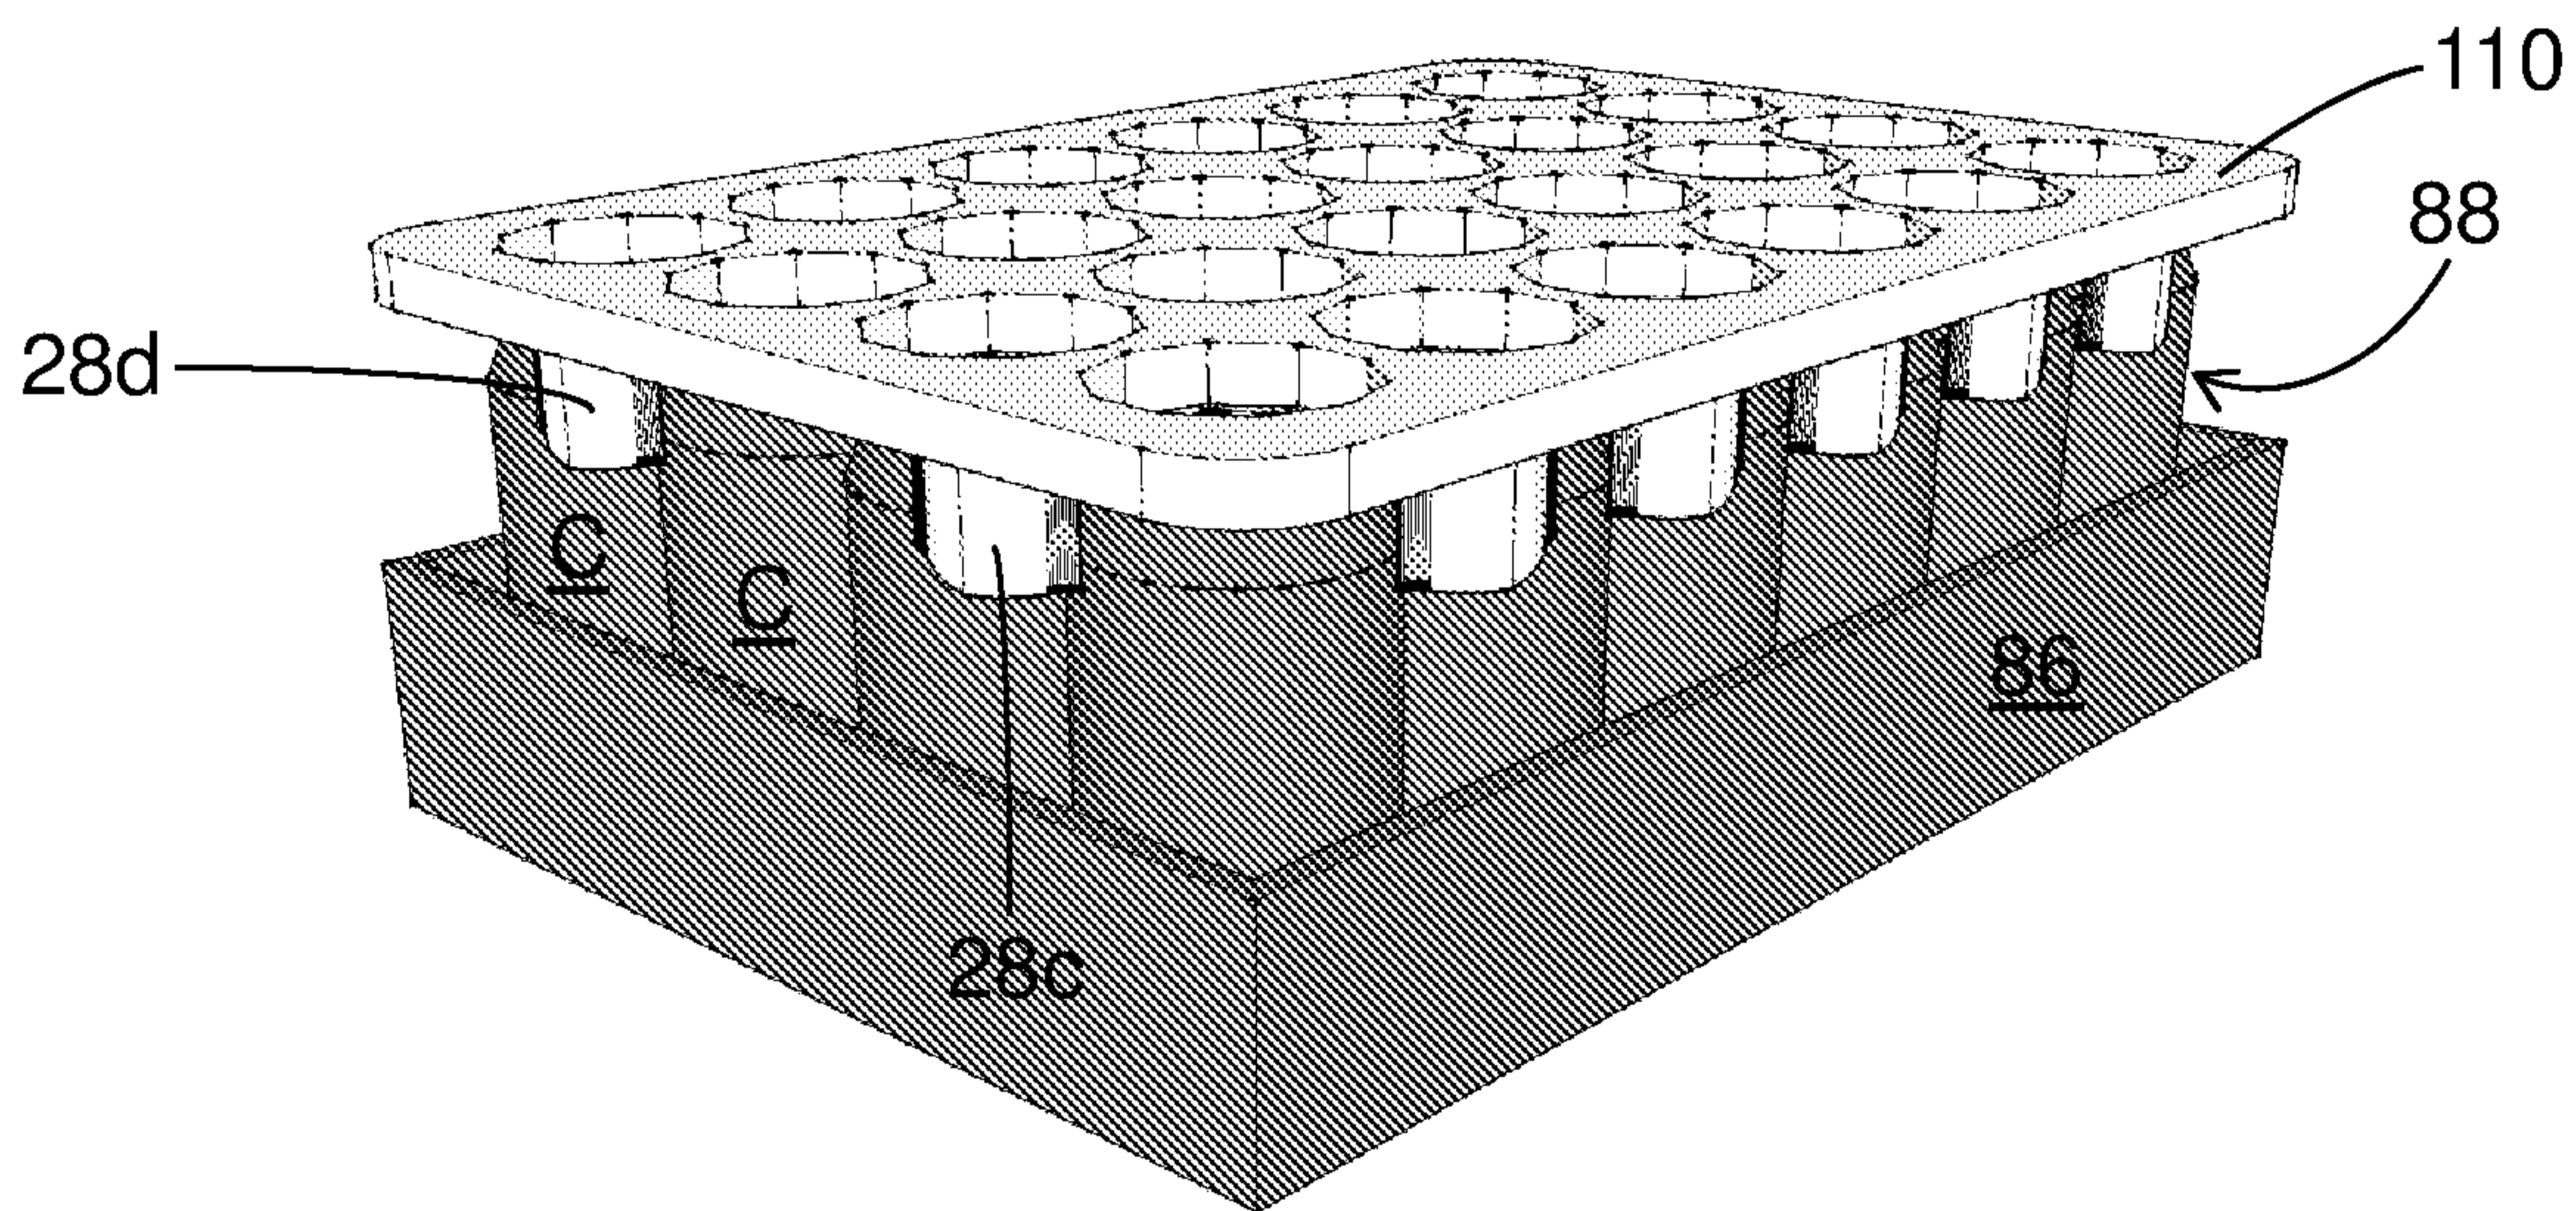


FIGURE 6B

7/10

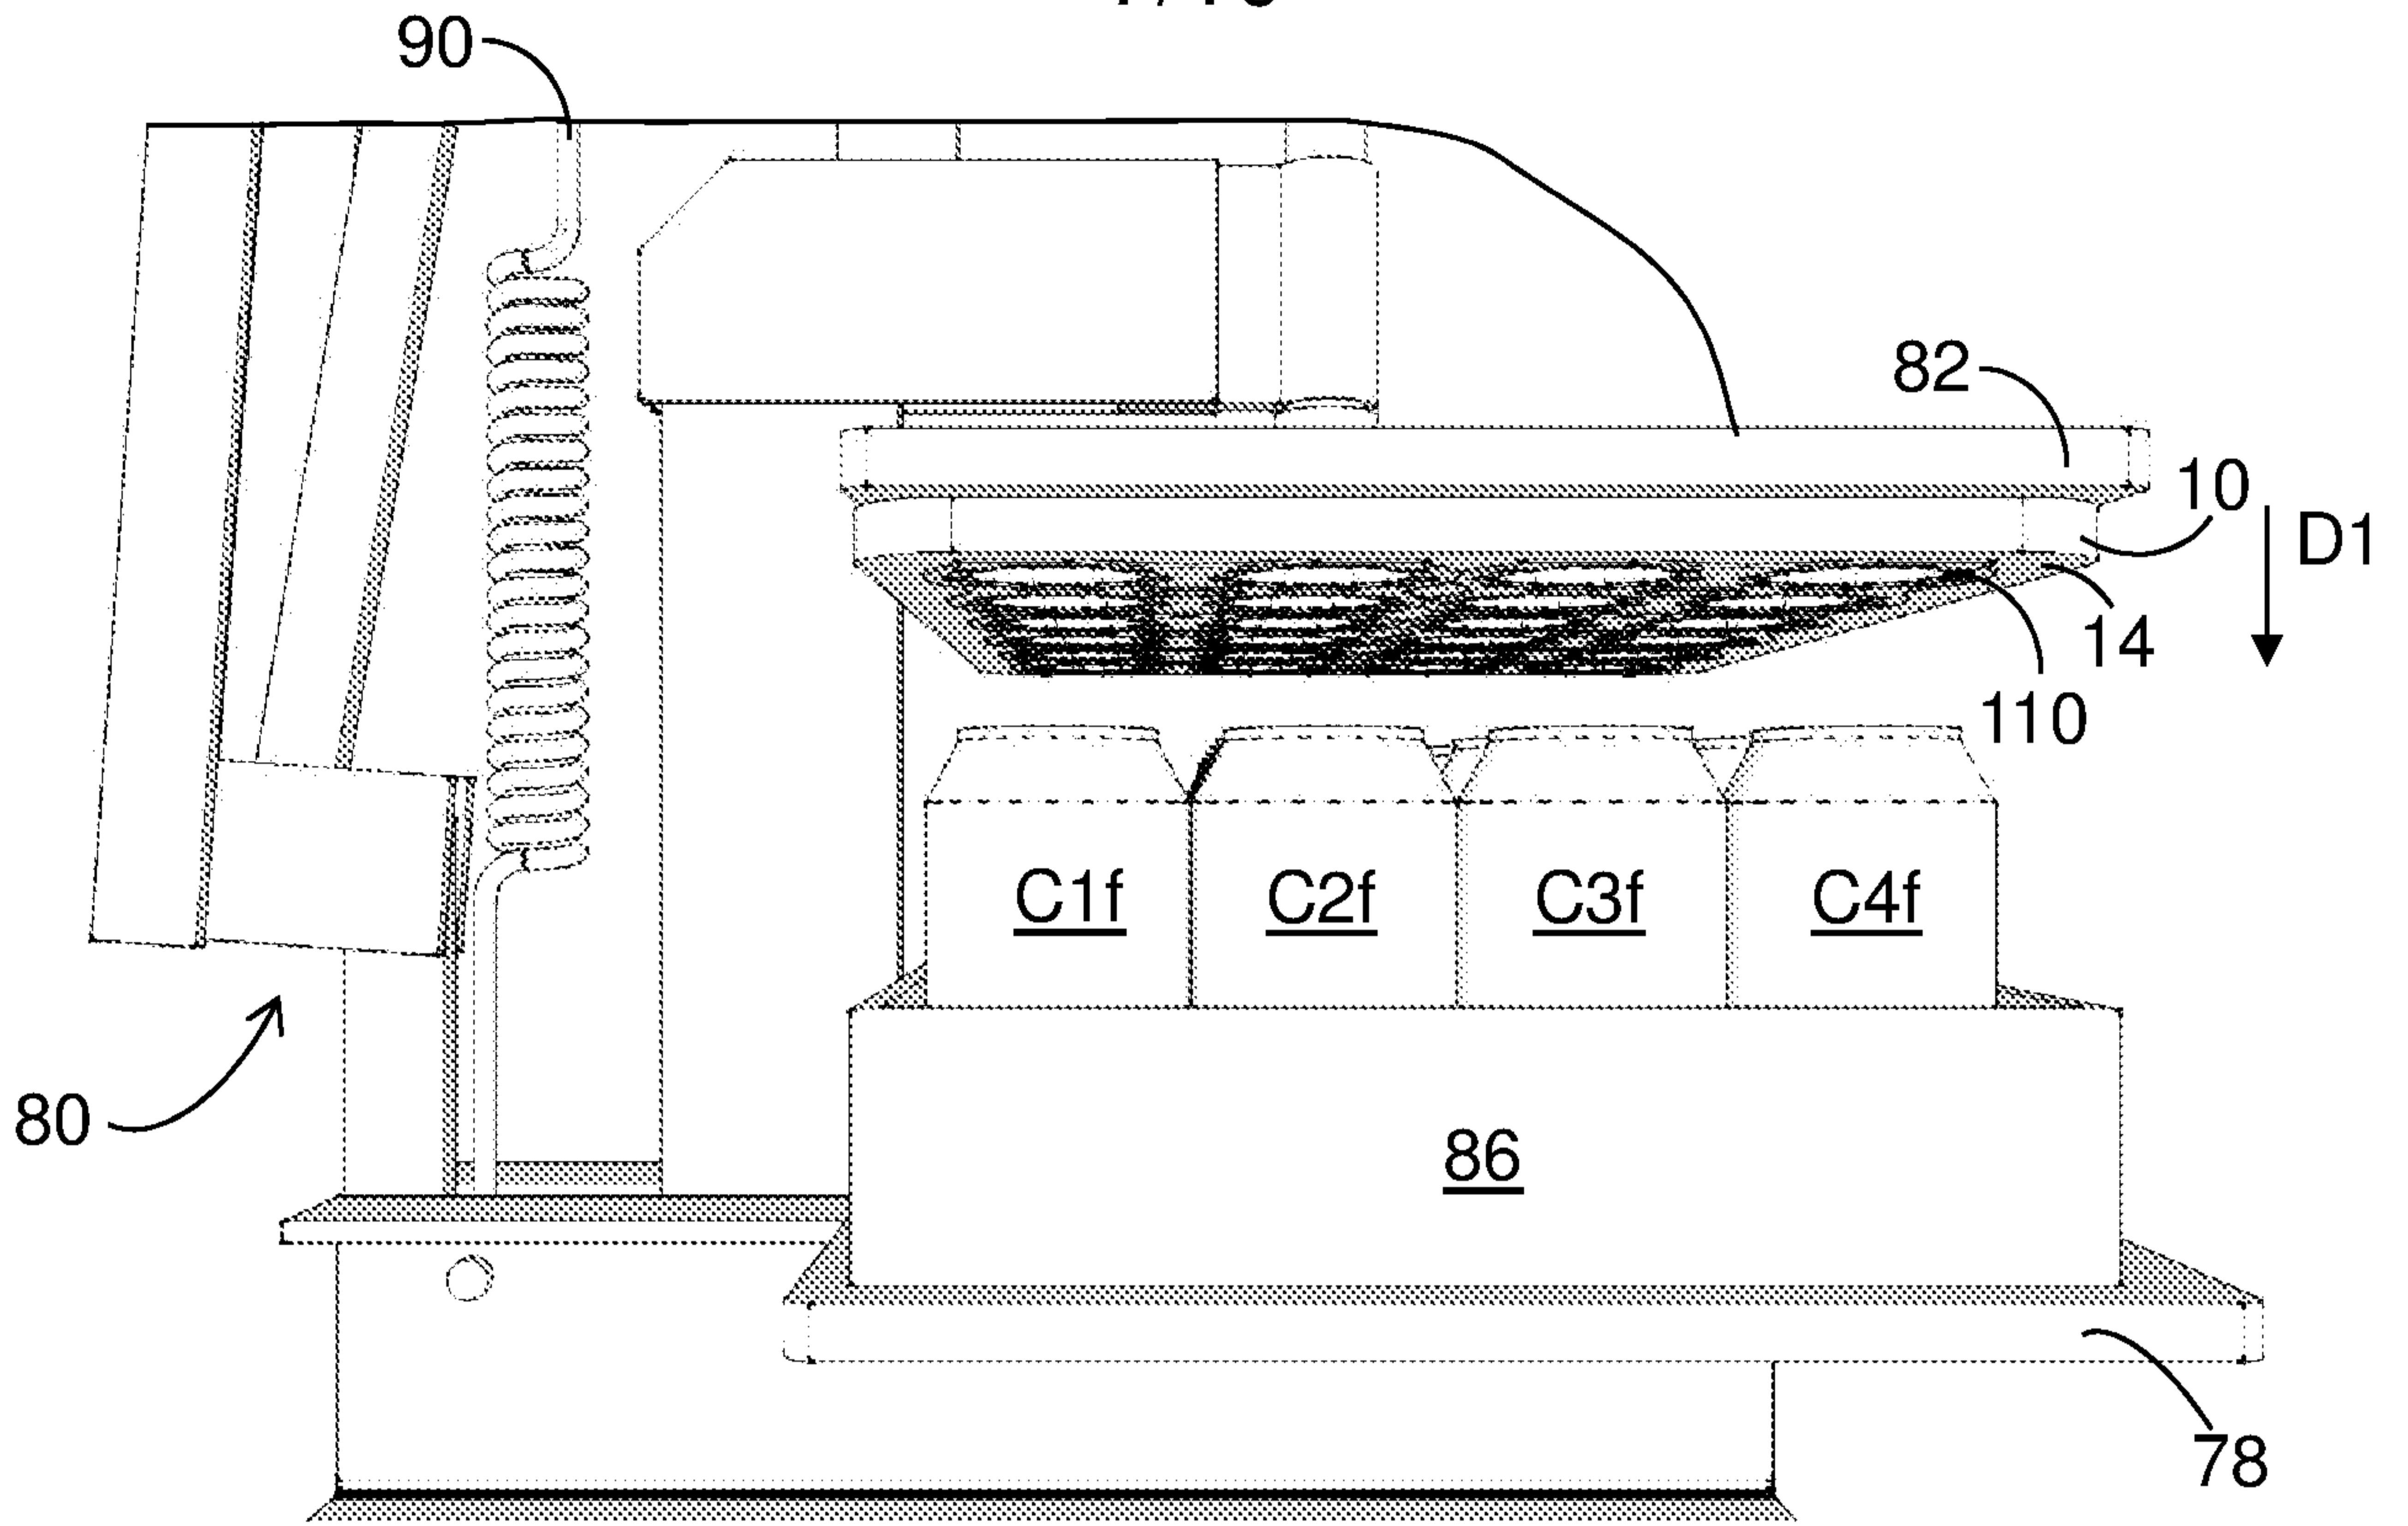


FIGURE 7A

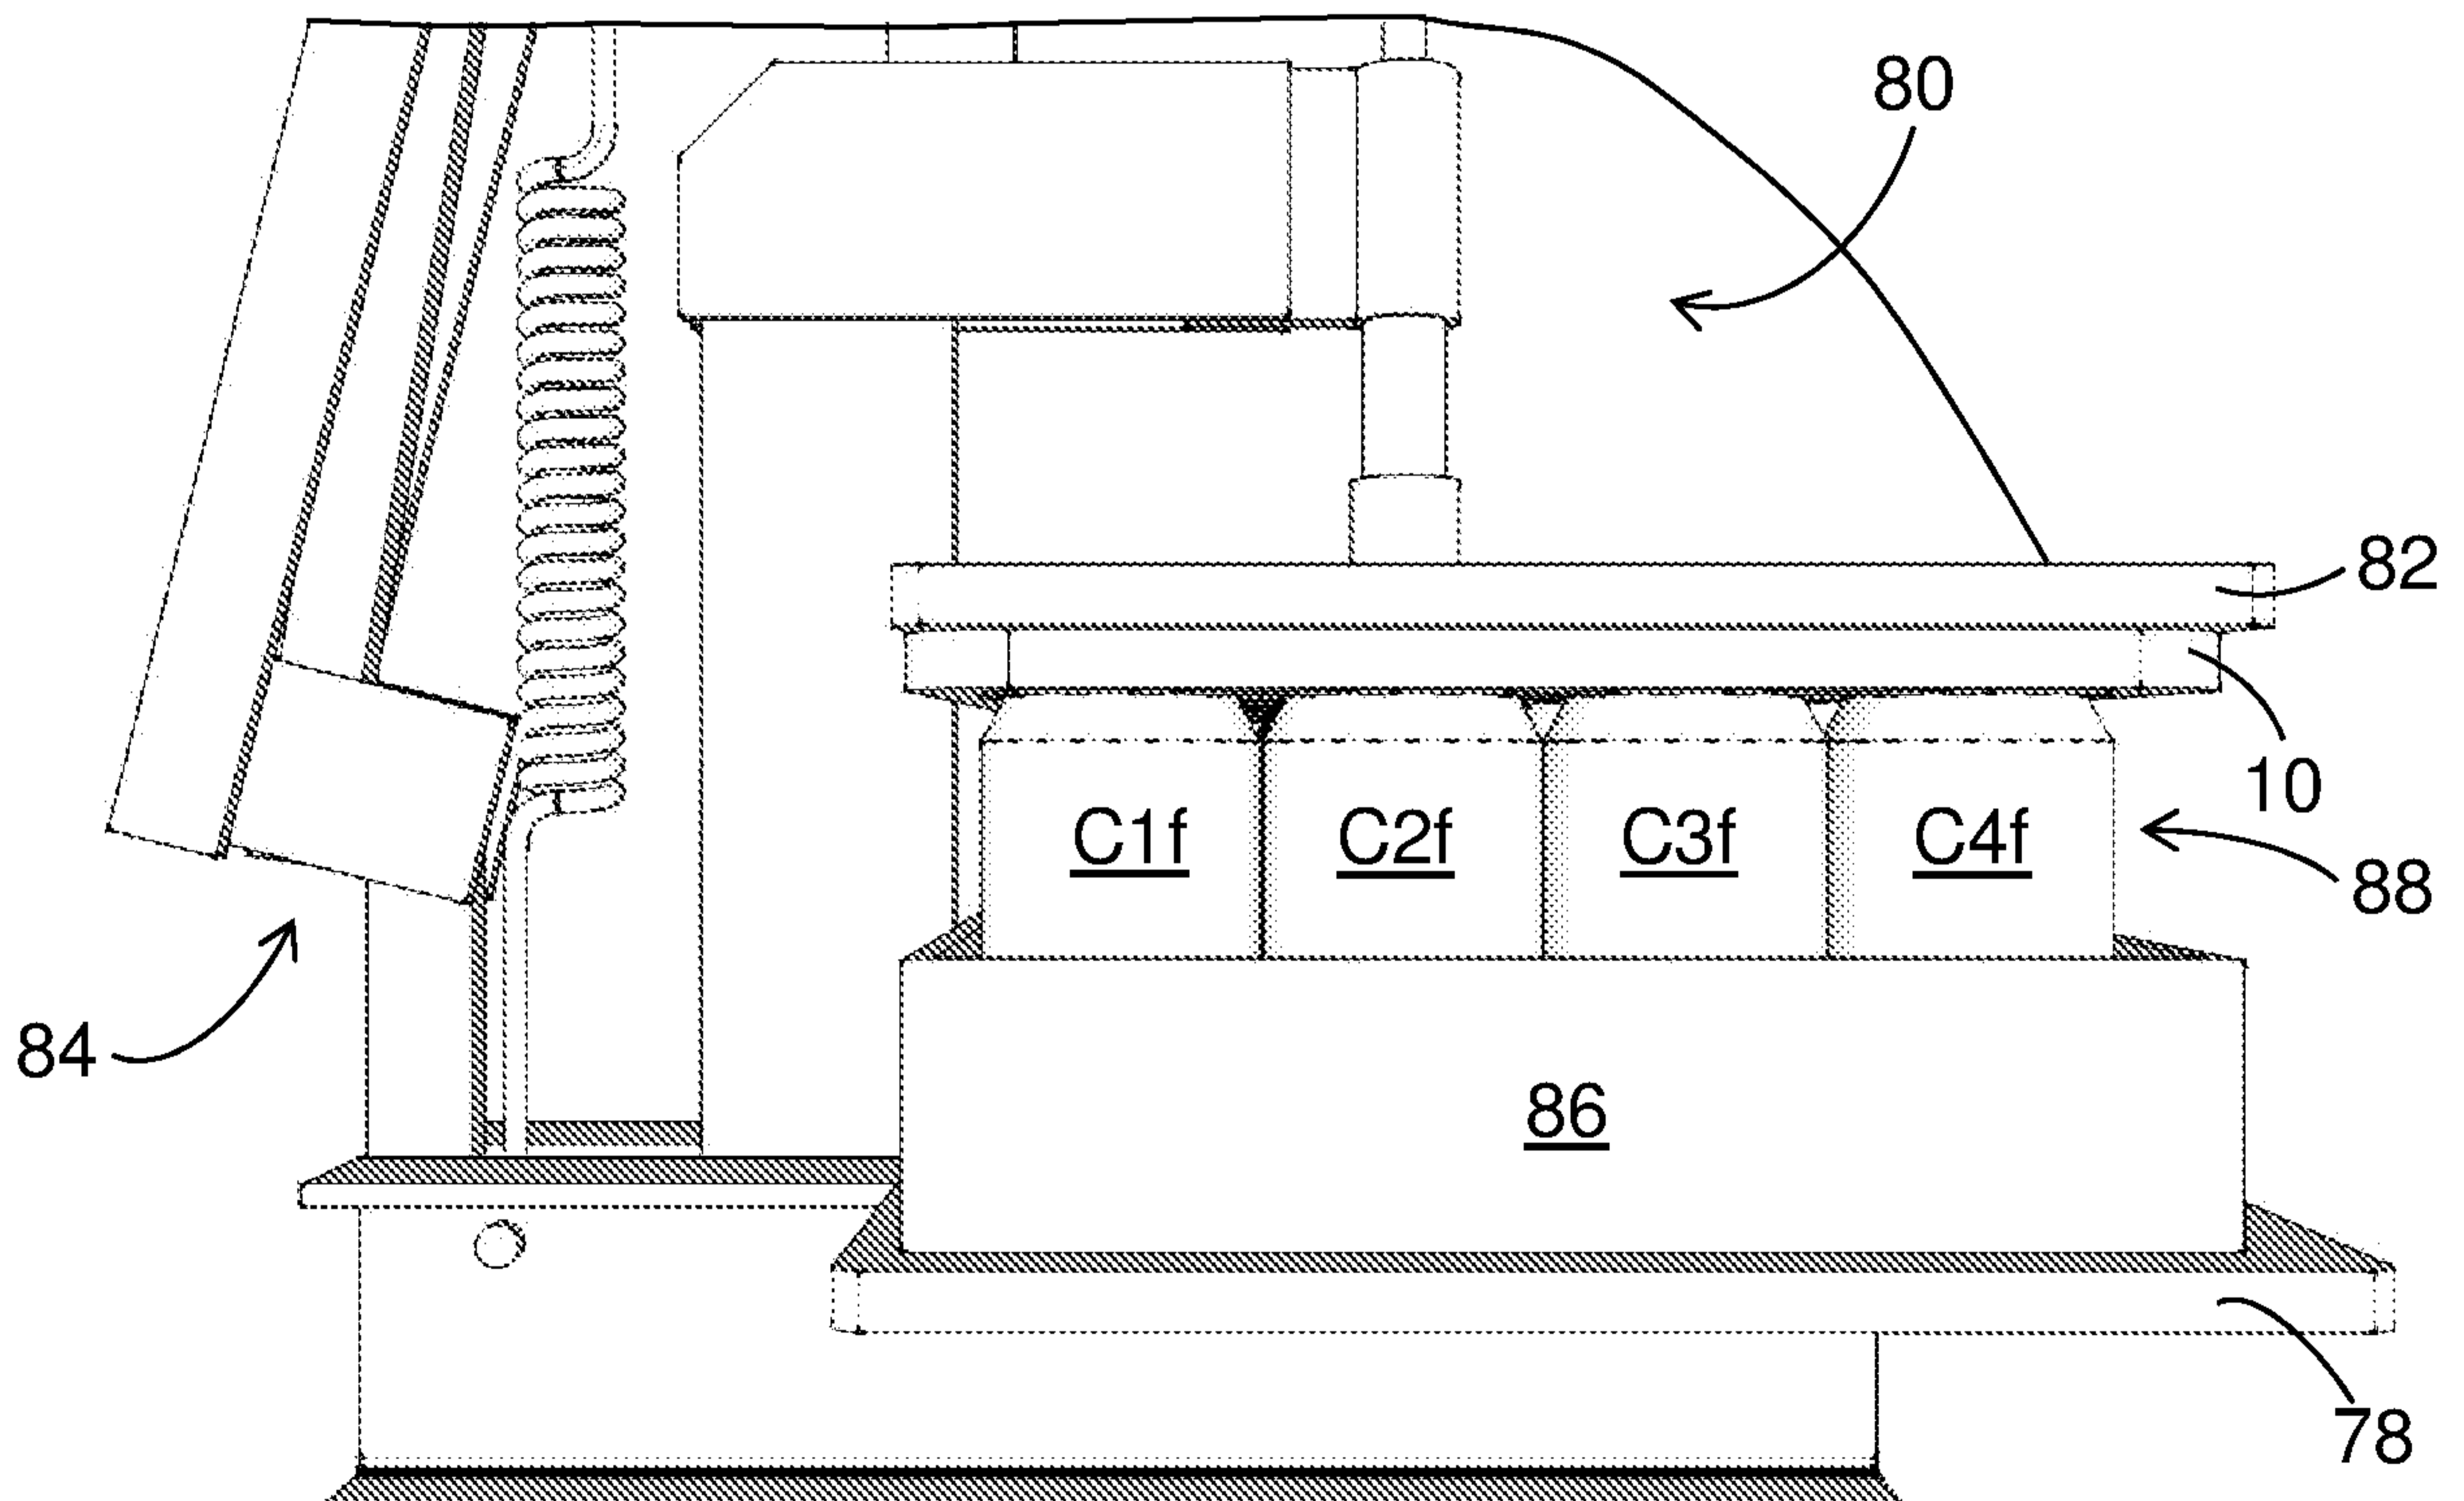


FIGURE 7B

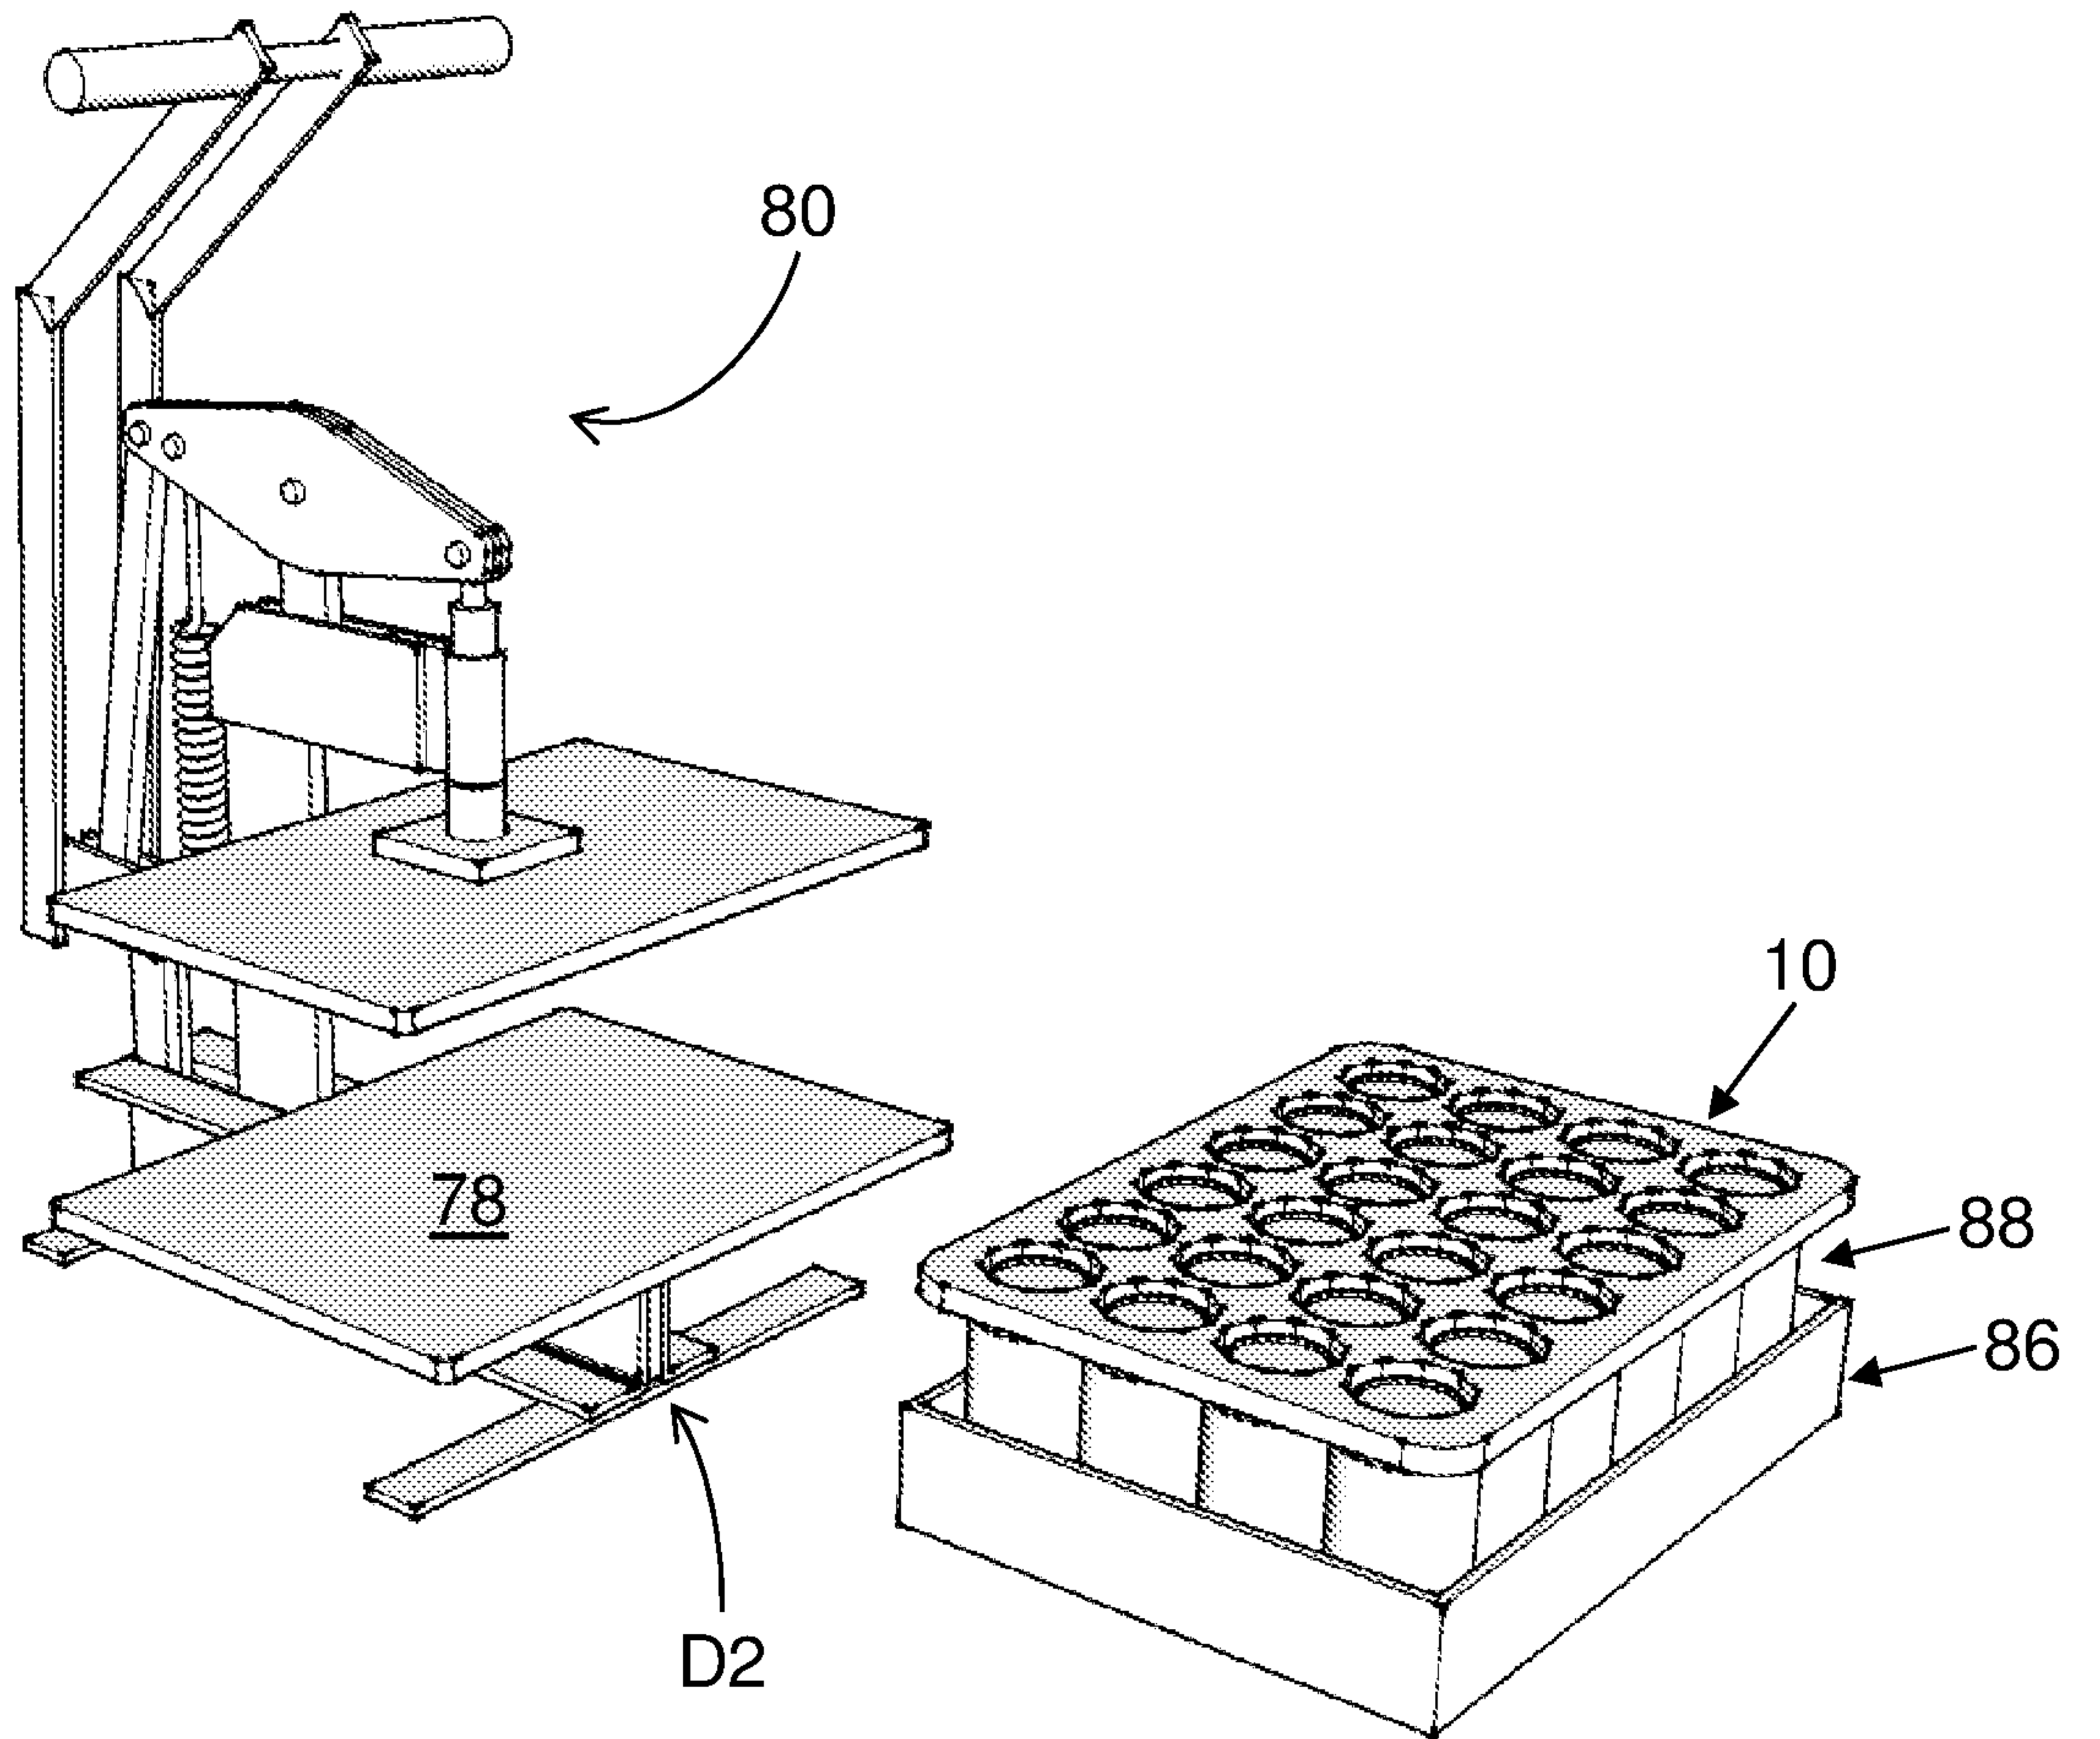


FIGURE 8



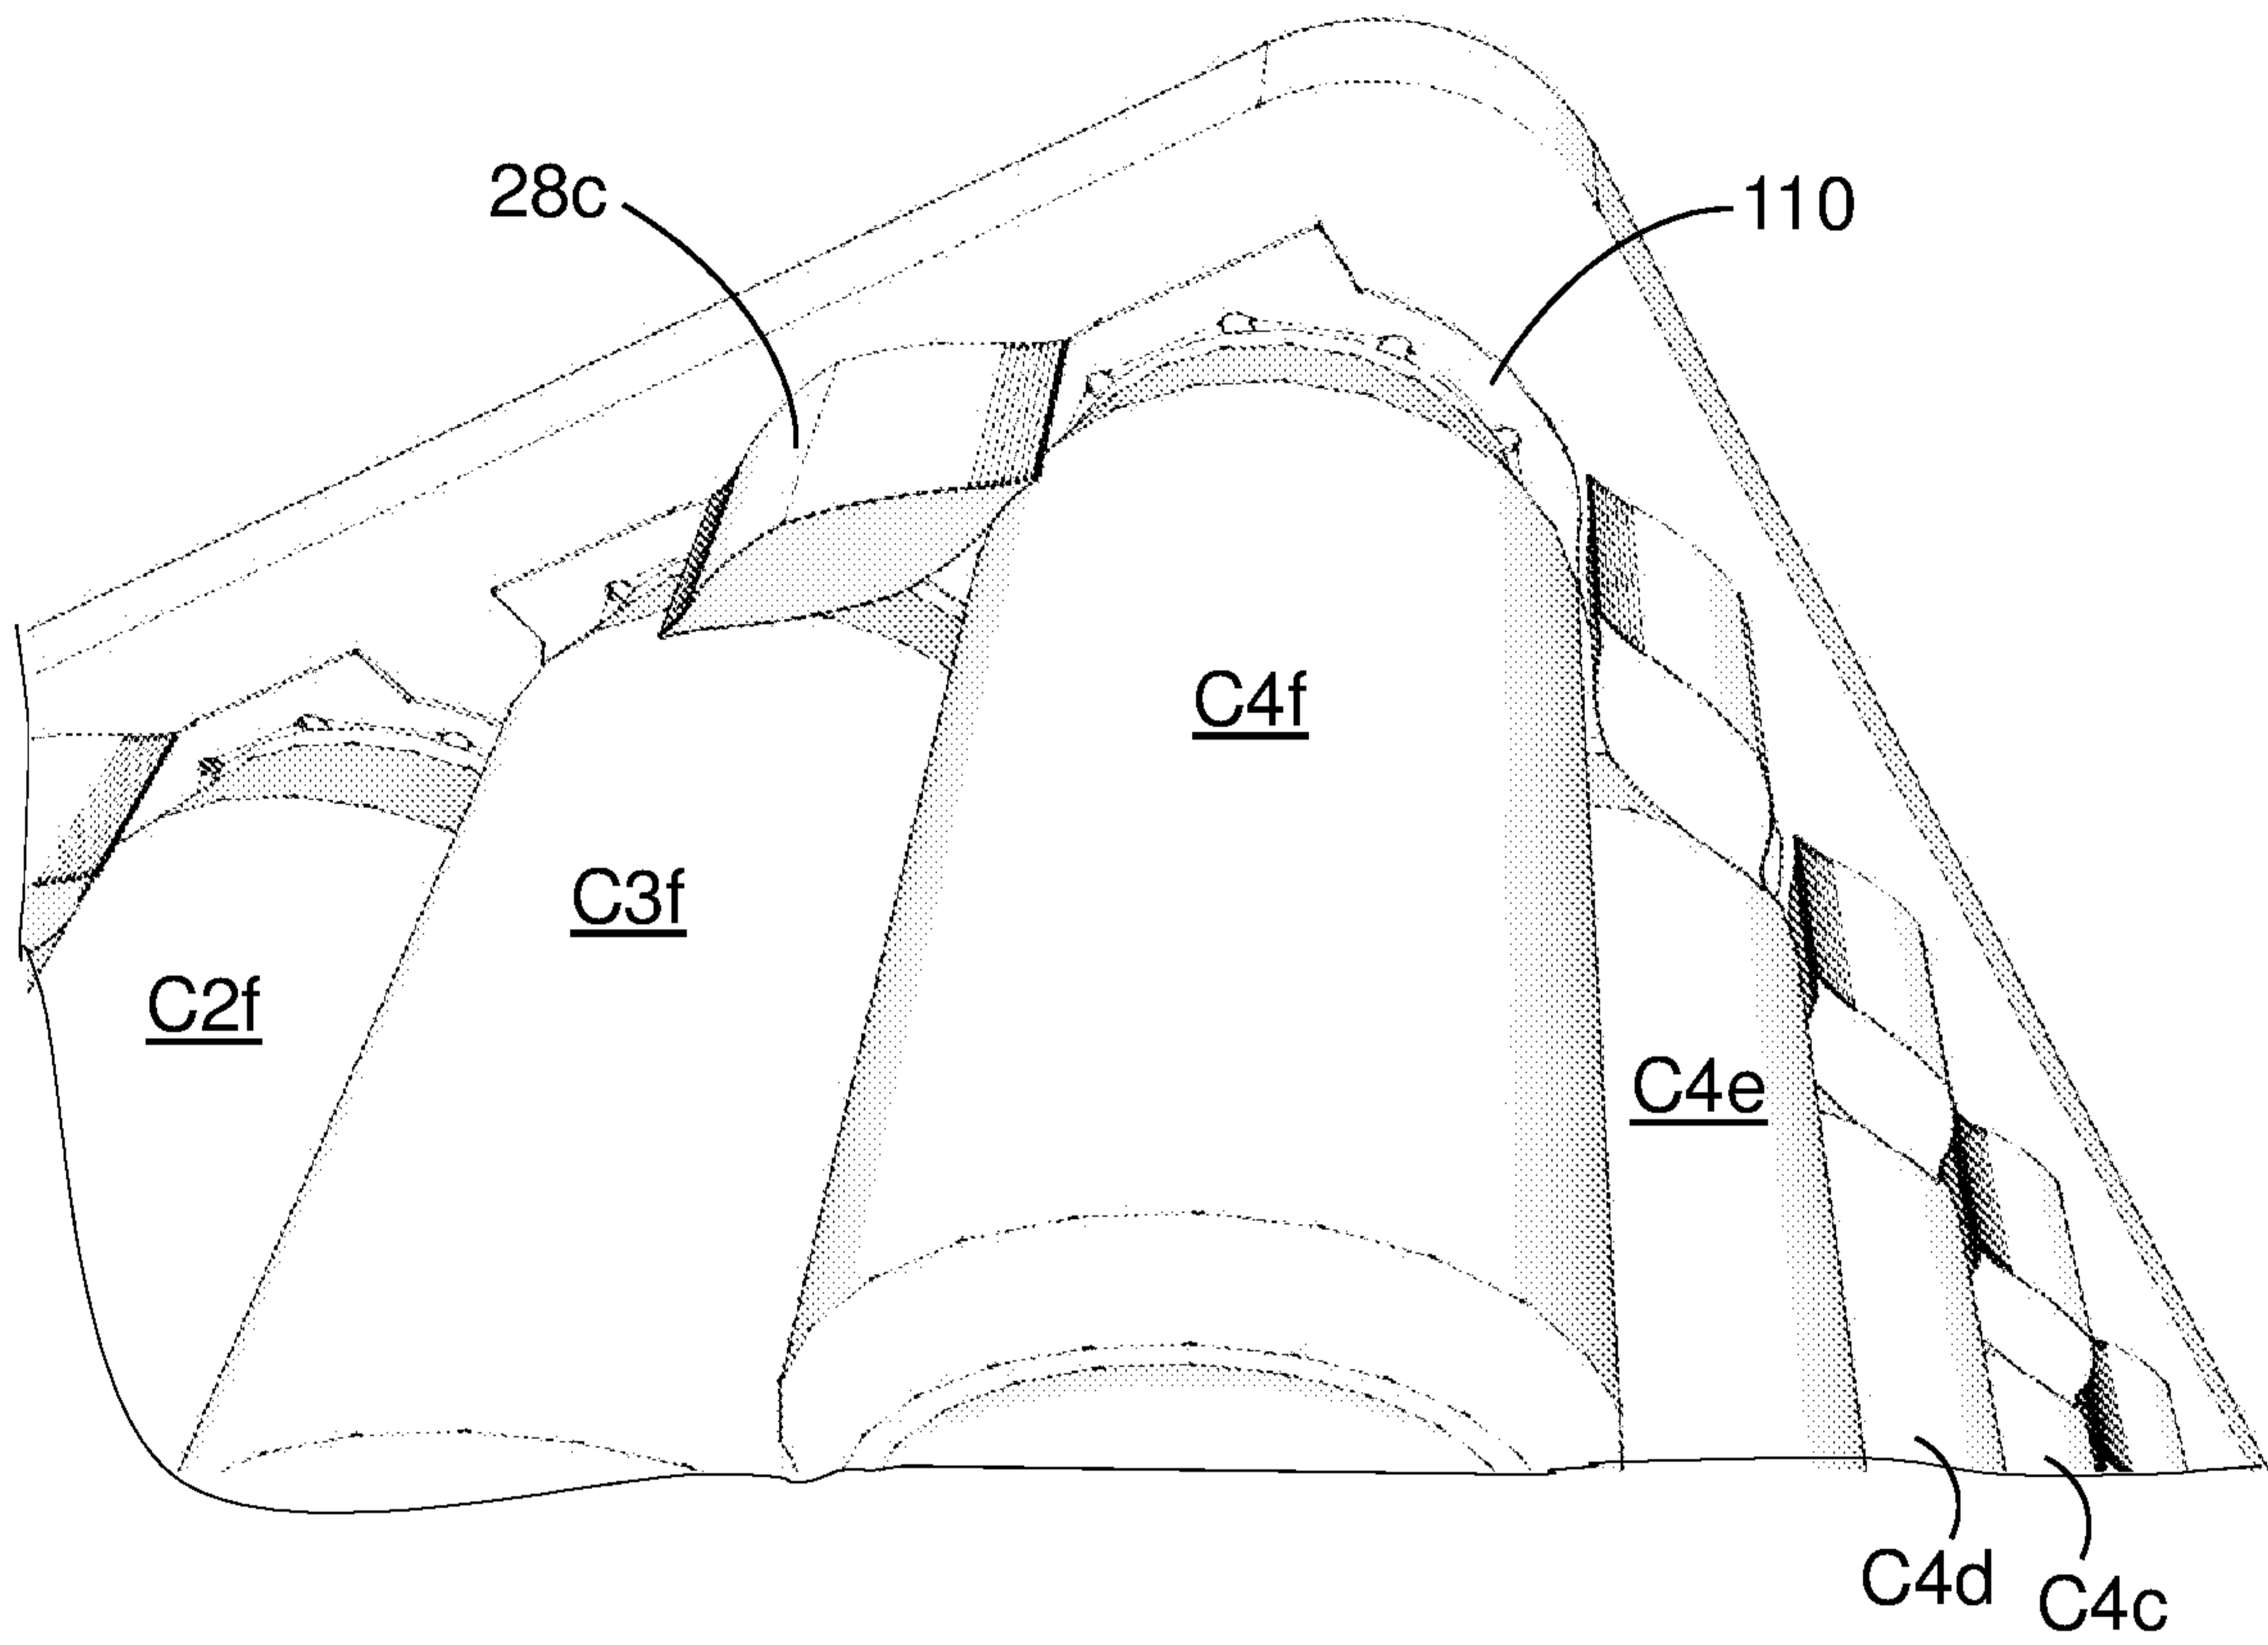


FIGURE 9

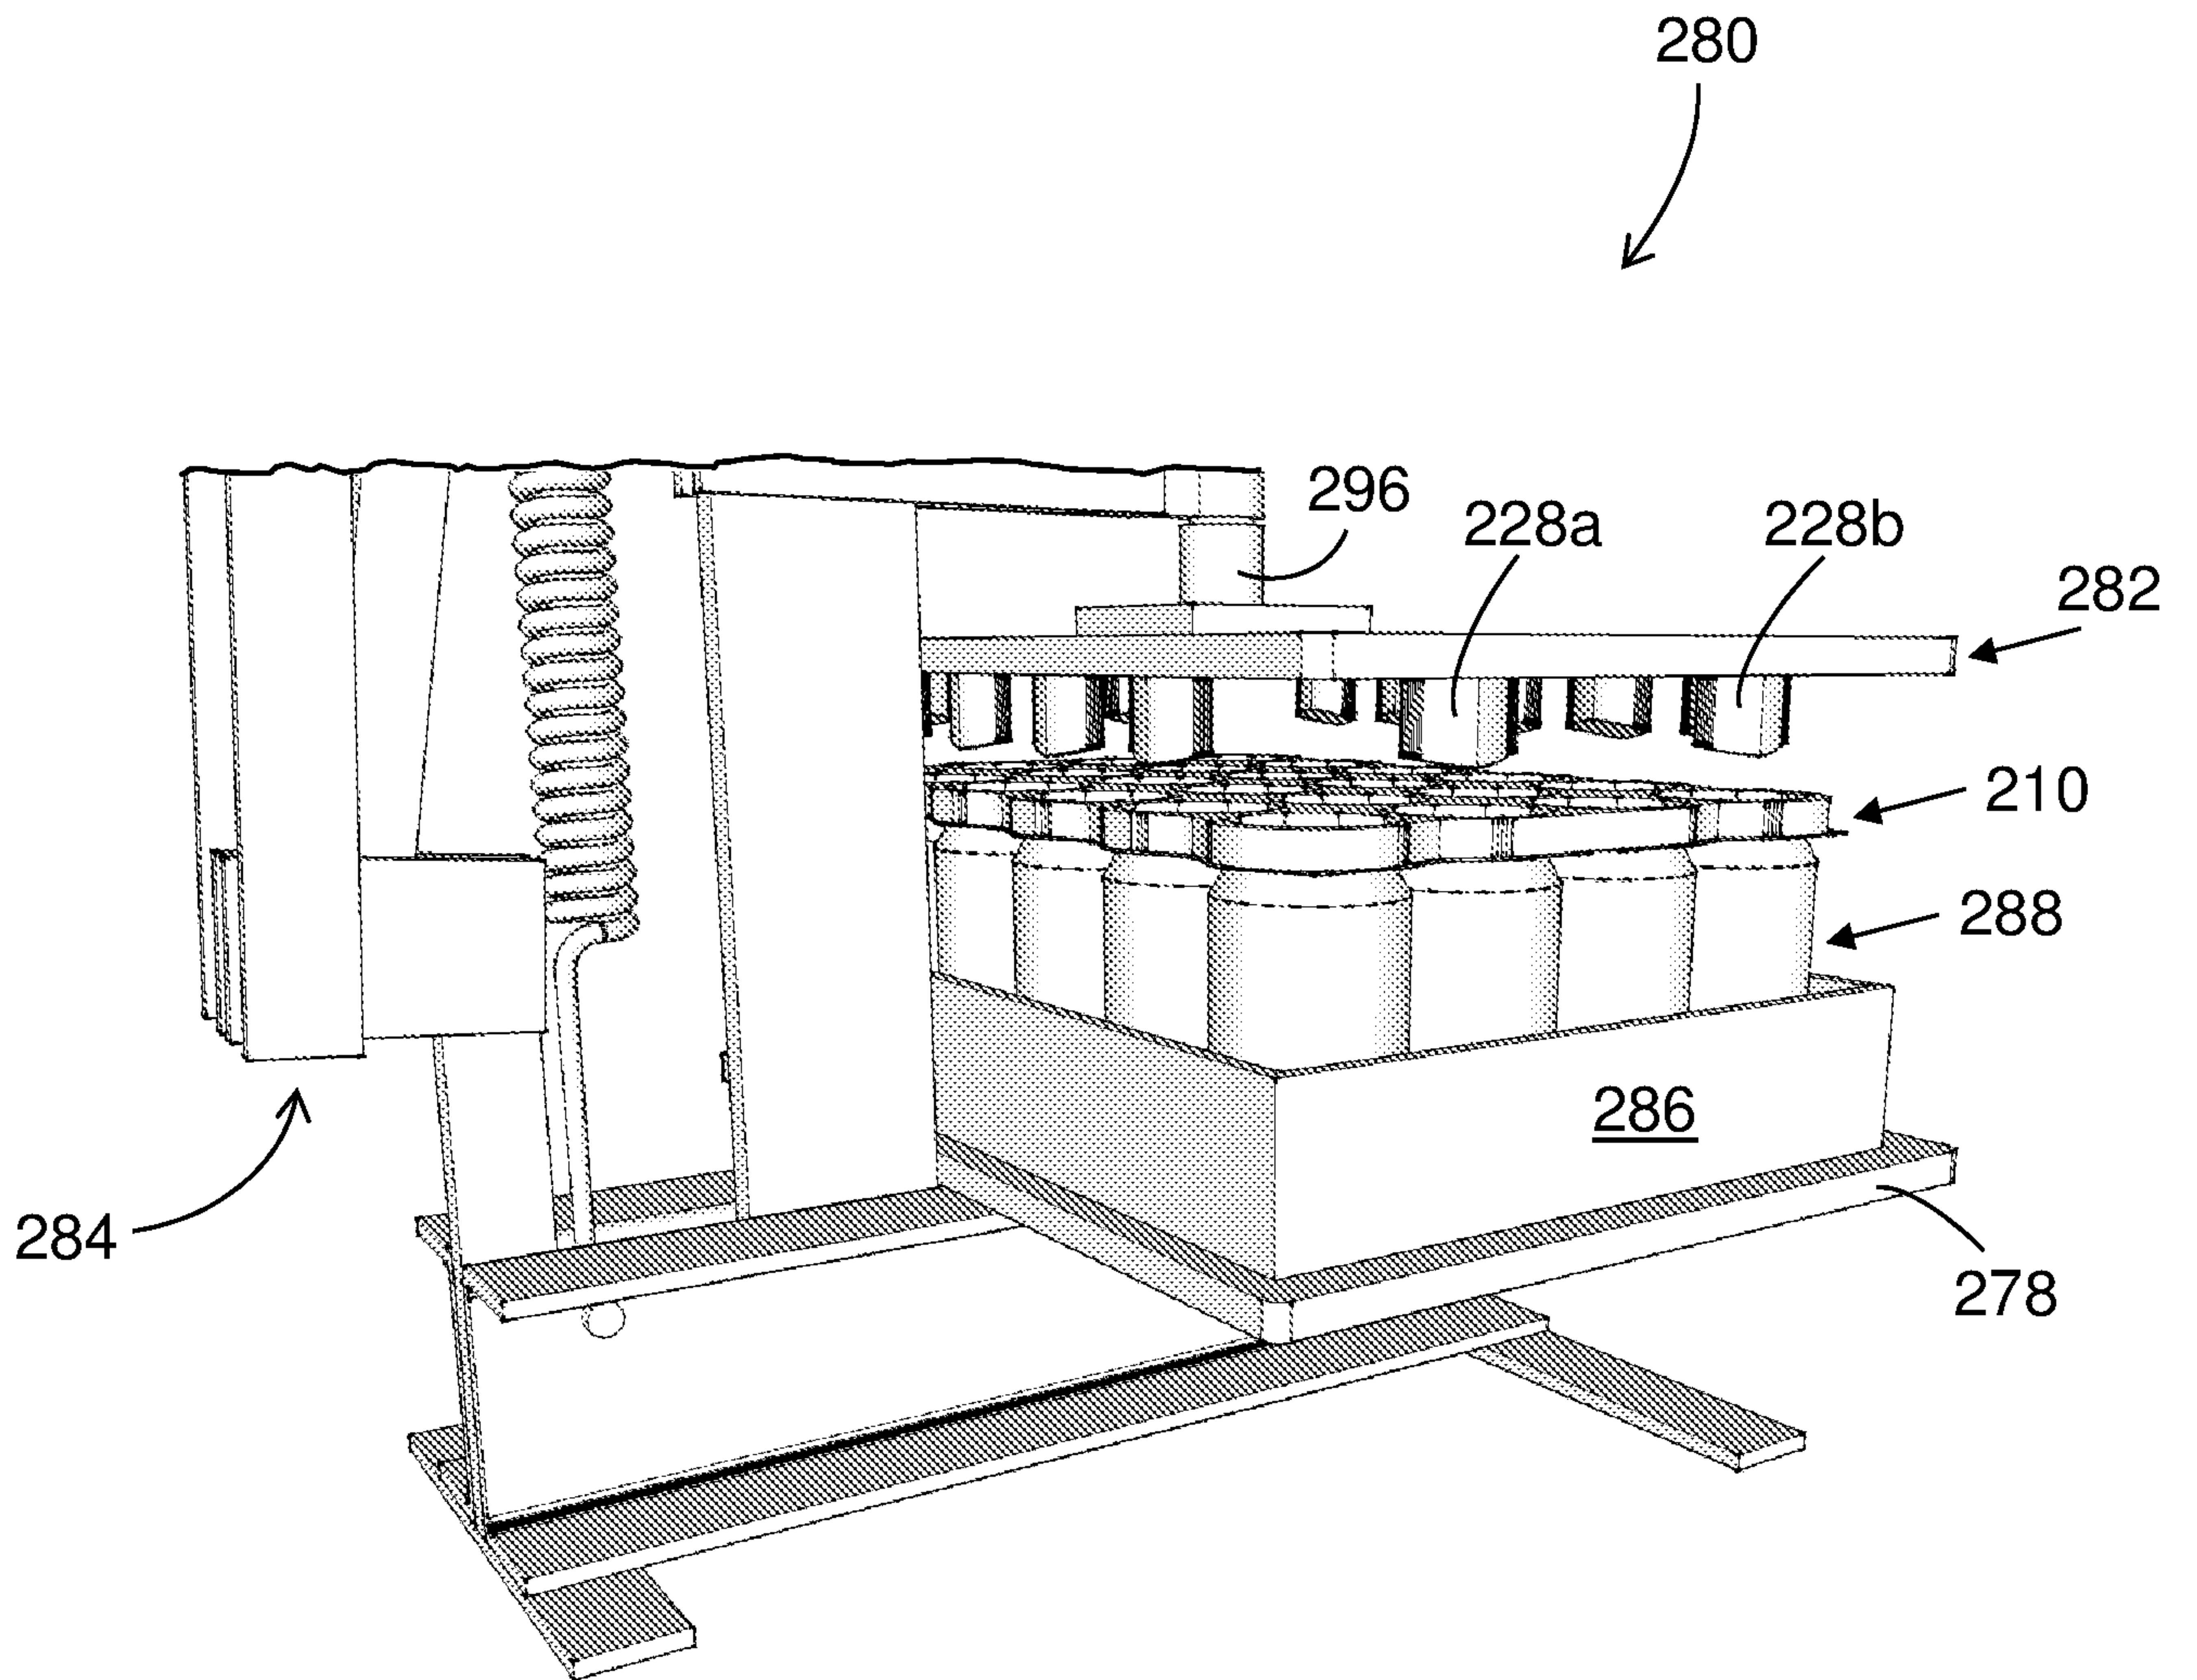


FIGURE 10

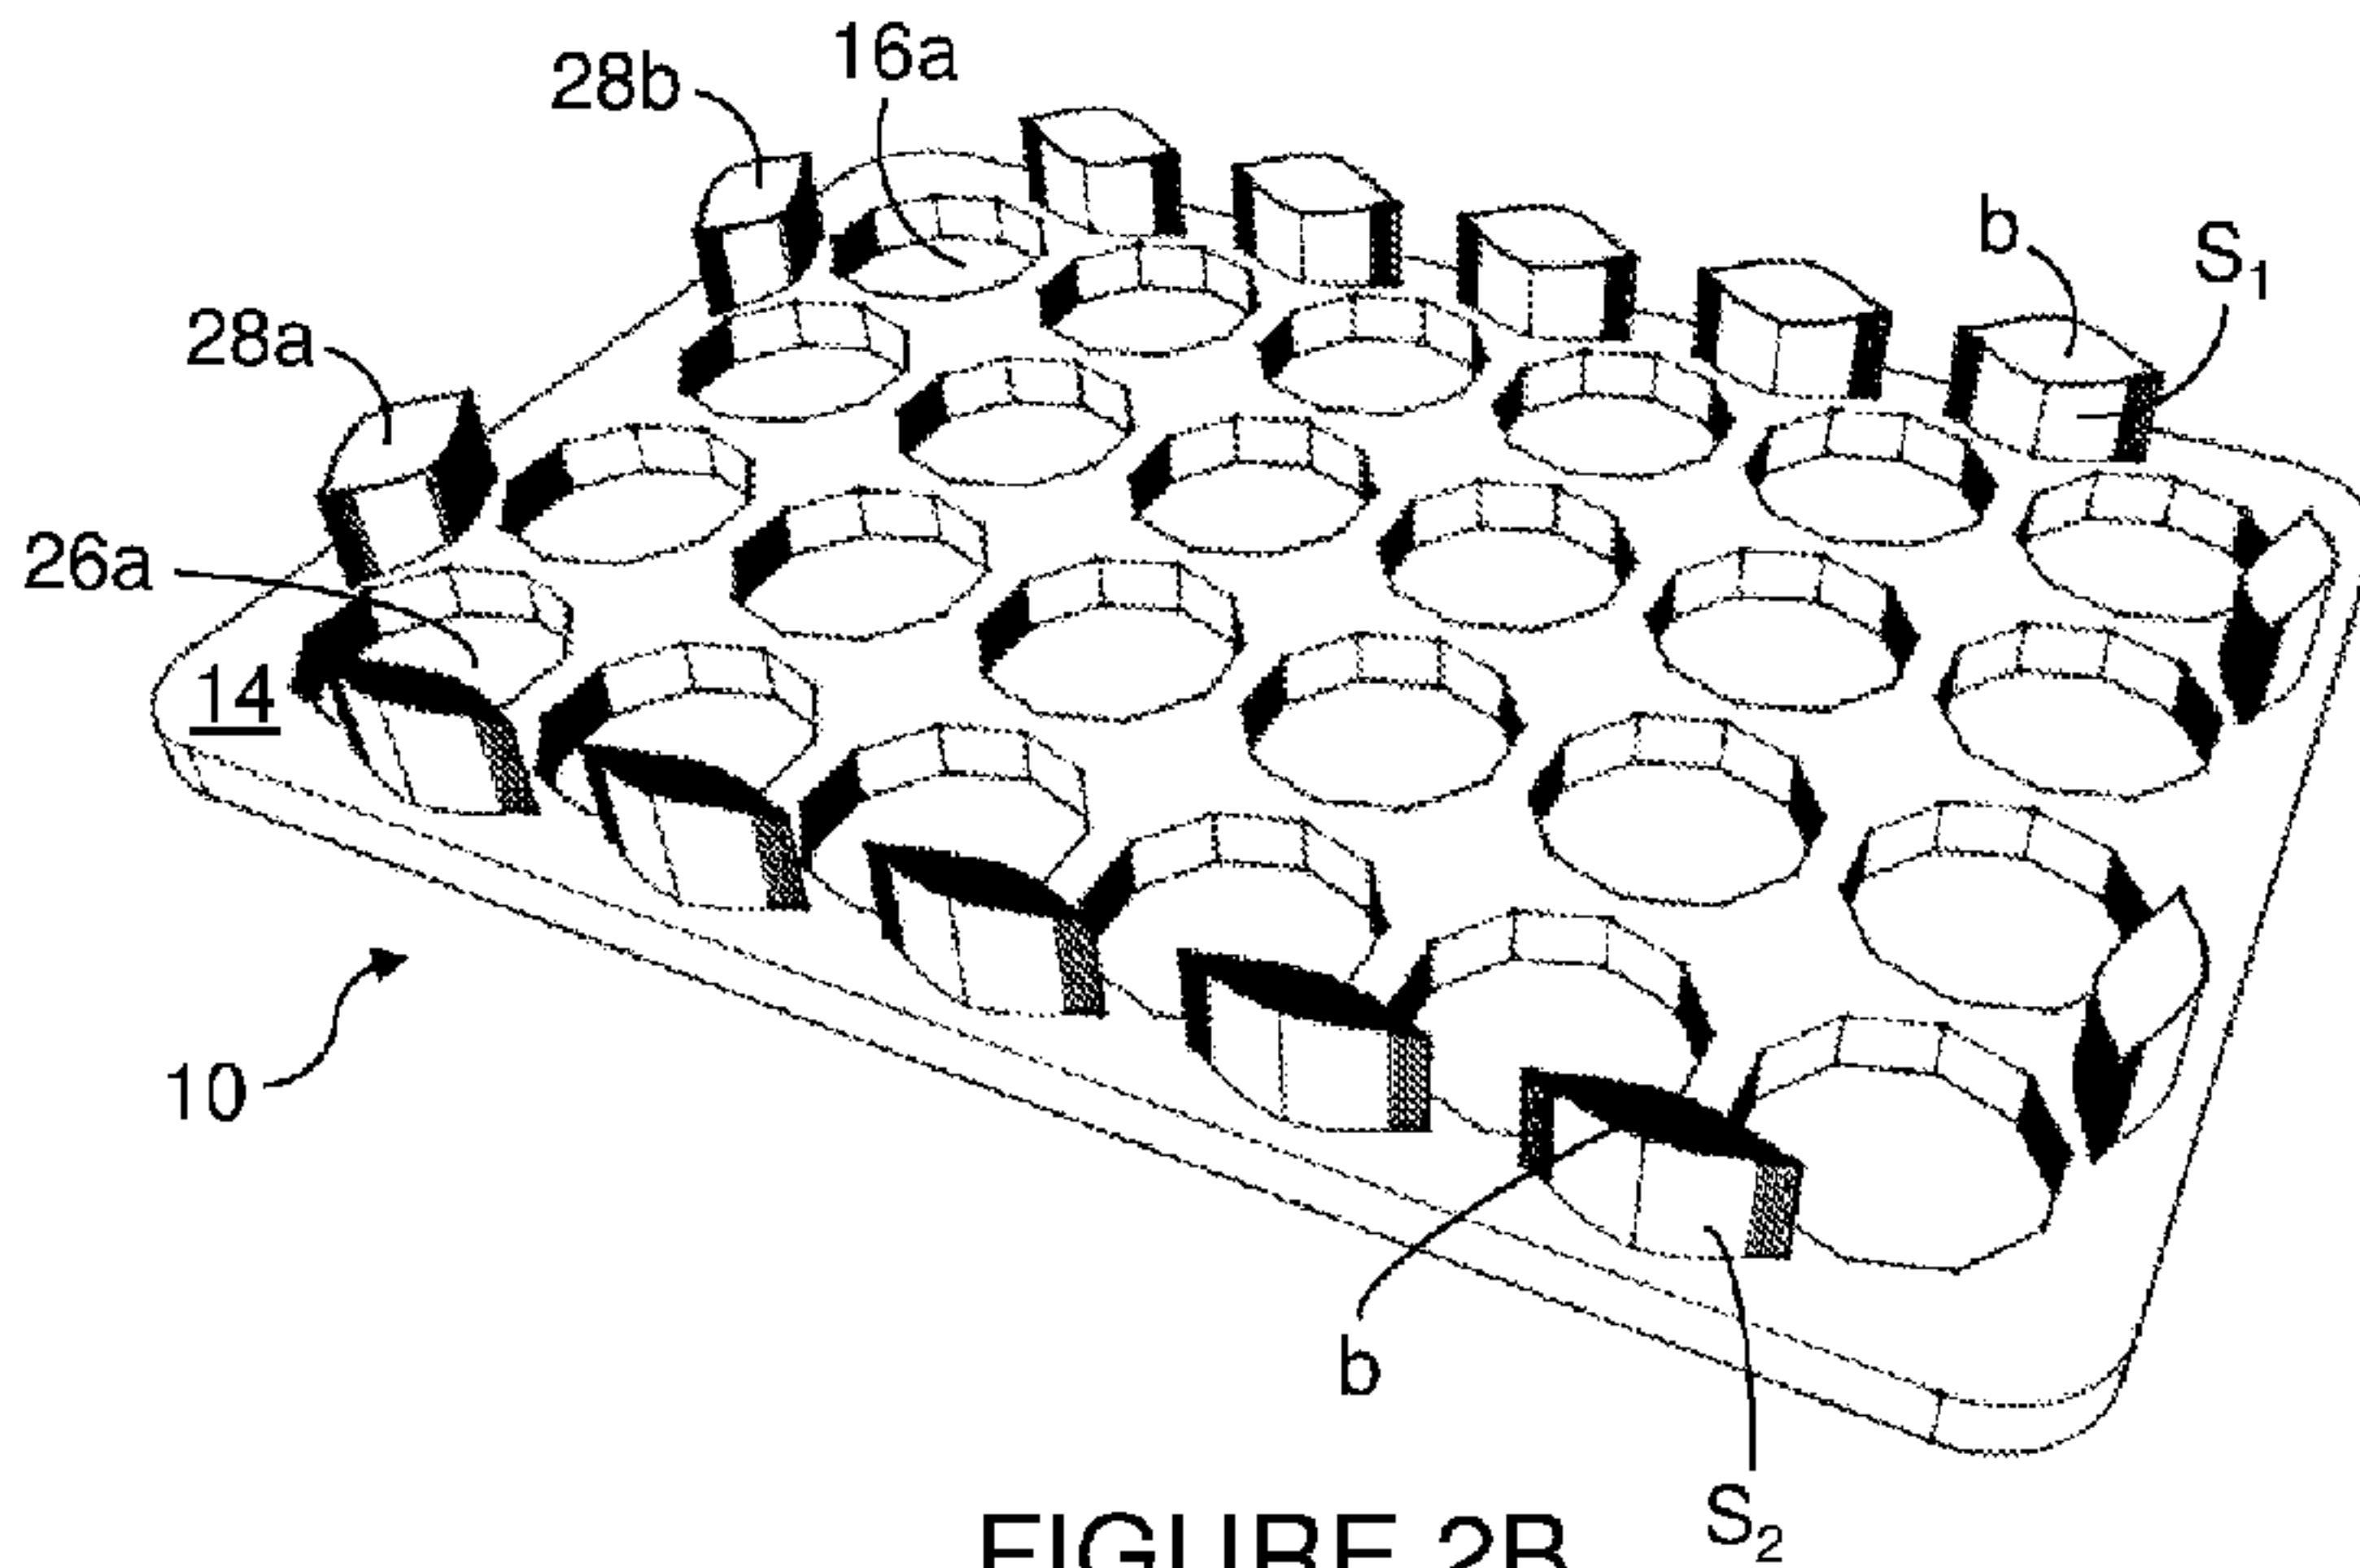


FIGURE 2B