

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 February 2005 (03.02.2005)


PCT

(10) International Publication Number
WO 2005/010438 A1

- (51) International Patent Classification⁷: F23R 3/36, F23D 17/00, F23L 7/00
- (21) International Application Number: PCT/IT2003/000462
- (22) International Filing Date: 25 July 2003 (25.07.2003)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): ANSALDO ENERGIA S.p.A. [IT/IT]; Via Nicola Lorenzi, 8, I-16152 Genova (IT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): BONZANI, Federico [IT/IT]; Via Salgari, 34/11, I-16156 Genova (IT). POLLAROLO, Giacomo [IT/IT]; Via Ceppi Bairolo, 8/14, I-16126 Genova (IT).
- (74) Agents: VITTORANGELI, Lucia et al.; Jacobacci & Partners S.p.A, Via Senato, 8, I-20121 Milano (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: GAS TURBINE BURNER

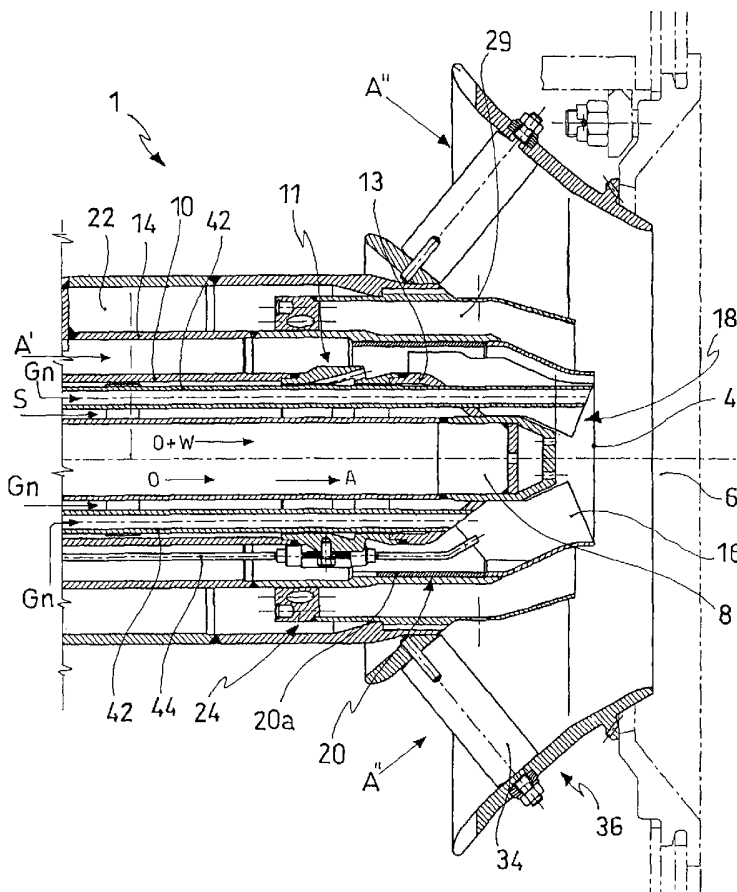

(57) Abstract: A turbine burner (1) comprising a secondary feed unit for the supply of a backup mixture and a primary feed unit intended for the supply of a primary mixture comprising lean gas, comprising a primary mixture channel (24). The primary mixture channel (24) has an annular wall (28) having a truncated cone-shaped end portion (30) capable of conveying the primary mixture directly to the combustion zone (6) facing the axial swirler (18), achieving efficient combustion even for primary mixtures comprising gases with a low calorific value.

WO 2005/010438 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

DESCRIPTION**"GAS TURBINE BURNER"**

[0001]. The subject of the invention is a burner intended for the use of non-conventional fuels in gas turbines, for example in plant for the production of electrical energy.

[0002]. It is known practice in the industry to use the term non-conventional fuels to mean fuels different from those such as natural gas and light gas oil (diesel oil) usually employed in gas turbines.

[0003]. Currently known solutions for burners for non-conventional gases are embodied taking into account the need to burn different mixtures depending on the conditions of operation of the plant which supplies the recovered fuel which can be used by the burner or depending on the requirements of the electrical network supplied by the plant of which the turbine is part.

[0004]. For example, there is the known case where, on starting up the gas turbine or when the power demand from the electrical network is very low, burner operation provides for combustion with a so-called backup mixture, generally consisting of a mixture of natural gas and steam or gas oil or gas oil and water, of course together with air.

[0005]. In nominal conditions, burner operation provides

for combustion of a primary mixture formed, for example, of a primary gas and an inert gas, for example steam or nitrogen, together with air.

[0006]. All of this makes it necessary, in the structure of a burner, to provide suitable tubes to convey the various mixtures, in optimum conditions for proper mixing of the components and for efficient interaction with the combustion air, to a combustion zone in which combustion actually occurs.

[0007]. Furthermore, a requirement has arisen recently for burners to be produced suitable for the combustion of primary mixtures with widely differing compositions. In other words, it has become necessary to devise burners capable of achieving efficient combustion of primary mixtures which are not of a constant composition.

[0008]. The problem addressed by the invention is that of devising a burner for gas turbines which has structural and operating characteristics such as to meet the above-mentioned requirements and at the same time eliminate the disadvantages mentioned with reference to the known technology.

[0009]. This problem is solved by a burner in accordance with claim 1. Other forms of embodiment of the invention are described in the dependent claims.

[0010]. The characteristics and advantages of the burner

according to the invention will become clear from the following description provided purely by way of a preferred, non-limiting example, in which:

[0011]. figure 1 shows a view in longitudinal section of a burner according to the invention;

[0012]. figure 2 shows a view in isometric projection of the end portion of the burner in figure 1;

[0013]. figures 3a to 3c show respectively a view in longitudinal section, a front view and a rear view of a primary mixture channel of the burner in figure 1;

[0014]. figures 4a and 4b show respectively a view in longitudinal section and a rear view of a nozzle ring of the primary mixture channel in figure 3a;

[0015]. figure 5 shows a view in section of a detail of figure 4b;

[0016]. figures 6a and 6b show respectively a view in longitudinal section and a rear view of a sleeve of the burner in figure 1, and

[0017]. figure 7 shows a table giving experimental data regarding the composition, flame velocity and lower heating value of lean gases used in the burner according to the invention.

[0018]. With reference to the appended drawings, the number 1 indicates as a whole a turbine burner intended particularly for use in association with gas turbines for

electrical plant.

[0019]. The burner 1 comprises a secondary feed unit intended to supply a secondary or backup mixture.

[0020]. Said secondary feed unit is capable of supplying
5 and discharging said secondary mixture from an opening 4
to a combustion zone 6 facing said opening 4.

[0021]. Said secondary mixture comprises, for example,
natural gas and steam. In a further variant, said
secondary mixture comprises gas oil. In a still further
10 variant, said secondary mixture comprises gas oil and
water.

[0022]. In one form of embodiment, said secondary feed
unit comprises a central tube 8, known as the spray
nozzle, intended for the supply of a secondary mixture
15 variant, for example composed of gas oil O only, or of
gas oil O and water W. In a further variant, said spray
nozzle 8 is intended for the supply of air A.

[0023]. Furthermore, said secondary feed unit comprises a
gas-steam tube 10, intended for the supply of a further
20 secondary mixture variant, comprising natural gas Gn and
steam S.

[0024]. The gas-steam tube 10 is connected to a sleeve
11, of substantially cylindrical shape, provided with
gas-steam holes 12 which provide communication between
25 the inside of said sleeve and the outside of the sleeve.

[0025]. The gas-steam holes 12 are arranged circumferentially along the annular wall of the sleeve 11 and have axes which are incident relative to the axis of the sleeve 11.

5 [0026]. In a preferred form of embodiment, said gas-steam holes 12 can be varied in number between 10 and 18. In a still further form of embodiment, said gas-steam holes can be varied in number between 12 and 16. In a preferred embodiment, said gas-steam holes are 12 in number. In a
10 further variant embodiment, said gas-steam holes are 16 in number.

[0027]. Said gas-steam holes preferably have a constant angular pitch between the respective centres, for example equal to 18° .

15 [0028]. In a preferred embodiment, the sleeve 11 is connected to a bell-shaped part 13 which closes around the spray nozzle 8.

[0029]. In a preferred form of embodiment, the secondary feed unit comprises an axial air tube 14, intended to
20 supply an axial airflow A'.

[0030]. The gas-steam holes 12 are intended for the discharge of the secondary gas mixture formed of natural gas G_n and steam S towards the axial air tube 14.

[0031]. The inclination of the axes of the gas-steam
25 holes 12 is suitable for spraying said secondary mixture

towards the wall of said axial air tube 14.

[0032]. In a preferred form of embodiment, said secondary feed unit provides for a system of vanes 16, preferably twisted, known as an axial swirler 18.

5 [0033]. Said vanes 16 are arranged concentrically relative to the axial air tube 14 and have a radial extension such as to allow the spray nozzle 8 to be located centrally.

[0034]. The axial swirler 18 is arranged in the end part
10 of the axial air tube 14, preferably not welded or rigidly attached to it.

[0035]. Advantageously, said sliding fit between the axial air tube 14 and the axial swirler 18 absorbs the differences in thermal expansion between said axial air
15 tube 14 and said axial swirler 18.

[0036]. The vanes 16 of the axial swirler 18 are spaced circumferentially in order to produce swirl passages between one vane and the next for the axial airflow A' fed to the combustion zone 6.

20 [0037]. In a preferred form of embodiment, said secondary feed unit provides for a baffle 20 preferably arranged upstream of the axial swirler 18 relative to the combustion zone 6.

[0038]. Said baffle 20 comprises an annular wall 20a,
25 preferably cylindrical, extending substantially axially.

[0039]. The annular wall 20a is preferably arranged to fit closely against the inner surface of the axial air tube 14, axially adjacent to the axial swirler 18.

[0040]. Preferably, said baffle 20 is arranged frontally relative to the gas-steam holes 12 of the gas-steam pipe 10.

[0041]. The burner 1 also comprises a primary feed unit for the supply of at least one primary combustion mix.

[0042]. For example, said primary mix comprises lean gas, for example derived from steel-making processes, and steam.

[0043]. It is emphasised that in the specific sector of turbine burners, lean gas is taken to mean a gas having a lower heating value of less than 15,000 kJ/kg in general containing mainly hydrogen, carbon monoxide, methane and inert gas (carbon dioxide, nitrogen or steam).

[0044]. The primary feed unit comprises a primary mixture tube 22 for the supply of the primary mixture.

[0045]. Said primary feed unit also comprises a primary mixture channel 24 having a fluid flow connection to said primary mixture tube 22.

[0046]. The primary mixture channel 24 provides for a nozzle ring 26 to which is connected, preferably by the outer peripheral edge, an annular wall 28.

[0047]. The annular wall 28 of the primary mixture

channel 26 forms, at a distance radially from the axial air tube 14, a cavity 29.

[0048]. The annular wall 28 extends axially far enough to be close to the combustion zone 6, and is thus able to feed said primary mixture directly into said combustion zone 6 facing the axial swirler 18.

[0049]. In a preferred form of embodiment, said annular wall 28 of the primary mixture channel 24 has a truncated cone-shaped end portion 30, converging in the direction of discharge of the primary mixture.

[0050]. The nozzle ring 26 has a plurality of primary mixture holes 32, passing through said ring, so as to provide fluid flow communication between the primary mixture tube 22 and the cavity 29 between the annular wall 28 of the primary mixture channel 24 and the axial air tube 14.

[0051]. In a preferred form of embodiment, said primary mixture holes 32 are organised so that the centres lie on two concentric circumferences, on which said holes are angularly staggered.

[0052]. For example, said nozzle ring 26 has forty primary mixture holes 32 on each circumference, spaced apart, on each circumference, so as to have an angular pitch of 9°.

[0053]. Advantageously, the primary mixture coming from

the primary mixture tube 22 passes through said primary mixture holes 32 assuming a turbulent swirling motion as far as the combustion zone 6.

[0054]. In one form of embodiment, said primary mixture channel 24 has an axial length L equal to 182.9 mm (figure 3a) and said primary mixture holes have an axis inclined as described above by an angle B equal to 17° (figure 5).

[0055]. In a further form of embodiment, said primary mixture channel 24 has an axial length L equal to 194.85 mm (figure 3a) and said primary mixture holes have an axis inclined as described above by an angle B equal to 12° (figure 5).

[0056]. Furthermore, said primary feed unit comprises an assembly of vanes 34, preferably twisted, known as a diagonal swirler 36, arranged concentrically with the primary mixture channel 24.

[0057]. The diagonal swirler 36 is intended to convey a diagonal airflow A'' to the combustion zone 6.

[0058]. The vanes 34 of said diagonal swirler 36 are arranged spaced circumferentially so as to produce swirl passages through which the diagonal airflow A'' is given swirl and turbulence so as to be suitable for effective combustion.

[0059]. In one form of embodiment, the burner 1 also

comprises a pilot unit.

[0060]. Preferably said pilot unit comprises one or more pilot tubes 42 capable of supplying natural gas in particular operating situations of the turbine which may
5 be associated with the burner 1, such as cases of shedding of the electrical load or reduction in the power required by the network.

[0061]. Furthermore, said burner 1 comprises at least one pair of igniters 44.

10 [0062]. In a first operating condition, for example on starting up the turbine, the burner 1 is used in a first combustion condition, known as natural gas backup.

[0063]. In this condition, the burner 1 is supplied with a secondary mixture formed of natural gas and steam which
15 is discharged from the gas-steam holes 12 of the sleeve 11.

[0064]. The secondary flow is struck by the axial airflow A' coming from the axial air tube 14.

[0065]. The mixture thus formed of air, steam and
20 natural gas passes through the axial swirler 18 and reaches the combustion zone 6. There, combustion is further sustained by the diagonal airflow A'' coming from the diagonal swirler 36.

[0066]. The baffle 20 arranged axially upstream and
25 adjacent to the axial swirler 18 prevents part of the

inflammable secondary mixture, for example part of the steam-natural gas mixture, from being drawn towards the cavity 29 causing undesirable and harmful explosions when changing over from backup operation to nominal operation.

5 [0067]. In a further operating condition on starting up the turbine, the burner is used in a further backup combustion condition, known as gas oil backup.

[0068]. In this condition, the burner 1 is supplied with a secondary mixture formed of gas oil O and water W or of
10 gas oil O only, exiting to the combustion zone 6 through the spray nozzle 8.

[0069]. The secondary mixture is struck by the axial airflow A' coming from the axial air tube 14 through the axial swirler 18 and by the diagonal airflow A'' coming
15 from the diagonal swirler 36.

[0070]. In the so-called nominal operating condition, the burner 1 is supplied with a primary mixture formed of primary gas, for example lean gas, and steam, pre-mixed upstream of the nozzle channel 24.

20 [0071]. The primary mixture passes through the primary mixture holes 32 of the nozzle ring 26 which imparts to said primary mixture a swirling and turbulent motion along the cavity 29 until, maintaining this vigorous swirling motion, it arrives directly at the combustion
25 zone 6 facing the outlet of the axial swirler 18.

[0072]. This swirl and turbulence of the primary mixture are not damped by structural discontinuities in the nozzle channel 26, such as projections, lobes and similar.

5 [0073]. Furthermore, the end portion 30 of the annular wall 28 of the primary mixture channel 24, of truncated cone shape, intensifies this swirl by reducing the cross-section through which the flow passes.

[0074]. The primary mixture exiting from the primary
10 mixture channel 24 directly to the combustion zone 6 is also struck by the axial airflow A' coming from the axial swirler 18, and by the diagonal airflow A'', coming from the diagonal swirler 36.

[0075]. The embodiment described above achieves high
15 swirl numbers, the term swirl number, as is known in the sector, denoting a characteristic fluid-dynamics parameter derived from the ratio between the moment of the quantity of tangential motion and that of axial motion of the moving fluid.

20 [0076]. Said high swirl numbers are within a range of values of between 2 and 3, while typical values in the known technology are equal to 0.8.

[0077]. The embodiment described above has shown excellent operation in nominal conditions of the burner
25 even with primary mixtures having an extremely variable

composition. This is because the high degree of turbulence and swirl generated by the geometry of the burner maintain a stable flame front even for lean hydrogen primary mixtures.

5 [0078]. In a further operating condition known as load shedding, in general resulting from disconnection of the plant from the electrical network or from an unexpected drop in the power required by the network, the burner is supplied with natural gas by the pilot tubes 42.

10 [0079]. The natural gas in the combustion zone 6 is struck by the axial airflow A' and by the diagonal airflow A''.

[0080]. Unusually, the burner according to the invention has proved capable of achieving efficient combustion even
15 when supplied with primary mixtures varying in composition and above all in the case of primary mixtures characterised by low hydrogen content.

[0081]. For example, results of experiments carried out have shown that there are no undesirable phenomena such
20 as flame separation, backfiring or pressure fluctuations induced by the combustion (the phenomenon generally known as humming).

[0082]. In particular, the table given in figure 7 shows the composition and characteristics of the fuels used in
25 gas turbines when supplying the burner according to the

invention with a primary mixture containing lean gas having a different composition. The last two columns on the right of the table also give the values calculated for flame velocity and for lower heating value.

5 [0083]. The burner according to the invention has shown excellent combustion capabilities with primary mixtures containing lean gas with a percentage of molecular hydrogen H₂ varying from 2% by volume to about 30% by volume.

10 [0084]. The burner has also shown excellent combustion capabilities with flame velocities of between 0.3 m/s and 1.6 m/s.

[0085]. Moreover, the burner has shown excellent combustion capabilities with gases having a low calorific value, between 7.3 MJ/Kg and 10.0 MJ/Kg, it being generally recognised in the industry that a gas is defined as having low calorific value up to a value of 15 MJ/kg.

[0086]. According to a further advantageous aspect, the extended primary mixture channel, which directly supplies the primary mixture to the combustion zone facing the axial swirler, avoids the formation of residues, generally metallic such as iron and nickel powders, due to the presence of contaminants in the fuel which, particularly in some solutions in the known technology,

are deposited on the axial swirler, requiring lengthy and difficult maintenance and/or repair work.

[0087]. According to a further advantageous aspect, the baffle arranged upstream of the axial swirler in the axial air tube prevents an inflammable mixture from being drawn towards the cavity which, when changing over from backup operation to nominal operation, would lead to undesirable and dangerous explosions.

[0088]. According to a further advantageous aspect, the number of the gas-steam holes in the sleeve maintain a large difference in pressure between the gas-steam pipe and the cavity, limiting the moving back of turbulence and instability from said cavity towards the gas-steam pipe.

[0089]. Finally, according to a still further advantageous aspect, the primary mixture channel is of simple construction and can be used in place of designs already in operation to improve their efficiency.

[0090]. It is clear that a person skilled in the art, for the purpose of meeting incidental and specific requirements, will be able to make numerous changes and produce numerous variants to the burner described above, without thereby departing from the scope of the invention as defined in the following claims.

CLAIMS

1. A turbine burner (1) comprising
- a secondary feed unit for the supply of a secondary or backup mixture and the discharge of said mixture from an opening (4) to a combustion zone (6) facing said opening (4);
 - a primary supply unit comprising a primary mixture channel (24) intended for the supply of said primary mixture, arranged concentrically with said secondary feed unit;
- said burner (1) being characterised in that said primary mixture channel (24) comprises an annular wall (28) capable of conveying said primary mixture directly to said combustion zone (6) facing said opening (4).
2. A burner according to claim 1, in which said secondary feed unit comprises an axial air tube (14) terminating in an axial swirler (18).
3. A burner according to claim 2, in which said annular wall (28) of the primary mixture channel (24) conveys said primary mixture directly downstream of the opening (4) of said axial swirler (18).
4. A burner according to any one of the preceding claims, in which said annular wall (28) of the primary mixture channel (24) has a truncated cone-shaped end portion (30), converging in the direction of discharge of the

primary mixture.

5. A burner according to any one of the preceding claims, in which said primary mixture channel (24) comprises a nozzle ring (26) provided with primary mixture holes (32) having axes not parallel to the axis of said ring.

6. A burner according to claim 5, in which said primary mixture holes have an axis inclined by an angle (B) equal to 17°.

7. A burner according to claim 6, in which said primary mixture channel has an axial length (L) equal to 182.8 mm.

8. A burner according to claim 5, in which said primary mixture holes have an axis inclined by an angle (B) equal to 12°.

9. A burner according to claim 8, in which said primary mixture channel has an axial length (L) equal to 194.85 mm.

10. A burner according to any one of the preceding claims, in which said secondary feed unit comprises a sleeve (11) connected to a gas-steam tube (10) intended for the supply of a secondary mixture comprising natural gas (Gn) and steam (S), said sleeve (11) comprising gas-steam holes (12).

11. A burner according to claim 10, in which said gas-steam holes are twelve in number.

12. A burner according to claim 10, in which said gas-steam holes are sixteen in number.

13. A burner according to claim 10, in which said gas-steam holes face towards a baffle (20) capable of
5 preventing this secondary mixture from being drawn to the primary mixture channel (24).

14. A burner according to any one of the preceding claims in which said secondary feed unit comprises a spray nozzle (8) intended for the supply of a secondary mixture
10 composed of gas oil (O) or gas oil and water (O+W) or intended for the supply of air (A).

15. A burner according to any one of the preceding claims, also comprising a pilot unit comprising a plurality of pilot tubes (42) capable of supplying
15 natural gas (Gn).

16. A burner according to any one of the preceding claims, comprising at least one pair of igniters (44).

17. A burner according to any one of the preceding claims, also comprising a diagonal swirler (36).

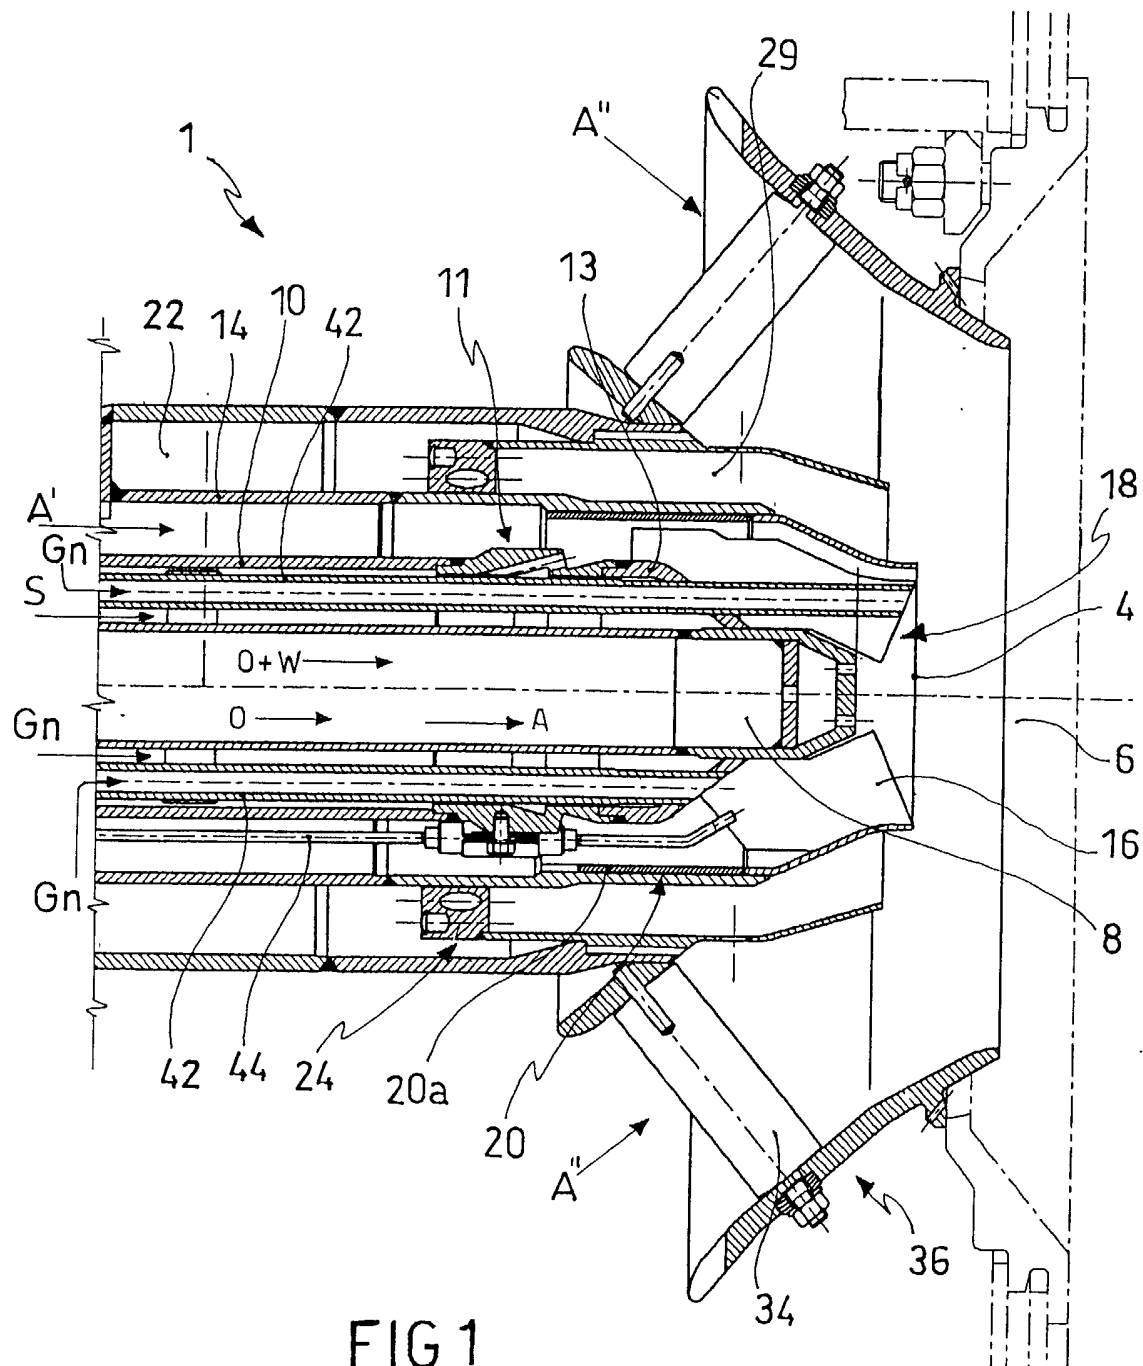


FIG.1

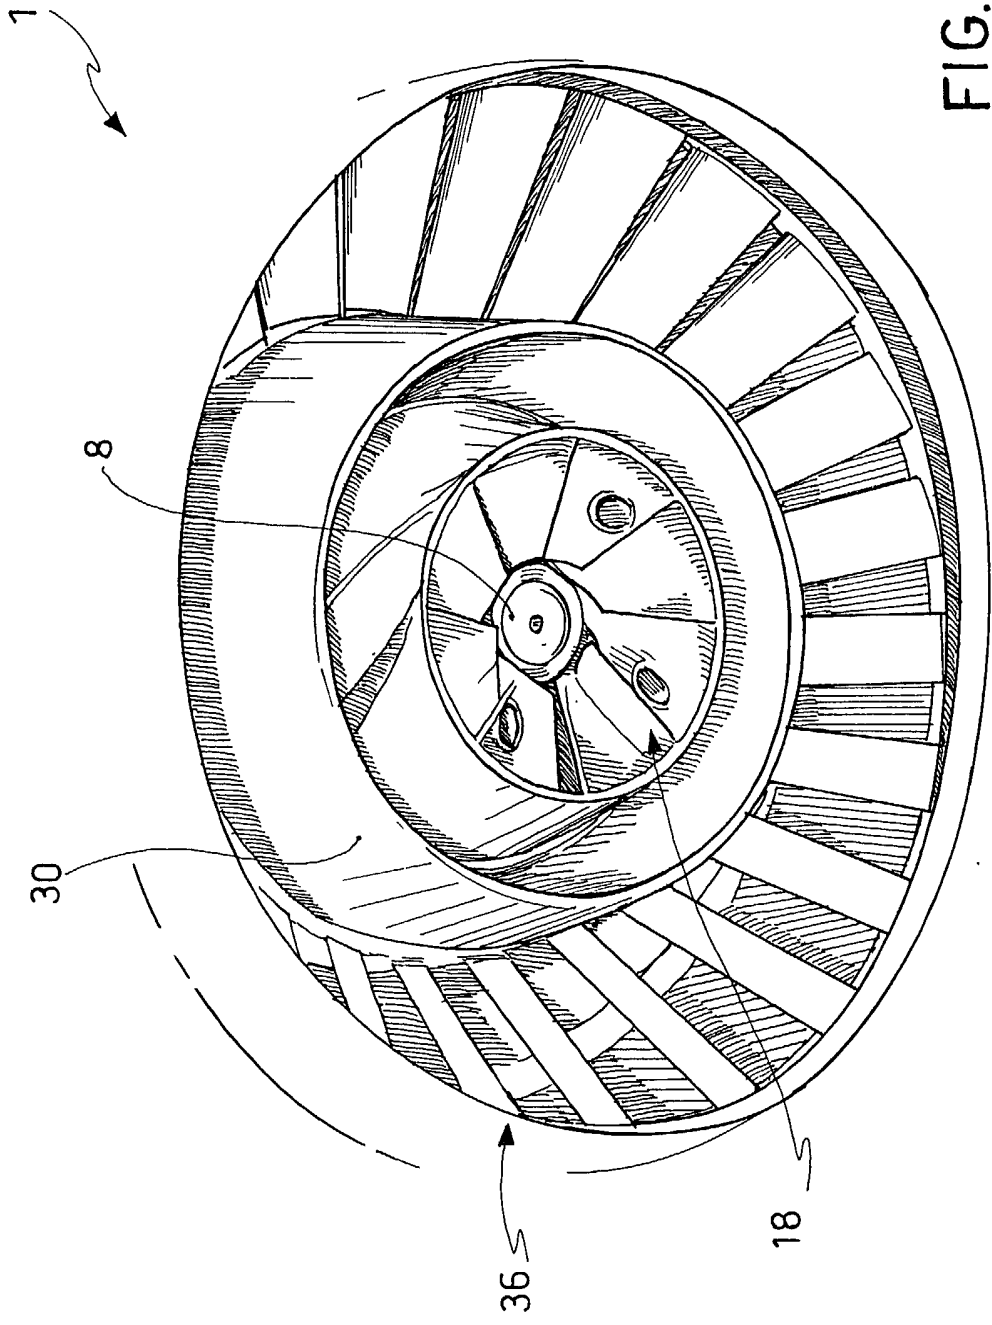


FIG. 2

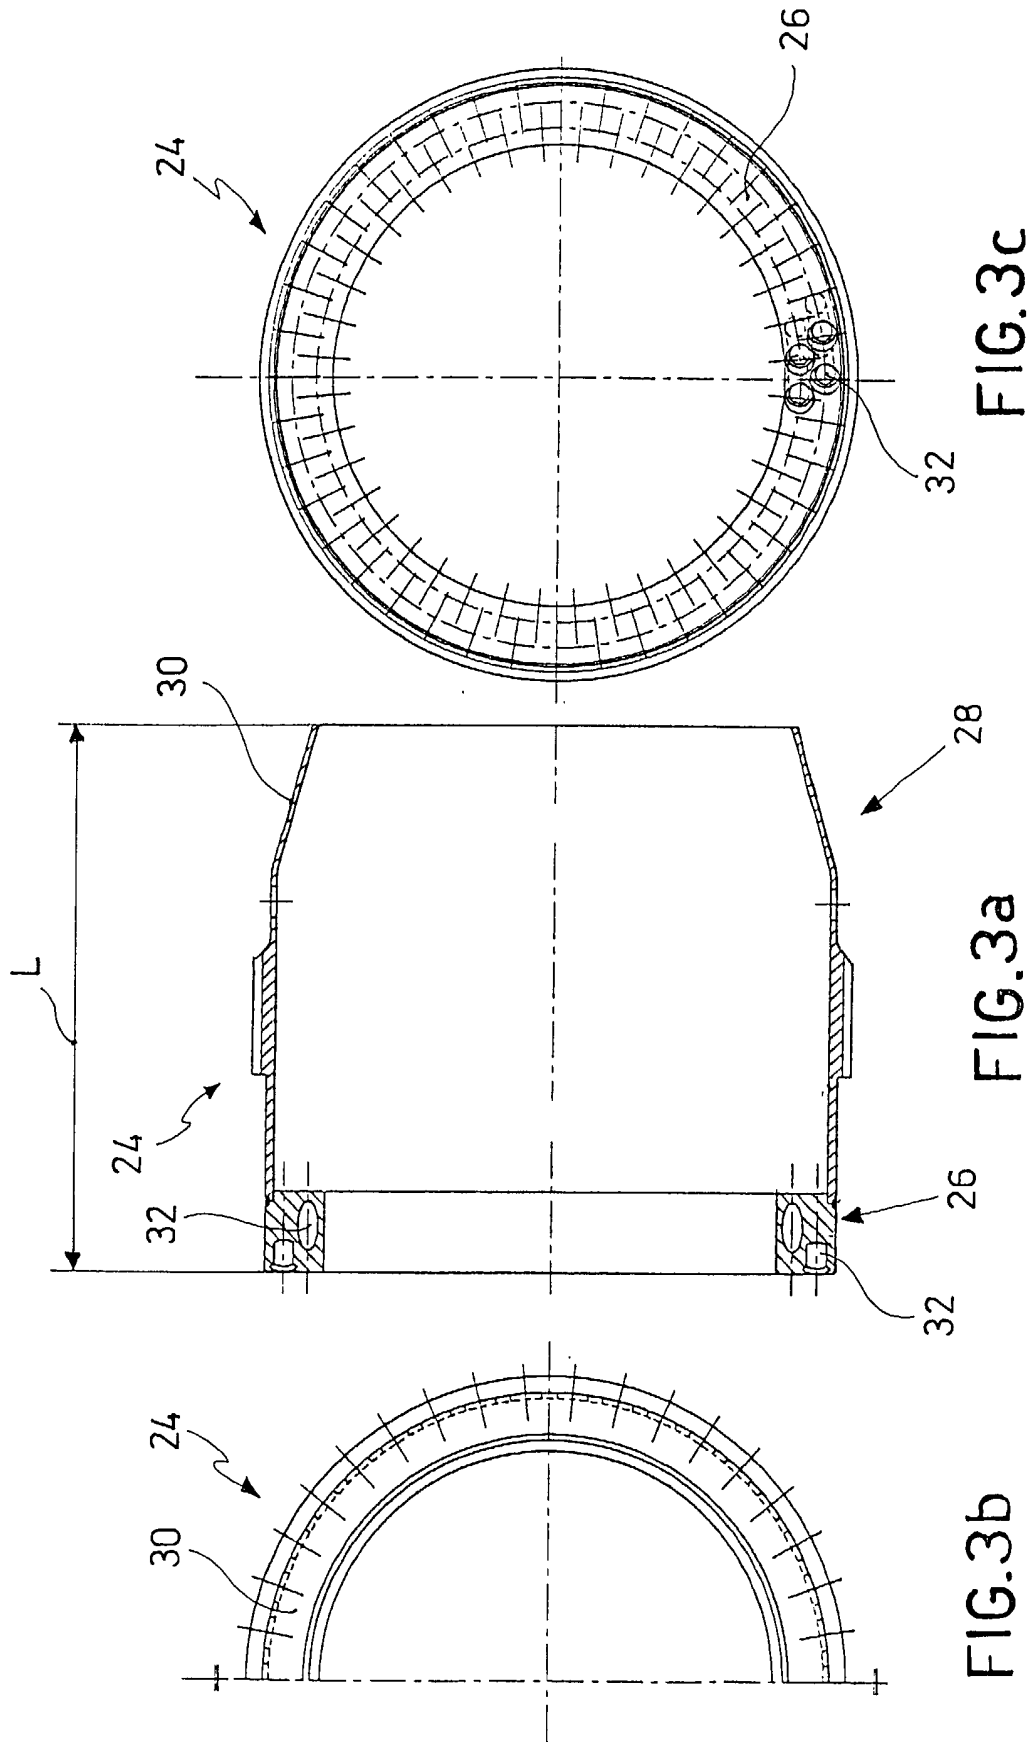


FIG. 3c

FIG. 3a

FIG. 3b

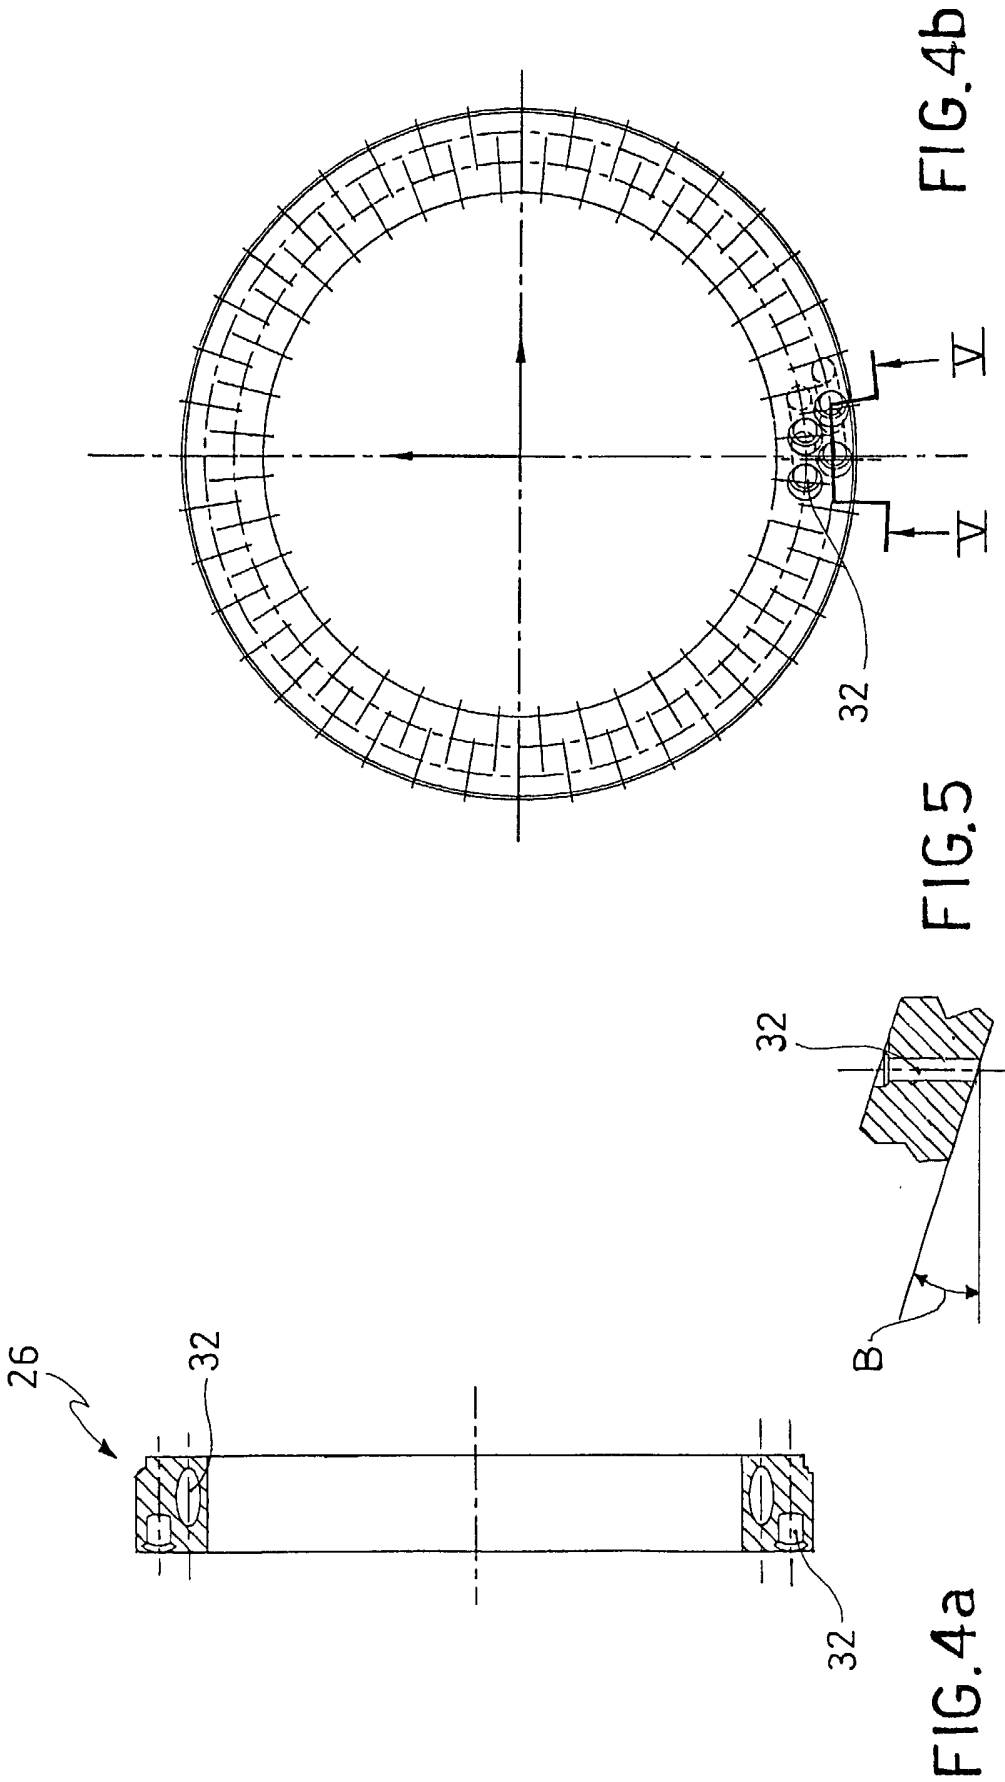


FIG. 4b

FIG. 5

FIG. 4a

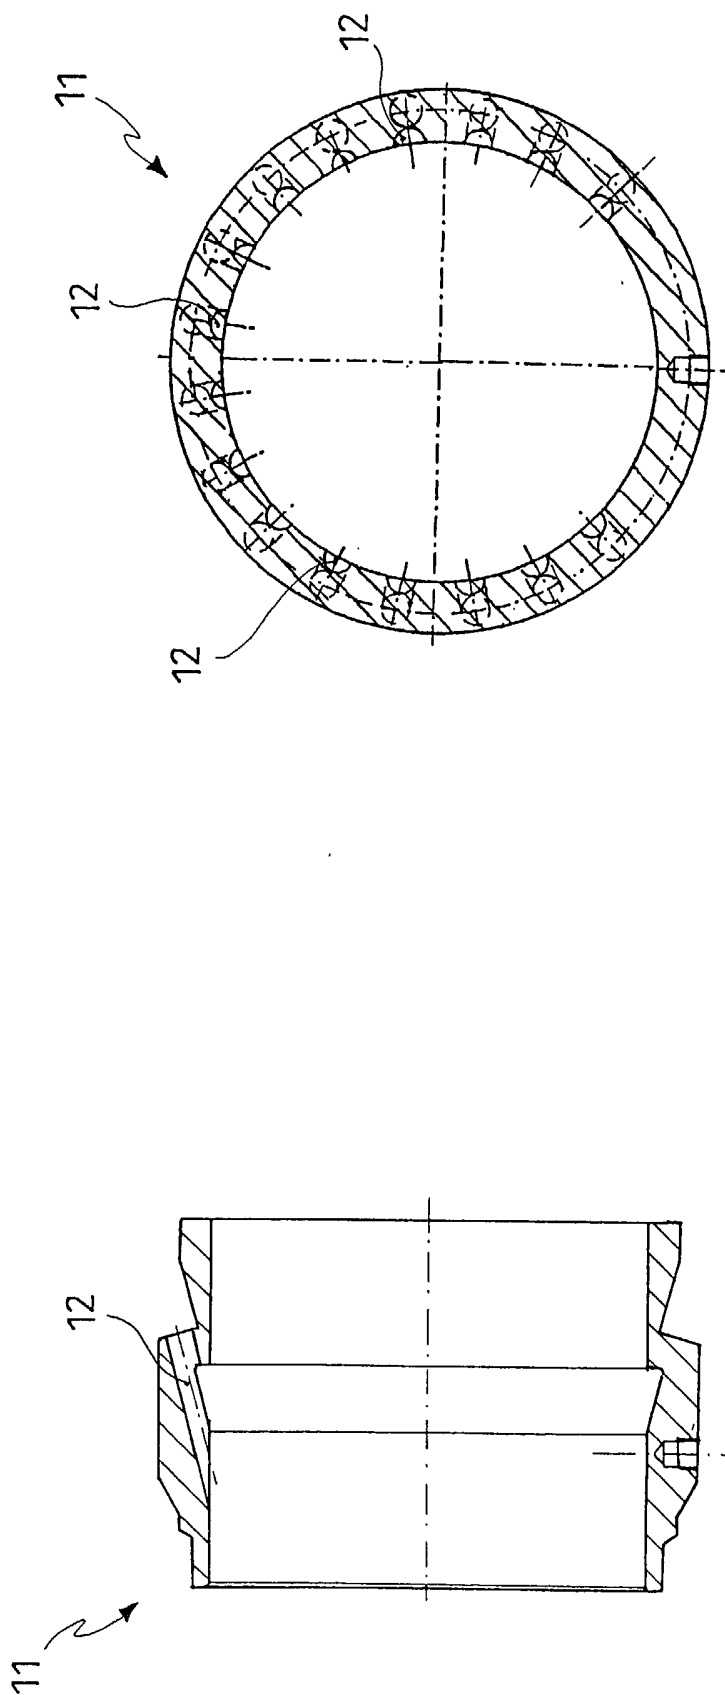


FIG. 6b

FIG. 6a

Lean gas	H ₂ [% vol]	CO [% vol]	H ₂ O [% vol]	N ₂ [% vol]	CO ₂ [% vol]	CH ₄ [% vol]	Flame velocity [m/s]	Lower heating value [MJ/kg]
A	27	33	35	2	3	-	1.60	8.60
B	9	16	-	46	14	15	0.39	7.30
C	10	10	26	25	8	21	0.35	10.00
D	2	17	-	48	14	19	0.30	7.30

Figure 7

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IT 03/00462

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F23R3/36 F23D17/00 F23L7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F23R F23D F02C F27D F23L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
X	US 4 890 453 A (IWAI KAZUMI ET AL) 2 January 1990 (1990-01-02) column 4, line 33 - column 5, line 31 column 5, line 66 - column 6, line 53; figures 1,3	1-3,5,14
X	EP 1 239 219 A (OSAKA GAS CO LTD) 11 September 2002 (2002-09-11) paragraphs '0001!, '0157! - '0167!, '0223! - '0228!; figures 13,33	1-5
X	EP 1 277 920 A (SIEMENS AG) 22 January 2003 (2003-01-22) paragraphs '0010! - '0013!, '0021! - '0023!, '0056!, '0064! - '0066!; figure 2	1-3,10, 17
	----- -/--	

Further documents are listed in the continuation of box C

Patent family members are listed in annex

° Special categories of cited documents

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

26 March 2004

Date of mailing of the international search report

05/04/2004

Name and mailing address of the ISA

European Patent Office, P B 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Coli, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/JP 03/00462

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
X	US 5 451 160 A (BECKER BERNARD DR ING) 19 September 1995 (1995-09-19) column 4, line 37 - column 5, line 27; figure 1 -----	1-4
X	EP 0 924 462 A (ASEA BROWN BOVERI) 23 June 1999 (1999-06-23) the whole document -----	1
A	DE 10 60 082 B (OFU OFENBAU UNION G M B H) 25 June 1959 (1959-06-25) the whole document -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 03/00462

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4890453	A	02-01-1990	JP 1784377 C	31-08-1993
			JP 4070524 B	11-11-1992
			JP 63194111 A	11-08-1988
			DE 3885117 D1	02-12-1993
			DE 3885117 T2	24-02-1994
			EP 0278699 A2	17-08-1988
			US 4993222 A	19-02-1991

EP 1239219	A	11-09-2002	AU 1736401 A	25-06-2001
			CA 2394397 A1	21-06-2001
			EP 1239219 A1	11-09-2002
			US 2002192615 A1	19-12-2002
			WO 0144720 A1	21-06-2001
			TW 487773 B	21-05-2002

EP 1277920	A	22-01-2003	EP 1277920 A1	22-01-2003
			WO 03008768 A1	30-01-2003

US 5451160	A	19-09-1995	DE 4212810 A1	29-10-1992
			WO 9219913 A1	12-11-1992
			DE 59204270 D1	14-12-1995
			EP 0580683 A1	02-02-1994
			JP 3133066 B2	05-02-2001
			JP 6506760 T	28-07-1994
			KR 234569 B1	15-12-1999
RU 2079049 C1	10-05-1997			

EP 0924462	A	23-06-1999	EP 0924462 A1	23-06-1999

DE 1060082	B	25-06-1959	NONE	
