

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
8 February 2001 (08.02.2001)

PCT

(10) International Publication Number
WO 01/08932 A1

- (51) International Patent Classification⁷: B60R 21/16
- (21) International Application Number: PCT/US00/18848
- (22) International Filing Date: 11 July 2000 (11.07.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/365,374 30 July 1999 (30.07.1999) US
- (71) Applicant: MILLIKEN & COMPANY [US/US]; 920 Milliken Road, Spartanburg, SC 29303 (US).
- (72) Inventor: RAMESH, Keshavaraj; 119 Old Airport Road #101, Lagrange, GA 30240 (US).
- (74) Agent: PARKS, William, S.; P.O. Box 1927, Spartanburg, SC 29304 (US).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BY, CH, CN, CR, CU, CZ, DK, DM, EE, FI, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, NO, NZ, PL, PT, RO, RU, SD, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: AIRBAG USING LOW SEAM AND FABRIC

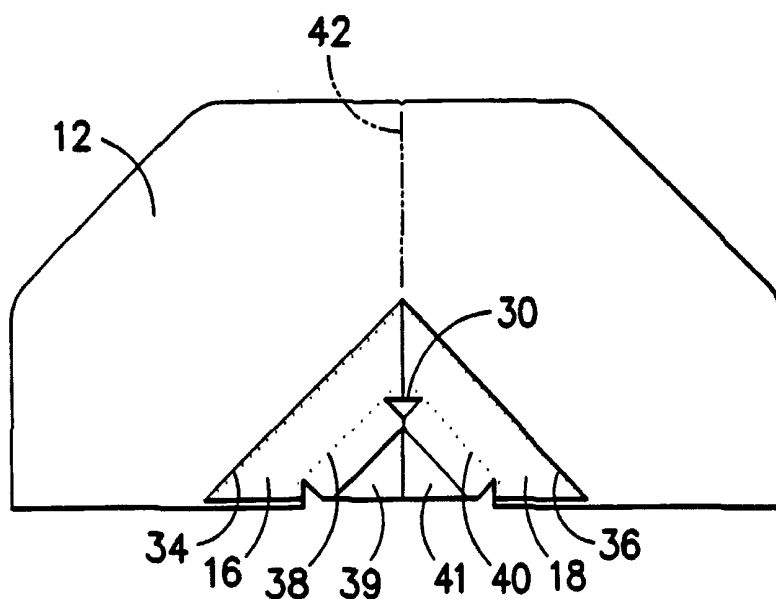

(57) Abstract: The present invention relates to an airbag cushion (50) which simultaneously exhibits a low amount of seam usage as well as a very low amount of fabric utilized to produce the target airbag cushion (50), both in correlation to an overall high amount of available inflation airspace within the cushion (50) itself.



WO 01/08932 A1

Disclosure

AIRBAG USING LOW SEAM AND FABRIC

5

Technical Field

10

The present invention relates to an airbag cushion which simultaneously exhibits a low amount of seam usage (in order to attach at least two fabric panels or portions of a single panel together) as well as a very low amount of fabric utilized to produce the target airbag cushion, both in correlation to an overall high amount of available inflation airspace within the cushion itself. These two separate, but correlated factors, one based on an effective seam usage index are now combined for the first time in what is defined as an effective seam usage index (being the quotient of the length of overall seams on the cushions and the available inflation airspace volume) and the other based on an effective fabric usage index (being the quotient of the amount of fabric utilized in the construction of the airbag cushion and the available inflation airspace volume). The inventive airbag cushion must possess an effective seam usage factor of at most 0.11 and an effective fabric usage factor of at most 0.0330. A cushion exhibiting such low seam usage and fabric usage factors and also comprising an integrated looped pocket for the disposition of an inflator can is also provided as well as an overall vehicle restraint system comprising the inventive airbag cushion.

25

Background Art

All U.S. patents cited herein are hereby fully incorporated by reference.

Inflatable protective cushions used in passenger vehicles are a component of relatively complex passive restraint systems. The main elements of these systems are:

5 an impact sensing system, an ignition system, a propellant material, an attachment device, a system enclosure, and an inflatable protective cushion. Upon sensing an impact, the propellant is ignited causing an explosive release of gases filling the cushion to a deployed state which can absorb the impact of the forward movement of a body and dissipate its energy by means of rapid venting of the gas. The entire

10 sequence of events occurs within about 30 milliseconds. In the undeployed state, the cushion is stored in or near the steering column, the dashboard, in a door, or in the back of a front seat placing the cushion in close proximity to the person or object it is to protect.

Inflatable cushion systems commonly referred to as air bag systems have been

15 used in the past to protect both the operator of the vehicle and passengers. Systems for the protection of the vehicle operator have typically been mounted in the steering column of the vehicle and have utilized cushion constructions directly deployable towards the driver. These driver-side cushions are typically of a relatively simple configuration in that they function over a fairly small well-defined area between the

20 driver and the steering column. One such configuration is disclosed in U.S. Patent 5,533,755 to Nelsen et al., issued July 9, 1996, the teachings of which are incorporated herein by reference.

Inflatable cushions for use in the protection of passengers against frontal or side impacts must generally have a more complex configuration since the position of a vehicle passenger may not be well defined and greater distance may exist between the passenger and the surface of the vehicle against which that passenger might be thrown in the event of a collision. Prior cushions for use in such environments are disclosed in U.S. Patent 5,520,416 to Bishop, issued May 28, 1996; U. S. Patent 5,454,594 to Krickl issued October 3, 1995; U.S. Patent 5,423,273 to Hawthorn et al. issued June 13, 1995; U.S. Patent 5,316,337 to Yamaji et al. issued May 31, 1994; U.S. Patent 5,310,216 to Wehner et al. issued May 10, 1994; U.S. Patent 5,090,729 to Watanabe issued February 25, 1992; U.S. Patent 5,087,071 to Wallner et al. issued Feb. 11, 1992; U.S. Patent 4,944,529 to Backhaus issued July 31, 1990; and U.S. Patent 3,792,873 to Buchner et al. issued February 19, 1974, all of which are incorporated herein by reference.

The majority of commercially used restraint cushions are formed of woven fabric materials utilizing multifilament synthetic yarns of materials such as polyester, nylon 6 or nylon 6,6 polymers. Representative fabrics for such use are disclosed in U.S. Patent 4,921,735 to Bloch issued May 1, 1990; U.S. Patent 5,093,163 to Krummheuer et al. issued March 3, 1992; U.S. Patent 5,110,666 to Menzel et al. issued May 5, 1992; U.S. Patent 5,236,775 to Swoboda et al. August 17, 1993; U.S. Patent 5,277,230 to Sollars, Jr. issued January 11, 1994; U.S. Patent 5,356,680 to Krummheuer et al. October 18, 1994; U.S. Patent 5,477,890 to Krummheuer et al. issued December 26, 1995; U.S. Patent 5,508,073 to Krummheuer et al., issued April

16, 1996; U.S. Patent 5,503,197 to Bower et al. issued April 2, 1996 and U.S. Patent 5,704,402 to Bowen et al. issued January 6, 1998, all of which are incorporated herein by reference.

As will be appreciated, the permeability of the cushion structure is an
5 important factor in determining the rate of inflation and subsequent rapid deflation following the impact event. In order to control the overall permeability of the cushion, it may be desirable to use differing materials in different regions of the cushion. Thus, the use of several fabric panels in construction of the cushion may prove to be a useful design feature . The use of multiple fabric panels in the cushion
10 structure also permits the development of relatively complex three dimensional geometries which may be of benefit in the formation of cushions for passenger side applications wherein a full bodied cushion is desired. While the use of multiple fabric panels provides several advantages in terms of permeability manipulation and geometric design, the use of multiple fabric panels for use in passenger side restraint
15 cushions has historically required the assembly of panels having multiple different geometries involving multiple curved seams.

As will be appreciated, an important consideration in cutting panel structures from a base material is the ability to maximize the number of panels which can be cut from a fixed area through close-packed nesting of the panels. It has been found that
20 minimizing the number of different geometries making up panels in the cushion and using geometries with substantially straight line perimeter configurations generally permits an enhanced number of panels to be cut from the base material. The use of panels having generally straight line profiles has the added benefit of permitting the

panels to be attached to one another using substantially straight seams or be substantially formed during the weaving process using a jacquard or dobby loom. The use of panels having generally straight line profiles has the added benefit of permitting the panels to be attached to one another using substantially straight seams or be

5 substantially formed during the weaving process using a jacquard or dobby loom. For the purposes of this invention, the term "seam" is to be understood as any point of attachment between different fabric panels or different portions of the same fabric panel. Thus, a seam may be sewn (such as with thread), welded (such as by ultrasonic stitching), woven (such as on a jacquard or dobby loom, as merely examples), and the

10 like. The key issue regarding seam length within this invention pertains to the ability to form a high available inflation airspace volume cushion with the lowest amount of labor needed. Since sewing, welding, etc., procedures to connect panels or portions of panels greatly increases the time necessary to produce airbag cushions, it is highly desirable to reduce the labor time which can be accomplished through the reduction in

15 the length of seams required. Substantially straight seam configurations thus provide more cost-effective methods of producing such airbags.

However, even with the utilization of substantially straight seams to produce airbags cushions, a problem still resides in the need for labor-intensive cutting and sewing operations for large-scale manufacture. There remains a need then to reduce

20 the amount of time to produce airbag cushions while simultaneously providing the greatest amount of fabric to allow for a sufficient volume of air (gas) to inflate the target airbag cushion during an inflation event (herein described as "available inflation airspace"). Such a desired method and product has not been available, particularly

for passenger-side airbags which, as noted previously, require greater amounts of fabric for larger volumes of air (gas) to provide the greatest amount of protection area to a passenger. With greater amounts of fabric needed, generally this has translated into the need for longer seams to connect and attach fabric panels, which in turn translates into greater amounts of time needed for sewing, and the like, operations. Thus, a need exists to produce high available inflation airspace volume airbag cushions with minimal requirements in seam lengths to manufacture the overall cushion product. The prior art has not accorded any advancements or even discussions to this effect.

Furthermore, since the costs of producing airbag fabrics are relatively high and there is a general need to reduce such costs, there is a consequent need to more efficiently make use of the fabric by lowering the amount which needs to be cut (cutting operations also translate into higher labor costs), reducing the amount of fabric used in order to provide substantially lower packing volumes (in order to reduce the size of the airbag modules in cars since available space on dashboards, doors, and the like, are at a premium within automobiles), and reduce the shipping weight of such products (which translates into lower shipping costs), as well as other highly desired reasons. However, it has been problematic to reduce such utilized fabric amounts in the past without consequently also reducing the available inflation airspace volume within the cushion product. There is a need then to reduce the amount of time to produce airbag cushions while simultaneously providing the lowest amount of fabric and simultaneously allow for a sufficient volume of air (gas) to inflate the target airbag cushion during an inflation event (herein described as "available inflation

airspace"). Such a desired method and product has not been available, particularly for passenger-side airbags which, as noted previously require greater amount of fabric for larger volumes of air (gas) to provide the greatest amount of protection area to a passenger. With greater amounts of fabric needed, generally this has translated into
5 the need for longer seams to connect and attach fabric panels, which in turn translates into greater amounts of time needed for cutting, sewing, and the like, operations. Furthermore, there has not been any discussion within the prior art of the possibility of simultaneously reducing the amount of overall seam length and reducing the required amount of utilized fabric, all while providing sufficient volumes of available inflation
10 airspace within the target airbag cushion. Thus, a need exists to produce high available inflation airspace volume airbag cushions with minimal requirements in seam lengths and fabric utilization to manufacture the overall cushion product. As noted above, the prior art has not accorded any advancements or even discussions to this effect.

15

Disclosure of Invention

In view of the foregoing, it is a general object of the present invention to provide a cost-effective, easy to manufacture airbag cushion for utilization within a vehicle restraint system. The term "vehicle restraint system" is intended to mean both
20 inflatable occupant restraining cushion and the mechanical and chemical components (such as the inflation means, ignition means, propellant, and the like). It is a more particular object of the present invention to provide a vehicle restraint system wherein the target airbag cushion preferably comprises very low amounts of fabric and

comprises all substantially straight seams to attach its plurality fabric components together (although as noted above, other configured seams may also be used as long the overall required effective seam usage factor is met). A further object of this invention is to provide an easy-to-assemble airbag cushion which is minimally labor-
5 intensive to manufacture, requires much lower fabric costs due to a substantial reduction in the overall requirement of utilized fabric amounts, and which also comprises an integrated looped pocket for the disposition of an inflator can within the airbag cushion. It is still a further object of this invention to provide a vehicle restraint system comprising an airbag cushion which provides the maximum amount
10 of available inflation airspace volume simultaneously with the lowest length of seam (or seams) and lowest amount of utilized fabric necessary to manufacture the cushion. Another object of the invention is to provide a method of making a low cost airbag cushion (due to low levels of labor required to sew the component parts together and reduced amount of fabric to manufacture and cut) of simple and structurally efficient
15 design.

To achieve these and other objects and in accordance with the purpose of the invention, as embodied and broadly described herein, the present invention provides an airbag cushion having at least two fabric components connected by at least one seam, wherein said airbag cushion possesses an effective seam usage factor of less
20 than 0.11 and possesses an effective fabric usage factor of less than about 0.0330. The seam usage factor is derived from a seam usage index which concerns (and is defined as) the quotient of the total length of all seams present within the airbag cushion (measured in meters) over the total volume of available inflation airspace

within the airbag cushion (measured in liters). The seam itself may be applied by any well known operation including, but not limited to, thread-stitching, ultrasonic stitching, and the like. The term "available inflation airspace," as eluded to above, connotes the volume within which air (gas) would be transferred from an inflation
5 assembly to the airbag cushion during and inflation, and consequent, inflation event. Such an airbag cushion must generally have at least one substantially straight seam, although, preferably, each seam possesses such a specific configuration. In order to produce such a specific airbag cushion, in fact, it is evident that the amount of sewing, stitching, and the like, required to form the end-product must be very low. A curved
10 seam, although possible in this invention, requires potentially longer lengths of thread, etc., in order to attach the different fabric components of the target cushion. As a result, the utilization of curved, or other non-straight seams, should be minimized.

The effective seam usage factor (as defined within the correlating seam usage index formula, above) for the inventive airbag cushion then is preferably less than
15 about 0.11, more preferably less than 0.10, still more preferably less than 0.09, even more preferably less than 0.07, and most preferably lower than 0.06. Thus, the volume of available inflation airspace within the airbag cushion should be as great as possible with the length of seam reduced to its absolute minimum.

The fabric usage factor is derived from an effective fabric usage index which
20 concerns (and is defined as) the quotient of the total amount of fabric utilized to manufacture the airbag cushion (measured in square meters) over the total volume of available inflation airspace within the airbag cushion (measured in liters). In order to exhibit a sufficiently low effective fabric usage factor, the amount of fabric must be

very low with a correspondingly high available inflation airspace volume. Of course, this airspace volume will be the same for each factor since the measurements of both factors (seam usage and fabric usage) are made for the same bag. Such an airbag cushion must have at least two fabric panels which require connection through the
5 utilization of very small seam lengths (preferably, again, substantially straight seams).

The inventive bag is able to provide high available inflation airspace volumes due to the particular configurations of these fabric panels. The configurations permit more efficient utilization of fabric webs by cutting panels from the webs and producing less waste of unused fabric. Furthermore, fabric panels can be connected together,
10 preferably, by placing one over the other (if both are of the same configuration) and sewing both panels together; or similarly shaped portions of a single fabric panel may be folded over on top of each other and connected by a seam. This two-dimensional cushion then can be inflated into a three-dimensional object upon an inflation event and provide the required amount of coverage to protect a passenger during a collision.
15 The preferred embodiment is discussed in greater detail below.

The effective fabric usage factor (as defined within the correlating seam usage index formula, above) for the inventive airbag cushion then is preferably less than about 0.033, more preferably less than 0.030, still more preferably less than 0.029, even more preferably less than 0.028, and most preferably lower than 0.027. Thus, the
20 volume of available inflation airspace within the airbag cushion should be as great as possible with the amount of fabric utilized reduced to its absolute minimum while still providing sufficient protection to a passenger in an automobile during a collision event.

A one-piece construction will generally have a relatively low available inflation airspace volume, although the length of the total number of seams may be quite low; a driver-side airbag will generally consist of many seams (of relatively large overall length), particularly curved seams, and a relatively low volume of available
5 airspace; and the prior art passenger-side airbags require large amount of fabric as well as complex sewing operations with numerous and rather long seams. Although the available inflation airspace volume in such passenger-side airbags is rather large, the total length of all the utilized seams is generally too great to meet the
10 aforementioned preferred effective seam usage factor within that index and the total amount of utilized fabric is too large to meet the aforementioned preferred effective fabric usage factor within that index. The inventive cushion therefore is relatively easy to manufacture, requires very low sewing, or similar type, attachment operations of its fabric panel components, requires very low amounts of fabric, but is also configured to provide an optimum large amount of available inflation airspace for
15 maximum protection to a passenger during a collision event.

The present invention also provides an airbag cushion possessing the required effective seam and fabric usage factors which also comprises a looped pocket for introduction of the inflator can of an inflator assembly. In the most preferred
20 embodiment one large body panel is utilized having two mirror-image portions which, when folded over along the middle of the fabric panel, the boundaries of both portions are aligned. One substantially straight seam is then utilized to seal the adjacent (and similarly configured) side to the already-folded side and two opening will remain. The large opening is then covered by one panel of rectilinear shape; the small opening

(opposite the large opening) will have extra fabric which can be overlapped (to provide extra reinforcing fabric at the point of potential inflation) and sewn to form the desired pocket in which to dispose the inflation can. This embodiment is discussed below in greater detail.

5 Additional objects and advantages of the invention will be set forth in part in the description which follows, and in part will be obvious from the description, or may be learned by practice for the invention. It is to be understood that both the foregoing general description and the following detailed description of preferred
embodiments are exemplary and explanatory only, and are not to be viewed as in any
10 way restricting the scope of the invention as set forth in the claims.

Brief Description Of The Drawings

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate several potentially preferred embodiments of the invention
15 and together with the description serve to explain the principles of the invention wherein:

FIG. 1 is an aerial view of a portion of a fabric web with lines indicating the specific preferred locations for cutting to form two sets of fabric panels to manufacture two separate inventive cushions, each for the inclusion within a vehicle
20 restraint system configured within a module which is stored substantially vertically.

FIG. 2 is an aerial view of a preferred cut fabric panel with second and third smaller preferred cut panels connected thereto.

FIG. 3 is an aerial view of the connected preferred cut fabric panels showing

the first folding step in producing the mouth portion of the target cushion.

FIG. 4 is an aerial view of the connected preferred cut fabric panels showing the second folding step in producing the mouth portion of the target cushion.

FIG. 5 is an aerial view of the connected preferred cut fabric panels showing
5 the third folding step in producing the mouth portion of the target cushion as well as the entire connected fabric panel composite folded over and connected to itself.

FIG. 6 is an aerial view of the preferred cut fabric front panel of the target cushion.

FIG. 7 is a front view of the finished target cushion showing the preferred
10 front panel and the substantially straight seams connecting the front panel to the remaining preferred cut fabric panels.

FIG. 8 is a side view of the finished, unfolded, and non-inflated, target cushion.

FIG. 9 is a cut-away side view of a vehicle for transporting an occupant
15 illustrating the deployment of an inflatable restraint cushion within a vehicle restraint system according to the present invention.

FIG. 10 is an aerial view of a portion of a fabric web with lines indicating the specific preferred locations for cutting to form two sets of fabric panels to
manufacture two separate inventive cushions, each for the inclusion within a vehicle
20 restraint system configured within a module which is stored substantially horizontally.

FIG. 11 is an aerial view of a preferred cut fabric panel with second and third smaller preferred cut panels connected thereto.

FIG. 12 is an aerial view of the connected preferred cut fabric panels showing

the first folding step in producing the mouth portion of the target cushion.

FIG. 13 is an aerial view of the connected preferred cut fabric panels showing the second folding step in producing the mouth portion of the target cushion.

FIG. 14 is an aerial view of the connected preferred cut fabric panels showing
5 the third folding step in producing the mouth portion of the target cushion as well as the entire connected fabric panel composite folded over and connected to itself.

FIG. 15 is an aerial view of the preferred cut fabric front panel of the target cushion.

FIG. 16 is a front view of the finished target cushion showing the preferred
10 front panel and the substantially straight seams connecting the front panel to the remaining preferred cut fabric panels.

FIG. 17 is a side view of the finished, unfolded, and non-inflated, target cushion.

FIG. 18 is a cut-away side view of a vehicle for transporting an occupant
15 illustrating the deployment of an inflatable restraint cushion within a vehicle restraint system according to the present invention.

FIG. 19 is an aerial view of a portion of a fabric web with lines indicating the specific preferred locations for cutting to form two sets of fabric panels to
manufacture two separate inventive cushions, each which provide means for an
20 integrated mouth to form a pocket for the disposition of an inflation can therein.

FIG. 20 is an aerial view of a preferred cut fabric panel with second and third smaller preferred cut panels connected thereto.

FIG. 21 is an aerial view of the connected preferred cut fabric panels showing

the entire connected fabric panel composite folded over and connected to itself.

FIG. 22 is an aerial view of the preferred cut fabric front panel of the target cushion.

FIG. 23 is a front view of the finished target cushion showing the preferred front panel and the substantially straight seams connecting the front panel to the remaining preferred cut fabric panels.

FIG. 24 is a top view of the finished, unfolded and non-inflated, target cushion.

FIG. 25 is a side view of the finished, unfolded and non-inflated, target cushion including the integrated mouth structure for the disposition of an inflation can therein.

FIG. 26 is a cut-away side view of a vehicle for transporting an occupant illustrating the deployment of an inflatable restraint cushion within a vehicle restraint system according to the present invention.

15

Description Of The Preferred Embodiments

Reference will now be made in detail to potentially preferred embodiments of the invention, examples of which have been illustrated in the accompanying drawings.

It is to be understood that it is in no way intended to limit the invention to such illustrated and described embodiments. On the contrary, it is intended to cover all alternatives, modifications and equivalents as may be included within the true spirit and scope of the invention as defined by the appended claims and equivalents thereto.

Turning now to the drawings, wherein like elements are denoted by like

reference numerals throughout the various views, in **FIG. 1** there is shown a fabric web **10**, wherein eight fabric panels to be cut **12, 14, 16, 18, 20, 22, 24, and 26** have been outlined. Also, specific fabrics pieces to be removed and slits **28, 30, 32** within the two largest fabric panels **12, 14** are outlined as well. The fabric web **10** in this
5 specific example comprised nylon 6,6, 630 denier yarns, woven on a jacquard loom into a fabric **10** comprising 41 picks by 41 ends per inch.

In **FIG. 2**, two smaller preferred fabric panels **16, 18** have been connected to one preferred large fabric panel **12** by substantially straight seams **34, 36, 38, 40**. The composite fabric structure now has two small fabric portions **39, 41** uncovered by the
10 two smaller fabric panels **16, 18**. The free space **30** remains and an imaginary straight line **42** denotes the future fold line within the fabric composite of the fabric panels **12, 16, 18**.

In **FIG. 3**, tie-rods **42, 44** have been placed over the small fabric portions **39, 41** parallel to the seams **38, 40**, and the fabric portions **39, 41** have been folded back
15 in a manner to form a right angle at the point of contact between the two portions **39, 41**.

In **FIG. 4**, the small fabric portions **39, 41** have been folded over once again and seams **35, 37** have been produced to connect the fabric portions **39, 41** to themselves and to the smaller fabric panels **16, 18**. The folded over fabric portions
20 **39, 41** provide reinforcement in order to withstand inflation pressures at the mouth opening of the cushion.

In **FIG. 5**, the fabric panel **12** has been folded over imaginary line **42** (in half) leaving one smaller fabric panel **16** in view (the other is not illustrated as it is now

located on the bottom portion of fabric panel **12** directly beneath smaller fabric panel **18**). A seam **46** connects fabric panel **12** to itself and also connects the smaller fabric panels **16, 18** both to the larger panel **12** and to themselves. Upon unfolding of the connected composite, the non-connected ends of the panel **12** will form the same
5 shape as the front panel **24** of **FIG. 6**. **FIG. 7** then shows the seam **48** needed to sew the non-connected ends of the large panel **12** (of **FIG. 5**), and **FIG. 8** provides a side view of the finished cushion **50** after all the connection through seams **38, 42, 34, 46** have been made.

FIG. 9 shows a fully deployed inflatable restraint cushion **50** in opposing
10 relation to an occupant **52** located on the front seat **54** of a vehicle **56** such as an automobile, airplane, and the like. As shown, the cushion **50** may be outwardly deployed from the dash panel **57** through an inflation means **58** from a position directly opposite the occupant **52**. It is to be understood, however, that the cushion **50** may likewise be deployed from any other desired location in the vehicle **56** including
15 the steering wheel (not illustrated), the vehicle side panels (not illustrated), the floor (not illustrated), or the backrest of the front seat **54** for disposition in opposing relation to a rear passenger (not illustrated).

In **FIG. 10** there is shown a fabric web **110**, wherein eight fabric panels to be cut **112, 114, 116, 118, 120, 122, 124, and 126** have been outlined. Also, specific slits
20 **128, 129, 130, 32** within the two largest fabric panels **112, 114** are outlined as well. The fabric web **110** in this specific example comprised nylon 6,6, 630 denier yarns, woven on a jacquard loom into a fabric **110** comprising 41 picks by 41 ends per inch.

In **FIG. 11**, two smaller preferred fabric panels **116, 118** have been connected to

one preferred large fabric panel **112** by substantially straight seams **144, 146, 148**.

The composite fabric structure now has two small fabric portions **131, 150, 152** uncovered by the two smaller fabric panels **116, 118**. An imaginary straight line **142** denotes the future fold line within the fabric composite of the fabric panels **112, 116,**
5 **118**, which is noticeably off-center in order to ultimately allow for the bag to be deployed at an angle from a horizontally disposed dashboard (not illustrated).

In **FIG. 12**, tie-rods **153, 155** have been placed over the small fabric portions **150, 152** and have been folded back over the tie-rods **153, 155** as shown, folded again, as in **FIG. 13**, and connected to themselves by seams **152, 156**. The folded over
10 fabric portions **150, 152** provide reinforcement in order to withstand inflation pressures at the mouth opening of the cushion.

In **FIG. 14**, the fabric panel **112** has been folded over imaginary line **142** leaving one smaller fabric panel **116** in view (the other is not illustrated as it is now located on the bottom portion of fabric panel **112** directly beneath smaller fabric panel
15 **118**). A seam **158** connects fabric panel **112** to itself and also connects the smaller fabric panels **116, 118** both to the larger panel **112** and to themselves. Upon unfolding of the connected composite, the non-connected ends of the panel **112** will form the same shape as the front panel **124** of **FIG. 15**. **FIG. 16** then shows the seam **159** needed to sew the non-connected ends of the large panel **112** (of **FIG. 14**), and
20 **FIG. 17** provides a side view of the finished cushion **160**.

FIG. 18 shows a fully deployed inflatable restraint cushion **160** in opposing relation to an occupant **162** located on the front seat **164** of a vehicle **166** such as an automobile, airplane, and the like. As shown, the cushion **160** may be outwardly

deployed from the dash panel 167 through an inflation means 168 from a position directly opposite the occupant 162. It is to be understood, however, that the cushion 160 may likewise be deployed from any other desired location in the vehicle 166 including the steering wheel (not illustrated), the vehicle side panels (not illustrated),
5 the floor (not illustrated), or the backrest of the front seat 164 for disposition in opposing relation to a rear passenger (not illustrated).

In FIG. 19 there is shown a fabric web 210, wherein eight fabric panels to be cut 212, 214, 216, 218, 220, 222, 224, and 226 have been outlined. Also, specific fabrics pieces to be removed and slits 228, 230, 232 within the two largest fabric
10 panels 212, 214 are outlined as well. The fabric web 210 in this specific example comprised nylon 6,6, 630 denier yarns, woven on a jacquard loom into a fabric 210 comprising 41 picks by 41 ends per inch.

In FIG. 20, two smaller preferred fabric panels 216, 218 have been connected to one preferred large fabric panel 212 by substantially straight seams 234, 236, 238,
15 240. An imaginary straight line 242 denotes the future fold line within the fabric composite of the fabric panels 212, 216, 218.

In FIG. 21, the fabric panel 212 has been folded over imaginary line 242 (in half) leaving one smaller fabric panel 216 in view (the other is not illustrated as it is now located on the bottom portion of fabric panel 212 directly beneath smaller fabric
20 panel 218). A seam 244 connects fabric panel 212 to itself and also connects the smaller fabric panels 216, 218 both to the larger panel 212 and to themselves. Upon unfolding of the connected composite, the non-connected ends of the panel 212 will form the same shape as the front panel 224 of FIG. 22. FIG. 23 then shows the seam

252 needed to sew the non-connected ends of the large panel 212 (of FIG. 21), and FIG. 24 provides a top view of a finished cushion 246 and FIG. 25 provides a side view of a finished cushion 250 after all the connection through seams 234, 244, 248 have been made.

5 **FIG. 26** shows a fully deployed inflatable restraint cushion 260 in opposing relation to an occupant 262 located on the front seat 264 of a vehicle 266 such as an automobile, airplane, and the like. As shown, the cushion 260 may be outwardly deployed from the dash panel 267 through an inflation means 268 from a position directly opposite the occupant 262. It is to be understood, however, that the cushion
10 **260** may likewise be deployed from any other desired location in the vehicle 266 including the steering wheel (not illustrated), the vehicle side panels (not illustrated), the floor (not illustrated), or the backrest of the front seat 264 for disposition in opposing relation to a rear passenger (not illustrated).

 These specific configurations and shapes provide the lowest overall seam
15 usage and fabric usage, both as compared to the available inflation airspace volume. Specific measurements for each inventive cushion manufactured in this configuration (but with different amounts of fabric utilized) are further described in the Tables below.

 Each of the panels utilized in these preferred embodiments may be formed
20 from a number of materials including by way of example only and not limitation woven fabrics, knitted fabrics, non-woven fabrics, films and combinations thereof. Woven fabrics may be preferred with woven fabrics formed of tightly woven construction such as plain or panama weave constructions being particularly preferred.

Such woven fabrics may be formed from yarns of polyester, polyamides such as nylon 6 and nylon-6,6 or other suitable material as may be known to those in the skill in the art. Multifilament yarns having a relatively low denier per filament rating of not greater than about 1-4 denier per filament may be desirable for bags requiring particular good foldability.

In application, woven fabrics formed from synthetic yarns having linear densities of about 40 denier to about 1200 denier are believed to be useful in the formation of the airbag according to the present invention. Fabrics formed from yarns having linear densities of about 315 to about 840 are believed to be particularly useful, and fabrics formed from yarns having linear densities in the range of about 400 to about 650 are believed to be most useful.

While each of the panels may be formed of the same material, the panels may also be formed from differing materials and or constructions such as, without limitation, coated or uncoated fabrics. Such fabrics may provide high permeability fabric having an air permeability of about 5 CFM per square foot or higher, preferably less than about 3 CFM per square foot or less when measured at a differential pressure of 0.5 inches of water across the fabric. Fabrics having permeabilities of about 1-3 CFM per square foot may be desirable as well. Fabrics having permeabilities below 2 CFM and preferably below 1 CFM in the uncoated state may be preferred. Such fabrics which have permeabilities below 2 CFM which permeability does not substantially increase by more than a factor of about 2 when the fabric is subjected to biaxial stresses in the range of up to about 100 pounds force may be particularly preferred. Fabrics which exhibit such characteristics which are formed by means of

fluid jet weaving may be most preferred, although, as noted previously, weaving on jacquard and/or dobby looms also permits seam production without the need for any further labor-intensive sewing or welding operations.

In the event that a coating is utilized on one or more material panels, neoprene, 5 silicone urethanes or disperse polyamides may be preferred. Coatings such as dispersed polyamides having dry add on weights of about 0.6 ounces per square yard or less and more preferably about 0.4 ounces per square yard or less and most preferably about 0.3 per square yard or less may be particularly preferred so as to minimize fabric weight and enhance foldability. It is, of course, to be understood that 10 aside from the use of coatings, different characteristics in various panels may also be achieved through the use of fabrics incorporating differing weave densities and/or finishing treatments such as calendaring as may be known to those in the skill of the art.

While the airbag cushions according to the present invention have been 15 illustrated and described herein, it is to be understood that such cushions may also include additional components such as shape defining tethers, gas vents, and the like as may be known to those in the skill of the art.

With regard to comparable airbag cushions, the following table presents comparative seam usage factors for other well known and commercially available 20 airbag cushions. The labels used are those used within Standard & Poor's DRI, a well known publication which denotes many different types of products offered for sale to the automotive industry.

TABLE 1

Seam Usage Index Factors for Comparative Commercially Available Airbag Cushions

	<u>S&P DRI Number</u>	<u>Total Length of Total Seams (m)("A")</u>	<u>Available Inflation Airspace Volume (L)("B")</u>	<u>Seam Usage Factor (A/B)</u>
5	GM-C4	12.42	95.00	0.1307
	W202	14.83	129.00	0.1150
	GM4200	12.43	90.00	0.1381
	414T	14.83	128.00	0.1159
	CY	14.83	128.00	0.1159
10	CF	16.83	128.00	0.1315

TABLE 2

Fabric Usage Index Factors for Comparative Commercially Available Airbag Cushions

	<u>S&P DRI Number</u>	<u>Total Amount of Fabric Used (m)("C")</u>	<u>Available Inflation Airspace Volume (L)("B")</u>	<u>Fabric Usage Factor (C/B)</u>
15	GM-C4	4.47	95.00	0.0471
	W202	4.34	129.00	0.0337
	GM4200	3.89	90.00	0.0432
20	414T	4.35	128.00	0.0340
	CY	4.34	128.00	0.0339
	CF	4.53	128.00	0.0354

The 414T and CF bags listed above are tilted cushions for use in conjunction with relatively horizontal dashboards. The others are used in conjunction with substantially vertically configured dashboards.

Generally, an airbag module manufacturer or automobile manufacturer will specify what dimensions and performance characteristics are needed for a specific model and make of car. Thus, airbag inflation airspace volume, front panel protection area (particularly for passenger-side airbag cushions), and sufficient overall protection for a passenger are such required specifications. In comparison with those commercially available airbag cushions listed above, the inventive airbag cushions which meet the same specifications (and actually exceed the overall passenger protection characteristics versus the prior art cushions) but require less fabric, less seam length for sewing operations, and thus cost appreciably less than those competitive

cushions. The dimensions, seam usage factors, and fabric usage factors for the inventive bags (which compare with those in Tables 1 and 2, above, directly, and as noted) are presented below in tabular form and are the same general shape as those presented within the drawings described above (but with larger pieces of fabric panels, etc.):

TABLE 3

Seam Usage Index Factors for Inventive Airbag Cushions in Correlation to the S&P DRI Numbered Airbag Cushions Requiring Similar Dimensions and Performance Characteristics

10

Correlated Bags by S&P DRI Number	Total Length of Total Seams (m)("A")	Available Inflation Airspace Volume (L)("B")	Seam Usage Factor (A/B)
GM-C4	7.56	95.00	0.0796
W202	6.90	129.00	0.0535
GM4200	7.20	90.00	0.0800
414T	6.90	128.00	0.0539
CY	5.35	128.00	0.0418
CF	6.90	128.00	0.0539

20

TABLE 4

Fabric Usage Index Factors for Inventive Airbag Cushions in Correlation to the S&P DRI Numbered Airbag Cushions Requiring Similar Dimensions and Performance Characteristics

25

Correlated Bags by S&P DRI Number	Total Amount of Fabric Used (m)("C")	Available Inflation Airspace Volume (L)("B")	Fabric Usage Factor (C/B)
GM-C4	2.41	95.00	0.0253
W202	3.50	129.00	0.0271
GM4200	2.58	90.00	0.0287
414T	3.64	128.00	0.0284
CY	3.64	128.00	0.0284
CF	3.50	128.00	0.0273

35

Clearly, the inventive bags, which possess the same available inflation airspace volume and front fabric panel area as the comparative prior art commercially

available cushions (bags), require much less in the way of total seam length and fabric components which translates into overall much lower effective seam and fabric usage factors. Furthermore, as noted above, in standard crash tests, these inventive bags (cushions) either performed as well as or outperformed their commercially available, more expensive, counterparts.

While specific embodiments of the invention have been illustrated and described, it is to be understood that the invention is not limited thereto, since modifications may certainly be made and other embodiments of the principals of this invention will no doubt occur to those skilled in the art. Therefore, it is contemplated by the appended claims to cover any such modifications and other embodiments as incorporate the features of this invention which in the true spirit and scope of the claims hereto.

Claims

What I claim is:

1. An airbag cushion comprising at least one seam in order to connect either (a)
at least two
5 fabric panels or (b) at least two portions of a single fabric panel, wherein said airbag
cushion possesses an effective seam usage factor of less than 0.11 and possesses an
effective fabric usage factor of less than about 0.0330.
2. The airbag cushion of Claim 1 wherein said airbag cushion possesses an
10 effective seam usage factor of less than about 0.10 and possesses an effective fabric
usage factor of less than about 0.030.
3. The airbag cushion of Claim 2 wherein said airbag cushion possesses an
effective seam usage factor of less than about 0.09.
15
4. The airbag cushion of Claim 2 wherein said airbag cushion possesses an
effective fabric usage factor of less than about 0.029.
5. The airbag cushion of Claim 3 wherein said airbag cushion possesses an
20 effective seam usage factor of less than about 0.07.

6. The airbag cushion of Claim 3 wherein said airbag cushion possesses an effective fabric usage factor of less than about 0.028.
7. The airbag cushion of Claim 2 wherein said airbag cushion possesses an effective seam usage factor of less than about 0.06.
8. The airbag cushion of Claim 2 wherein said airbag cushion possesses an effective fabric usage factor of less than about 0.027.
9. The airbag cushion of Claim 1 wherein said airbag cushion comprises a looped pocket into which an inflator can may be disposed.
10. The airbag cushion of Claim 7 wherein said airbag cushion further comprises tie-rods.
11. A vehicle restraint system comprising the airbag cushion of Claim 1.
12. A vehicle restraint system comprising the airbag cushion of Claim 2.
13. A vehicle restraint system comprising the airbag cushion of Claim 3.
14. A vehicle restraint system comprising the airbag cushion of Claim 4.

15. A vehicle restraint system comprising the airbag cushion of Claim 5.
16. A vehicle restraint system comprising the airbag cushion of Claim 6.
- 5 17. A vehicle restraint system comprising the airbag cushion of Claim 7.
18. A vehicle restraint system comprising the airbag cushion of Claim 8.
19. A vehicle restraint system comprising the airbag cushion of Claim 9.
- 10
20. The airbag cushion of Claim 1 wherein at least one seam present within said airbag cushion is substantially straight.

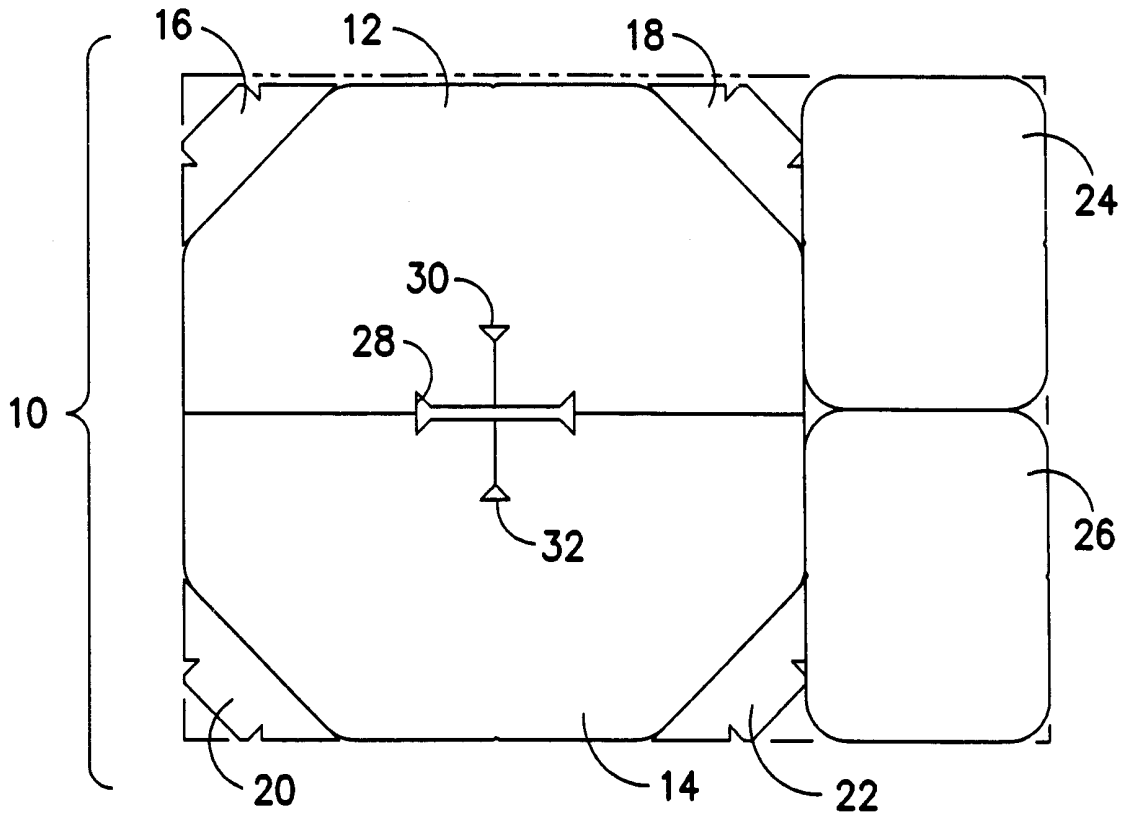


FIG. -1-

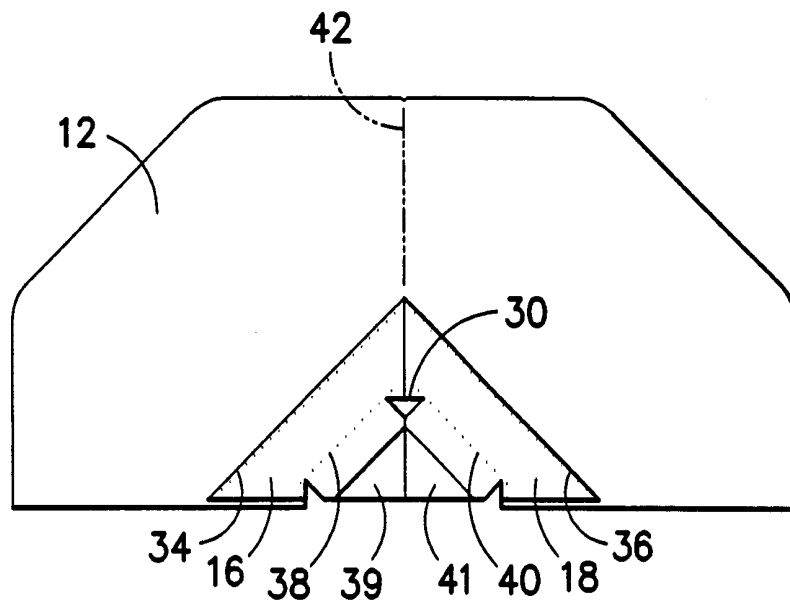


FIG. -2-

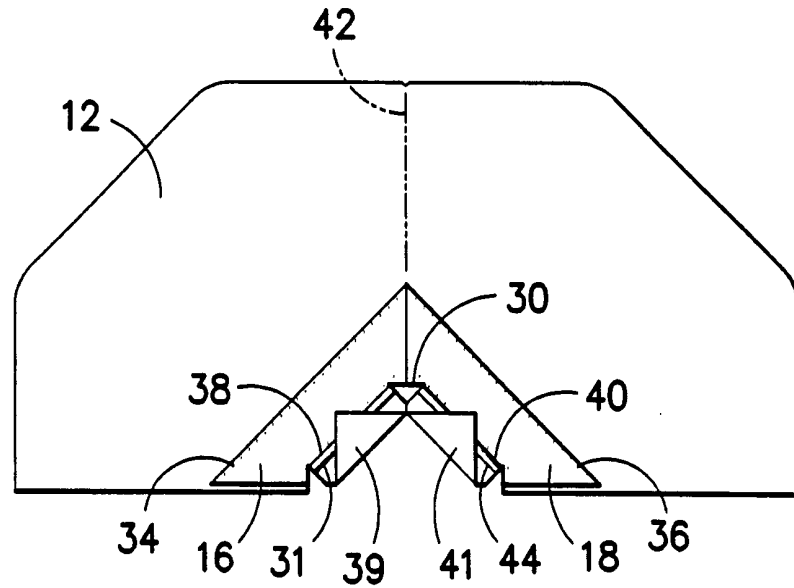


FIG. -3-

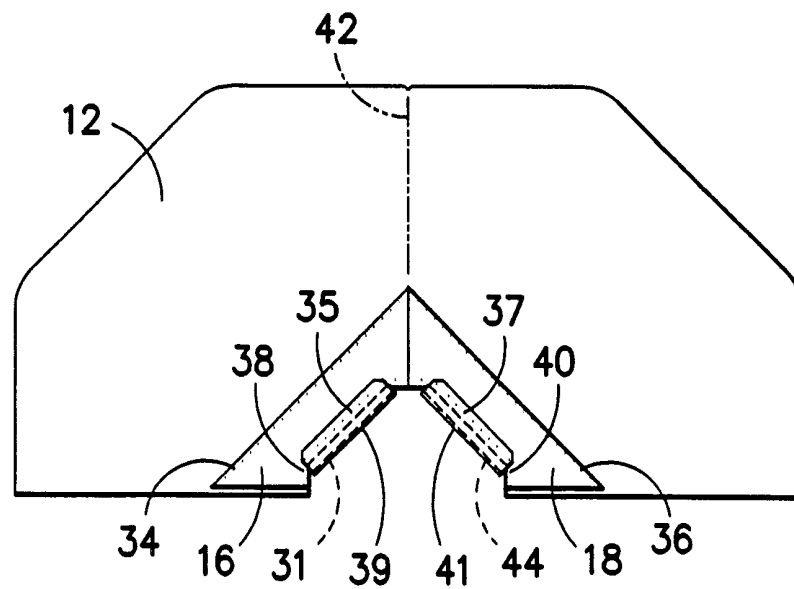


FIG. -4-

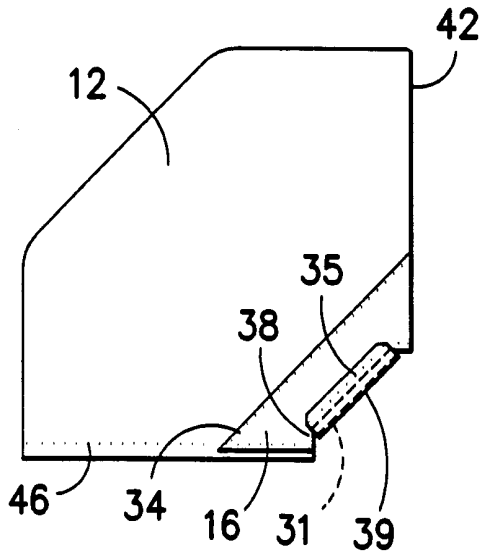


FIG. -5-

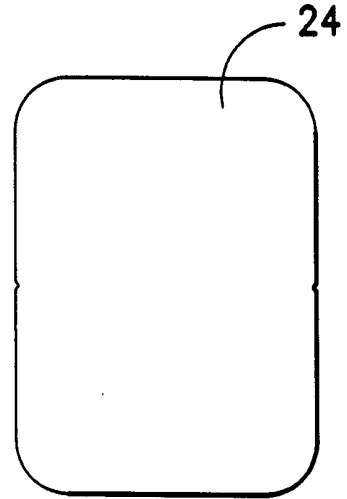


FIG. -6-

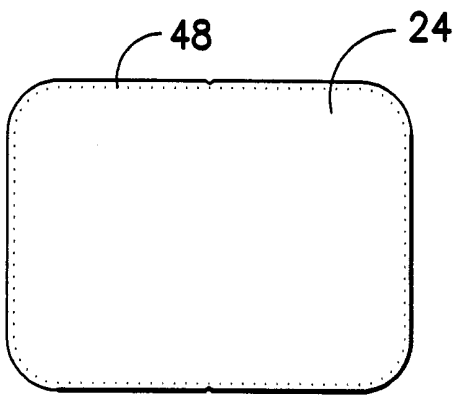


FIG. -7-

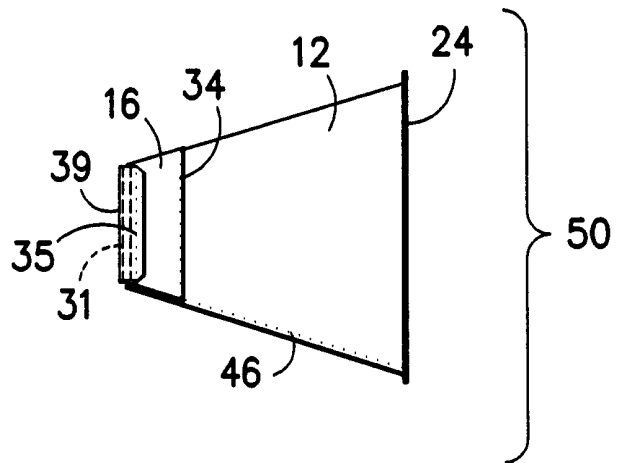


FIG. -8-

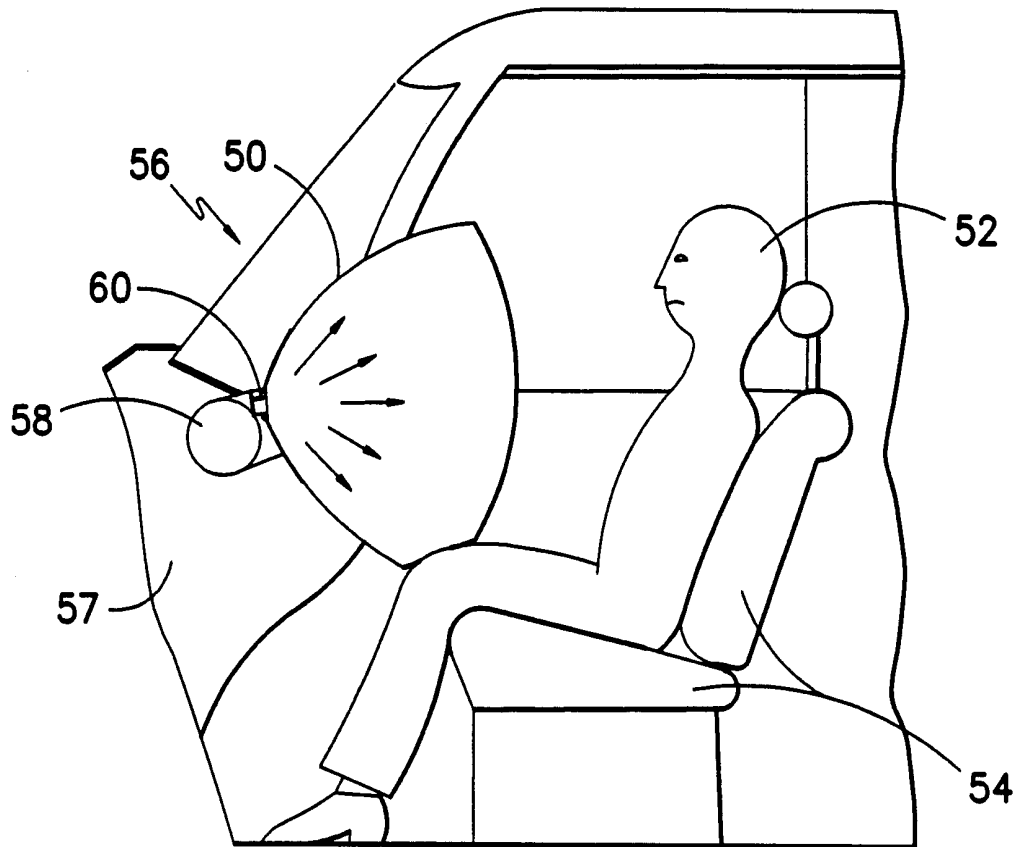


FIG. -9-

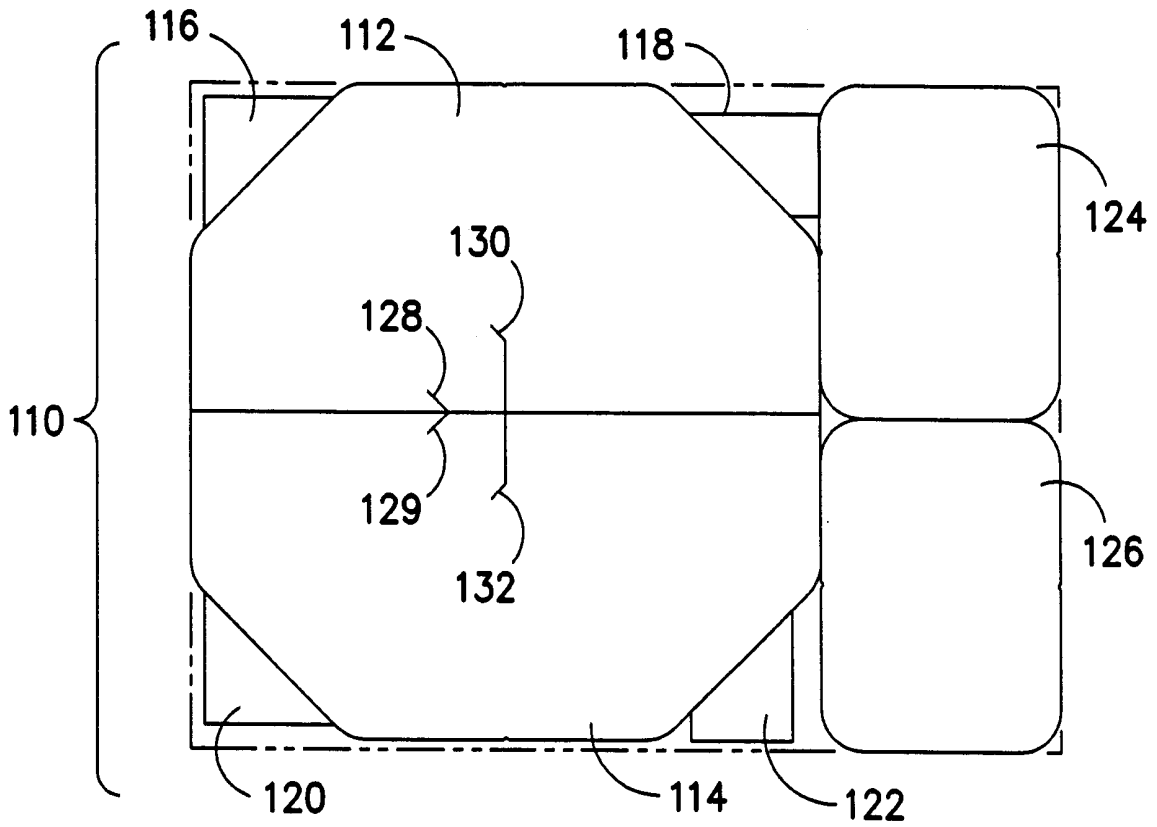


FIG. -10-

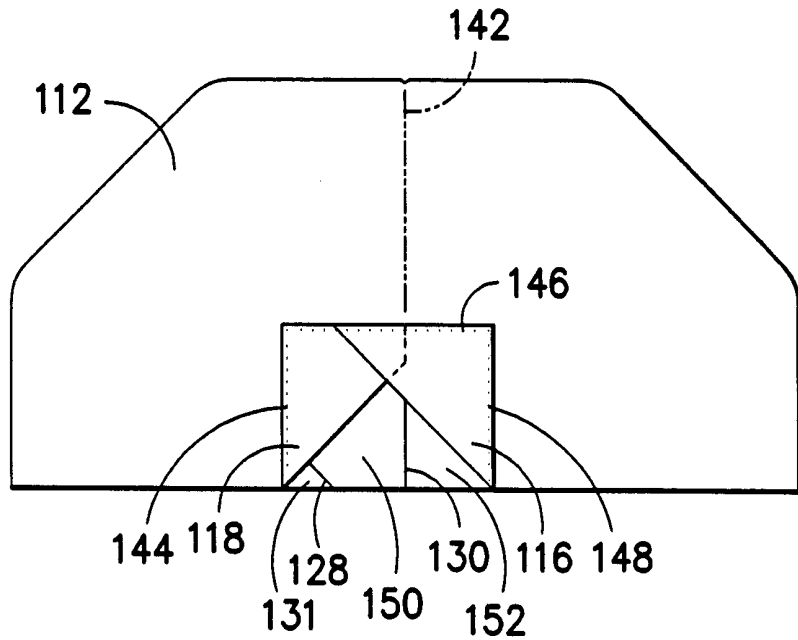


FIG. -11-

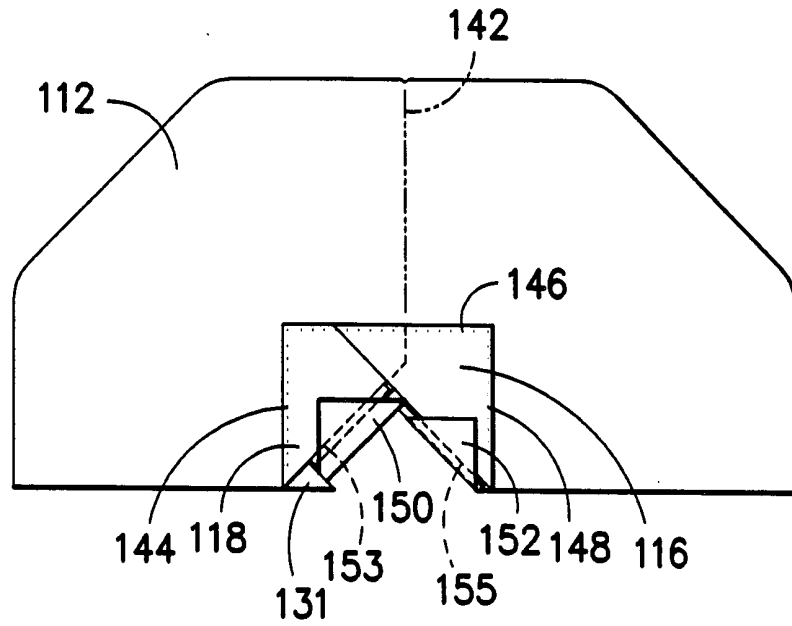


FIG. 12-

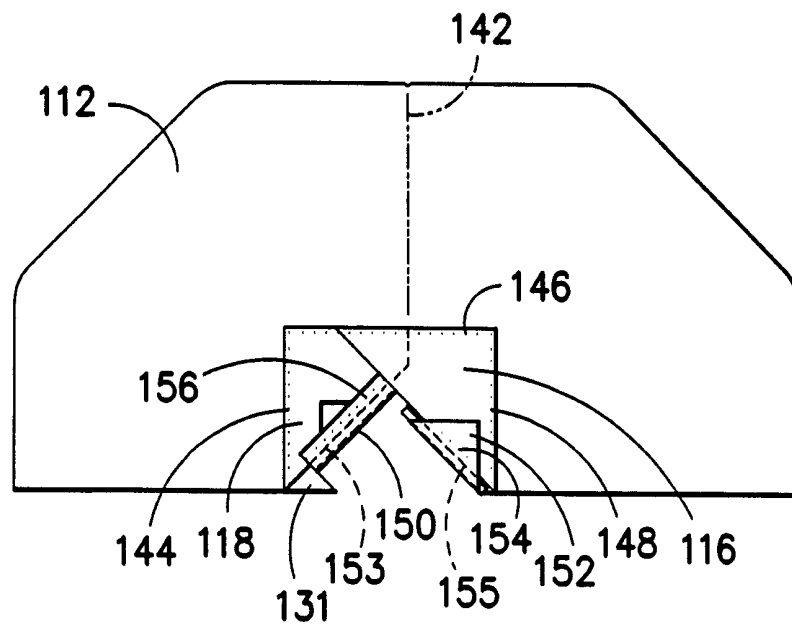


FIG. -13-

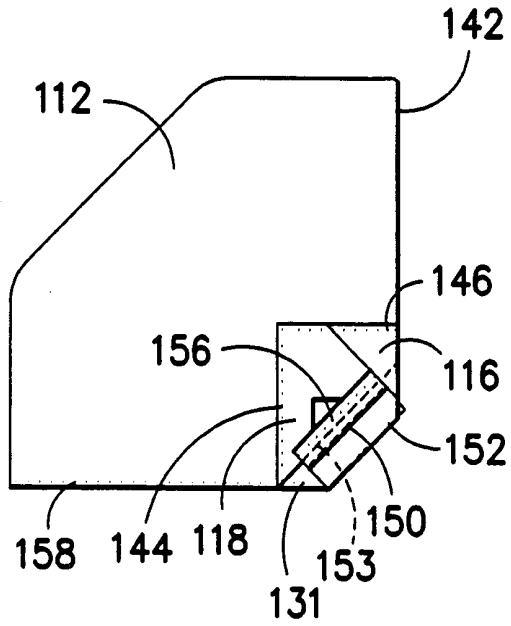


FIG. -14-

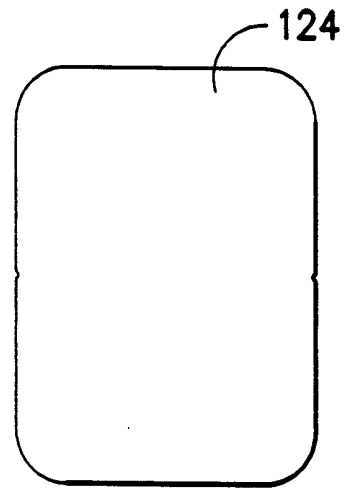


FIG. -15-

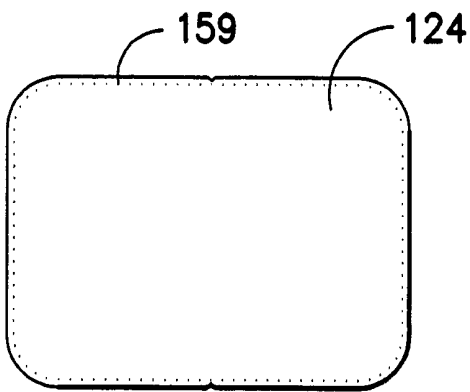


FIG. -16-

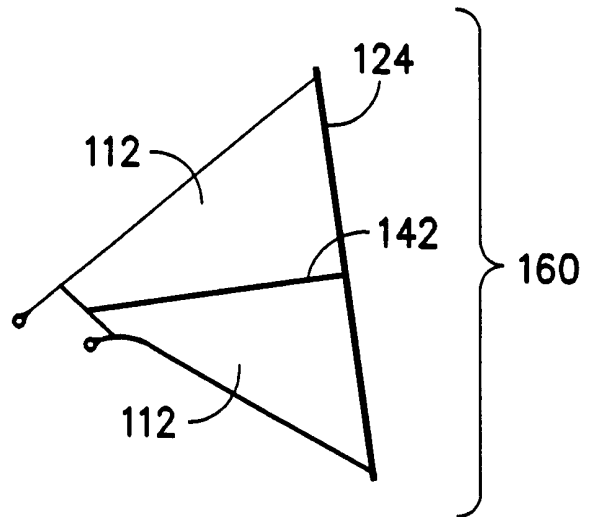


FIG. -17-

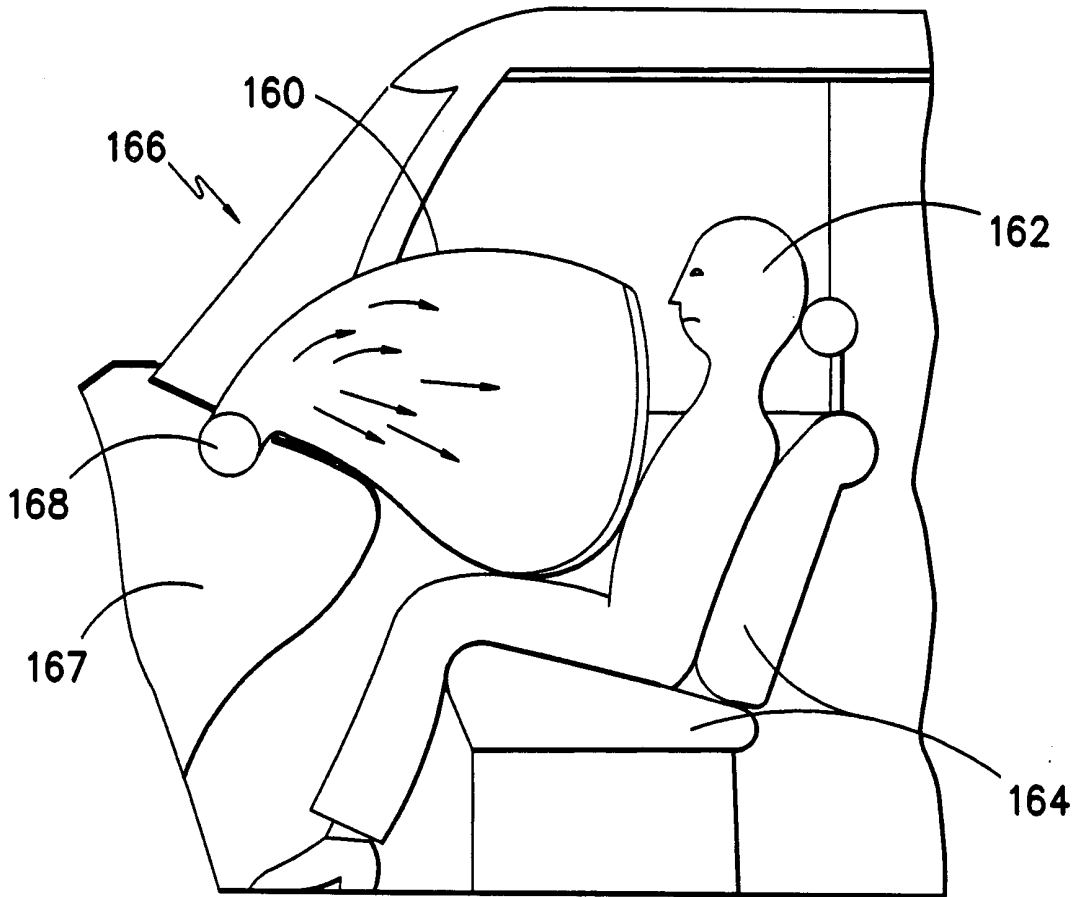


FIG. -18-

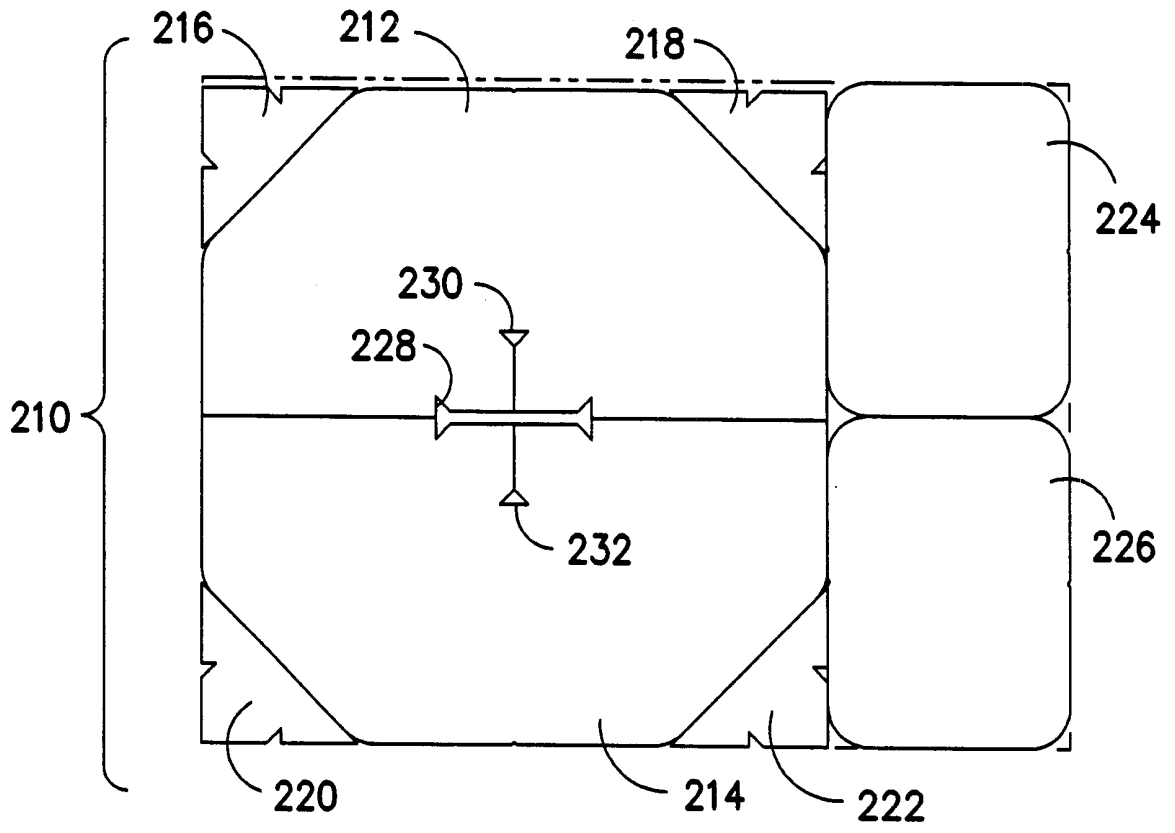


FIG. -19-

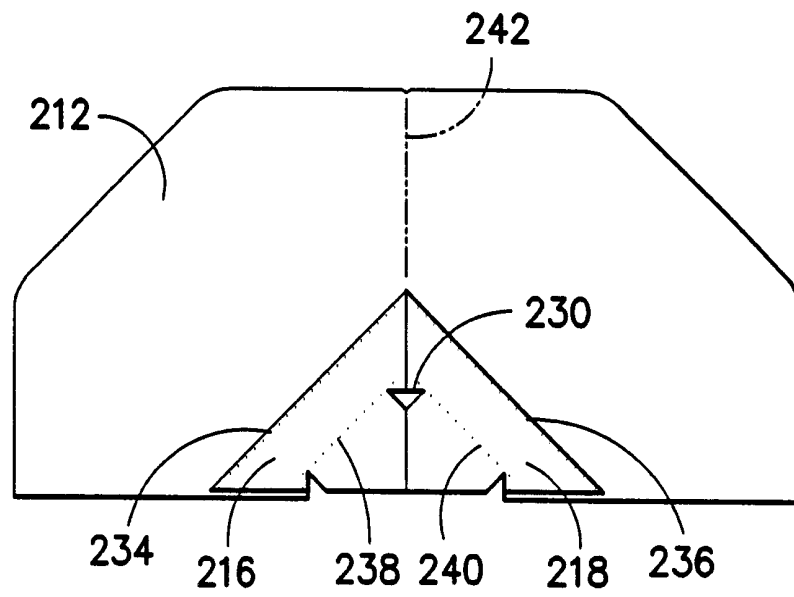


FIG. -20-

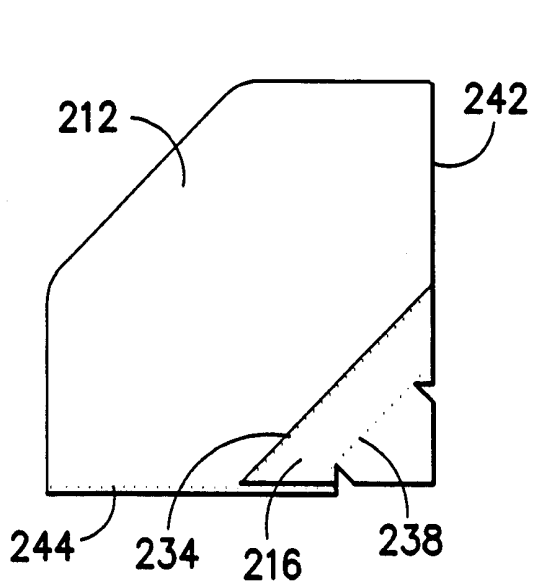


FIG. -21-

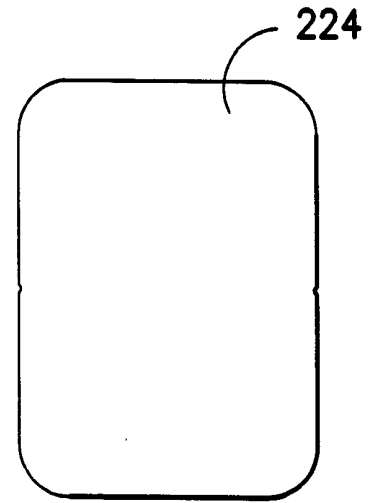


FIG. -22-

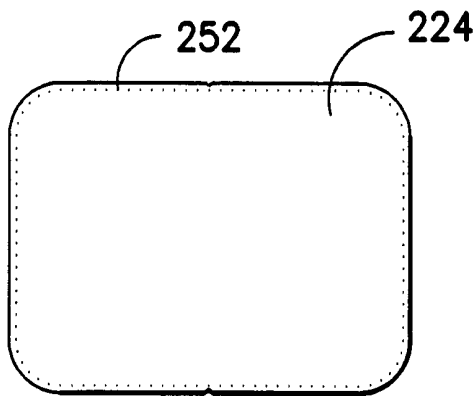


FIG. -23-

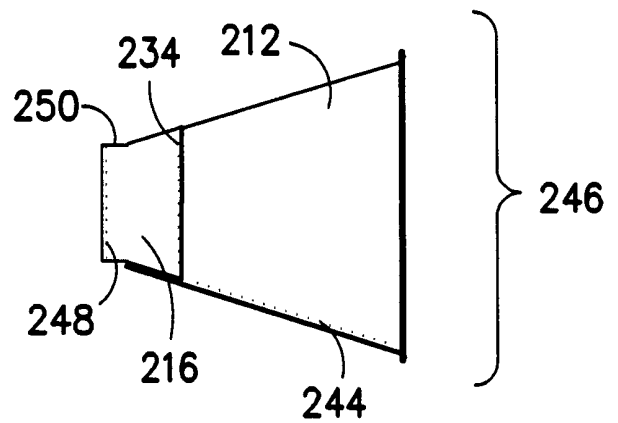


FIG. -24-

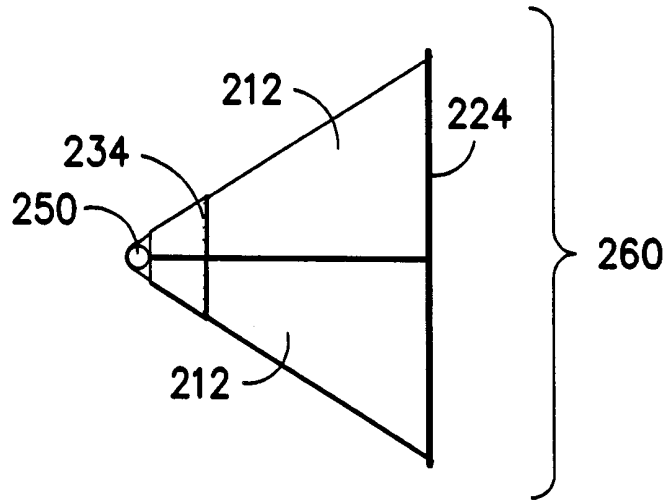


FIG. -25-

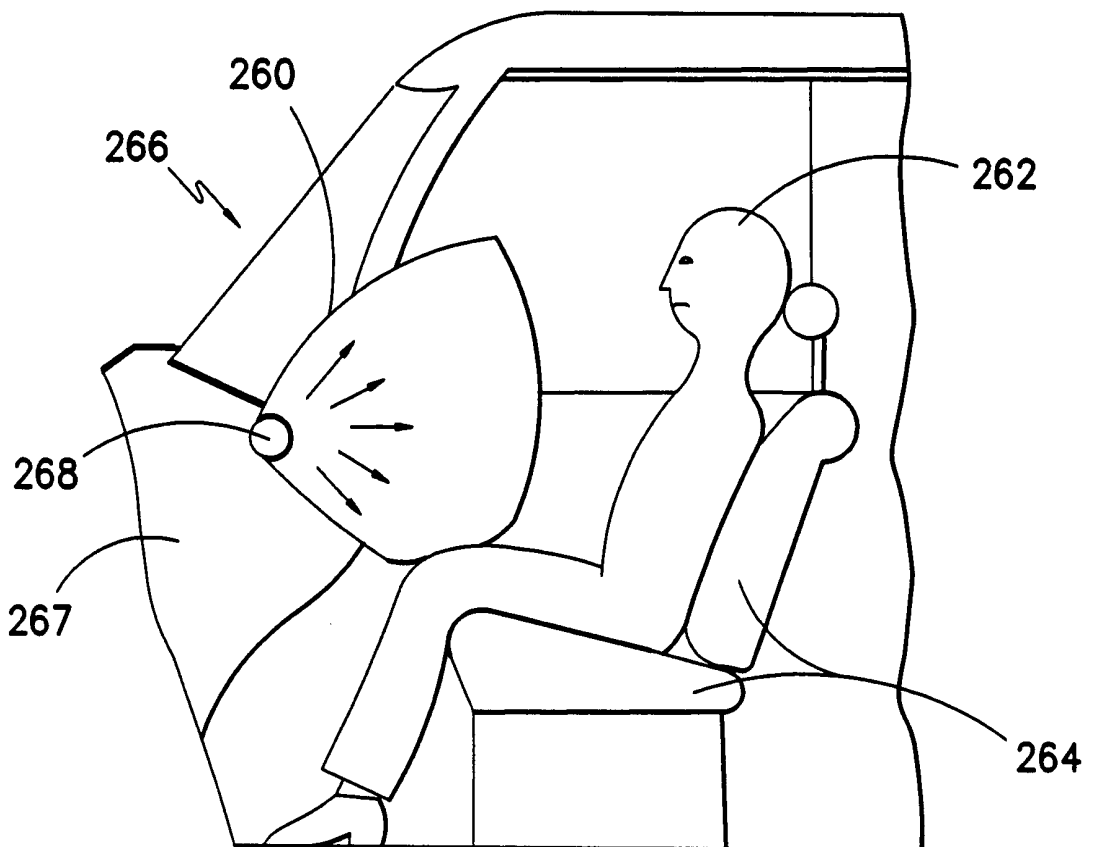


FIG. -26-

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/18848

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :B60R 21/16
US CL : 280/743.1

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 280/743.1;728.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,533,755 A (NELSEN et al) 09 July 1996, see entire document.	1-20
A	US 4,944,529 A (BACKHAUS) 31 July 1990, see entire document.	1-20

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

16 AUGUST 2000

Date of mailing of the international search report

14 SEP 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ERIC CULBRETH *Diane Smith for*

Telephone No. (703) 308-0360