



(51) International Patent Classification:

C12M 1/33 (2006.01) C12M 1/00 (2006.01)
B01F 7/00 (2006.01) C13K 1/02 (2006.01)
C08H 8/00 (2010.01)

(21) International Application Number:

PCT/US2013/068614

(22) International Filing Date:

6 November 2013 (06.11.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/724,581	9 November 2012 (09.11.2012)	US
61/724,587	9 November 2012 (09.11.2012)	US
61/724,590	9 November 2012 (09.11.2012)	US
61/724,594	9 November 2012 (09.11.2012)	US
61/724,598	9 November 2012 (09.11.2012)	US
61/724,602	9 November 2012 (09.11.2012)	US
61/724,612	9 November 2012 (09.11.2012)	US
61/724,620	9 November 2012 (09.11.2012)	US
13/790,223	8 March 2013 (08.03.2013)	US

(71) Applicant: **E. I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).

(72) Inventor: **GALLAGHER, F., Glenn**; 216 Fairhill Drive, Wilmington, DE 19808 (US).

(74) Agent: **FELTHAM, S., Neil**; E. I. du Pont de Nemours and Company, Legal Patent Records Center, Chestnut Run Plaza 721/2340, 974 Centre Road, PO Box 2915 Wilmington, DE 19805 (US).

[Continued on next page]

(54) Title: COMBINED TANGENTIAL SHEAR HOMOGENIZING AND FLASHING APPARATUS HAVING A NON-UNIFORM ROTOR/STATOR GAP DIMENSION AND A PARAMETER RESPONSIVE TO A VARIABLE ROTOR/STATOR GAP DIMENSION

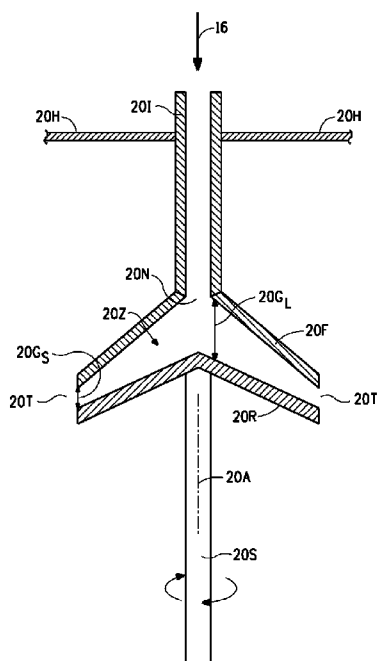


FIG. 3

(57) Abstract: A combined tangential shear homogenizing and flashing apparatus for destructuring pretreated biomass comprises a housing connectable to a source of pressurized pretreated biomass, and a stator and a rotor mounted within the housing. The stator and rotor being confrontationally disposed and spaced apart by a non-uniformly dimensioned axial gap. The least axial dimension between the rotor and the stator defining a restriction to a biomass flow. In use, rotational movement of the rotor with respect to the stator imparts a tangential shear to a volume of pretreated biomass. The tangential shear homogenizes the volume of pretreated biomass while a pressure difference causes a partial phase separation of the homogenized biomass into vapor and liquid phases such that the pretreated biomass undergoes at least a three-fold total volumetric increase and a weight transition to a vapor of at least one percent (1%).



(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

TITLE

Combined Tangential Shear Homogenizing and Flashing
Apparatus Having A Non-Uniform Rotor/Stator Gap Dimension
and A Parameter Responsive To A Variable Rotor/Stator Gap
5 Dimension

FIELD OF THE INVENTION

The invention relates to an apparatus for
10 homogenizing cellulosic or lignocellulosic biomass by
imposing tangential shear on the biomass while it is
simultaneously exposed to a flashing operation, and more
specifically, to a combined tangential shear Homogenizing
and Flashing apparatus having a non-uniform rotor/stator
15 gap dimension.

CLAIM OF PRIORITY

This application claims priority from each of the
20 following United States Provisional Applications, each of
which is hereby incorporated by reference:

(I) Combined Tangential Shear Homogenizing and
Flashing Apparatus Having A Uniform Rotor/Stator Gap
25 Dimension, Application S.N. 61/724,581, filed 09 November
2012;

(II) Combined Tangential Shear Homogenizing and
Flashing Apparatus Having A Non-Uniform Rotor/Stator Gap
30 Dimension, Application S.N. 61/724,587, filed 09 November
2012;

(III) Combined Tangential Shear Homogenizing and
Flashing Apparatus Having Rotor/Stator Gap Dimension With

Uniform and Non-Uniform Regions, Application S.N. 61/724,590, filed 09 November 2012;

(IV) Combined Tangential Shear Homogenizing and Flashing Apparatus Having A Parameter Responsive Variable Rotor/Stator Gap Dimension, Application S.N. 61/724,594, filed 09 November 2012;

(V) Method For Flash Treating Biomass While Simultaneously Undergoing Tangential Shear Homogenization, Application S.N. 61/724,598, filed 09 November 2012;

(VI) Combined Tangential Shear Homogenizing and Flashing Apparatus Having A Housing With A Single Effluent Outlet, Application S.N. 61/724,602, filed 09 November 2012;

(VII) Combined Tangential Shear Homogenizing and Flashing Apparatus Having A Housing With Dual Effluent Outlets, Application S.N. 61/724,612, filed 09 November 2012; and

(VIII) System For Destructuring Biomass Including A Combined Tangential Shear Homogenizing and Flashing Apparatus, Application S.N. 61/724,620, filed 09 November 2012.

CROSS-REFERENCE TO RELATED APPLICATIONS

Subject matter disclosed herein is disclosed in the following copending applications, all filed contemporaneously herewith and all assigned to the assignee of the present invention:

Combined Tangential Shear Homogenizing and Flashing Apparatus Having A Uniform Rotor/Stator Gap Dimension, Application S. N. 13/790,189, filed March 08, 2013;

5 Combined Tangential Shear Homogenizing and Flashing Apparatus Having A Non-Uniform Rotor/Stator Gap Dimension and A Parameter Responsive To A Variable Rotor/Stator Gap Dimension, Application S. N. 13/790-,223, filed March 08, 2013;

10

Combined Tangential Shear Homogenizing and Flashing Apparatus Having Rotor/Stator Gap Dimension With Uniform and Non-Uniform Regions, Application S. N. 13/790,170, filed March 08, 2013; and

15

System Including A Combined Tangential Shear Homogenizing and Flashing Apparatus Having Single Or Dual Effluent Outlet(s) and Method For Flash Treating Biomass Utilizing The Same, Application S. N. 13/790,208, filed 20 March 08, 2013.

BACKGROUND OF THE INVENTION

As the world's supply of crude oil is diminished there is growing interest in converting biomass into 25 fuels and chemicals. Biomass is created through photosynthesis (using energy from the sun) where carbon dioxide is reduced and combined with water to form a wide range of organic polymeric structures. Biomass can be aquatic or terrestrial plants. Specific biomass sources 30 include macroalgae (kelp), microalgae, energy crops (e.g., grasses, trees), crop residue (e.g., corn stover, forestry byproducts), biomass processing byproducts (e.g., bagasse, sawdust), as well as postconsumer products derived from aquatic or terrestrial plants

(e.g., office paper, retail waste and municipal solid waste).

To be useful for further biological or chemical transformations the polymeric nature of biomass must be
5 destructured. The first step of destructuring is commonly referred to as pretreatment. There is a universal need to efficiently destructure the biomass with minimal time, investment and energy.

Extensive work has focused on improving
10 pretreatment. Various chemical pretreatment methods are known, including treatments with acids or bases, introducing solvents, water, enzymes, recycled destructuring reaction products, and chemical or biological agents or catalysts to promote
15 depolymerization.

Such chemical pretreatment methods may be used in combination with mechanical pretreatment techniques that impose physical deformations on the biomass. These mechanical pretreatment techniques involve the use of
20 apparatus that subject biomass at elevated temperatures and pressures to operations such as mixing, grinding and/or milling. These activities facilitate size reduction and/or the destructuring of the biomass. Under these pretreatment conditions the state of the biomass
25 may be altered to the extent that portions of the biomass dissolve, liquify and/or melt. The state of the pretreated biomass ranges from solids, to compressible solids, to molten material and liquids or mixtures thereof.

It has been recognized that improved destructuring
30 may be achieved by rapidly transitioning the biomass to lower pressure with a resulting flash and cooling of the biomass due to latent heat of vaporization of the flashed components. This state change may be referred to as
35 flashing or steam explosion. The process may be

complemented with additional steam in a jet cooker. The increased shear in the high velocity two-phase flow introduces gradients that disrupt some of the biomass structure. In general shear fields are in the flow direction, although turbulence may exist. The magnitude of the shear is dependent on the combination of the flow properties of the pretreated materials and the change in state for the apparatus (i.e., temperature and pressure). Thus, the shear is difficult to control independently of the biomass fluid properties.

It has been attempted to adjust the flashing operation with varying cross section in the flash device. Unfortunately, the flashing operation can be compromised by variations in the quality of the pretreated biomass flow characteristics and particulate size resulting in erratic performance or pluggage in the flash device. The pretreated biomass quality is a function of the variability of the biomass feed material (inherent genetics of the biomass, agronomy conditions, harvest, and storage conditions) and how the varying structure and composition of the biomass is transformed by the pretreatment activities.

In moving this pretreated biomass material from one vessel to another for treatments or subjecting the material to a flashing operation the variability of viscosity, solids content, and particle size may challenge proper operation of typical types of valves, nozzles, and metering devices and may result in erratic performance, instability, or pluggage.

For example, U.S. Published Application 2008/0277082 discloses a system with a flash across a valve. If the pretreated material flowing through the valve has variable flow characteristics the valve may plug. Similarly, in U.S. Published Application 2010/0317053 the plunger associated with the valve may not seal properly

due to variations in the quality of the pretreated biomass and/or the presences of solids.

In view of the foregoing it is believed that there
5 remains a need for an apparatus, method and system
through which pretreated biomass can pass to achieve a
flash operation while maintaining stable operation with
minimal pluggage and the ability to subject the flashing
biomass to shear forces independent of the flow
10 properties of the pretreated biomass.

SUMMARY OF THE INVENTION

The present invention relates to a method, apparatus
and system for destructuring pretreated biomass at above
15 atmospheric pressure and at an elevated temperature by
discharge of the same into a reduced pressure zone (a
flashing operation) defined within the housing of a
combined tangential shear homogenizing and flashing
apparatus that includes a stator and a relatively movable
20 rotor. While the material is being subjected to flashing
a tangential shearing force is imposed on the material by
the action of the relatively moving rotor and stator.
Introducing an independent tangential shear in a rotating
device during the flashing operation homogenizes the
25 volume of pretreated biomass. The apparatus provides
inherently more stable performance due to the ability of
the rotation to shear particles to a more acceptable size
while systematically sweeping potential particle
accumulations away from the flashing zone of the device.

30 In other aspects the invention is directed to a
combined tangential shear homogenizing and flashing
apparatus having various configurations of rotor and
stator that results in different axial dimensions being
defined therebetween the rotor and stator.

In yet another aspect the gap defined between the rotor and stator and/or the rotational speed of the rotor is/are varied in accordance measured parameters of the pretreated biomass, such as pressure, temperature, particle size and/or material composition.

In still other aspects the housing of the combined tangential shear homogenizing and flashing apparatus is provided with one or more outlet ports that direct communicate with a downstream process utility.

10

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be more fully understood from the following detailed description, taken in connection with the accompanying drawings, which form a part of this application and in which:

15

Figure 1 is a highly stylized schematic representation of a system for implementing a method for destructuring biomass that includes a combined tangential shear homogenizing and flashing apparatus in which a gap of uniform axial dimension is defined between the rotor and stator elements of the apparatus, all in accordance with various aspects of the present invention;

20

Figure 2 is a highly stylized schematic representation of an alternate implementation of an embodiment of a combined tangential shear homogenizing and flashing apparatus in which a gap of uniform axial dimension is defined between the rotor and stator elements of the apparatus;

25

Figures 3 and 4 are highly stylized schematic representations of alternate implementations of an embodiment of a combined tangential shear homogenizing and flashing apparatus in which a gap of non-uniform dimension is defined between the rotor and stator elements of the apparatus;

30

Figure 5 is a highly stylized schematic representation of yet another alternate embodiment of a combined tangential shear homogenizing and flashing apparatus in which a gap defined between the rotor and stator elements of the apparatus has regions that exhibit uniform and non-uniform axial dimensions;

Figure 6 is highly stylized schematic representation of a modification useful with any of the embodiments shown in Figures 1 through 5 wherein a flow diverter is disposed in the entrance region of the mixing zone; and

Figure 7 is highly stylized schematic representation of another modification useful with any of the embodiments shown in Figures 1 through 5 wherein the rotor and stator are provided with cylindrical portions that align to define an annular milling region in the entrance region of the mixing zone.

DETAILED DESCRIPTION

Throughout the following detailed description similar reference characters refer to similar elements in all figures of the drawings.

Figure 1 is a highly stylized schematic illustration of a system generally indicated by reference character 10 for implementing a method for destructuring biomass, both in accordance with various aspects of the present invention.

The system 10 includes a pretreatment device 12 operative to pretreat one or more stream(s) 14 of raw cellulosic feedstock with processing aids such as water, solvents, compatabolizing agents, acids, bases and/or catalyst in preparation for destructuring and other further operations. Any suitable pretreatment operation on the biomass may be performed within the pretreatment device 12, as, for example, agitating, washing, pressurizing and/or heating the biomass to a

predetermined elevated temperature. Pretreated material from the source 12 is conducted through a feed line 16 to a combined tangential shear homogenizing and flashing apparatus 20 also in accordance with the present
5 invention.

The combined tangential shear homogenizing and flashing apparatus 20 itself comprises a housing 20H having an inlet port and channel 20I and at least a first effluent output port 20E₁. However, it lies within the
10 contemplation of the present invention to provide a separate second output port 20E₂ for the housing 20H. A stator 20F and a rotor 20R are disposed within the housing 20H in confrontational orientation with respect to each other. In the arrangement illustrated in Figure
15 1 the rotor and stator are parallel to each other and are oriented substantially perpendicular to the axis 20A.

The stator 20F is secured in a fixed disposition at any convenient location within the housing. The rotor 20R is mounted on a shaft 20S for relative rotation with
20 respect to the stator. Motive force for the rotor 20R is provided by a drive motor 20M connected to the shaft 20S. The shaft 20S aligns with the axis 20A of the apparatus 20.

The stator 20S and the rotor 20R cooperate to define
25 a mixing zone 20Z therebetween. The inlet channel 20I is connectible to the feed line 16 and serves to conduct pressurized biomass material from the pretreatment device 12 into the entrance region 20N of the mixing zone 20Z located in the vicinity of the axis 20A. The exit 20T of
30 the mixing zone 20Z is disposed at the radially outer edge of the rotor 20R and communicates with the interior of the housing 20H and thus, with the first effluent output port 20E₁ and the second output port 20E₂, if present.

In a typical arrangement as illustrated in Figure 1 the rotor and the stator are each substantially disk-shaped members. However, it should be understood that the rotor and stator can have any convenient three-dimensional configuration, peripheral shape and size. The surfaces of the rotor and stator can be smooth or patterned with groves or elevated sections so as to facilitate particle size reduction. The various structural elements of the apparatus 20 may be manufactured of any suitable materials of construction. The rotor, stator, housing may be preferably made from stainless steel. Various alternative structural configurations of the rotor 20R and stator 20S and the resulting modifications to the configuration of the mixing zone 20Z are discussed herein.

As will be described the apparatus 20 assists in the destructuring process by homogenizing the pretreated biomass while simultaneously causing a partial phase separation of the homogenized biomass into vapor and liquid phases. The distinct liquid and vapor phases so produced may be conducted singly or together directly to a processing utility 28 disposed downstream of the apparatus 20. If only a single effluent output port 20E₁ is provided both the liquid and vapor phases resulting from the homogenization and flash of the biomass are conveyed through a first conduit 22 to the utility 28. If the housing 20H is provided with a second output port 20E₂ the vapor phase is carried via the conduit 24 to the utility 28 and the liquid phase is conducted separately to the utility 28 through the first conduit 22. Representative of the various processing devices that may be used for the utility 28 include an agitating vessel for further destructuring.

However, it should be appreciated that flashed vapor of the biomass leaving the housing through the second

outlet port 20E₂ may require different processing. Accordingly, the conduit 24 may be connected to an alternative processing utility 28A in which the vapor phase may be isolated for recycling and re-use or refined for various applications.

In a system in accordance with the present invention the conduits 22, 24 provide direct, uninterrupted fluid communication between the respective outlet ports 20E₁, 20E₂ and the particular utility(ies) 28, 28A to which they are connected. As used in this application the term "direct", "directly" (or like terms) means that effluent(s) from the mixing zone 20Z is(are) conducted to their respective destination(s) without any impediment to fluid communication and without the need to pass through a separate intermediate device (such as a discrete flash or metering device).

The dimension of the mixing zone 20Z may be measured in a direction parallel to the axis 20A and is determined by the magnitude of the axial gap 20G between the rotor 20R and the stator 20F. Since in Figure 1 the rotor and stator are arranged parallel to each other and are situated substantially perpendicular to the axis 20A, the gap 20G, and thus the axial dimension of the mixing zone, is uniform across the across the full radial extent of the mixing zone 20Z. It should be noted that if the confronting surfaces of the rotor and/or stator in any embodiment of the invention are patterned with grooves and/or elevated sections to facilitate homogenization the axial dimension of the gap between the rotor and the stator is defined as the underlying surface should the grooves and elevated sections be eliminated.

The dimension of the gap 20G may be adjusted by relocating the rotor with respect to the stator. Suitable expedients for manually adjusting the axial dimension of the gap prior to operation include shims,

threaded shaft components, and hydraulic positioning devices. However, in the preferred case the dimension of the gap is automatically adjusted during operation by a gap adjustment control system 34 to be described.

5 The axial dimension of the gap is initially sized to a predetermined value based upon the particular pressure, temperature and nature of the biomass to be destructured. This initial sizing of the gap sets the predetermined appropriate initial axial dimension of the mixing zone
10 20Z. A predetermined volume of biomass having a predetermined pressure and temperature is introduced into the mixing zone 20Z through the inlet port 20I.

In operation, various properties of the pretreated biomass influent into the entrance 20N of the mixing zone
15 20Z are monitored by a sensor network generally indicated by reference numeral 30. The sensor 30 may include one or more sensing devices operative to monitor parameters such as pressure, temperature, particle size and/or composition (e.g., nature) of the pretreated influent
20 biomass.

The flow of the pretreated biomass in a substantially radially outward direction through the mixing zone 20Z is controlled by the pressure difference between the entrance 20N and exit 20T. As the pretreated
25 biomass flows radially outwardly through the mixing zone 20Z it undergoes a pressure drop. The pressure gradient vector, indicative of the change in pressure through the mixing zone, is indicated in the drawing by the vector P.

Simultaneously with the flow of pretreated biomass
30 through the mixing zone 20Z the motor 20M rotates the rotor 20R with respect to the stator 20F. The relative rotational movement between the rotor and stator generates a circumferentially directed shear field within the mixing zone 20Z. The shear field imparts a
35 tangential shear force to the volume of pretreated

biomass flowing through the mixing zone 20Z. The direction of the tangential shear force is indicated in the drawing by the vector S. The tangential shear force homogenizes the pretreated biomass while the pressure difference across the mixing zone causes a partial phase separation of the homogenized biomass into vapor and liquid phases. Depending upon the particular structure of the rotor and stator the phase separation may occur within the radial extent of the mixing zone or within a predetermined close distance from the exit 20T thereof. In the case illustrated in Figure 1 the partial phase separation occurs within the mixing zone.

In accordance with this invention selection of the predetermined initial size of the gap 20G coupled with the pressure differential and temperature of the biomass cause a partial phase separation of the homogenized pretreated biomass into vapor and liquid phases such that the biomass undergoes at least a three-fold total volumetric increase and a weight transition to a vapor state of at least one percent (1%).

Introducing an independent tangential shear force S in a rotating device during the flashing operation provides inherently more stable performance due to the ability of the rotation to homogenize particles to a more acceptable size while systematically sweeping potential particle accumulations away from the flashing zone of the device.

Due to the inherent inconsistencies of biomass composition and the manner in which various pretreatment operations impact these inconsistencies the resulting pretreated biomass in the flow line 16 may contain significant variations in fluid properties as well as size of discrete particles.

Accordingly, as a further aspect of the present invention the gap adjustment control system 34 enables

the apparatus 20 and a system 10 incorporating the same to adapt automatically to adjust the gap 20G between the rotor and the stator and to compensate for such variations in pretreated biomass composition, flow
5 properties and particulate size. This ability to vary the gap 20G allows the apparatus 20 also to function as a metering device.

In addition to the sensor 30 the gap adjustment control system 34 includes a programmable controller
10 device 34C that is responsive to the signals from the sensor network 30 to vary the gap dimension 20G and thus, the axial dimension of the mixing zone 20Z, in accordance with one or more of the various sensed parameters of the influent pretreated biomass. The gap adjustment control
15 system 34 may further include actuator 36 operatively connected to the motor 20M to physically effect adjustments to the gap dimension. The actuator 36 responds to a control signal from the control system 34 carried on a line 34A to move the motor and the rotor
20 connected thereto as a unit toward and away from the stator thus to vary the gap dimension of the mixing zone based upon various measured parameters of the influent pretreated biomass. Thus, for example, the pressure of the biomass feed through the mixing zone 20Z may be
25 maintained constant or varied in any predetermined way. Additionally or alternatively, for example, the gap dimension may be varied in a time-controlled manner to expel troublesome particles. It should be understood that various other expedients may be used to effect
30 modification of the gap dimension, and that such other expedients are to be construed as lying within the contemplation of the present invention. For example, the gap dimension may be altered by displacing the stator within the housing relative to the rotor.

Alternatively or additionally, a signal from the control system 34 carried on a line 34B may be applied as a motor control signal to vary the rotational speed of the rotor 20M. Changing the rotational speed of the rotor facilitates particle size reduction.

As mentioned earlier, in the arrangement shown in Figure 1 the rotor and stator are each substantially disk-shaped members that are mounted parallel to each other and substantially perpendicular to the axis 20A such that the gap 20G is uniform across the entire radial extent of the mixing zone 20Z. Figure 2 illustrates an alternate implementation of an apparatus 20 having a uniform axial dimension across the mixing zone but in which the rotor and stator are frustoconically shaped to facilitate material flow. Similar to the situation in Figure 1, with the arrangement shown in Figure 2 the flash occurs within the radial extent of the mixing zone.

The location of the flash can be adjusted by appropriate adjustment of the geometry of the rotor and/or stator. Figures 3 and 4 illustrate two forms of an alternate embodiment of the apparatus 20 in which the mixing zone 20Z defined by the gap 20G between the rotor and stator has a non-uniform dimension. In these Figures the largest axial dimension $20G_L$ of the gap, and thus of the mixing zone, is located in the vicinity of the entrance 20N.

In the structure shown in Figure 3 one (or both) of the rotor and/or stator is(are) frustoconically shaped members that are inclined with respect to the axis 20A such that the members taper uniformly toward each other at positions radially outwardly from the axis 20A. As a result of this structure the smallest axial gap dimension $20G_S$ occurs near the exit 20T at the radially outer edge of the mixing zone 20Z. The smallest axial gap dimension $20G_S$ presents a restriction to the substantially radially

outwardly flow of biomass. In this form of the invention the partial phase separation occurs just past the radially outer edge.

The arrangement shown in Figure 4 illustrates an
5 construction in which the smallest axial gap dimension $20G_S$, and thus the restriction to biomass flow, occurs at a selected location radially inwardly from the exit $20T$ of the mixing zone $20Z$. In the arrangement shown in Figure 4 the flow restriction should be not more than
10 one-third of the radial distance of the mixing zone inwardly from the exit of the mixing zone. In Figure 4 the restriction is defined by a constrictive feature $20K$ that is formed in the stator $20F$. The partial phase separation occurs within the mixing zone in the vicinity
15 of the feature $20K$. It should be understood that an analogous feature may alternatively or additionally be provided on the rotor $20R$.

Figure 5 illustrates another alternate embodiment of the apparatus 20 . In this embodiment the rotor and the
20 stator are configured to present a hybrid structure having a variety of gap configurations. A radially inner region $20G_I$ includes sections $20G_U$ and $20G_N$ having uniform $20G_U$ and non-uniform $20G_N$ axial dimensions, respectively. If desired, the section $20G_U$ of uniform dimension in the
25 radially inner region $20G_I$ may be omitted. Alternatively, any convenient number of additional uniform and non-uniform sections may be provided in the radially inner region $20G_I$ if desired.

A radially outer region $20G_M$ has a uniform axial gap
30 dimension and defines the smallest axial dimension $20G_S$ of the gap. The confronting surfaces of the rotor and stator in this region $20G_V$ cooperate to function as a metering device. The metering action provided by these surfaces regulates the exit pressure and provides
35 improved pressure stability when compared to the

structure of Figure 4 where the smallest axial dimension 20G_s is a point contact.

Figures 6 and 7 illustrate two additional structural details that may be used with any of the rotor/stator
5 arrangements illustrated in Figures 1 through 5.

In Figure 6 a flow diverter 20L is positioned between the rotor 20R and the stator 20F at a predetermined location near the entrance 20N of the mixing zone. The flow diverter 20L serves to streamline
10 influent flow and avoid dead zones or abrupt direction changes that may lead to pockets of stagnant material. The flow diverter 20L may be mounted at any convenient location on either the rotor or the stator.

Figure 7 illustrates an arrangement in which the
15 apparatus is provided with a milling device disposed upstream of the entrance 20N of the mixing zone 20Z. The stator 20F has a substantially cylindrical portion 20C having a predetermined axial dimension formed thereon. Correspondingly, a substantially cylindrical barrel 20B
20 mounted to the rotor 20R. The barrel 20B has a predetermined axial dimension. The barrel 20B extends axially from the rotor 20R into concentric nested relationship with the cylindrical portion 20C of the stator.

The barrel and the cylindrical portion of the stator
25 cooperate to define an axially extending milling zone 38 disposed between the rotor and the stator. The axial dimension of the milling zone 38 is determined by the extent of axial overlap between the barrel 20B and the
30 cylindrical portion 20C.

Any of a variety of mixing enhancers 38E may be may
be incorporated on the barrel 20B and/or the walls of the cylinder 20C. In Figure 7 the mixing enhancers 38E are shown in the form of pins. However, it is understood
35 that other suitable forms of mixing enhancers, such as

Maddock straight, Maddock tapered, pineapple, or gear may be used. Drawings of such mixing enhancers are shown in Perry's Chemical Engineering Handbook, Seventh Edition, Figure 18-48.

5 Yet further, if desired, a flow 20L diverter may be mounted at the upstream end of the barrel 20B.

-o-0-o-

10 Those skilled in the art, having the benefit of the teachings of the present invention, may impart modifications thereto. Such modifications are to be construed as lying within the scope of the present invention, as defined by the appended claims.

15

WHAT IS CLAIMED IS:

1. A combined tangential shear homogenizing and flashing apparatus for destructuring pretreated biomass
5 comprising:

a housing having an inlet and at least one outlet, the housing having an axis extending therethrough, the inlet being connectable to a source of pressurized pretreated biomass while the
10 outlet is connectible in direct fluid communication with a downstream utility; and

a stator and a rotor mounted within the housing, the stator and rotor being confrontationally disposed and spaced apart by an axial gap thereby to define a mixing zone
15 communicating with the inlet and the outlet, the axial dimension of the gap varying at positions radially outwardly from the axis with the least axial dimension between the rotor and the stator
20 being defined at a predetermined radial position, the least axial dimension between the rotor and stator defining a restriction to a biomass flow;

the rotor being connectable to a motor operative to rotate the rotor with respect to the
25 stator, such that, in use, with a predetermined pressure difference defined between the inlet and the outlet, rotational movement of the rotor with respect to the stator imparts a tangential shear to a predetermined volume of pretreated biomass
30 introduced into the mixing zone at a predetermined pressure and temperature while the biomass is moving through the mixing zone in the direction of the pressure difference,

the tangential shear being able to homogenize
35 the biomass and the pressure difference being able

to cause a partial phase separation of the homogenized biomass into vapor and liquid phases such that the pretreated biomass undergoes at least a three-fold total volumetric increase.

5

2. The combined tangential shear homogenizing and flashing apparatus of claim 1 wherein the pretreated biomass undergoes a weight transition to a vapor of at least one percent (1%).

10

3. The combined tangential shear homogenizing and flashing apparatus of claim 1 or 2 further comprising: a sensor operative to monitor one or more of the pressure, temperature, particle size and/or composition (e.g., nature) parameters of the pretreated influent biomass; and an actuator selected from: a) an actuator responsive to the sensor for relatively displacing the rotor and stator with respect to each other thereby to vary the magnitude of the gap in accordance with the monitored one or more parameter(s); and

15

b) an actuator responsive to the sensor for varying the magnitude of the rotational speed of the rotor in accordance with the monitored one or more parameter(s).

20

4. The combined tangential shear homogenizing and flashing apparatus of claim 1, 2, or 3 wherein the restriction is disposed adjacent to the radially outer edge of the mixing zone.

25

5. The combined tangential shear homogenizing and flashing apparatus of claim 1, 2, or 3 wherein the axial dimension of the gap tapers uniformly from the axis to the radially outer edge of the mixing zone, the smallest axial dimension of the gap defining the flow restriction.

30

6. The combined tangential shear homogenizing and flashing apparatus of claim 1, 2, or 3 wherein the restriction is disposed not more than one-third of the radial distance inwardly from outer edge of the mixing zone toward the axis.

7. The combined tangential shear homogenizing and flashing apparatus of claim 1, 2, or 3 further comprising:

a flow diverter mounted between the rotor and the stator for conducting biomass into the mixing zone.

8. The combined tangential shear homogenizing and flashing apparatus of claim 7 wherein the flow diverter is mounted to the rotor.

9. The combined tangential shear homogenizing and flashing apparatus of claim 7 wherein the flow diverter is mounted to the stator.

10. The combined tangential shear homogenizing and flashing apparatus of claim 1, 2, or 3 wherein the stator has a substantially cylindrical portion formed thereon, the cylindrical portion having a predetermined axial dimension; and wherein the apparatus further comprises:

a substantially cylindrical barrel mounted to the rotor, the barrel having a predetermined axial dimension, the barrel extending axially from the rotor into nested relationship with the cylindrical portion of the rotor, the barrel and the cylindrical portion of the housing cooperating to define an axially extending milling zone therebetween.

11. The combined tangential shear homogenizing and flashing apparatus of claim 10 wherein the barrel of the stator has an array of mixing enhancers thereon.

5 12. The combined tangential shear homogenizing and flashing apparatus of claim 10 wherein the barrel has an axially upstream end thereon, and wherein,
a flow diverter is mounted at the axially upstream end of the barrel.

10

13. The combined tangential shear homogenizing and flashing apparatus of claim 1, 2, or 3 wherein the rotor and the stator are substantially disc-shaped members that are both mounted substantially perpendicularly to the
15 axis of the apparatus.

14. The combined tangential shear homogenizing and flashing apparatus of claim 1, 2, or 3 wherein the rotor and the stator are substantially frustoconically-shaped
20 members that are both mounted with an inclination with respect to the axis of the apparatus.

15. The combined tangential shear homogenizing and flashing apparatus of claim 3 wherein the monitored
25 parameter is the pressure of the pretreated influent biomass.

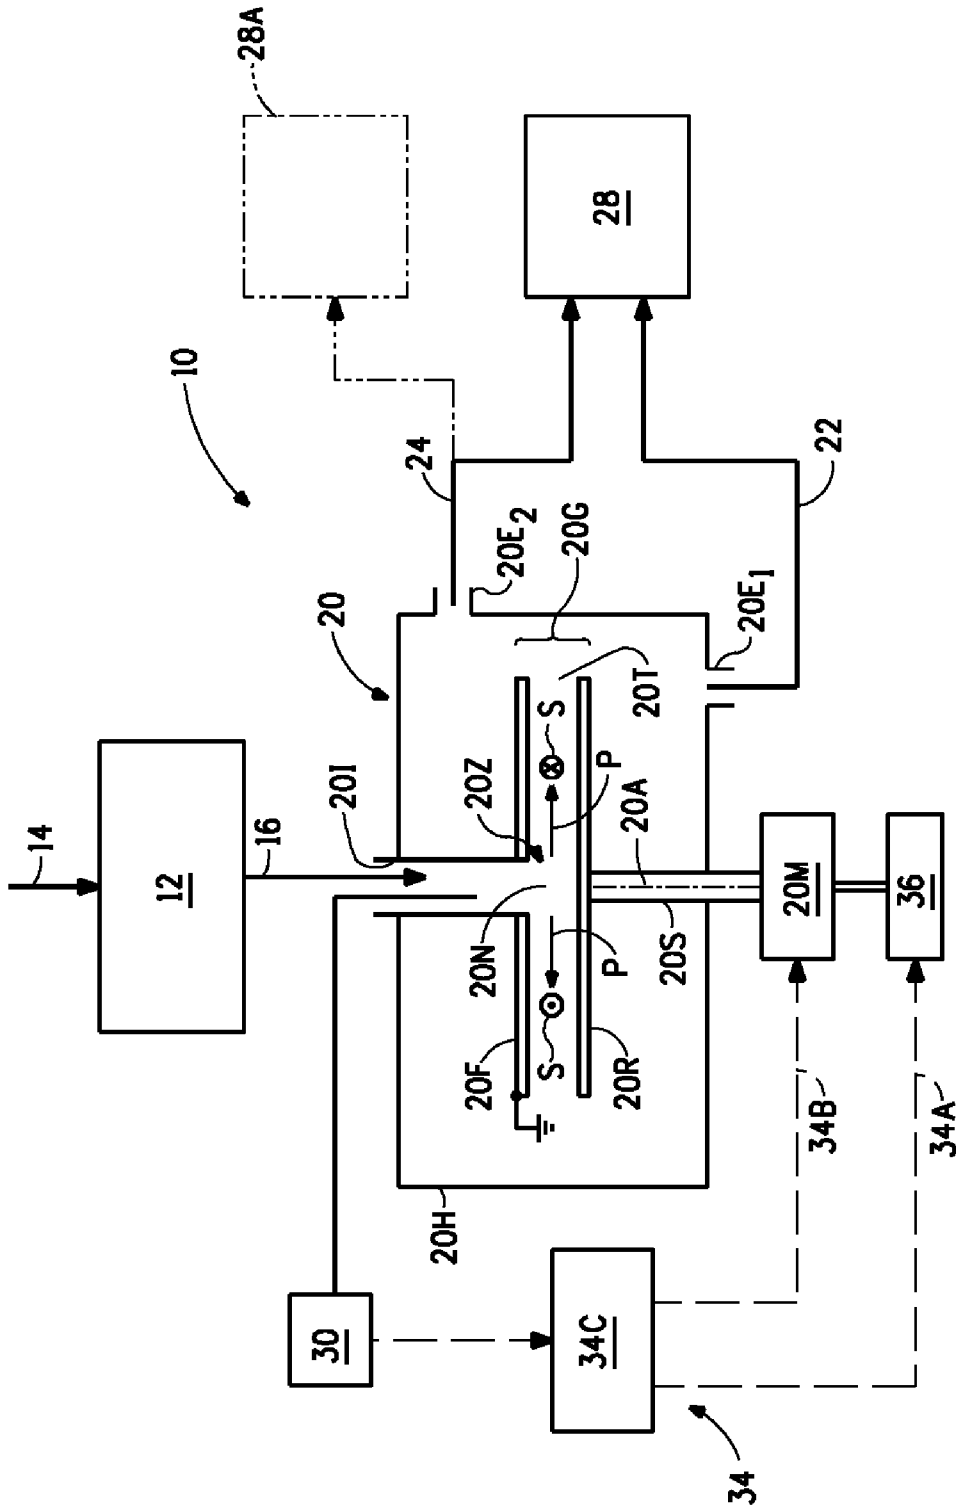


FIG. 1

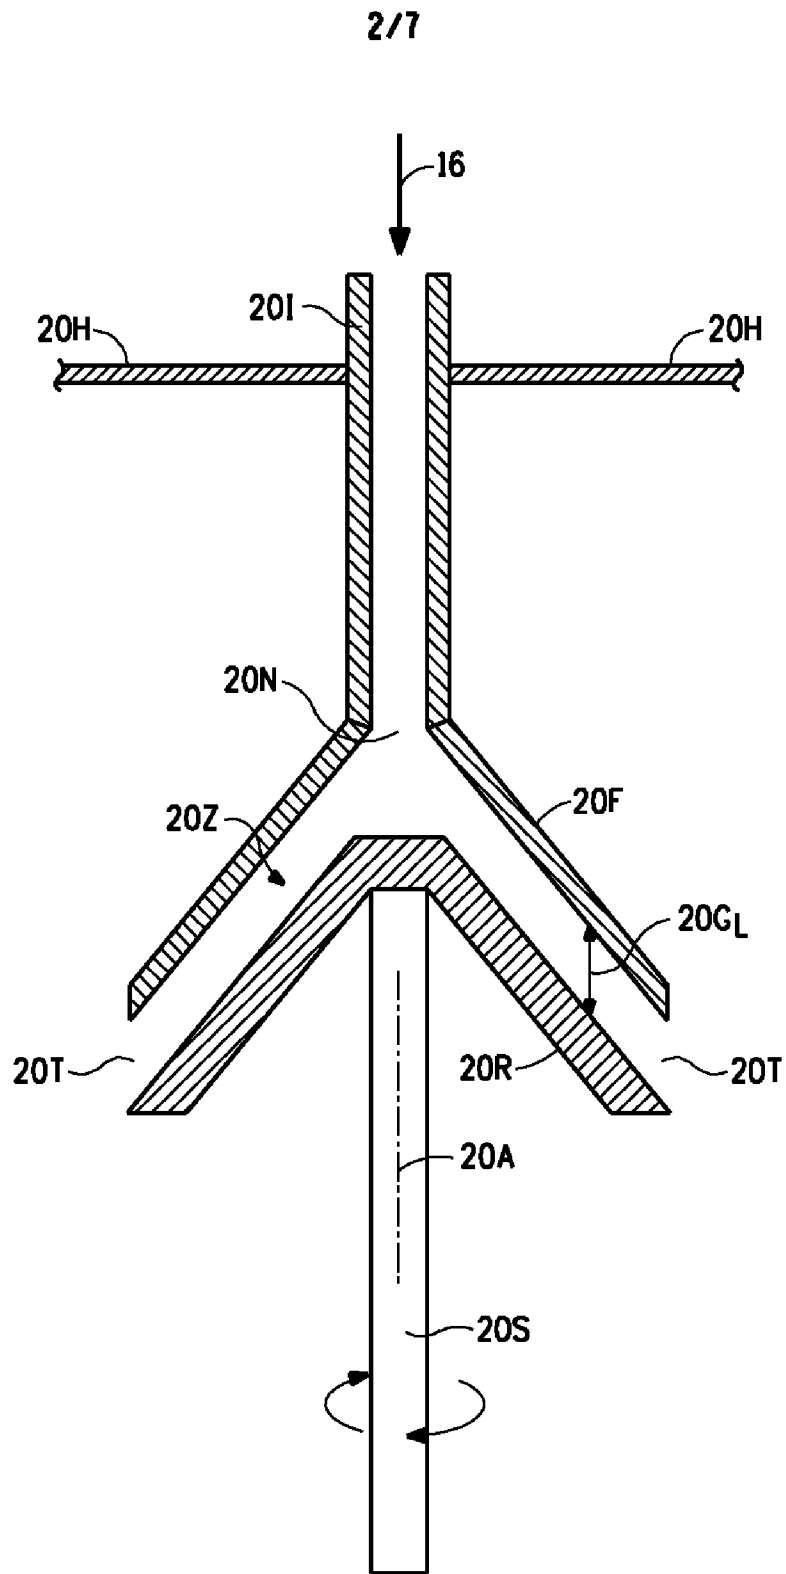


FIG. 2

3/7

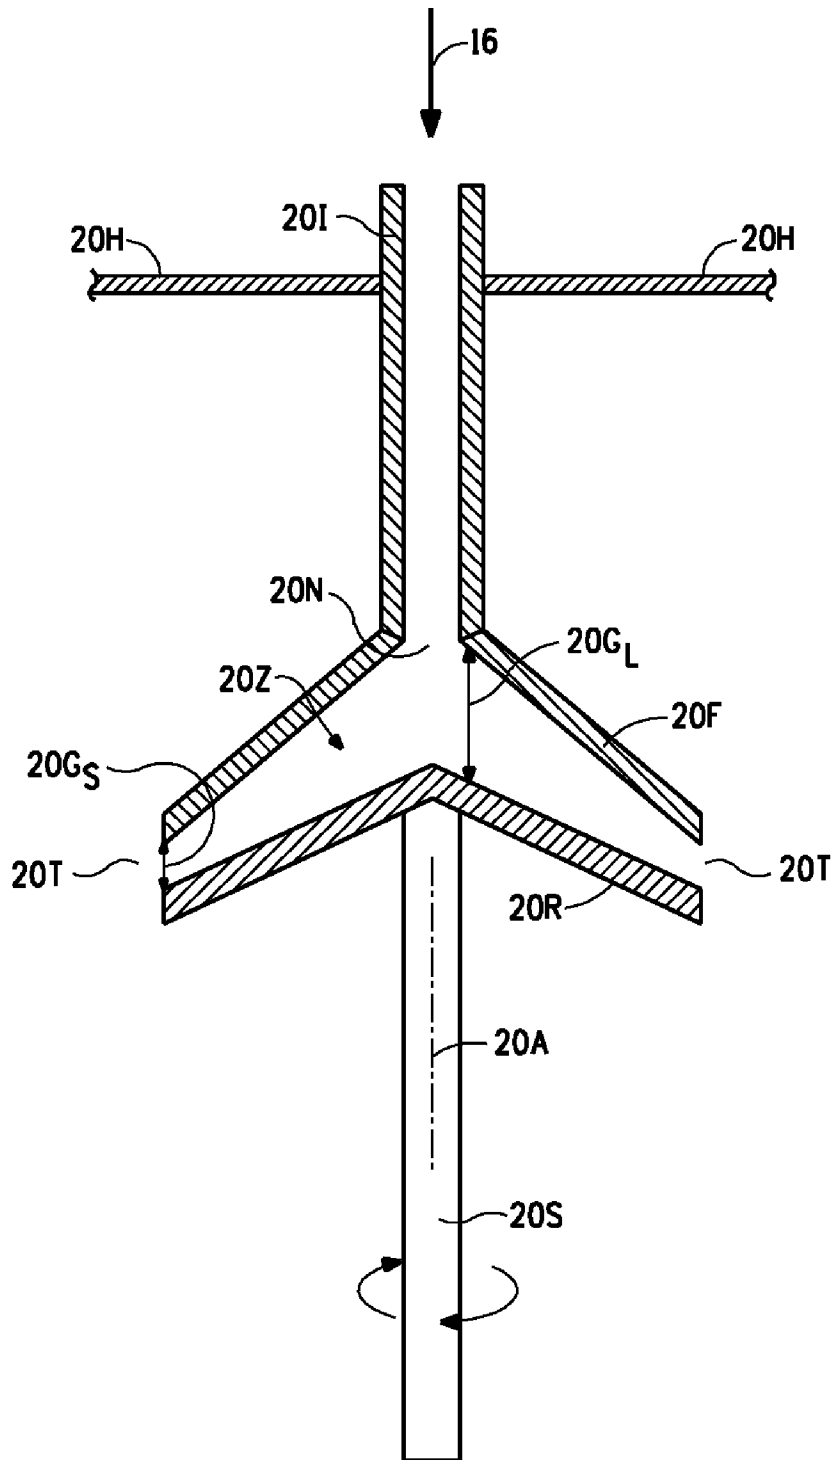


FIG. 3

4/7

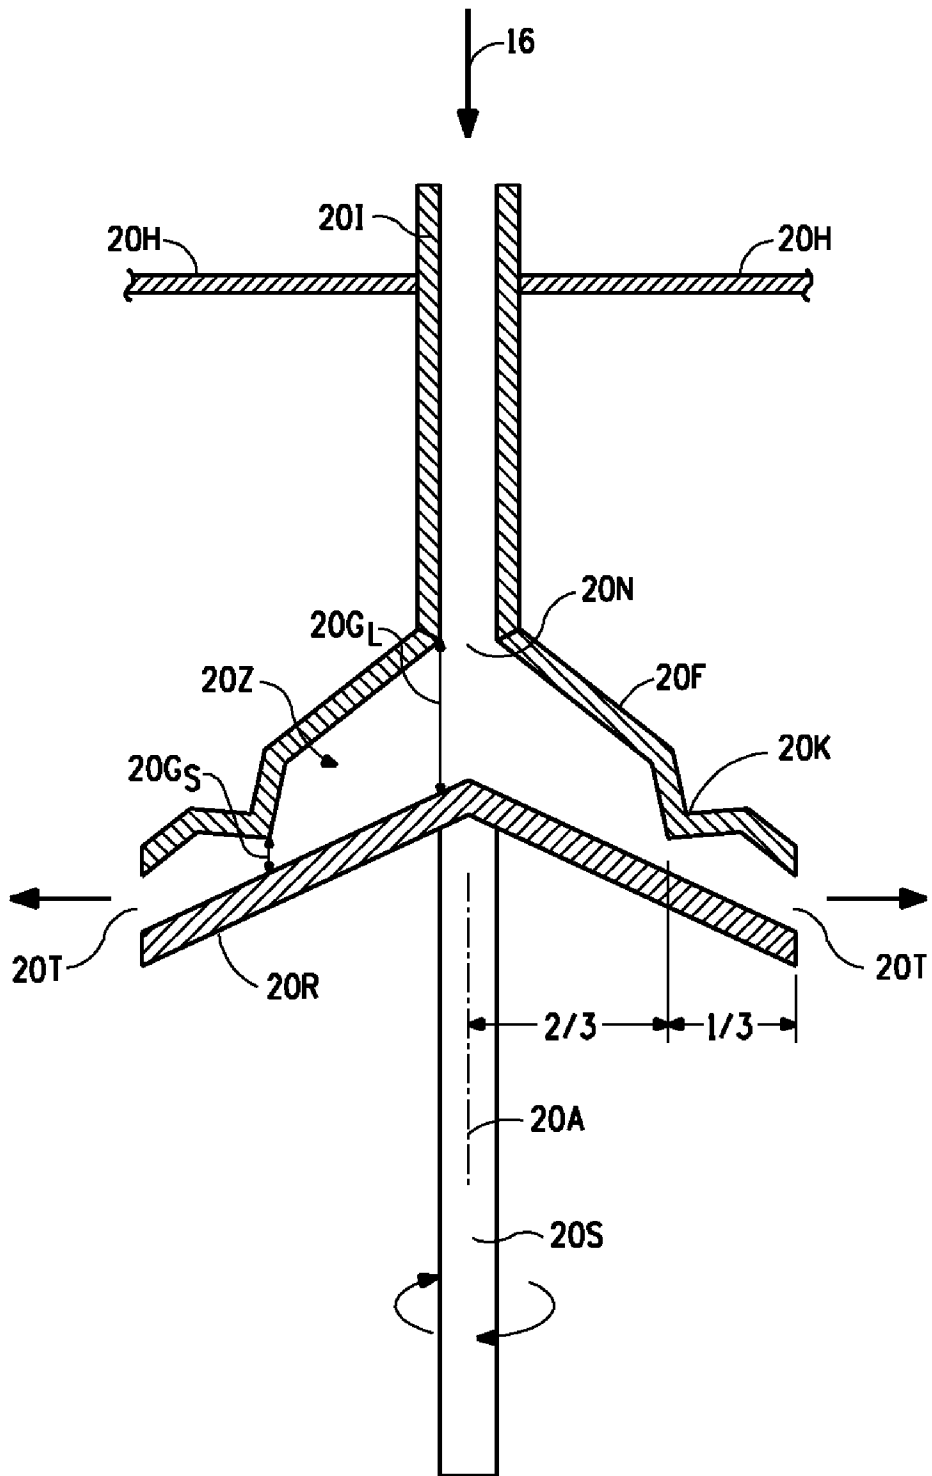
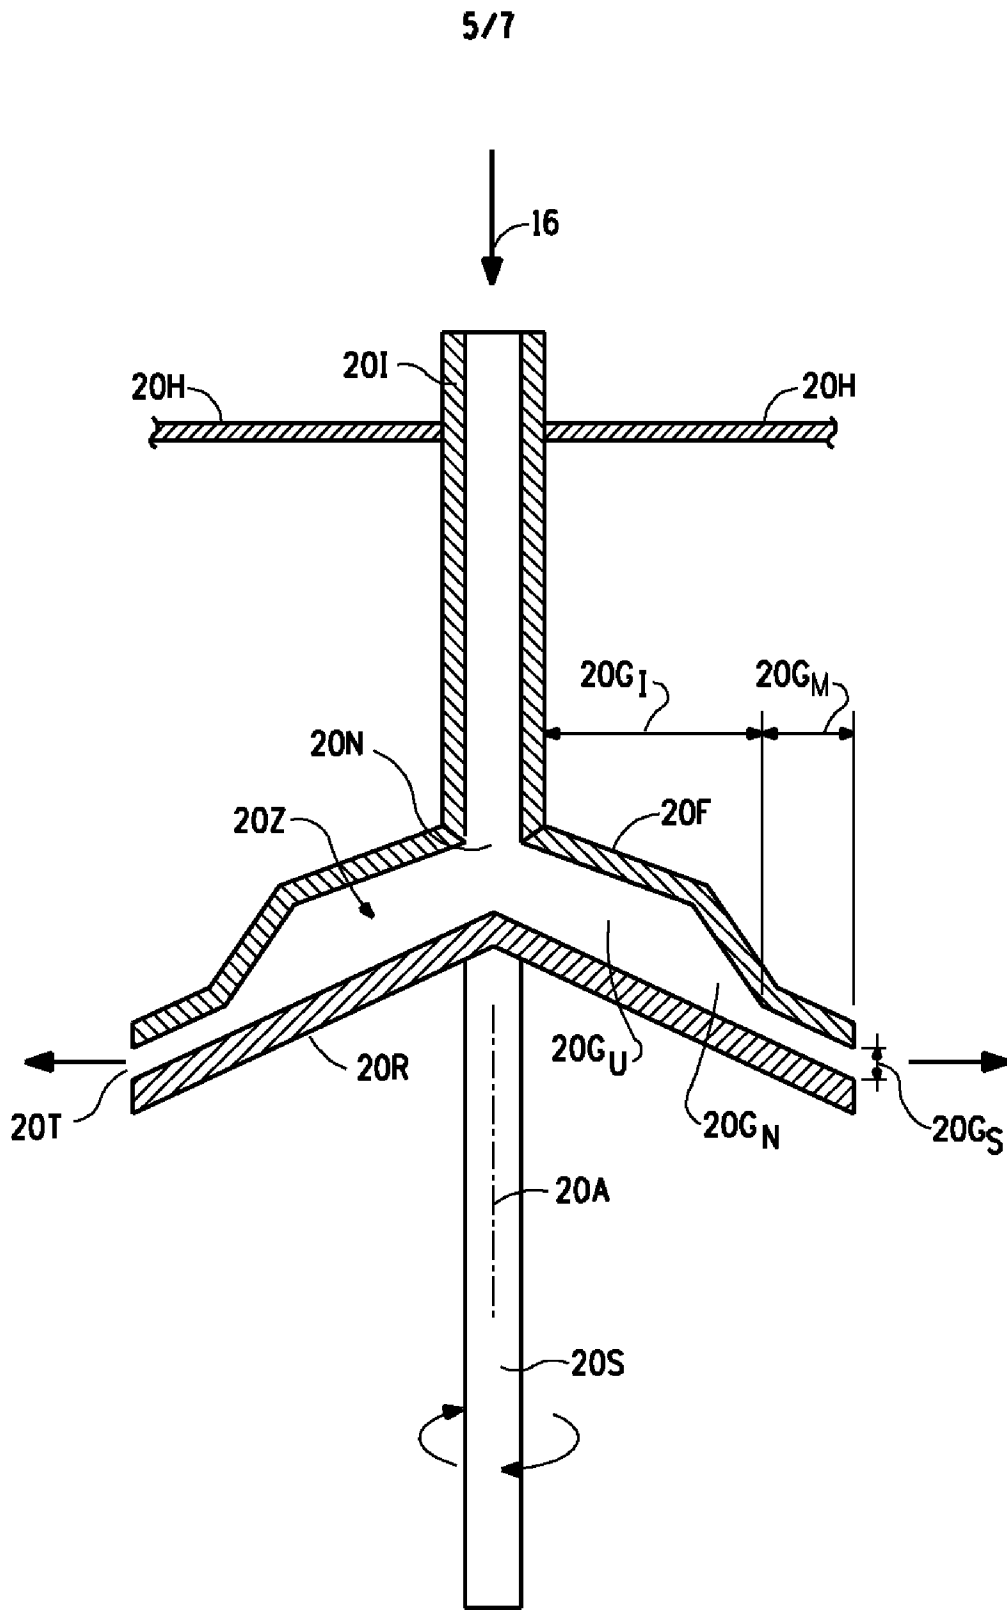


FIG. 4



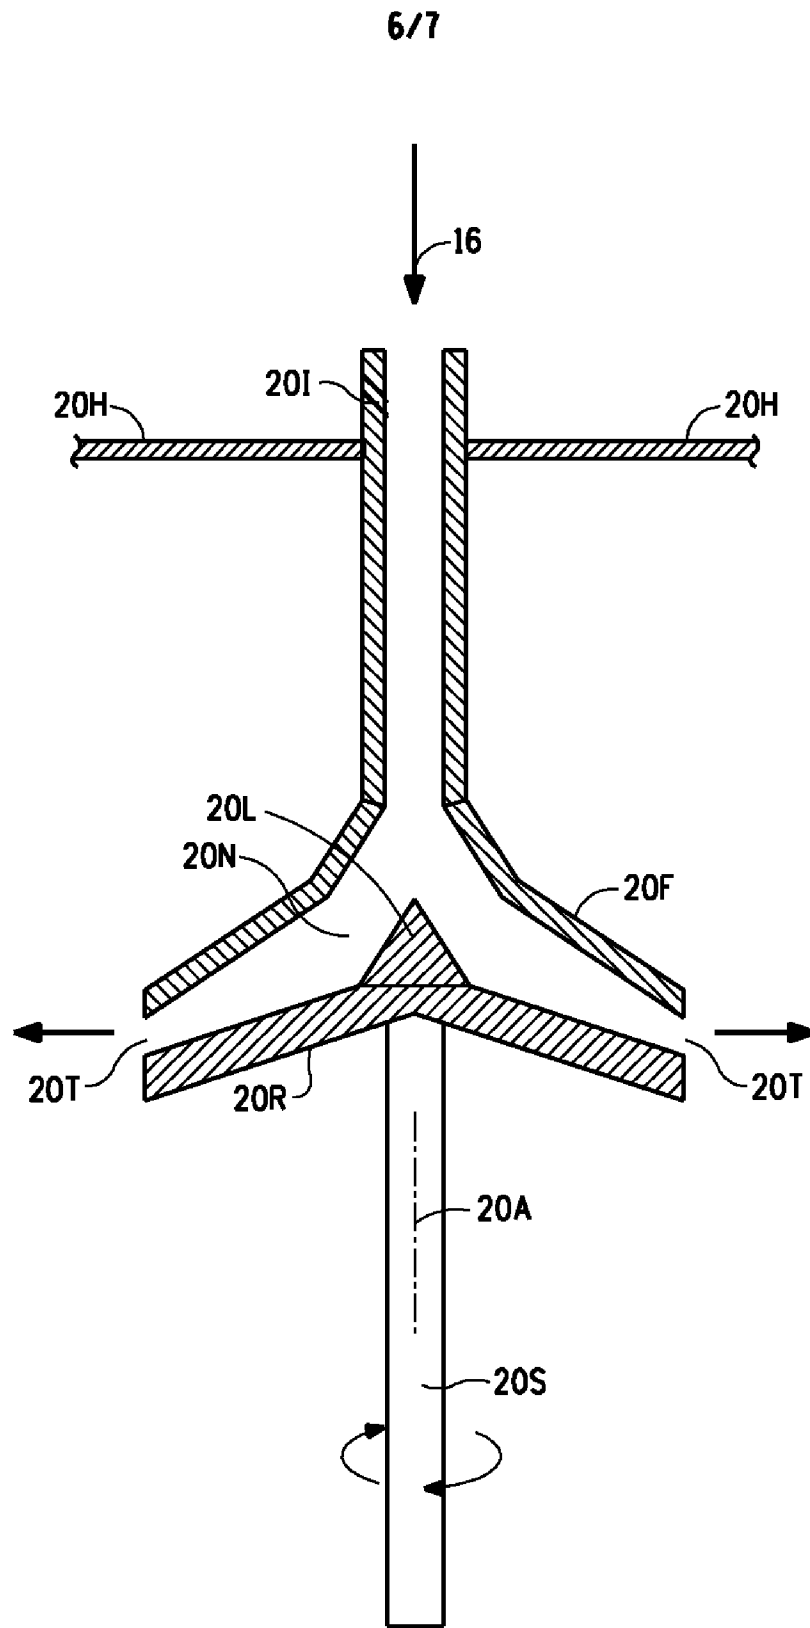


FIG. 6

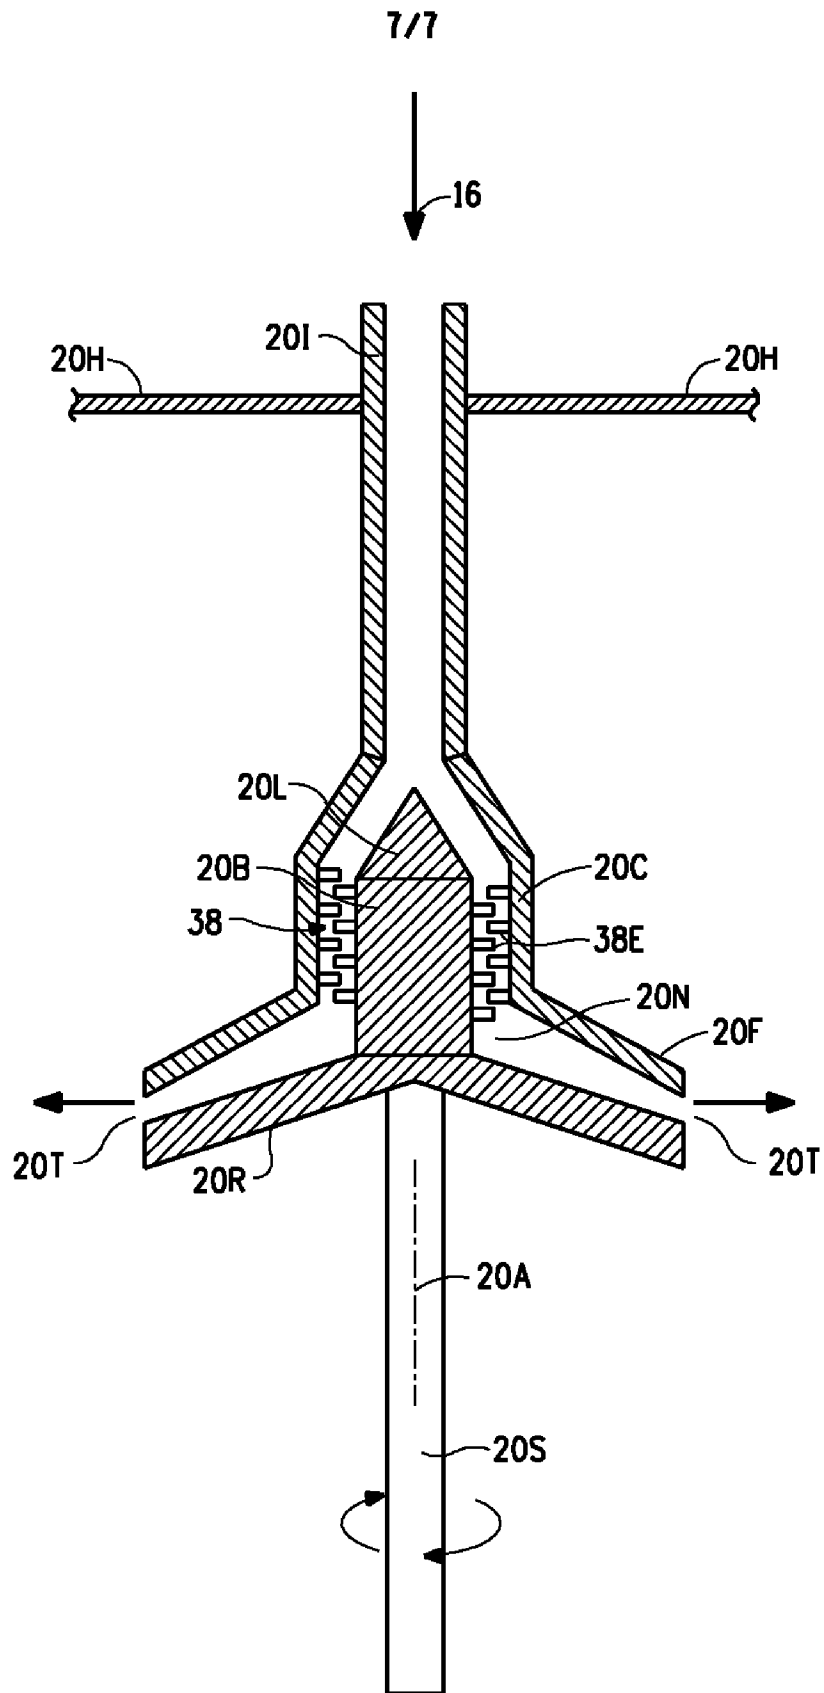


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/068614

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C12M1/33 B01F7/00 C08H8/00 C12M1/00 C13K1/02
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 C12M B01F C08H C13K C12P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 894 627 A (PETER WILLEMS) 26 April 1962 (1962-04-26) page 1, line 9 - line 70 page 2, line 74 - page 3, line 6 page 3, line 120 - line 126 page 6, line 126 - page 7, line 83 page 7, line 114 - page 8, line 97 page 10, line 119 - page 11, line 6 figures 1-3,11-15,21	1-15
A	----- EP 0 017 041 A1 (BAYER AG [DE]) 15 October 1980 (1980-10-15) claims 1-10; figures 1-17	1-15
A	----- US 2010/317053 A1 (STROMBERG BERTIL [US] ET AL) 16 December 2010 (2010-12-16) cited in the application paragraph [0024] - paragraph [0027]; figures 1,2 -----	1-15

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 14 February 2014	Date of mailing of the international search report 24/02/2014
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Cubas Alcaraz, Jose
--	---

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2013/068614

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 894627	A	26-04-1962	NONE
EP 0017041	A1	15-10-1980	DE 2911547 A1 25-09-1980
			EP 0017041 A1 15-10-1980
			JP S55128444 A 04-10-1980
			US 4313909 A 02-02-1982
US 2010317053	A1	16-12-2010	NONE