




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : B22D 15/04, 27/04, 27/09</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/27567 (43) International Publication Date: 18 May 2000 (18.05.00)</p>
<p>(21) International Application Number: PCT/SE99/02005 (22) International Filing Date: 5 November 1999 (05.11.99) (30) Priority Data: 9803794-8 6 November 1998 (06.11.98) SE (71) Applicant (for all designated States except US): VOLVO LASTVAGNAR AB [SE/SE]; S-405 08 Göteborg (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): LARSSON, Bengt-Åke [SE/SE]; Stångaättersgatan 4, S-541 70 Skövde (SE). SANDER, Bertil [SE/SE]; Pl. 1592, S-460 11 Nygård (SE). CARLSSON, Roland [SE/SE]; Brunnsvägen 15, S-541 77 Skövde (SE). DAHLBERG, Sven-Erik [SE/SE]; Pionvägen 10, S-541 39 Skövde (SE). (74) Agents: ANDERSSON, Per et al.; Albihns Patentbyrå Göteborg AB, P.O. Box 142, S-401 22 Göteborg (SE).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. In English translation (filed in Swedish).</p>	

(54) Title: METHOD AND DEVICE FOR CHILL MOULDING

(57) Abstract

A device for casting cast iron including a metal chill mould (100) having outer walls (206, 208, 210) and inner walls (212, 213, 220). The inner walls are in contact with a mould (300). The device further includes pressurising means (400) for applying a variable pressure on the outer walls (206, 208, 210) of the chill mould, in order to control changes in volume of molten material enclosed by the chill mould, and chill mould cooling means (500) for variable cooling of the inner walls (212, 213, 220) of said chill mould. A method using said device for carrying out the invention is also disclosed.

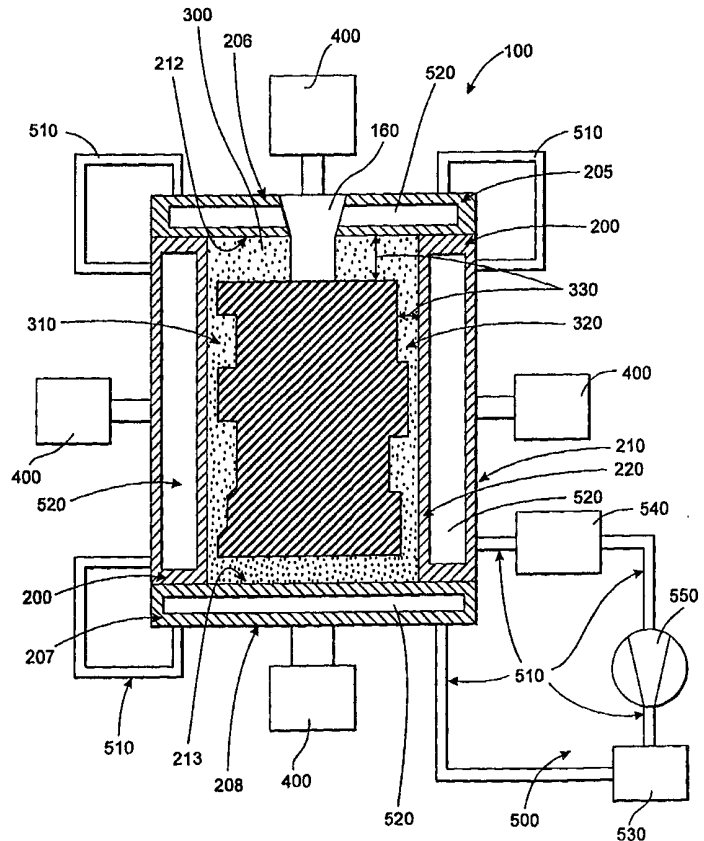

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND DEVICE FOR CHILL MOULDING

TECHNICAL FIELD

The present invention relates to a method and a device for chill moulding
5 cast iron.

BACKGROUND ART

A method and a device for the manufacture of cast iron parts by casting in a
stationary metal mould, which is lined with a layer of hardening moulding
10 material or green sand, is shown in SE-C-506508, which is hereby included
in the description as a reference. A tubular metal mould is used whereby a
tubular, upwardly open space in the mould is lined using an insulating form
material. Molten cast iron is filled from above, in such a way that the cooling
effect of the mould and lining gives a directional frontage of solidification from
15 the lower end of the lining and upwards to a feeder volume at the top for the
last of the iron to solidify.

The described method and device give excellent results for cast parts of even
thickness and relatively thin walls, such as cylinder linings, but are less
20 suitable for casting of parts with varying cross-section and more complex
geometry, where the rate of cooling will vary too much between different
parts of the casting. Demands for improved mechanical properties combined
with good ductility means that alloyed materials, which are traditionally used
for improving mechanical properties, can not be used as the workability will
25 be reduced due to the high carbide content and casting becomes difficult due
to its tendency to shrink.

DISCLOSURE OF INVENTION

Therefore, a general purpose of the invention is to provide a method and a
30 device for chill moulding of cast iron parts of varying cross-sectional area and
of relatively complex geometry, where the mechanical properties of the cast
material is not controlled and limited by the added alloying materials alone.

A further purpose of the casting method according to the invention is to provide increased possibilities for influencing the rate of cooling of the casting, primarily through the pearlite transformation temperature range, which makes it possible to improve the mechanical properties even further. An increased rate of cooling will also increase productivity, i.e. a larger number of cast parts per unit of time and production unit.

A further purpose of the invention is to fulfil high level environmental requirements, such as low emissions of pollutants, reduced use of energy, a clean working environment, reduced use of moulding material or sand, calculated per unit of weight for castings with a corresponding reduced need for depositing moulding material or sand and a significantly improved recovery of added energy.

According to the present invention, these purposes are achieved by a device for casting cast iron, which device includes a chill mould having outer walls and inner walls, wherein the inner walls are in contact with a mould, characterised in that said device also includes pressurising means for applying a variable pressure against the outer walls of said mould, as well as a chill mould cooling means for variable cooling of the inner walls of said metal chill mould.

The wall thickness of the mould is chosen so that the desired rate of heat transfer for the required mechanical properties of the cast part is achieved. The mould is preferably made of moulding material or green sand.

Furthermore, it is advantageous to include an hydraulic or a pneumatic press in said pressurising means for acting on the outer walls of the metal chill mould.

Said chill mould cooling means preferably includes a number of cooling circuits arranged in said metal chill mould, a coolant container, a heat exchanger and a coolant pump, whereby said coolant pump circulates a coolant through a coolant conduit interconnecting said cooling circuits with
5 said coolant container, said heat exchanger and said coolant pump.

These purposes are, according to the present invention, achieved by a method for manufacturing cast iron parts according to the invention, whereby a metal chill mould, having outer walls and inner walls and where the inner
10 walls are in contact with a mould, is filled with molten cast iron. The method is characterised in that pressurising means can apply a variable pressure against the outer walls of said metal chill mould, and that chill mould cooling means can variably cool the inner walls of said metal chill mould during the cooling of the casting.

15

Said mould is preferably made from a hardening moulding material or green sand. The thickness of the walls of the mould is chosen to achieve the required rate of cooling.

20 The casting method allows casting of materials having a low C-equivalent, as well as materials having high levels of carbide stabilising alloying materials used to obtain castings with a considerably higher flexural strength, fatigue strength and modulus of elasticity, which in all will give good mechanical properties.

25

By casting materials with a low C-equivalent and by adding moderate amounts of carbide stabilising alloying materials, a strong material, virtually free of carbides and with a good machinability, can be obtained.

30 The casting method will also give less dimensional scatter for the casting compared to conventional green sand casting.

BRIEF DESCRIPTION OF DRAWINGS

Preferred embodiments of the invention will be described in more detail below, with reference to the appended figure, wherein;

- 5 Fig. 1 shows a schematic cross-section of a device for chill mould casting of cast iron according to the invention.

MODE(S) FOR CARRYING OUT THE INVENTION

Fig. 1 shows a device 100 chill mould casting of cast iron according to the present invention. The device includes a rigid, thick-walled metal chill mould 100, with side elements 200, a top element 205 and a bottom element 207. Each of the side elements 200 has an outer wall 210, facing away from a mould cavity 150 into which molten cast iron is to be poured, and an inner wall 220, facing the mould 300. The top element 205 is provided with a corresponding outer side 206 and an inner side 212. Similarly, the bottom element 207 has an outer side 208 and an inner side 213. The thickness of the mould wall 330 is chosen so that a desired heat transfer rate is obtained. The mould material, wall thickness, pressure and temperature controls the heat transfer rate, whereby a thin wall will give a fast cooling rate and a thick wall a slow cooling rate. The mould 300 is produced by conventional methods, alternatively in a air-squeezing core machine, a core forming machine or by manual manufacture, using a hardening, insulating mould material, with a suitable known organic or inorganic binding agent, or green sand. The moulding is performed using a template which shapes the mould cavity 150. The thickness of the mould wall 330 is generated by conventional means, alternatively in the core box or by the height of the mould block. The mould 300 preferably includes a first mould part 310 and a second mould part 320. The mould parts 310 and 320 are joined by means of an adhesive or a bolt connection after the core has been assembled, should a core be required. The mould 300 is placed in the chill mould 100 whereupon the side elements 200, the top element 205 and the bottom element 207 of the chill mould 100 closes around the mould 300 by pressurising one or more

pressurising means 400. Molten material is poured into the mould through an inlet port 160 which is connected to the mould cavity 150. The inlet port is made by conventional methods.

5 In this way it is possible to apply variable pressure on the side elements 200, the top element 205 and the bottom element 207 of the chill mould, using pressurising means 400 arranged in connection with the chill mould. The pressurising means 400 preferably include hydraulic or pneumatic presses arranged to act on the outer walls, 206, 208 and 210 respectively, of the chill
10 mould. During solidification of the molten material in the chill mould 100 volume reductions (e.g. during forming of austenite) and increases (e.g. during forming of graphite) will occur during different phase transformations. These changes in volume will be larger or smaller depending on factors such as the relationship in size between the molten material, the mould and cores,
15 if any, as well as the chemical composition of the basic material, inoculation, treatment of the smelt, etc. . By making it possible to control the pressure applied to the outer walls, 206, 208 and 210 respectively, of the chill mould, it is also possible to partially control the force by which residual molten material is transferred from areas of increasing volume to areas of decreasing
20 volume, without being forced into the mould or core, nor causing shrinkage porosity.

The device according to the invention is also provided with variable cooling by a chill mould cooling means 500, which acts on the inner walls of the chill
25 mould 212, 213 and 220 respectively. The chill mould cooling means 500 includes several, preferably six, cooling circuits 520 arranged in or on the side elements 200, top element 205 and bottom element 207 of the chill mould. The chill mould cooling means 500 preferably includes a coolant container 530, in which a coolant such as water is stored, a heat exchanger
30 540 for recovering heat from the coolant and a coolant pump 550 for circulating the coolant through a coolant conduit to and from the coolant circuits 520.

The mould cavity 150 is cooled by the coolant in the chill mould 100 during the entire casting process. The rate of cooling is regulated by the heat transfer rate of the mould wall 330, the heat transfer rate of the inner wall 220
5 of the chill mould, the mould cavity 150 and the temperature of the coolant. The heat transfer is also affected by the pressurisation of the pressurising means 400. The rate of cooling is controlled during the entire cooling process, until the pearlite transformation has been completed, to achieve the desired mechanical properties for the casting; a high cooling rate will give a
10 high strength. The cooling rate through the pearlite transformation phase can be increased by opening the chill mould when the temperature of the casting is above the temperature for pearlite transformation. The air cooling which will then occur, increases the cooling rate further giving an even higher strength. On the other hand, the cooling rate can also be reduced by opening
15 the chill mould when the temperature of the casting is in the austenite range. Immediately after the opening the casting is immersed in and covered by an insulating medium and is kept in this state until the temperature of the casting has dropped below the pearlite transformation temperature. This method can also be used for reducing stresses in the cast part, but the casting must then
20 be kept in the insulating medium until its temperature is lower than 200 °C, in the case of cast iron. The opening of the chill mould can take place before or after the pearlite transformation phase, depending on the material properties desired.

25 The invention is not limited to the embodiments shown in the figure or described above, but can be modified within the scope of the appended claims. It is, for instance, possible to construct the mould in more than two mould parts, e.g. by using three or four parts assembled into one mould unit.

CLAIMS

1. A device for casting cast iron including a metal chill mould (100) having
5 outer walls (206, 208, 210) and inner walls (212, 213, 220), which inner walls
are in contact with a mould (300), characterized in that said device
further includes pressurising means (400) for applying a variable pressure on
the outer walls (206, 208, 210) of the chill mould, and chill mould cooling
10 means (500) for variable cooling of the inner walls (212, 213, 220) of said
chill mould.
2. A device according to claim 1, characterized in that said
pressurising means (400) includes hydraulic or pneumatic presses arranged
to act on the outer walls (206, 208, 210) of said chill mould.
15
3. A device according to claims 1 or 2, characterized in that said
chill mould cooling means (500) includes several cooling circuits (520)
arranged in said chill mould (100), a coolant container (530), a heat
exchanger (540) and a coolant pump (550), whereby said coolant pump
20 circulates a coolant through a coolant conduit (510) connecting said coolant
circuits (520) with each other and with said coolant container (530), said heat
exchanger (540) and said coolant pump (550).
4. A device according to claims 1 to 3, characterized in that the
25 wall (330) of said mould has a thickness chosen so that a desired rate of heat
transfer is obtained, in order to achieve desired mechanical properties in the
cast material.
5. A device according to claims 1 to 4, characterized in that said
30 mould (300) is made of a hardening mould material or green sand.

6. A method for making iron castings, wherein a metal chill mould (100), having outer walls (206, 208, 210) and inner walls (212, 213, 220) and where said inner walls are in contact with a mould (300), is filled with molten cast iron, characterized in that pressurising means (400) acts with
5 variable pressure on the outer walls (206, 208, 210) of said metal chill mould, and that chill mould cooling means (500) variably cools the inner walls (212, 213, 220) of said chill mould during cooling of the casting.
7. A method according to claim 6, characterized in that said
10 mould (300) is made of a hardening mould material or green sand.
8. A method according to claim 6 or 7, characterized in that said pressurising means (400) includes hydraulic or pneumatic presses arranged to act on the outer walls (206, 208, 210) of said chill mould.
15
9. A method according to claims 6 to 8, characterized in that said chill mould cooling means (500) includes several cooling circuits (520) arranged in said chill mould (100), a coolant container (530), a heat exchanger (540) and a coolant pump (550), whereby said coolant pump
20 circulates a coolant through a coolant conduit (510) connecting said coolant circuits (520) with each other and with said coolant container (530), said heat exchanger (540) and said coolant pump (550).
10. A method according to claims 6 to 9, characterized in that the
25 wall (330) of said mould (300) has a thickness chosen so that a desired rate of cooling of the casting is obtained,

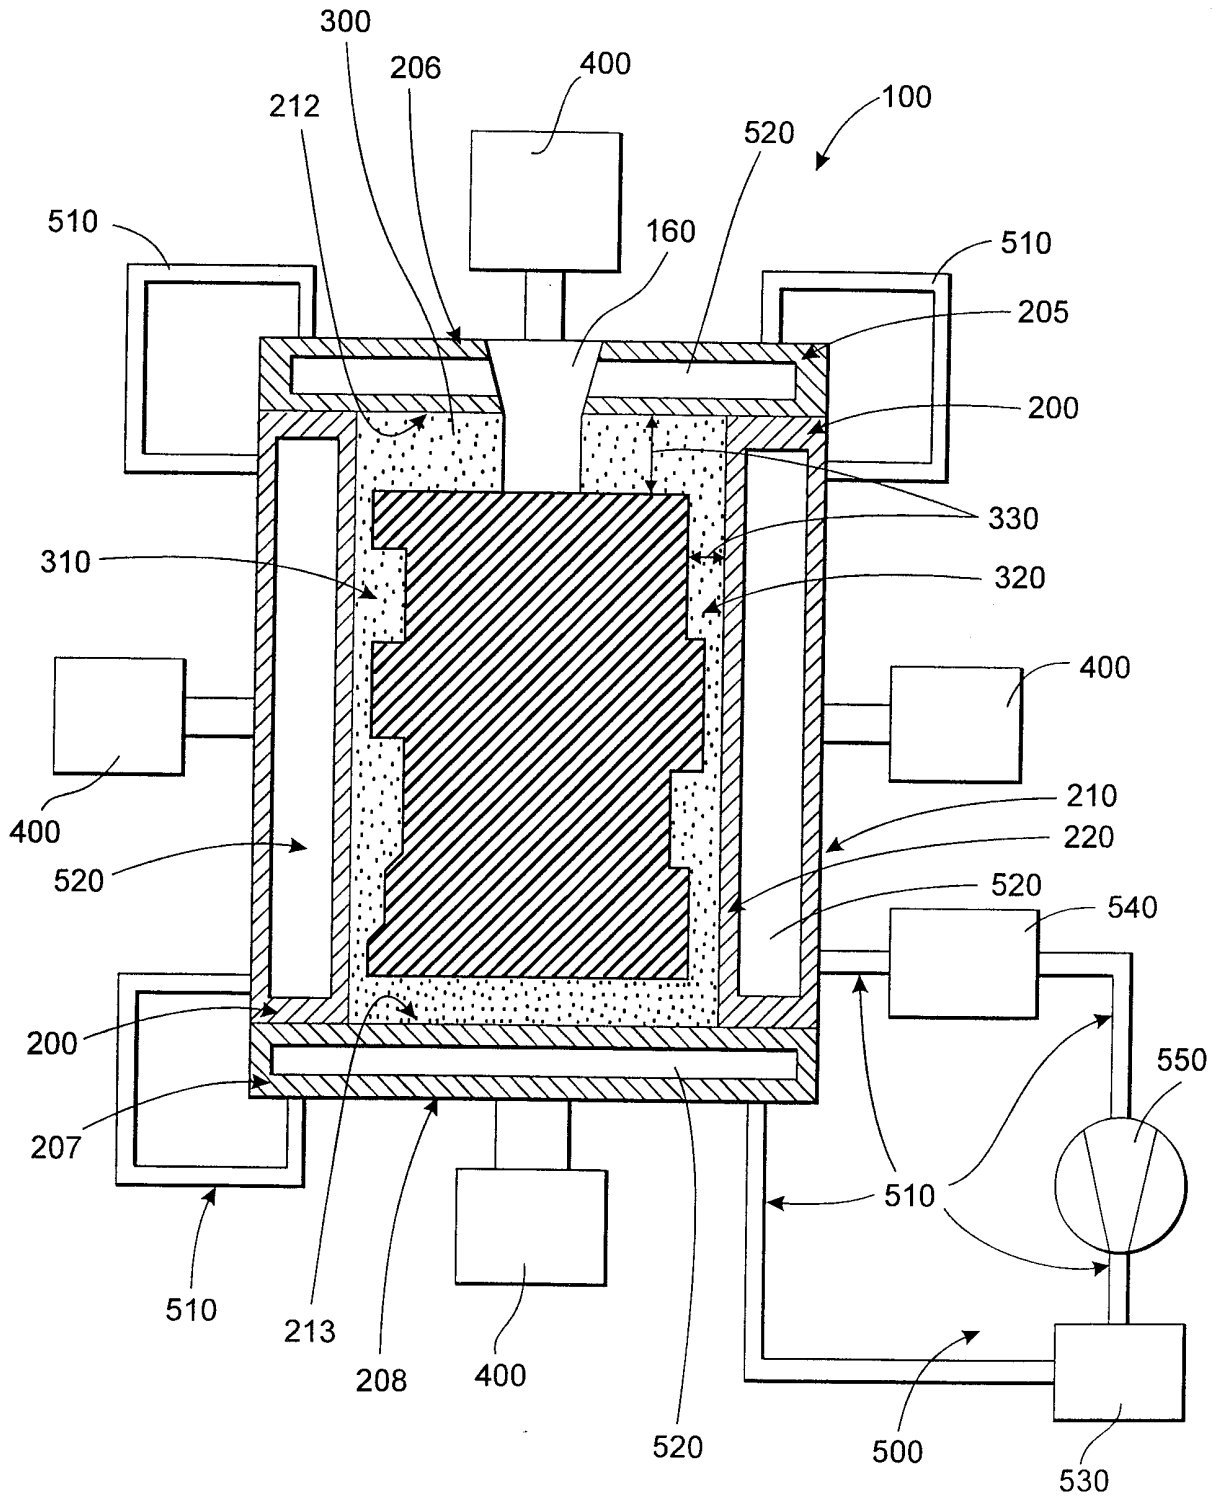


Fig. 1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 99/02005

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B22D 15/04, B22D 27/04, B22D 27/09
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B22C, B22D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4085790 A (ADALBERT WITTMOSER), 25 April 1978 (25.04.78), figure 3B, claim 1, abstract --	1-10
A	US 5744173 A (ROBERT A. STERETT), 28 April 1998 (28.04.98), figure 4, claims 15-17, abstract --	1-10
A	Derwent's abstract, No 1984-268966, week 198443, ABSTRACT OF SU 1079353 A (MOSC AUTOMECH INST), 15 March 1984 (15.03.84) --	1-10
A	SE 435243 B (ASEA AB), 17 Sept 1984 (17.09.84), figure 1 --	1-10

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
10 February 2000	17-02-2000
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Mårten Hulthén/MP Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 99/02005

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	WO 9919099 A1 (ASEA BROWN BOVERI AB), 22 April 1999 (22.04.99), figure 1, claim 1 -- -----	1-10

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE 99/02005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4085790 A	25/04/78	CA 1051631 A DE 2519463 A FR 2309289 A,B GB 1538540 A JP 1265384 C JP 51133135 A JP 59040534 B US 4068704 A	03/04/79 11/11/76 26/11/76 24/01/79 27/05/85 18/11/76 01/10/84 17/01/78
US 5744173 A	28/04/98	JP 11507300 T US 5944087 A WO 9731733 A	29/06/99 31/08/99 04/09/97
SE 435243 B	17/09/84	SE 8101868 A	25/09/82
WO 9919099 A1	22/04/99	AU 9470398 A SE 510712 C SE 9703709 A	03/05/99 14/06/99 14/04/99