

(19) **DANMARK**

(10) **DK/EP 2304135 T3**



(12) **Oversættelse af
europæisk patentskrift**

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **E 05 B 19/00 (2006.01)** **E 05 B 27/00 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2017-07-24**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2017-04-05**
- (86) Europæisk ansøgning nr.: **09767505.2**
- (86) Europæisk indleveringsdag: **2009-06-11**
- (87) Den europæiske ansøgnings publiceringsdag: **2011-04-06**
- (86) International ansøgning nr.: **US2009047001**
- (87) Internationalt publikationsnr.: **WO2009155195**
- (30) Prioritet: **2008-06-18 US 141427**
- (84) Designerede stater: **AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR**
- (73) Patenthaver: **Medeco Security Locks, Inc., 3625 Allegheny Drive , P.O. Box 3075, Salem, Virginia 24153, USA**
- (72) Opfinder: **FIELD, Peter, H., P.o. Box 104, Salem, VA 24153, USA**
POFF, Steve, 1709 Becky's Place, Roanoke, VA 24018, USA
- (74) Fuldmægtig i Danmark: **Plougmann Vingtoft A/S, Rued Langgaards Vej 8, 2300 København S, Danmark**
- (54) Benævnelse: **LÅSESYSTEM OG FREMGANGSMÅDE TIL AT BETJENE EN LÅS**
- (56) Fremdragne publikationer:
EP-A1- 0 534 589
EP-A1- 0 780 530
WO-A1-2008/121336
CH-A- 355 710
DE-A1- 1 928 504
DE-A1- 4 304 604
US-A- 5 809 816

DESCRIPTION

FIELD OF THE INVENTION

[0001] This invention relates to lock systems and methods for operating locks and in particular relates to improvements in keys, key blanks, keyways, and lock cylinders, with regard to defining the profiles of keys, key blanks, and keyways using the shapes of ridges or grooves in a generally flat rectangular key blade profile. The shape of the key blank and key, of course, determines the shape of the keyway in a lock cylinder plug.

BACKGROUND AND PRIOR ART

[0002] The lock cylinders art is requiring higher and higher security and there is a need in the art for the development of a shape or profile of a cross section of key and corresponding shape of the keyway in the cylinder plug to accommodate a hierarchical lock providing high security. The shape of the keyway is the first barrier that rejects or filters an unauthorized key in attempt to operate the lock cylinder.

[0003] There is only a finite space in a lock cylinder plug that can be occupied by the key and that space must be structured to allow for the maximum number of unique keyway shapes to be able to develop lock systems of adequate size. In large modern lock systems it is usual to arrange the structure of the keyways in a manner so that a least three levels of a hierarchical system can be provided, with one master key blank at the top level of the system, some sub-master key blanks at a medium level and several change key blanks at the lowest level of the hierarchical system. A new key section design must be different from prior key sections so that the key blanks can be controlled by the manufacturer and the end user can benefit from the security offered by the exclusivity of this key control via the key blanks.

[0004] Unique key profile shapes provide for additional protection against unauthorized key copying. Most key blanks of the generally flat rectangular key profiles are manufactured with single pass formed milling cutters that shape the side of the key blank. The axis of rotation of the cutter is held parallel to the side of the blade. Keys using an undercut groove profile require additional form cutting on specially designed machines that are usually not available at commercial duplicator operations and thus the blanks are more difficult to copy or counterfeit.

[0005] Early in the development of lock cylinders, it became apparent that there were specific parameters that affected the size of the lock cylinder systems that could be developed and that there were many design factors that influenced the wear of the key and the cylinder and thus the longevity of the system. Key blanks were designed with these parameters in mind. Representative examples of the prior art include the following:

[0006] In US PAT 0263244, Taylor discloses a key blank design that offers an economically simple solution to the problem of having a key that moves too freely in the keyhole. This offers a very minimal keyway shape in the plug and key profile in the blank.

[0007] In US PAT 0420174, Taylor teaches a unique but limited master keying technique that uses a Y shaped key section in a plug that allows two differently shaped key profiles to contact their own areas of the non rotating tumbler pins.

[0008] In US PAT 0567305, Donavan discloses a method of expanding the number of key sections, thus increasing the available size of lock systems, by dividing the key blank height into various areas and using consistent warding techniques at these locations to develop hierarchical keyways or key profiles. This increases the system size of pin tumbler cylinders. The bittings of one key can be repeated on a different key blank, configured with a different key profile, and the cylinders into which these individual keys fit can also be operated by a higher level key designed to insert into both of the keyways.

[0009] In US PAT 0608069, Noack discloses an arrangement of key section warding that provides improved wear on the key and the key contact area on the tip of the locking pins. In addition it provides a narrow cross sectional width under the bitting area, thus making it difficult to manipulate pick tools under the tumbler pins.

[0010] In US PAT 3499304, M. Noujoks teaches a method of designing key section warding where both faces of the keys are provided with alternating ridges and grooves. It utilizes a master key blank that has all the grooves of the series but not the ridges, while the key blanks of a lower hierarchical level have varying ridges.

[0011] In US PATs 4168617 and 4368629, Prunbauer discloses more methods of designing key section warding where the master key will fit into the subordinate keyways but the lower keys will not fit into the master keyways. In one embodiment, the ridges and grooves defining the key section are of a rectangular cross-section shape, and the outwardly projecting variable ridge on the subordinate key extends laterally beyond any of the other variable ridges. The subordinate key is thicker at its further ridge than the master key is at any location. In another embodiment the master key is formed of a zigzag shape, that is with its opposite sides formed of a plurality of planer facets each of which is substantially parallel to a respective planer facet on the other side.

[0012] In US PAT 4416128, Steinbrink teaches another unique method of designing key sections where the longitudinal grooves on both sides of the key blank are formed with bottom faces that lay substantially along the arc of a circle.

[0013] In US PAT 4653298, Tietz discloses a method of designing master key section warding that incorporates an invariable or family profile near the bitting area on the blank, and the variations defining the individual key sections are located near the spline or bottom edge of the blank. Additionally there are at least two profile formations that cross a center line in the key

blank, one ridge is extending beyond the surface of the blank, and the variations are made with longitudinal grooves having rectangular cross sections.

[0014] In US PAT 4683740, Errani illustrates a key section design that has a undercut groove shape making it very difficult to manipulate a pick tool in the keyway of the plug. The undercut groove is formed by means of cutters having their rotational axis inclined in relation to the sides of the key blank.

[0015] In US PAT 5715717 and 5809816, Widen teaches some very specific methods of designing key sections using a three sided undercut groove located closest to the bottom edge of the key blank and extending inwardly inclined towards the bottom of the key blank, or using an undercut groove with a substantially flat surface which is inclined towards the groove bottom surface.

[0016] In US PAT 6145357, Stefanescu teaches a method of designing master key section warding that utilizes a key blank with a T-shaped cross sectional area with all the profile ribs having specific curvilinear cross sectional contours, with rounded front and flank portions.

[0017] In US PAT 6851292, Kruhn discloses a method of designing lock and key warding that incorporates specific perpendicular groove surfaces on one side of the key section, and slanting surfaces on the other side that are positioned in a relationship designed to trap, or limit the motion of a picking tool inserted into the key way.

Document WO 2008/121336 A1 having an international publication date that is after the priority date of the present application, describes a key blank or key having a blade on which the sides of the blade have a portion grooved for registration, another portion grooved for top-level hierarchical master keying, and two other portions, one on each side of the blade, for further master key variations and different combinations. One of the two further sections is curvilinear in shape and the other comprises rectangular or angular cuts.

Document EP 0 780 530 A1 describes a cylinder lock with a keyway having a V-shaped bend. A portion of one side of the keyway has curved ridges, but no curved grooves. Document CH 355710 describes various keys having longitudinal grooves extending along both sides. Each of the keys has either straight angular or rectangular grooves and ridges on both sides of the key blade or curved grooves and ridges on both sides of the key blade. Document DE 43 04 604 A1 describes a lock-assembly system including keys with a ranking of keys into individual keys and overriding keys in accordance with profiles of the keys and the associated lock-cylinder keyways. The keys and associated keyways have grooves and corresponding ridges on the opposed sides the keys and keyways that are rounded.

[0018] While the prior art has developed usable key sections, they fail to maximize the area of the plug and do not allow for the development of many large master keying systems.

SUMMARY OF THE INVENTION

[0019] The above problems are solved by the present invention, by providing a lock system according to claim 1 or a method for operating a lock according to claim 9.

This invention provides specific parameters for key section profiles and the corresponding keyways in a cylinder plug that allows for the development of many exclusive and non-interchangeable hierarchical master key systems. In order to accomplish this, the keyway and conforming key blade are considered separately for three vertical sections from the bottom edge of the keyway and blade up to the top edge of the blade. Each of the three sections is contoured or formed with specific variations of ridges and grooves that establish the lock's and key blank's positions within a hierarchical system or systems. The first, bottommost section of the blade has a registry groove for the positioning of any secondary side milling operations used in the manufacture of the blank, and the keyway has a conforming ridge in its bottommost section. This registry groove in the blade also allows for exact positioning of the blank in a key cutting or biting machine. A second vertical section of the blade has at least one undercut longitudinal groove on at least one side of the blade, and the keyway has a conforming ridge or ridges in its second vertical section. The location and shape of the undercut groove in the second section of the blade determines the primary family of the hierarchical system. The third section of the blade, just below the biting surface, may be divided into two sides. One of these sides has a variation of the key section profile determined by using longitudinal grooves of curved shaped forms that are shifted up and down the side of the blade to create the necessary variations. The position and curved form of the profiles on this side determines the secondary and subgroups in the family of the hierarchical system. On the other side of the third, or topmost section, of the blade, the variations in the key section profiles are determined by using longitudinal grooves having substantially rectangular or straight angular cross sections that vary in depth into the side of the blade. The position and depth of the angular profiles on this third section determine the individual location in the subgroup in the hierarchical system. The third section of the keyway has conforming curved ridges and grooves on one side thereof and conforming straight angular or rectangular ridges on the opposite side thereof.

[0020] By using these different but specific warding techniques at defined sections and on different sides of the blade it is possible to develop a structured system to allow the maximum number of new and unique key profile shapes. Additionally, by reversing the warding structure from side to side of the blade within different sections, it is possible to significantly increase the already large number of non-interchangeable key systems available, each providing adequate system size for the demands of modern security cylinder users.

BRIEF DESCRIPTION OF THE DRAWINGS.

[0021]

FIG. 1 is a prospective view of a key blank

FIG. 2 is a cross-sectional view taken along line a-a of FIG 1 and enlarged.

FIGs. 3 through 9 are cross-sectional views of other key configurations on the sides of the key blanks.

FIG. 10 is an illustrative diagram of a simple three level hierarchical structure of keyways.

FIG. 11 a is a side view of a key inserted into a lock cylinder.

FIG. 11b is a cross-section along the line A-A of FIG. 11 a.

FIG. 11c is an end view of the lock cylinder of FIG. 11b, without the key inserted into the keyway.

FIG. 12a is a cross-section of a key and keyway along the line A-A in FIG. 11a, showing a different key and keyway than what is shown in FIG. 11 b.

FIG. 12b is an end view of the lock cylinder of FIG. 12a, without the key inserted into the keyway.

FIG. 13a is a cross-section of a key and keyway along the line A-A in FIG. 11a, showing a different key and keyway than what is shown in FIGs. 11b and 12a.

FIG. 13b is an end view of the lock cylinder of FIG. 13a, without the key inserted into the keyway.

FIG. 14a is a cross-section of a key and keyway along the line A-A in FIG. 11a, wherein the keyway is the same keyway shown in FIGs. 11b and 11c, and the key is a master key.

FIG. 14b is an end view of the keyway of FIG. 14a with an instrument inserted into the keyway for bypassing the profiles of the keyway.

FIG. 15a is a cross-section of a key and keyway along the line A-A in FIG. 11a, wherein the keyway is the same keyway shown in FIGs. 12a and 12b, and the key is the master key shown in FIG. 14a.

FIG. 15b is an end view of the keyway of FIG. 15a with an instrument inserted into the keyway for bypassing the profiles of the keyway.

FIG. 16a is a cross-section of a key and keyway along the line A-A in FIG. 11a, wherein the keyway is the same keyway shown in FIGs. 13a and 13b, and the key is the master key shown in FIGs. 14a and 15a.

FIG. 16b is an end view of the keyway of FIG. 16a with an instrument inserted into the keyway for bypassing the profiles of the keyway.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0022] FIG. 1 shows a prospective view of a key blank. The key blank has a head or bow 1 for holding and turning the key and a blade 2 for inserting into a keyway of a lock cylinder. The keyway of the lock cylinder has a profile matching the profile of the key blade. The key blade has a top surface 3 into which key bittings (not shown) are cut to position elements such as pin tumblers in a lock cylinder as is well known in the art, see for example the patent to Medeco Security Locks U.S. Patent No. 5,419,168. The blank has a bottom surface 4 and an end tip 5. The end tip 5 may have a stop or other configuration; see for example U.S. Patent No. 1,679,558.

[0023] The cross section of the key blank in one configuration is shown in FIG. 2. FIG. 2 shows the top of the key blank blade 3 and the bottom of the key blank blade 4 and as shown in phantom lines three different sections. Section A, B, C and C'. As shown, Section A is adjacent to the bottom of the blade, Section C and C' are adjacent to the top of the blade and Section B is in between Section A and Section C and C'.

[0024] Section A contains a groove 6 extending the length of the blade for registry purposes. When a key blank is being cut with bittings or machined for other grooves, registry groove 6 is used to provide a location for further operations relative to such groove.

[0025] In Section B there is an undercut groove 7 also extending the length of the blade. The undercut groove may be used to provide a first level in the hierarchical scheme for hierarchical master keying.

[0026] The area above the undercut groove is divided into the two sides C and C' and the shapes and configurations of the grooves and ridges extending along these two sides are established by distinctly different parameters. The shapes in Section C are determined by a base curvilinear shape 110 on which is overlaid a number of partial circular curves 121, 122, 123, 124, 125 and 126. These curves are all centered along the baseline 110. The curves can project either outwardly as convex ridges or inwardly as concave grooves from the baseline creating either curved longitudinal ridges or curved longitudinal grooves along the side of the blank of Section C and below the top surface 3. Similar families of curved shapes can be determined by variations in the base curvilinear shape 110, i.e., a different curvilinear shape 110 can function as a center line for the various circular curves. Subgroups of these secondary families may be predetermined by the presence of either curved ridges, e.g., 122, 124, 125, or curved grooves, e.g., 121, 123, 126, and also by moving the base curvilinear shape 110 either up or down the side of the blank in relation to the registry groove 6 in Section A.

[0027] The shapes of the side of the key blade in Section C' are determined by providing rectangular sections such as 134' and straight angular shapes such as 131, 132' and 133 and by varying the depths of these shapes into the side of the blank. There are a large number of other locations to provide grooves in Section C' on this side of the blank, for example areas 135", 136" and 137". The size of the grooves and the depths of the grooves that are formed in Section C' on this side of the blank determine the individual position of the key cut from the key blank in the family hierarchical structure.

[0028] FIG. 3 shows the same cross-sectional view of the key blank but illustrates the base curve 110 shifted vertically in relation to registry groove 6 to produce a profile 10 in Section C on one side of the blade. The rectangular and straight angular shapes in Section C' on the other side of the blade has variations, as compared to the key blank of FIG. 2, which define profile 50.

[0029] FIG. 4 illustrates another key blank variation in which the base curve 110 is positioned at a different height in relation to the registry groove 6 for cutting the area on the side in Section C producing a profile indicated at 11. The other side of the key blank in FIG 4 in Section C' has a profile 50 showing the differences in cutting grooves and producing ridges.

[0030] FIG. 5 is a further cross-sectional view of the key blank illustrating the base curve 110 producing profile 12 on Section C of the key blank and profile 50 on the other side in Section C' of the key blank. Profile 12 differs from profile 10 in FIG 3 and profile 11 in FIG 4 in that the base curve 110 is positioned at a different height relative to the registry groove 6.

[0031] FIG. 6 is a cross-sectional view of the key blank illustrating a profile 10 in Section C and profile 51 in Section C'. Profile 51 differs from profile 50 in that groove 132 projects deeper into the side of the blank than groove 132' of FIG 3.

[0032] FIG. 7 is a cross-sectional view of a key blank illustrating profile 10 on Section C of the key blank and profile 62 on the other side in Section C'. Profile 62 differs in that groove 141 projects into the side of the blank at a different straight angular shape than groove 131 in FIG 2.

[0033] FIG. 8 is a further illustration of a cross-sectional view of a key blank illustrating a profile 23 in one side of the biting area of the blade in Section C and profile 71 on the other side of the blade in Section C'. In Section C the base curve 110 is the same as shown in FIG. 2, however the curved groove 123 is changed to a curved ridge 123' and the curved ridge 122 is changed to a curved groove 122'. These changes produce a different sub-grouping of the secondary families of the key blank hierarchical structure. In Section C' of the blank in FIG. 8 there is no groove in the area 132" and there is a straight angular groove 135. The straight angular grooves 131, 133 and 135 determine the individual position of the blank in the hierarchical structure.

[0034] FIG. 9 is a cross-sectional view of another variation of the key blank showing profile 31 in Section C and profile 81 in Section C'. Base curve 210 of profile 31 determines the location of partial circular curves 221-227 that extend as curve grooves 224 or curve ridges 221, 222, 223, 225, 226, 227 along the length of the key blade. Secondary families of the curved shapes are determined by variations in the base curvilinear shape. The subgroups of these secondary families are determined by the presence of either curved ridges or curved grooves and by the position of the base curvilinear shape up or down the side of the blank in relation to the registry groove 6 in Section A. In profile 81 there are only two cut grooves 151 and 153 showing further

possible variations.

[0035] FIG. 10 is an illustrative diagram of a simple three-level hierarchical structure of keyways. A key blank that is configured to fit exactly in the top most key section 1000 is structured to also fit in all of the subordinate keyways. A key blank that is configured to fit exactly in one of the secondary level keyways, e.g., 1300, will also fit into all of the subordinate keyways 1310, 1320, 1330 of secondary level keyway 1300, but not into any of the third level keyways 1110, 1120, 1130 of secondary keyway 1100 or 1210, 1220, 1230 of secondary keyway 1200. The keys that will fit in the lowest level of the keyways Level 3 will not fit in any of the higher level keyways. This fit or not fit determination is accomplished not by the bitting at the top of the keys as is typical in prior art (although such could be used to further provide hierarchical structure) but, is provided by the grooves extending along the sides of the key blank as described above.

[0036] FIG. 11 a shows a cylinder lock 300 embodying aspects of the present invention into which a key 330, such as a key described above, is inserted in the keyway. Key 330 includes a bow 332 and a blade 334. The cylinder lock 300 may be part of a lock assembly further including a cylinder housing rotatably supporting the cylinder 300 as well as tumbler pins, sliders, and other mechanisms (not shown) for preventing rotation of the cylinder within the cylinder housing until a properly configured key or other instrument is inserted into the keyway to operate the lock.

[0037] FIG. 11b shows a cross-section of the key blade 334 inserted into the keyway 302 of the cylinder 300. Key blade 334 has a cross-section similar to that shown in FIG. 9, although key blades having cross-sections such as those shown in FIGs. 2-8 may also be used. As described above, the key blade 334 includes a first section near a bottom edge 335 of the blade having a groove 336 formed longitudinally along at least a portion of the blade 334. Groove 336, as described above, may be provided for registry purposes. A second section of the blade 334 includes a groove 338 formed longitudinally along at least a portion of the length of the blade. A third section extending to the top edge 337 of the blade 334 includes, on one side, straight angular grooves 340, 344 extending longitudinally along at least a portion of the blade and, on the opposite side, curved grooves and ridges 342, 346 formed longitudinally along at least a portion of the length of the blade. As described above, in the preferred embodiment, one side of the third section of blade includes only straight, angular, or rectangular grooves while the opposite side includes only curved grooves and ridges.

[0038] FIG. 11c shows an end view of the cylinder 300 without the key blade 334 inserted therein. The cylinder 300 includes the keyway 302 having an open bottom end 304 and a closed top end 306. A first section of the keyway 302, adjacent the bottom end 304, includes a ridge 308 conforming to the groove 336 formed in the first section of the blade 334. A second section of keyway 302 includes a ridge 310 conforming to groove 338 formed in the second section of the blade 334. The third section of keyway 302, extending to the top end 306 of the keyway, includes, on one side thereof, ridges 312, 316 conforming to grooves 340, 344, respectively, formed on one side of the third section of the blade 334 and, on the opposite side

of the keyway, ridges 314 and grooves 318 conforming to the grooves 342 and ridges 346, respectively, formed on the opposite side of the third section of the blade 334. In a preferred embodiment, ridges 312 and 316 formed on one side of the third section of the keyway 302 have only a straight angular shape (as shown) or a straight rectangular shape. The grooves 318 and ridges 314 formed on the opposite side of the keyway 302 in the third section have only curved shapes.

[0039] FIGs. 12a and 12b show an end view of a cylinder 300' having a keyway 302'. FIG. 12a shows the cylinder 300' with a key blade 334' inserted into the keyway 302'. The key blade 334' is substantially identical to the key blade 334 shown in FIG. 11b, except that the groove 340' formed in the third section of the key blade 334' has a slightly higher position relative to the bottom edge 335 than the groove 340 formed in the key blade 334. Similarly, the ridge 312' extending into the keyway 302' conforms to the groove 340' formed in the third section of the blade 334' and is positioned higher along the keyway 302' than the ridge 312 of the keyway 302 shown in FIG. 11c.

[0040] FIGs. 13a and 13b show an end view of a cylinder 300" having a keyway 302". FIG. 13a shows the cylinder 300" with a key blade 334" inserted into the keyway 302". The key blade 334" is substantially identical to the key blade 334 shown in FIG. 11b and the key blade 334' shown in FIG. 12a, except that the groove 340" formed in the third section of the key blade 334" has a slightly higher position relative to the bottom edge 335 than the groove 340' formed in the key blade 334' and the groove 340 formed in the key blade 334. Similarly, the ridge 312" extending into the keyway 302" conforms to the groove 340" formed in the third section of the blade 334" and is positioned higher along the keyway 302" than the ridge 312 of the keyway 302 shown in FIG. 11c or the ridge 312' of the keyway 302' shown in FIG. 12b.

[0041] FIG. 14a shows the cylinder 300 (as shown in FIG. 11b). As described above and shown in FIG. 11c, keyway 302 of cylinder 300 includes a first ridge 308 in the first section near the bottom 304 of the keyway, a ridge 310 in a second section of the keyway, and in a third section of the keyway extending to the top end 306, ridges 312 and 316 formed on one side of the keyway and curved grooves 318 and ridges 314 formed on the opposite side of the third section of the keyway. FIG. 14a shows a key blade 350 inserted into the keyway 302. Key blade 350 is essentially identical to key blade 334 shown in FIG. 11b and includes a groove 336 in a first section, a groove 338 in a second section, groove 334 formed in one side of a third section of the blade and grooves 342 and ridges 346 formed in the opposite side of the third section of the blade. Blade 350 differs from blade 334 in that, instead of having a groove 340 in the third section conforming to ridge 312 of the keyway 302, key blade 350 includes an enlarged groove 352 that accommodates the ridge 312 with excess room to spare.

[0042] FIG. 15a shows the key blade 350 inserted into the keyway 302' of cylinder 300', and FIG. 16a shows the key blade 350 inserted into the keyway 302" of cylinder 300". As can be seen in the figures, the enlarged groove 352 formed in the key blade 350 accommodates all of the ridges 312, 312', 312". Accordingly, key blade 350 is a master key blade that will operate any of the cylinders 300, 300', 300".

[0043] A top edge of the blades 334 and 350 may have biting formed therein for positioning tumblers within the cylinder for operating the lock.

[0044] FIGs. 14b, 15b, and 16b show lock cylinders 300, 300', 300", respectively, with a lock bypassing instrument 360 inserted into the keyway of each of the cylinders. More specifically, the instrument 360 includes a blade-like projection adapted to be inserted into the keyway, wherein the projection is sufficiently thin to fit into the keyways between the ridges of the keyway. The instrument 360 may have other features formed therein, such as biting for positioning tumbler pins and a side projection for operating a slider within the keyway. Instrument 360 may thus be inserted into the keyway 302, 302', 302" and rotated to operate cylinder 300, 300', 300", respectively. Thus, the instrument 360 may be used to illicitly bypass the security provided by the unique combination of grooves and ridges formed in the keyway which is intended to be opened only by a properly conforming key having conforming grooves and ridges. The illustrated embodiment is exemplary. The instrument used to open the lock may take forms different from that shown in FIGs. 14b, 15b, and 16b and may comprise two or more pieces used in conjunction to open the lock as opposed to the single integrally-formed device (instrument 360) shown.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [US0263244A](#) [0006]
- [US0420174A](#) [0007]
- [US0567305A](#) [0008]
- [US0608069A](#) [0009]
- [US3499304A](#) [0010]
- [US4168617A](#) [0011]
- [US4368629A](#) [0011]
- [US4416128A](#) [0012]
- [USPAT4653298A](#) [0013]
- [USPAT4683740A](#) [0014]
- [US5715717A](#) [0015]
- [US5809816A](#) [0015]
- [US6145357A](#) [0016]

- US6851292B [0017]
- WO2008121336A1 [0017]
- EP0780530A1 [0017]
- DE4304604A1 [0017]
- US5419168A [0022]
- US1679558A [0022]

Patentkrav**1. Låsesystem omfattende:**

5 mindst en lås (300, 300', 300"), der har en kilegang (302, 302', 302") til at modtage et nøgleblad af en nøgle, hvor låsen er en del af en låseanordning, der inkluderer et cylinderhus, der roterbart støtter en cylinder samt stifte, skydere og andre mekanismer til at forhindre rotation af cylinderen i cylinderhuset indtil en korrekt konfigureret nøgle eller andet instrument er indsat i kilegangen for at betjene låsen, og

10 mindst en nøgle (330), der inkluderer et generelt fladsidet blad (334, 334', 334", 350), hvilket blad har en topkant (337), en bundkant (335), og modstående sider, hvor bladet er konfigureret til at blive indsat i kilegangen af låsen og til at gøre det muligt for en bruger at betjene låsen med nøglen,

15 **kendetegnet ved at** kilegangen er inddelt i tre eller flere afsnit langs sin højde, hvilke afsnit omfatter:

et første afsnit (A), der har en ribbe (308), der fremspringer ind i kilegangen og tilpasser sig til en registerrille af et nøgleblad;

20 et andet afsnit (B), der har en ribbe (310), der fremspringer ind i kilegangen; og

et tredje afsnit (C, C'), der har på en første side deraf kun krumme ribber (314) og riller (318) og på en anden side deraf ribber (312, 312', 312", 316), der fremspringer ind i kilegangen med kun i alt væsentligt rektangulære eller ligekantede former.

25

2. Låsesystemet ifølge krav 1, hvor nøglebladet (334, 334', 334", 350) er inddelt i tre eller flere afsnit mellem bundkanten (335) og topkanten (337), og hvor afsnittene omfatter:

et første afsnit, der har en registerrille (336), der tilpasser sig ribben (308) dannet i det første afsnit af kilegangen;

et andet afsnit, der har en rille (338), der tilpasser sig ribben (310) dannet i det andet afsnit af kilegangen; og

- 5 et tredje afsnit, der har på en første side deraf kun krumme langsgående riller (342) og ribber (346), der begge tilpasser sig henholdsvis ribberne (314) og rillerne (318) af den første side af det tredje afsnit af kilegangen, og på en anden side deraf riller (340, 340', 340", 344, 352) med kun i alt væsentligt rektangulære eller ligekantede former og der tilpasser sig til
- 10 ribberne (312, 312', 312", 316) af den anden side af det tredje afsnit af kilegangen.

3. Låsesystemet ifølge krav 2, hvor de tre afsnit (A, B, C, C') af nøglebladet er tilstødende hinanden, det første afsnit (A) starter ved bundkanten af nøglebladet og strækker sig opad, det andet afsnit (B) tilstøder det første afsnit og i midten af nøglebladet, og det tredje afsnit (C, C') mellem det andet afsnit og topkanten af nøglebladet.

4. Låsesystemet ifølge krav 2, omfattende to eller flere nøgler, hvor mindst en rille eller ribbe i mindst et afsnit af bladet af en nøgle er forskudt op eller ned i forhold til en bundkant (335) af nøglebladet sammenlignet med positionen af en lignende konfiguration på det andet blad for at skabe variationer i nøgle-råemner i et hierarkisk låsesystem.

5. Låsesystemet ifølge krav 2, omfattende to eller flere nøgler, hvor de i alt væsentligt rektangulære eller ligekantede former dannet i det tredje afsnit (C, C') af et blad er af forskellige dybder og forskellige vinkler sammenlignet med det andet blad for at skabe yderligere variationer i nøgleblad i et hierarkisk låsesystem.

6. Låsesystemet ifølge krav 2, hvor rillen (338) dannet i det andet afsnit (B) er en underskåren rille, der strækker sig langs en længde af bladet.
7. Låsesystemet ifølge krav 2, omfattende to eller flere nøgler, hvor mindst en rille i mindst et afsnit af bladet af en nøgle er forskudt op eller ned i forhold til en bundkant (335) af nøglebladet sammenlignet med positionen af en lignende rille på det andet blad for at skabe variationer i nøgle-råemner i et hierarkisk låsesystem, hvilket system yderligere omfatter mindst en lås med en kilegang, der tilpasser sig hver af de to eller flere nøgler.
- 10
8. Låsesystemet ifølge krav 1, yderligere omfattende en universalnøgle, der tilpasser sig alle kilegange af låsesystemet.
9. Fremgangsmåde til at betjene en lås omfattende:
- 15 at tilvejebringe en lås (300, 300', 300"), der har en kilegang (302, 302', 302") til at modtage et nøgleblad af en tilpassende nøgle, hvor låsen er en del af en låseanordning, der inkluderer et cylinderhus, der roterbart støtter en cylinder samt stifte, skydere og andre mekanismer til at forhindre rotation af cylinderen i cylinderhuset, indtil en korrekt konfigureret nøgle
- 20 eller andet instrument indsættes i kilegangen for at betjene låsen;
- at tilvejebringe en tilpassende nøgle (330) eller et lås-omledningsinstrument (360), der inkluderer mindst en del deraf konfigureret til blive indsat i kilegangen af låsen og til at gøre det muligt for en bruger at betjene låsen med instrumentet; og
- 25 at manipulere nøglen eller instrumentet til at betjene låsen,
- kendetegnet ved at** kilegangen indeles i tre eller flere afsnit langs sin højde, hvor afsnittene omfatter:
- et første afsnit, der har en ribbe (308), der fremspringer ind i kilegangen og der tilpasser sig til en registerrille af et nøgleblad;

et andet afsnit, der har en ribbe (310), der fremspringer ind i kilegangen; og

5 et tredje afsnit, der har på en første side deraf kun krumme ribber (314) og riller (318) og på en anden side deraf ribber (312, 312', 312", 316), der fremspringer ind i kilegangen med kun i alt væsentligt rektangulære eller ligekantede former.

10. Fremgangsmåden ifølge krav 9, omfattende trinnene at tilvejebringe den tilpassende nøgle (330), indsætte en del af nøglen i kilegangen (302, 302', 302"),
10 og manipulere nøglen til at betjene låsen, hvor delen af den tilpassende nøgle konfigureret til blive indsat i kilegangen omfatter et blad (334, 334', 334", 350) omfattende en topkant (337), en bundkant (335) og modstående sider til at modtage riller og ribber, der definerer en tværsnitsform af delen og inddeles i tre afsnit mellem bundkanten og topkanten, og hvor afsnittene omfatter:

15 et første afsnit, der har en rille (336), der tilpasser sig ribben (308) af det første afsnit af kilegangen,

et andet afsnit, der har en rille (338), der tilpasser sig ribben (310) af det andet afsnit af kilegangen; og

20 et tredje afsnit, der inkluderer en første side med kun krumme ribber (346) og riller (342) der tilpasser sig til de henholdsvis krumme riller (318) og ribber (314) af den første side af det tredje afsnit kilegangen, og en anden side, der har riller (340, 340', 340", 344, 352) med kun i alt væsentligt rektangulære eller ligekantede former, der tilpasser sig til ribberne (312, 312', 312", 316) af den anden side af det tredje afsnit af kilegangen.

25

11. Fremgangsmåden ifølge krav 9, omfattende trinnene at tilvejebringe låsomledningsinstrumentet (360), indsætte en del af instrumentet i kilegangen (302, 302', 302"),
30 og manipulere instrumentet til at betjene låsen, hvor delen af instrumentet konfigureret til at blive indsat i kilegangen er tilstrækkeligt tyndt til at passe i kilegangen mellem ribberne (314, 312, 312', 312", 316) af kilegangen.

12. Fremgangsmåden ifølge krav 11, hvor instrumentet (360) omfatter en enkelt, integreret formet indretning.

DRAWINGS

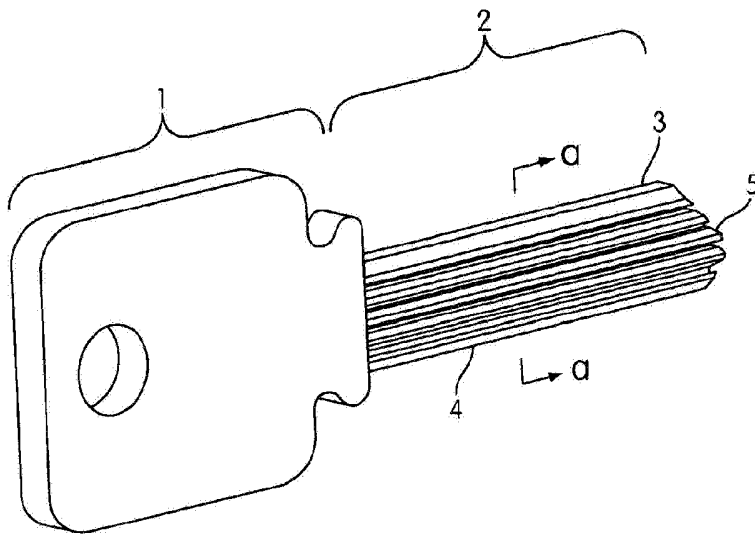


FIG. 1

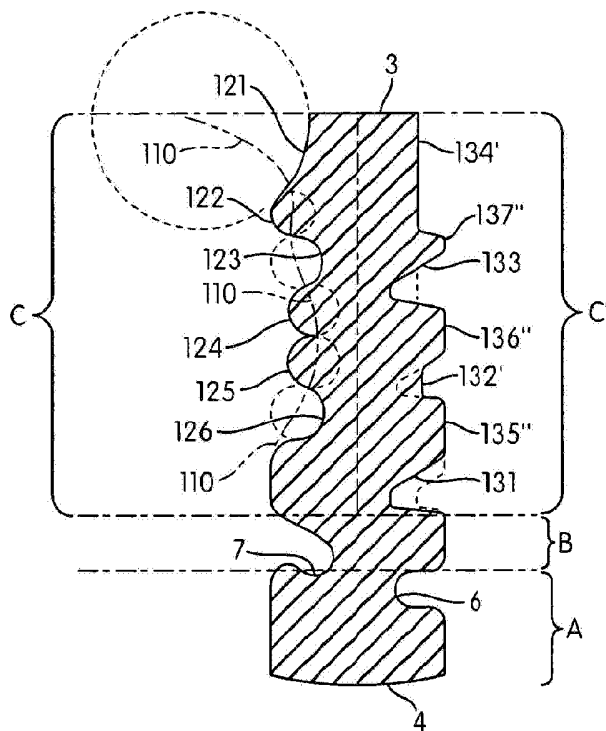
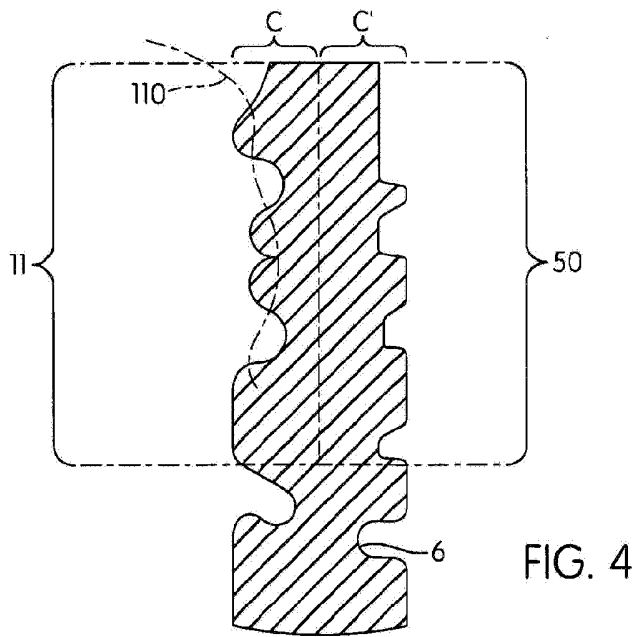
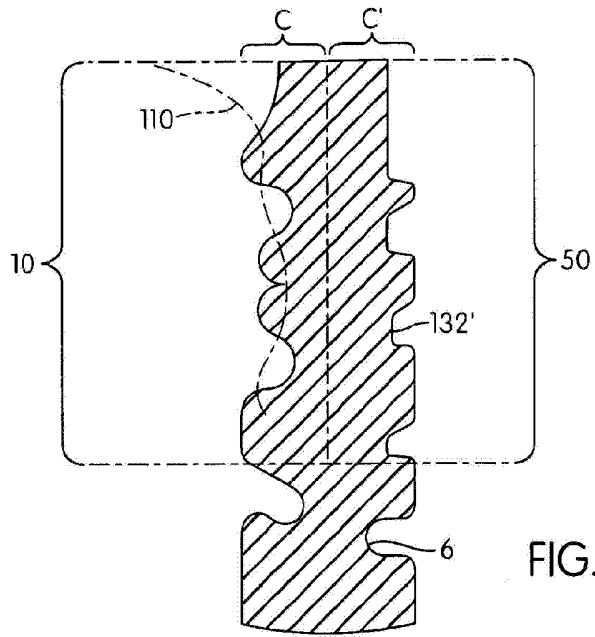
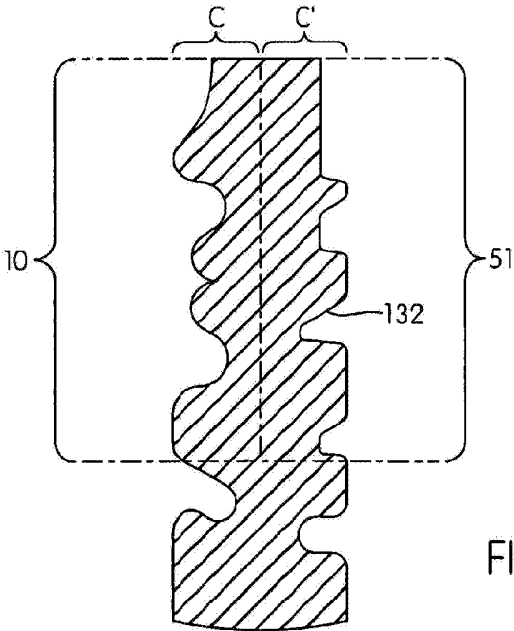
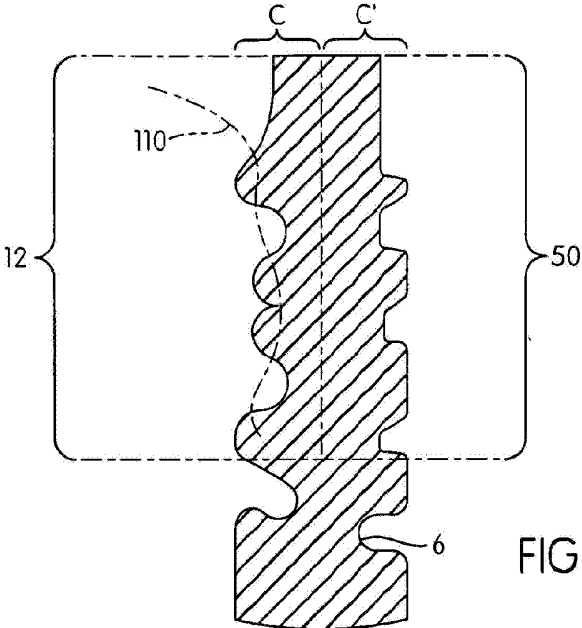


FIG. 2





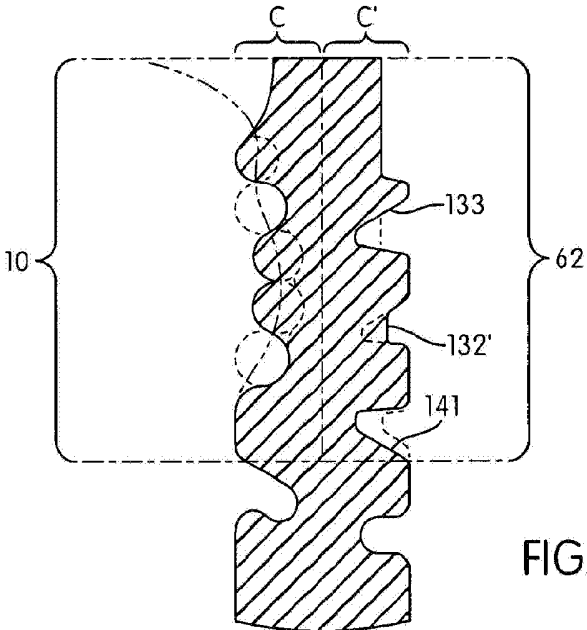


FIG. 7

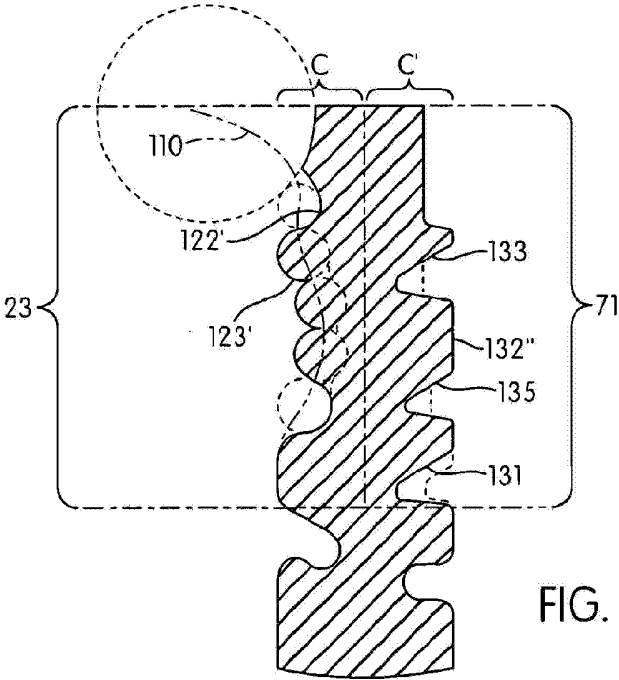


FIG. 8

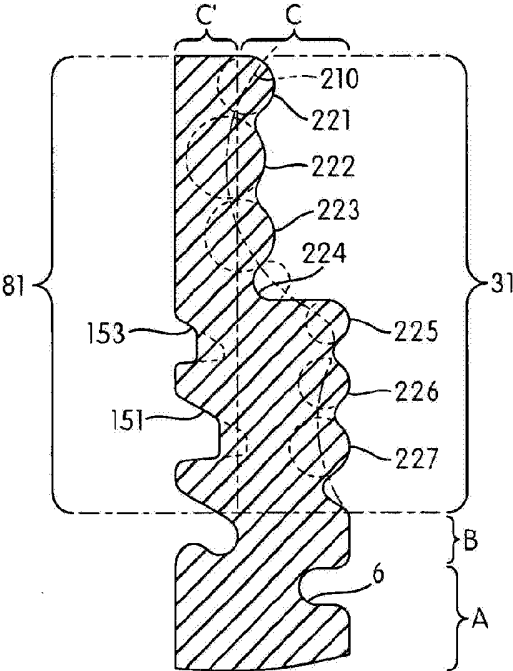


FIG. 9

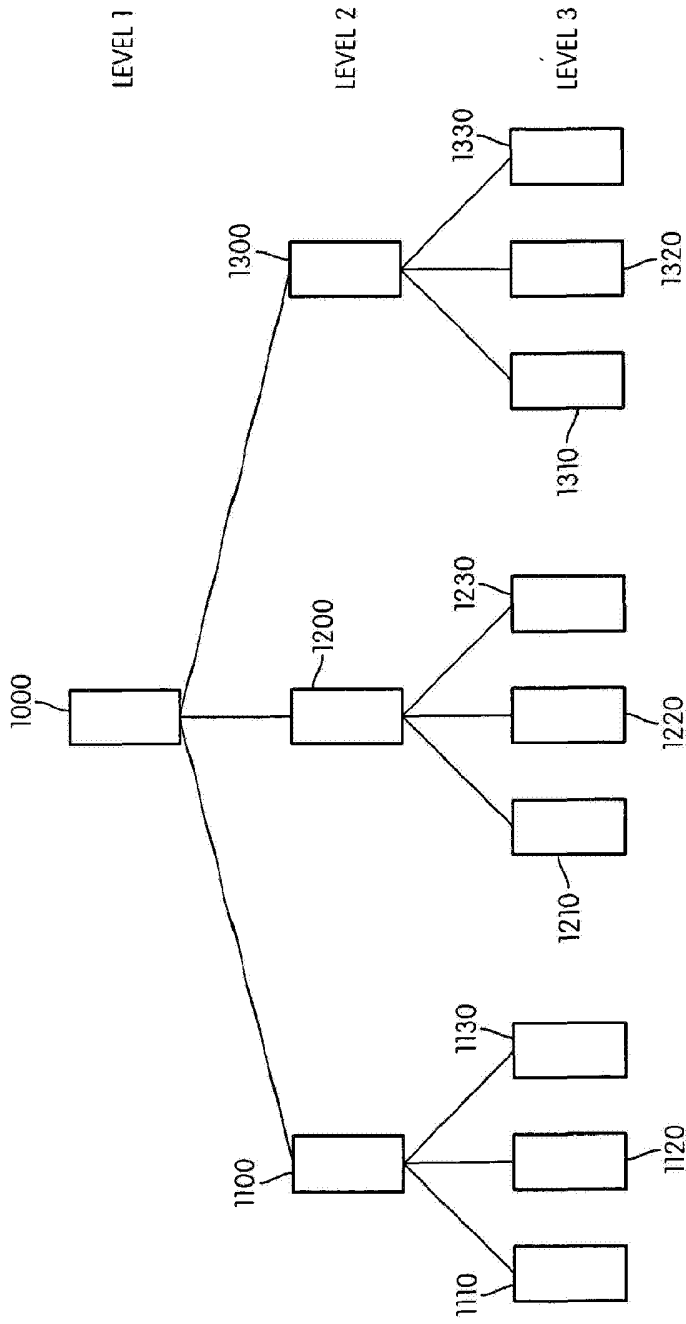


FIG. 10
PRIOR ART

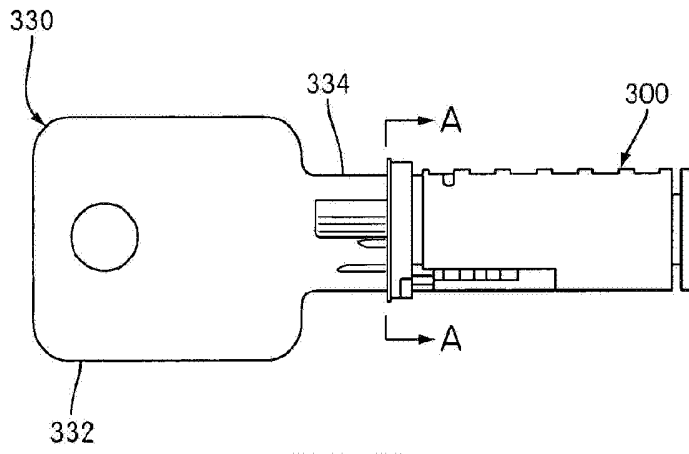


FIG. 11a

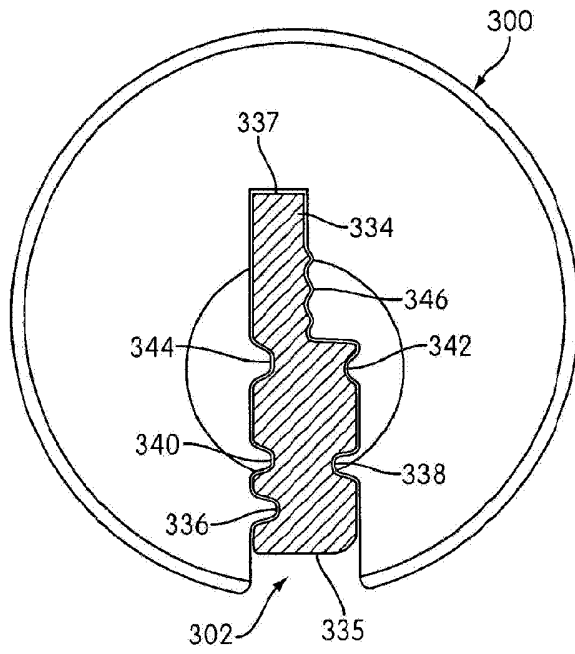


FIG. 11b

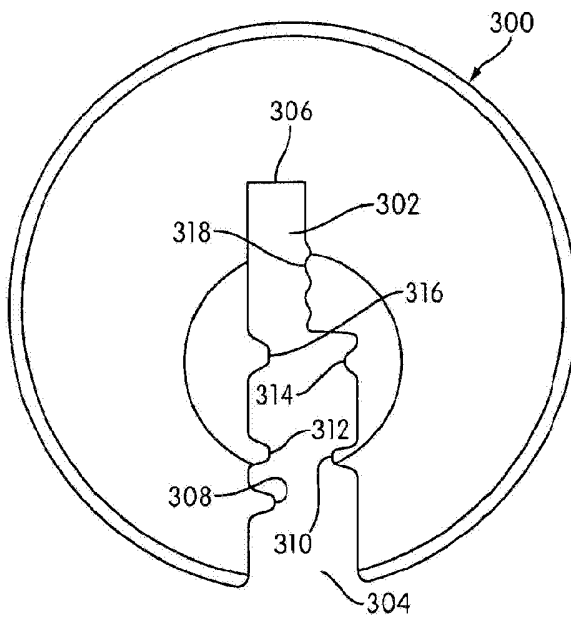


FIG. 11c

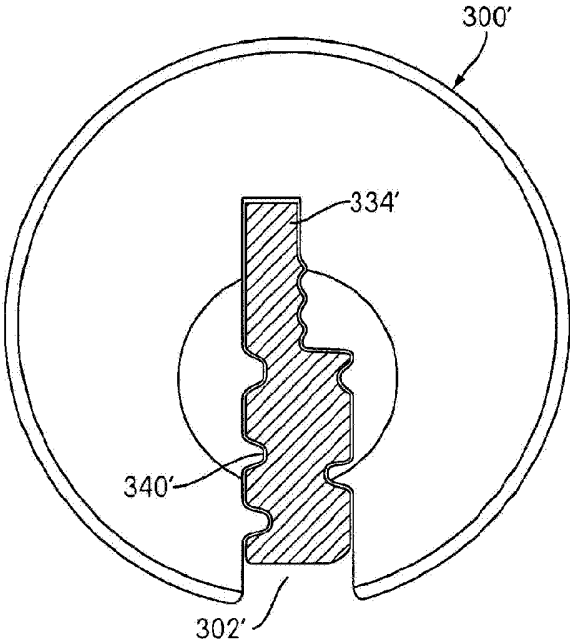


FIG. 12a

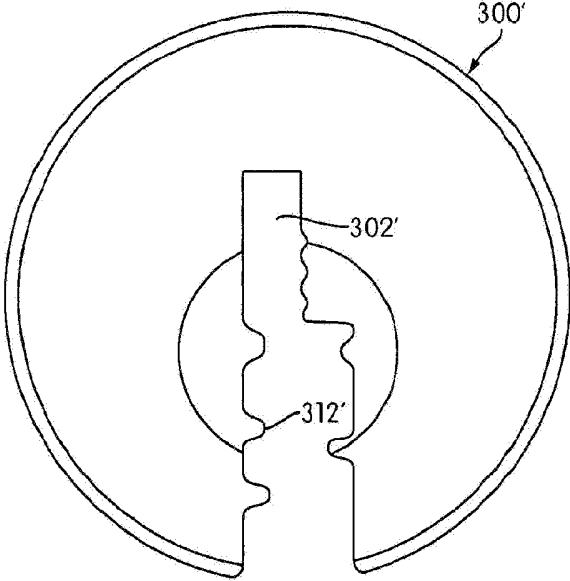


FIG. 12b

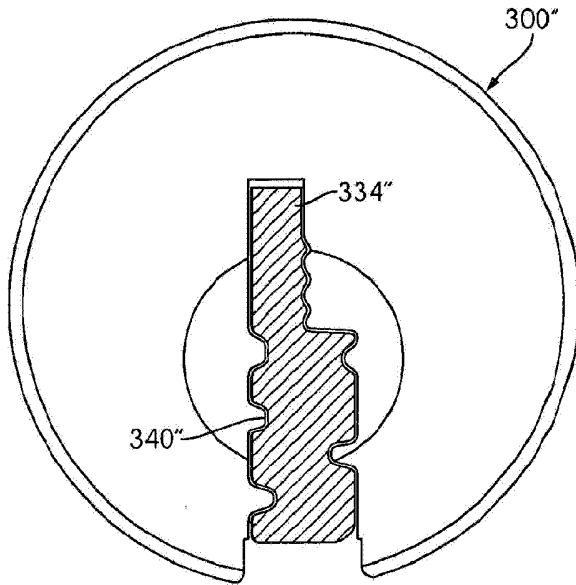


FIG. 13a

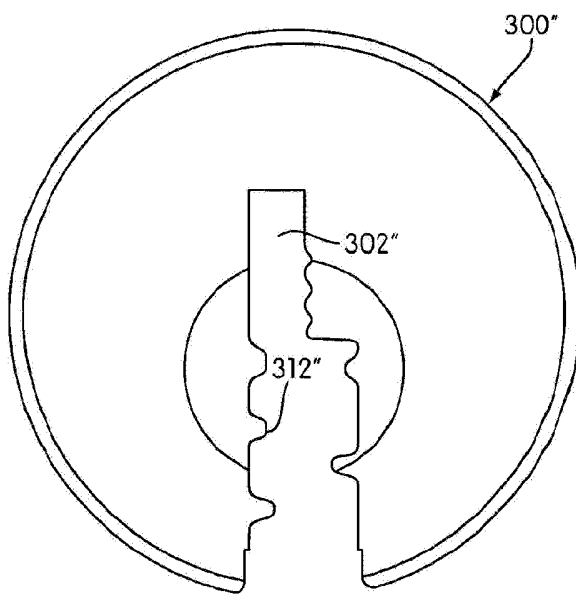


FIG. 13b

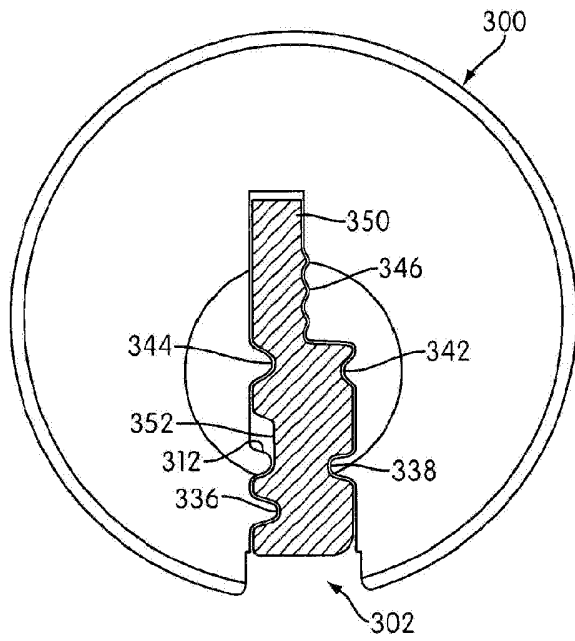


FIG. 14a

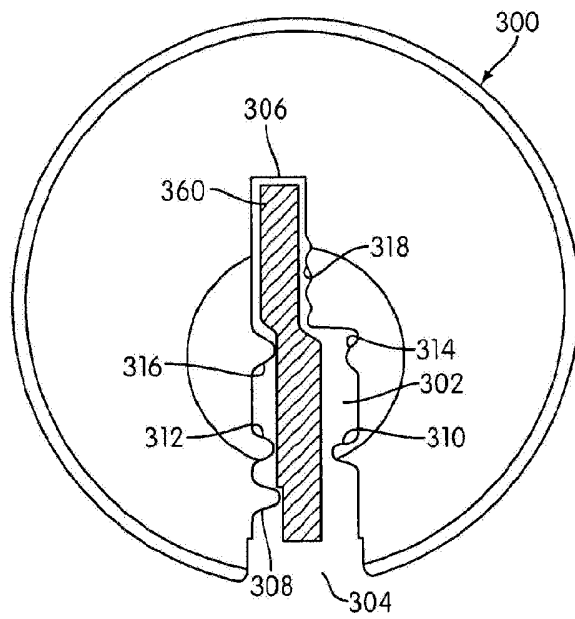


FIG. 14b

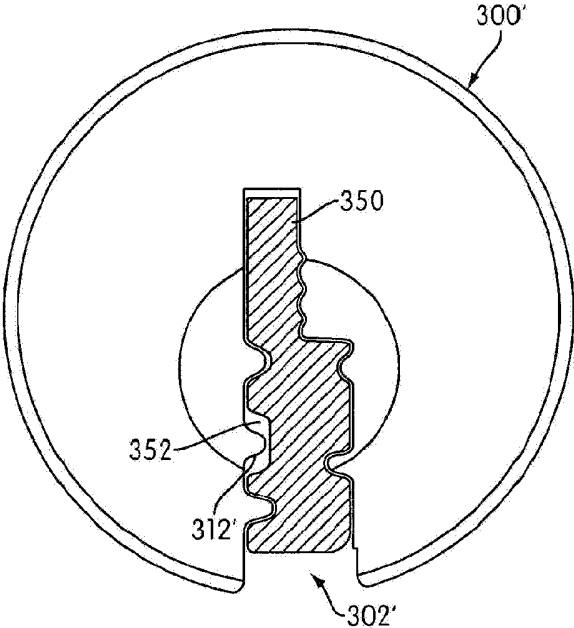


FIG. 15a

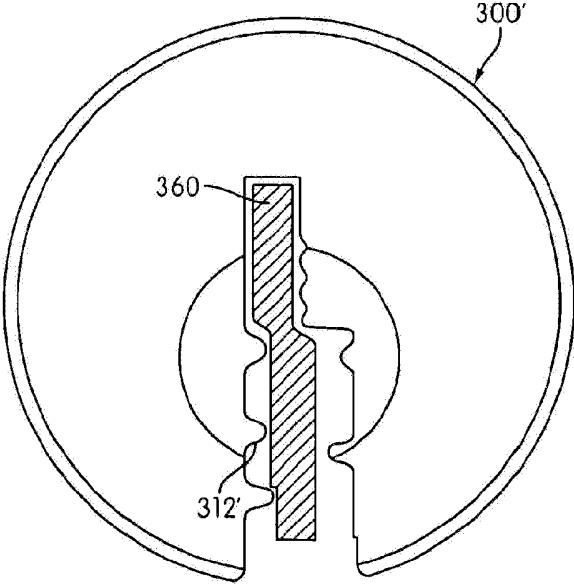


FIG. 15b

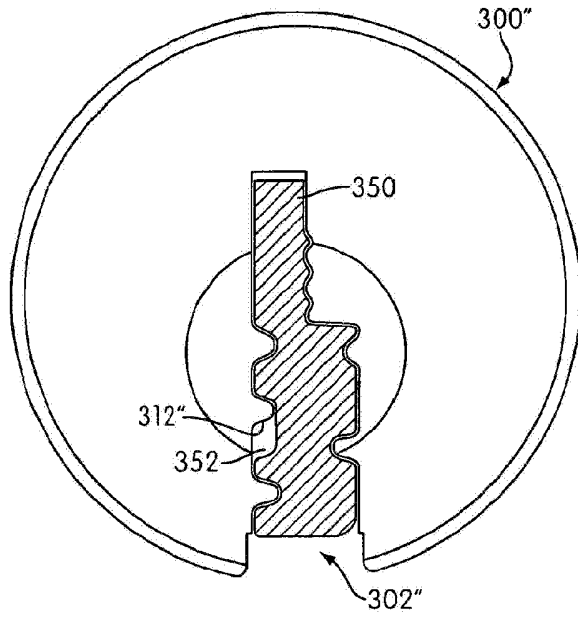


FIG. 16a

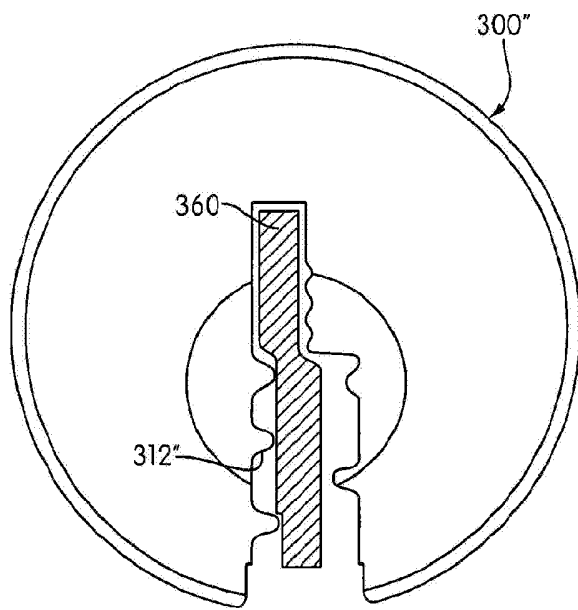


FIG. 16b