


AUSTRALIA

PATENTS ACT 1990

NOTICE OF ENTITLEMENT

We, PULSE (IRELAND), of 41-45 St. Stephen's Green, Dublin 2, Ireland, being the applicant in respect of Application No. 86662/91, state the following:-

1. The person nominated for the grant of the patent has entitlement from the actual inventors by mesne assignment.



For and on behalf of
PULSE (IRELAND)



Ruairi O'Coileain.....

(Signature)

31st May 1994
.....

(Date)

Name: Ruairi O'Coileain

Title: Director

File: 16214.80

SHELSTON WATERS
55 CLARENCE STREET, SYDNEY, AUSTRALIA



AU9186662

(12) PATENT ABRIDGMENT (11) Document No. AU-B-86662/91
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 659105



- (54) Title
PULSATION NOZZLE, FOR SELF-EXCITED OSCILLATION OF A DRILLING FLUID JET STREAM
International Patent Classification(s)
(51)⁵ E21B 007/24 E21B 007/18
- (21) Application No. : 86662/91 (22) Application Date : 15.10.91
- (87) PCT Publication Number : WO93/08365
- (43) Publication Date : 21.05.93
- (44) Publication Date of Accepted Application : 11.05.95
- (71) Applicant(s)
PULSE (IRELAND)
- (72) Inventor(s)
WILLIAM ANTHONY GRIFFIN; SEXTUS MERRILLE DE ALMEIDA
- (74) Attorney or Agent
SHELSTON WATERS , Level 21, 60 Margaret Street, SYDNEY NSW 2000
- (56) Prior Art Documents
US 4071097
US 3610347
US 3532174
- (57) Claim

1. A pulsation nozzle for self-excited oscillation of a fluid, which nozzle defines a cavity (3) having an axisymmetric inlet orifice (2) and outlet orifice (4), wherein the inlet orifice is adapted to restrict and accelerate incoming flow of drilling fluid, the diameter (D_3) of the outlet orifice is greater than the diameter (D_1) of the inlet orifice, the diameter of the cavity (D) is greater than the diameter (D_3) of the outlet orifice, characterised in that the axial length (L) of the cavity is chosen so as to induce the cyclical propagation of disturbances in a shear boundary defined between a thixotropic fluid passing directly through the nozzle and thixotropic fluid which is momentarily trapped in the cavity, thereby inducing a self-excited oscillating flow of said fluid within the nozzle, and a rapid pulsing flow emitting from the nozzle.



AU9186662


.ATY (PCT)

<p>(51) International Patent Classification ⁵ : E21B 7/24, 7/18</p>	<p>A1</p>	<p>(11) International Publication Number: WO 93/08365 (43) International Publication Date: 29 April 1993 (29.04.93)</p>
<p>(21) International Application Number: PCT/GB91/01790 (22) International Filing Date: 15 October 1991 (15.10.91)</p> <p>(71) Applicant (for all designated States except US): GRIFFIN, Thomas, Eugene [US/GB]; Fetternear House, Near Kemnay, Aberdeenshire AB5 9LY (GB).</p> <p>(72) Applicants and Inventors: GRIFFIN, William, Anthony [IE/IE]; 7 Norwood Court, Rochestown Road, Cork (IE). De ALMEIDA, Sextus, Merrille [LK/IE]; 5 Glendower Court, Ballincollig, Cork (IE).</p> <p>(74) Agents: HALE, Peter et al.; Kilburn & Strode, 30 John Street, London WC1N 2DD (GB).</p> <p><i>(71) PULSE (IRELAND)</i> <i>41-45 St. Stephen's Green</i> <i>Dublin 2</i> <i>Ireland</i></p>		<p>(81) Designated States: AT, AU, BB, BG, BR, CA, CH, CS, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MC, MG, MN, MW, NL, NO, PL, RO, SD, SE, SU, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IT, LU, NL, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p> <p style="font-size: 2em; text-align: center;">659105</p> <div style="display: flex; justify-content: space-around;">   </div>

(54) Title: PULSATION NOZZLE, FOR SELF-EXCITED OSCILLATION OF A DRILLING FLUID JET STREAM

(57) Abstract

A pulsation nozzle is adapted for insertion in a drill bit such as a single body or tri-cone bit, for delivery of a pulsed jet of thixotropic drilling fluid during drilling operations. The nozzle defines an inlet orifice (33) communicating with an internal cavity (32) and an outlet orifice (31), the dimensions of which are chosen in such a way as to induce the cyclical propagation of disturbances in a shear boundary defined between fluid passing directly through the nozzle and fluid which is momentarily trapped in the cavity, thereby inducing a self-excited oscillating flow of said fluid within the nozzle, and a rapid pulsing flow emitting from the nozzle.

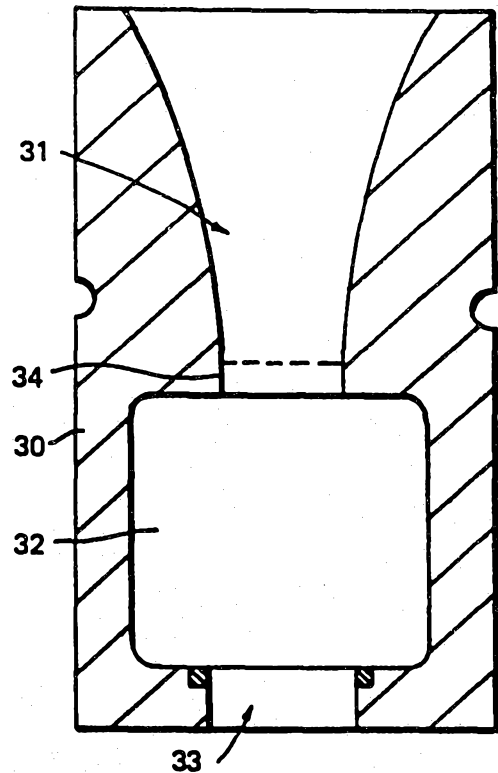

PULSATION NOZZLE, FOR SELF-EXCITED OSCILLATION OF A DRILLING FLUID
JET STREAM

5

TECHNICAL FIELD

The present invention relates to a pulsation nozzle, for self-excited oscillation of a thixotropic fluid such as a drilling fluid jet stream, particularly in rotary single body or tri-cone rock drills used in drilling deep wells for oil and gas exploration.

BACKGROUND ART

15 The kerfing process of a mud jet in assisting the mechanical action of a drill bit is well understood. The drilling mud also lubricates and cools the bit, and is circulated so as to carry away cuttings and rock debris. Normally, drilling mud is directed through a series of conical or tapering nozzles contained in slots above the bit roller cones or defined in the sides of the bit, in a continuous stream.

20 It is also known that pulsed jets have significant kerfing advantages over continuous stream jets. By exerting alternating loads onto the rock formation pulsed jets may not only produce a high momentary "waterhammer" effect, but may also produce high tensile stress on the compression strength of the formation. This would give rise to the weakening of the formation through the reflection of stress waves, prior to any mechanical shearing, gouging, or scraping action of the drill bit, leading to faster removal of debris and faster penetration rates.

35 However, a downhole tool that produces a pulsed jet through mechanical interruption or mechanical excitation of the normal or steady flow of drilling fluid would cause large energy losses, as well as mechanical wear on the indispensable moving parts and seals. Oscillating valve arrangements to cause flow pulsing are described, for example, in European Patent Specification No. 0,333,484A and 0,370,709A. A nozzle is described in British Patent Specification

- 2 -

No. 2,104,942A for restricting flow and inducing cavitation, i.e. the formation of bubbles in the fluid which implode on contact with the rock formation, which weakens and erodes the surface being drilled. However, in order to improve removal of rock debris, fluid is also
5 directed at higher pressure through a non-cavitating nozzle to provide a cross flow. It will be appreciated that a single nozzle delivering a rapidly oscillating pulsed flow would achieve these effects more efficiently.

10 A self-excited, acoustically resonating nozzle causing the emitted jet to be structured with large discrete vortex rings is described by V.E. Johnson, Jr. et al (Transactions of ASME, Vol. 106 June 1984282). A nozzle with a reduced diameter "organ pipe" section
15 for creating acoustically resonant standing waves inside the nozzle induces excitation and structuring of the jet outside the nozzle, which can also be accompanied by cavitation. However, this proposal does not suggest that self-excited oscillation of the jet may be induced inside the nozzle, so as to produce a rapidly pulsating jet as it emits from the nozzle. Furthermore, a problem associated with
20 acoustically resonating nozzles is that the length of the nozzle is limited by the space available in the bit plenum for locating the nozzles. Nozzle extensions are also subject to breakage and failure down hole.

25 A nozzle for the self-excited oscillation of a Newtonian fluid such as water, producing a pulsed jet for brittle material cutting applications has been investigated by Z.F. Liao and D.S. Huang (Paper 19, 8th International Symposium on Jet Cutting Technology (1986) Durham, England). The nozzle comprises a simple axisymmetric cavity
30 with an inlet and an outlet orifice of smaller diameter than the cavity diameter. Periodic pressure pulses are generated in the shear layer between the jet in the cavity and the surrounding fluid, and the jet oscillates as it emits from the nozzle to atmosphere. However, there is no teaching of a similar effect in a non-Newtonian
35 or thixotropic fluid such as drilling mud, emitting from a nozzle to a high pressure fluid environment as opposed to ambient air.

DISCLOSURE OF INVENTION

It has now been found that a self-excited pulsed jet effect,
5 similar to the type described by Liao and Huang, may be produced with
high pressure drilling fluid in a nozzle defining an axisymmetric
cavity. This effect is independent of a very significant pressure
load, or "back pressure", at the bottom hole produced by the weight
10 of drilling mud and cuttings in the annulus surrounding the drill
string and the hydrostatic pressure of the drilling mud.
Surprisingly, a self-excited pulsed jet may be produced with a rapid
oscillation frequency which is modulated in an apparently regular,
lower frequency pattern. This latter effect is advantageous in
enhancing stress deflection and break-up of the rock formation.

15

The present invention therefore overcomes the drawbacks of prior
art devices and provides a nozzle for self-excited oscillation of a
mud jet stream, producing a pulsed flow which may be incorporated,
for example, in existing nozzle slots in standard tri-cone drill bits
20 without special adaptation, with the potential to greatly increase
drilling rates.

According to the present invention, there is provided a
pulsation nozzle for self-excited oscillation of a fluid which nozzle
25 defines a cavity (3) having an axisymmetric inlet orifice (2) and
outlet orifice (4), wherein the inlet orifice is adapted to restrict
and accelerate incoming flow of drilling fluid, the diameter (D_3)
of the outlet orifice is greater than the diameter (D_1) of the
inlet orifice, the diameter of the cavity (D) is greater than the
30 diameter (D_3) of the outlet orifice, characterised in that the
axial length (L) of the cavity is chosen so as to induce the cyclical
propagation of disturbances in a shear boundary defined between a
thixotropic fluid passing directly through the nozzle and thixotropic
fluid which is momentarily trapped in the cavity, thereby inducing a
35 self-excited oscillating flow of said fluid within the nozzle, and a
rapid pulsing flow emitting from the nozzle.

The inlet orifice preferably defines conical or inwardly-tapering side walls (33). Most preferably, the axial length of the inlet orifice is greater than the axial length (L) of the cavity. The outlet orifice preferably defines cylindrical side walls, but may also define conical or outwardly-tapering side walls. The cavity is preferably cylindrical. The intersection of the curved cylindrical wall and planar floor and roof surfaces of the cavity is preferably curved, that is, not defined by a right angle.

10

Advantageously, the intersection of the cavity floor and the outlet orifice side walls is defined by a sharp edge. The intersection between the outlet orifice side walls and the exterior is also preferably provided by a sharp edge. The sharp edge is preferably hardened, most preferably by a coating or insert of diamond or CBN.

15

The ratio $D_3:D_1$ is preferably 1.01 to 1.30, most preferably 1.10 to 1.23.

20

The nozzle may define two intercommunicating cavities divided by a partition wall defining an intermediate axisymmetric orifice, the diameter (D_2) of which is greater than or equal to the diameter (D_1) of the nozzle inlet orifice.

25

The length L of the cavity is preferably chosen such that:
 $L > D_3$, or $L < 3D_1 + 3D_2$.

30

The invention also provides a drill tool or drill bit incorporating a nozzle for self-excited oscillation of drilling fluid as described herein.

35

Furthermore the invention provides a method of drilling a borehole using a drill tool incorporating a pulsation nozzle as described herein, wherein drilling fluid is supplied to the nozzle at a pressure of greater than about 120 p.s.i.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1 shows a perspective view from above in longitudinal
5 cross-section of a pulsation nozzle in accordance with a first
embodiment of the invention,

Figures 2a to 2d show schematically the theoretically assumed
mode of propagation of a self-excited oscillating flow through the
10 nozzle of Figure 1,

Figure 3 shows a perspective view from above in longitudinal
cross-section of a pulsation nozzle in accordance with a second
embodiment of the invention,

15

Figure 4 shows in longitudinal cross-section a pulsation nozzle
in accordance with a third embodiment of the invention,

Figure 5 is a graph of pressure versus time, plotting the nozzle
20 or stagnation pressure during a test, and

Figure 6 is a graph of pressure versus time, plotting (a) line
pressure, and (b) back pressure during the same test.

25 Figure 1 shows a pulsation nozzle in accordance with a first,
and simplest embodiment of the invention. The nozzle comprises a
cylindrical housing 1 defining an inlet orifice 2 of diameter D_1 ,
communicating with a cavity 3, of cylindrical shape, diameter D and
axial length L , in turn communicating with outlet orifice 4, of
30 diameter D_3 . The corners 5 of the cavity are preferably rounded
with a radius of 2 mm, for example. The intersection between the
cavity floor 6 and the outlet orifice side walls 7 is most preferably
a sharp hard edge, and may be formed by an artificial diamond or
cubic boron nitride (CBN) insert ring or edge coating. The
35 intersection between the roof 8 of the cavity and the side walls 9 of
the inlet orifice 2 may also be a sharp hard edge. As described
below, these edge regions are vitally important in initiating
propagation of vorticity disturbances when drilling fluid is flowing
through the nozzle under pressure.

The preferred relationships of D_1 , D_3 , D and L are referred to above, but it is essential that D_3 is greater than D_1 and that D is significantly greater than D_1 or D_3 . The length L of the cavity must be carefully chosen - if it is too short fluid will pass straight through the nozzle in a jet without the propagation of the desired flow disturbances between the interface of a high pressure fluid jet passing from orifice 2 to orifice 4 and fluid under lower pressure which remains for a longer period in the cavity. If L is too long, disturbances which are non-cyclic or irregular might be propagated, but this will not produce the rapid, cyclic self-excited oscillation of fluid in the cavity at the jet interface which is desired and which gives rise to a regular pulsating flow of fluid emitting from orifice 4. The nett cavity length may be increased effectively by providing two adjacent cavities as described below with reference to Figure 3. In an example, when $D_3:D_1$ is 1.10 to 1.23, given that D_1 is about 10 mm, L is preferably between 17 and 29 mm.

Figures 2a to 2d illustrate a theoretically assumed mode of propagation of disturbances in the flow of pressure fluid through the nozzle shown in Figure 1. It will be appreciated that it is difficult to observe the actual mode of propagation in the laboratory as the oscillating frequency established is extremely rapid. Firstly, as shown in Figure 2a, a jet of high pressure fluid is passed through orifice 2, which because of the restriction in flow and decrease in diameter, increases rapidly in velocity, as compared to fluid on entering the nozzle and to fluid in the remainder of the cavity. Fluid 11, all the more so because of the relatively high density and viscosity of drilling muds generally, becomes subject to high shear forces at the boundary between it and jet 10. The shearing action causes vortex rings to form around the jet. These vortices are propagated initially at the edge of orifice 2 and move down the boundary in an orderly manner as shown in Figure 2b until they impinge on the edge of orifice 4. By this stage expansion of the jet will cause the vortex rings to move away from the boundary and propagate or feed back upstream to the sensitive initial shear separation region 12 adjacent the edge of orifice 2 as shown in Figure 2c. This induces vorticity fluctuations. The inherent

- 7 -

instability of the shear separation at the boundary layer of the jet amplifies the small disturbances imposed on the initial shear separation region.

5 The amplified disturbance will then travel downwards to impinge the edge again, as shown in Figure 2d. Thereupon the events are repeated and a loop consisting of the emanation (Fig 2b), feedback (Fig 2c), and amplification (Fig 2d) is enclosed.

10 As a result a strong oscillation in the shear layer and the potential jet core is developed. A fluctuating pressure field may be set up within the cavity as a whole and the velocity of the jet emitting from the outlet orifice 4 varies periodically.

15 It should be appreciated that the oscillation comes without any external excitation and as such is described as "self-exciting". Thus, no moving parts or valve arrangements are required to bring about a pulsed flow.

20 A nozzle, as shown in Figure 1, may be adapted to fit into the nozzle-holding slots of most rotary bit designs.

Figure 3 shows a second embodiment of the invention, wherein a nozzle 20 comprises an inlet orifice 21 of diameter D_1 , a cavity 25 which is partitioned into two cavities 22 and 23 of equal size (each of length L and diameter D) by a partition wall 24 defining an intermediate orifice 25 of diameter D_2 , and having an outlet orifice 26 of diameter D_3 . The length and diameter of cavities 22 and 23 does not have to be the same; the cavity 23 may be slightly larger in diameter, for example. This arrangement permits the propagation of two separate enclosed loops as described above in cavities 22 and 23, and results in a greater nett velocity increase in the jet emitting from orifice 26 on account of the greater overall cavity length.

35

BEST MODE FOR CARRYING OUT THE INVENTION

Figure 4 shows a favoured embodiment wherein nozzle 30 comprises
5 a cylindrical cavity 32, an outlet orifice 33 having cylindrical
walls, and an enlarged inlet orifice 31 having outwardly tapering
trumpet-shaped walls. It should be noted that a short cylindrical
surface is present at 34 after the tapering surface ends. This may
10 be of the order of 3mm when the tapering walls would be of the order
of 19mm, for example. The length of the cavity 32 in this example
would be about 27 mm. Such a nozzle may be made from an alloy,
consisting, for example, of 84% tungsten carbide and 16% cobalt by
volume.

15 The trumpet-shaped inlet orifice 31 has the effect of funneling
the drilling mud into the nozzle cavity and reduces fluid pressure
losses as compared to the cylindrical inlet orifices described with
reference to Figures 1 and 3. Surprisingly, the fluid is funneled
more than expected and a "vena contracta" effect is produced, which
20 is probably due to the fact that the drilling mud is thixotropic,
i.e. its viscosity decreases with increasing velocity, and in this
situation the incipient jet in the cavity is squeezed by the lower
velocity/higher viscosity surrounding fluid. This phenomenon may
also lead to greater shearing at the jet boundary in the cavity in
25 this embodiment.

TEST RESULTS

A nozzle conforming to the following critical dimensions was
30 tested using drilling mud supplied thereto at a line velocity of 57.5
m/s.

	Inlet orifice diameter	13mm.
	Outlet orifice diameter	14mm.
35	Cavity length	17mm.

Figure 5 demonstrates the very rapid oscillation of pressure
within the nozzle during the test. The mean pressure variation with
time also varies more or less regularly as shown by the dashed

- 9 -

curve. This has been referred to above as a modulation of the oscillation frequency. However, both high frequency (e.g. greater than about 1KHz) and low frequency (e.g. greater than about 20Hz) primary oscillations may be induced. The modulated frequency is typically in the order of 0.25 - 10Hz.

Figure 6 demonstrates the corresponding variation in pressure as measured (a) in the fluid upstream of the nozzle (line pressure), and (b) in the fluid downstream of the nozzle (back pressure).

10

15

20

25

30

35

- 10 -

CLAIMS

1. A pulsation nozzle for self-excited oscillation of a fluid,
5 which nozzle defines a cavity (3) having an axisymmetric inlet
orifice (2) and outlet orifice (4), wherein the inlet orifice is
adapted to restrict and accelerate incoming flow of drilling fluid,
the diameter (D_3) of the outlet orifice is greater than the
diameter (D_1) of the inlet orifice, the diameter of the cavity (D)
10 is greater than the diameter (D_3) of the outlet orifice,
characterised in that the axial length (L) of the cavity is chosen so
as to induce the cyclical propagation of disturbances in a shear
boundary defined between a thixotropic fluid passing directly through
the nozzle and thixotropic fluid which is momentarily trapped in the
15 cavity, thereby inducing a self-excited oscillating flow of said
fluid within the nozzle, and a rapid pulsing flow emitting from the
nozzle.

2. A nozzle as claimed in claim 1 wherein the inlet orifice
20 defines inwardly-tapering side walls (33).

3. A nozzle as claimed in claim 2 wherein the axial length of
the inlet orifice is greater than the axial length (L) of the cavity.

25 4. A nozzle as claimed in any one of claims 1 to 3 wherein the
outlet orifice defines cylindrical side walls, or outwardly-tapering
side walls.

5. A nozzle as claimed in claim 4 wherein the intersection of
30 the cavity floor and the outlet orifice side walls is defined by a
sharp edge.

6. A nozzle as claimed in claim 5 wherein the sharp edge is
hardened.

35

7. A nozzle is claimed in claim 6 in which the sharp edge is
hardened by a coating or insert of diamond or cubic boron nitride.

- 11 -

8. A nozzle as claimed in claim 1 wherein the ratio $D_3:D_1$ is 1.01 to 1.30.

5 9. A nozzle as claimed in claim 8 wherein the ratio $D_3:D_1$ is 1.10 to 1.23.

10 10. A nozzle as claimed in claim 1 defining two intercommunicating cavities divided by a partition wall defining an intermediate axisymmetric orifice, the diameter (D_2) of which is greater than or equal to the diameter (D_1) of the nozzle inlet orifice.

15 11. A nozzle as claimed in claim 1 or claim 10 in which the length (L) of the cavity or cavities is chosen such that: $L > D_3$, or $L < 3D_1 + 3D_2$.

20 12. A drill tool or drill bit incorporating a nozzle for self-excited oscillation of drilling fluid as claimed in any one of the preceding claims.

25

30

35

86662/91

1/4

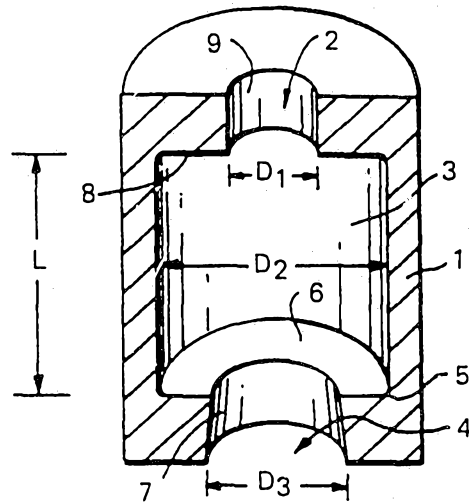


FIG. 1

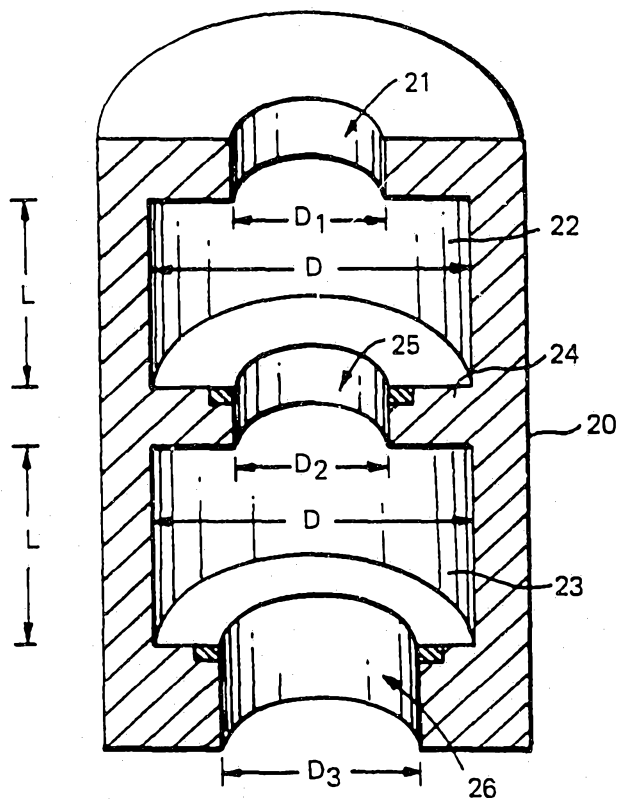


FIG. 3

SUBSTITUTE SHEET

2/4

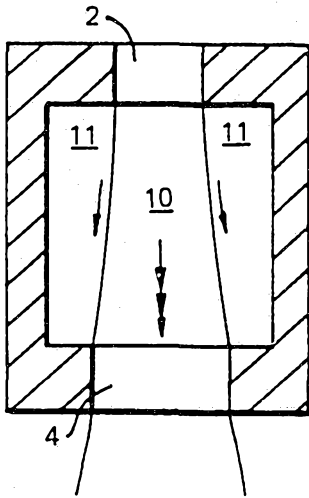


FIG. 2a

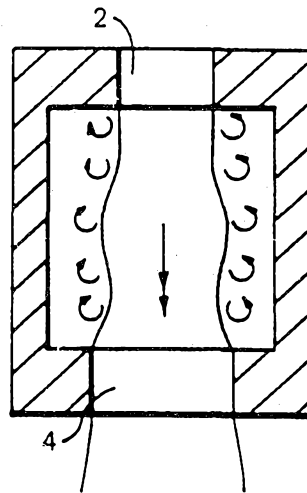


FIG. 2b

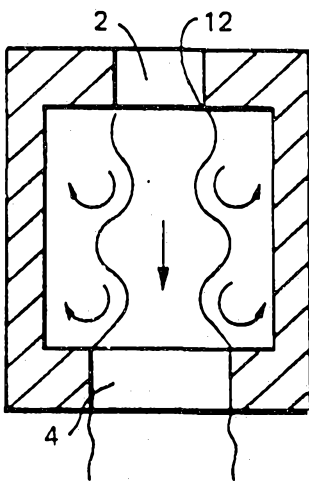


FIG. 2c

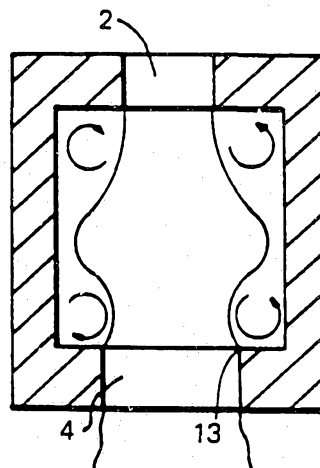


FIG. 2d

3/4

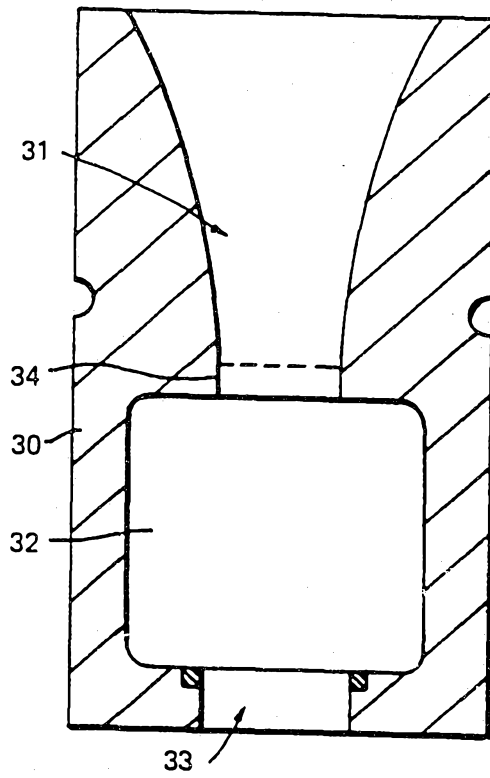


FIG. 4

4 / 4

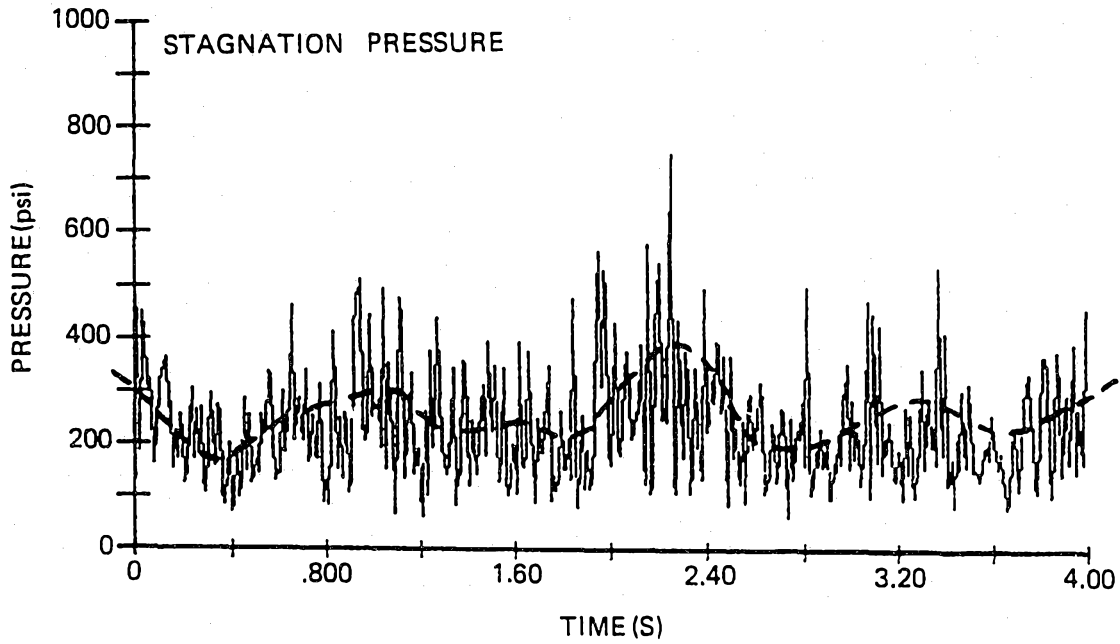


FIG. 5

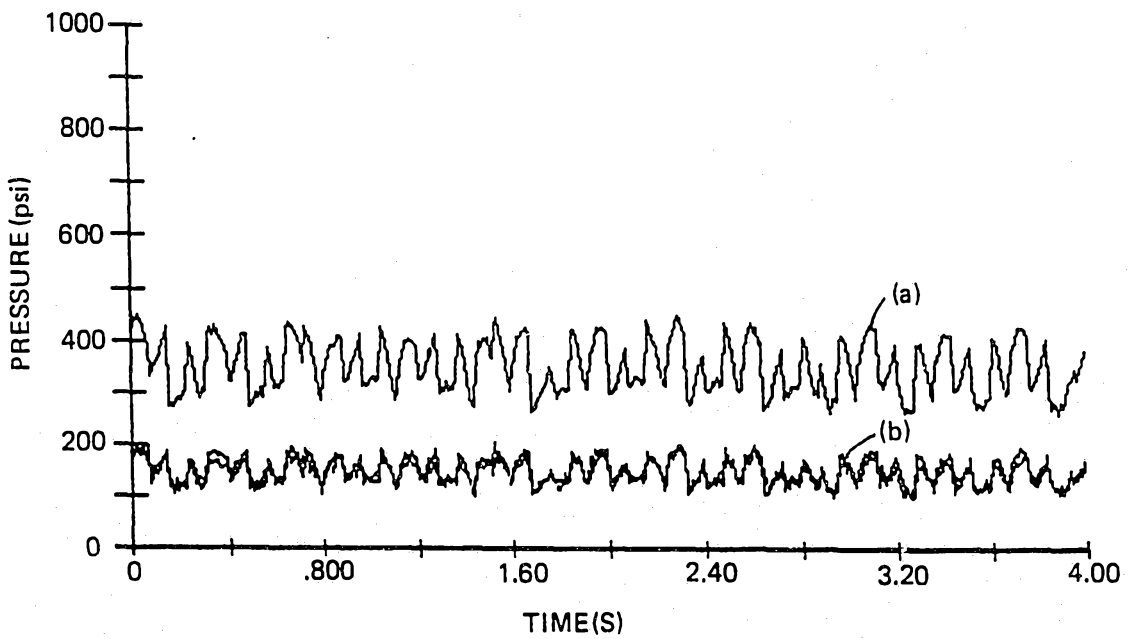


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 91/01790

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl.5 E 21 B 7/24 E 21 B 7/18		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl.5	E 21 B	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	8th International Symposium of Jet Cutting Technology, Durham, 9-11 September 1986, Z.F. LIAO et al.: "Nozzle device for the self-excited oscillation of a jet", pages 195-201, see whole document (cited in the application) ---	1
A	WO,A,9108371 (CABINET JOLLY) 13 June 1991, see page 5, line 30 - page 7, line 23; figures 1-5 ---	1-3,5, 12
A	US,A,3610347 (DIAMANTIDES) 5 October 1971, see column 3, lines 4-32; figure 1 ---	1
A	US,A,3532174 (DIAMANTIDES) 6 October 1970, see column 6, lines 20-52; figure 5 ---	1
A	US,A,4071097 (FÜLÖP) 31 January 1978, see abstract; figures 1-3 -----	1
<p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
25-09-1992	15. 10. 92	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	Milena Mazuera Vargas	

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

GB 9101790
SA 52188

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 12/10/92. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A- 9108371	13-06-91	FR-A- 2655372 EP-A- 0502938	07-06-91 16-09-92
US-A- 3610347	05-10-71	None	
US-A- 3532174	06-10-70	None	
US-A- 4071097	31-01-78	None	