




(22) Date de dépôt/Filing Date: 2001/03/12  
 (41) Mise à la disp. pub./Open to Public Insp.: 2001/09/20  
 (62) Demande originale/Original Application: 2 401 075  
 (30) Priorité/Priority: 2000/03/14 (US09/524,773)

(51) Cl.Int./Int.Cl. *E21B 3/04* (2006.01),  
*B25B 13/50* (2006.01), *E21B 17/00* (2006.01),  
*E21B 19/16* (2006.01), *E21B 21/01* (2006.01),  
*E21B 21/10* (2006.01), *E21B 33/06* (2006.01)  
 (71) Demandeur/Applicant:  
 WEATHERFORD/LAMB, INC., US  
 (72) Inventeurs/Inventors:  
 ALLEN, JOHN TIMOTHY, US;  
 BOX, STEVEN ANTONY, US;  
 PIETRAS, BERND-GEORG, DE;  
 HABETZ, JEFFREY MICHAEL, US  
 (74) Agent: MARKS & CLERK

(54) Titre : SYSTEME DE MISE EN CIRCULATION DE FLUIDE POUR Puits DE FORAGE  
 (54) Title: WELLBORE CIRCULATION SYSTEM

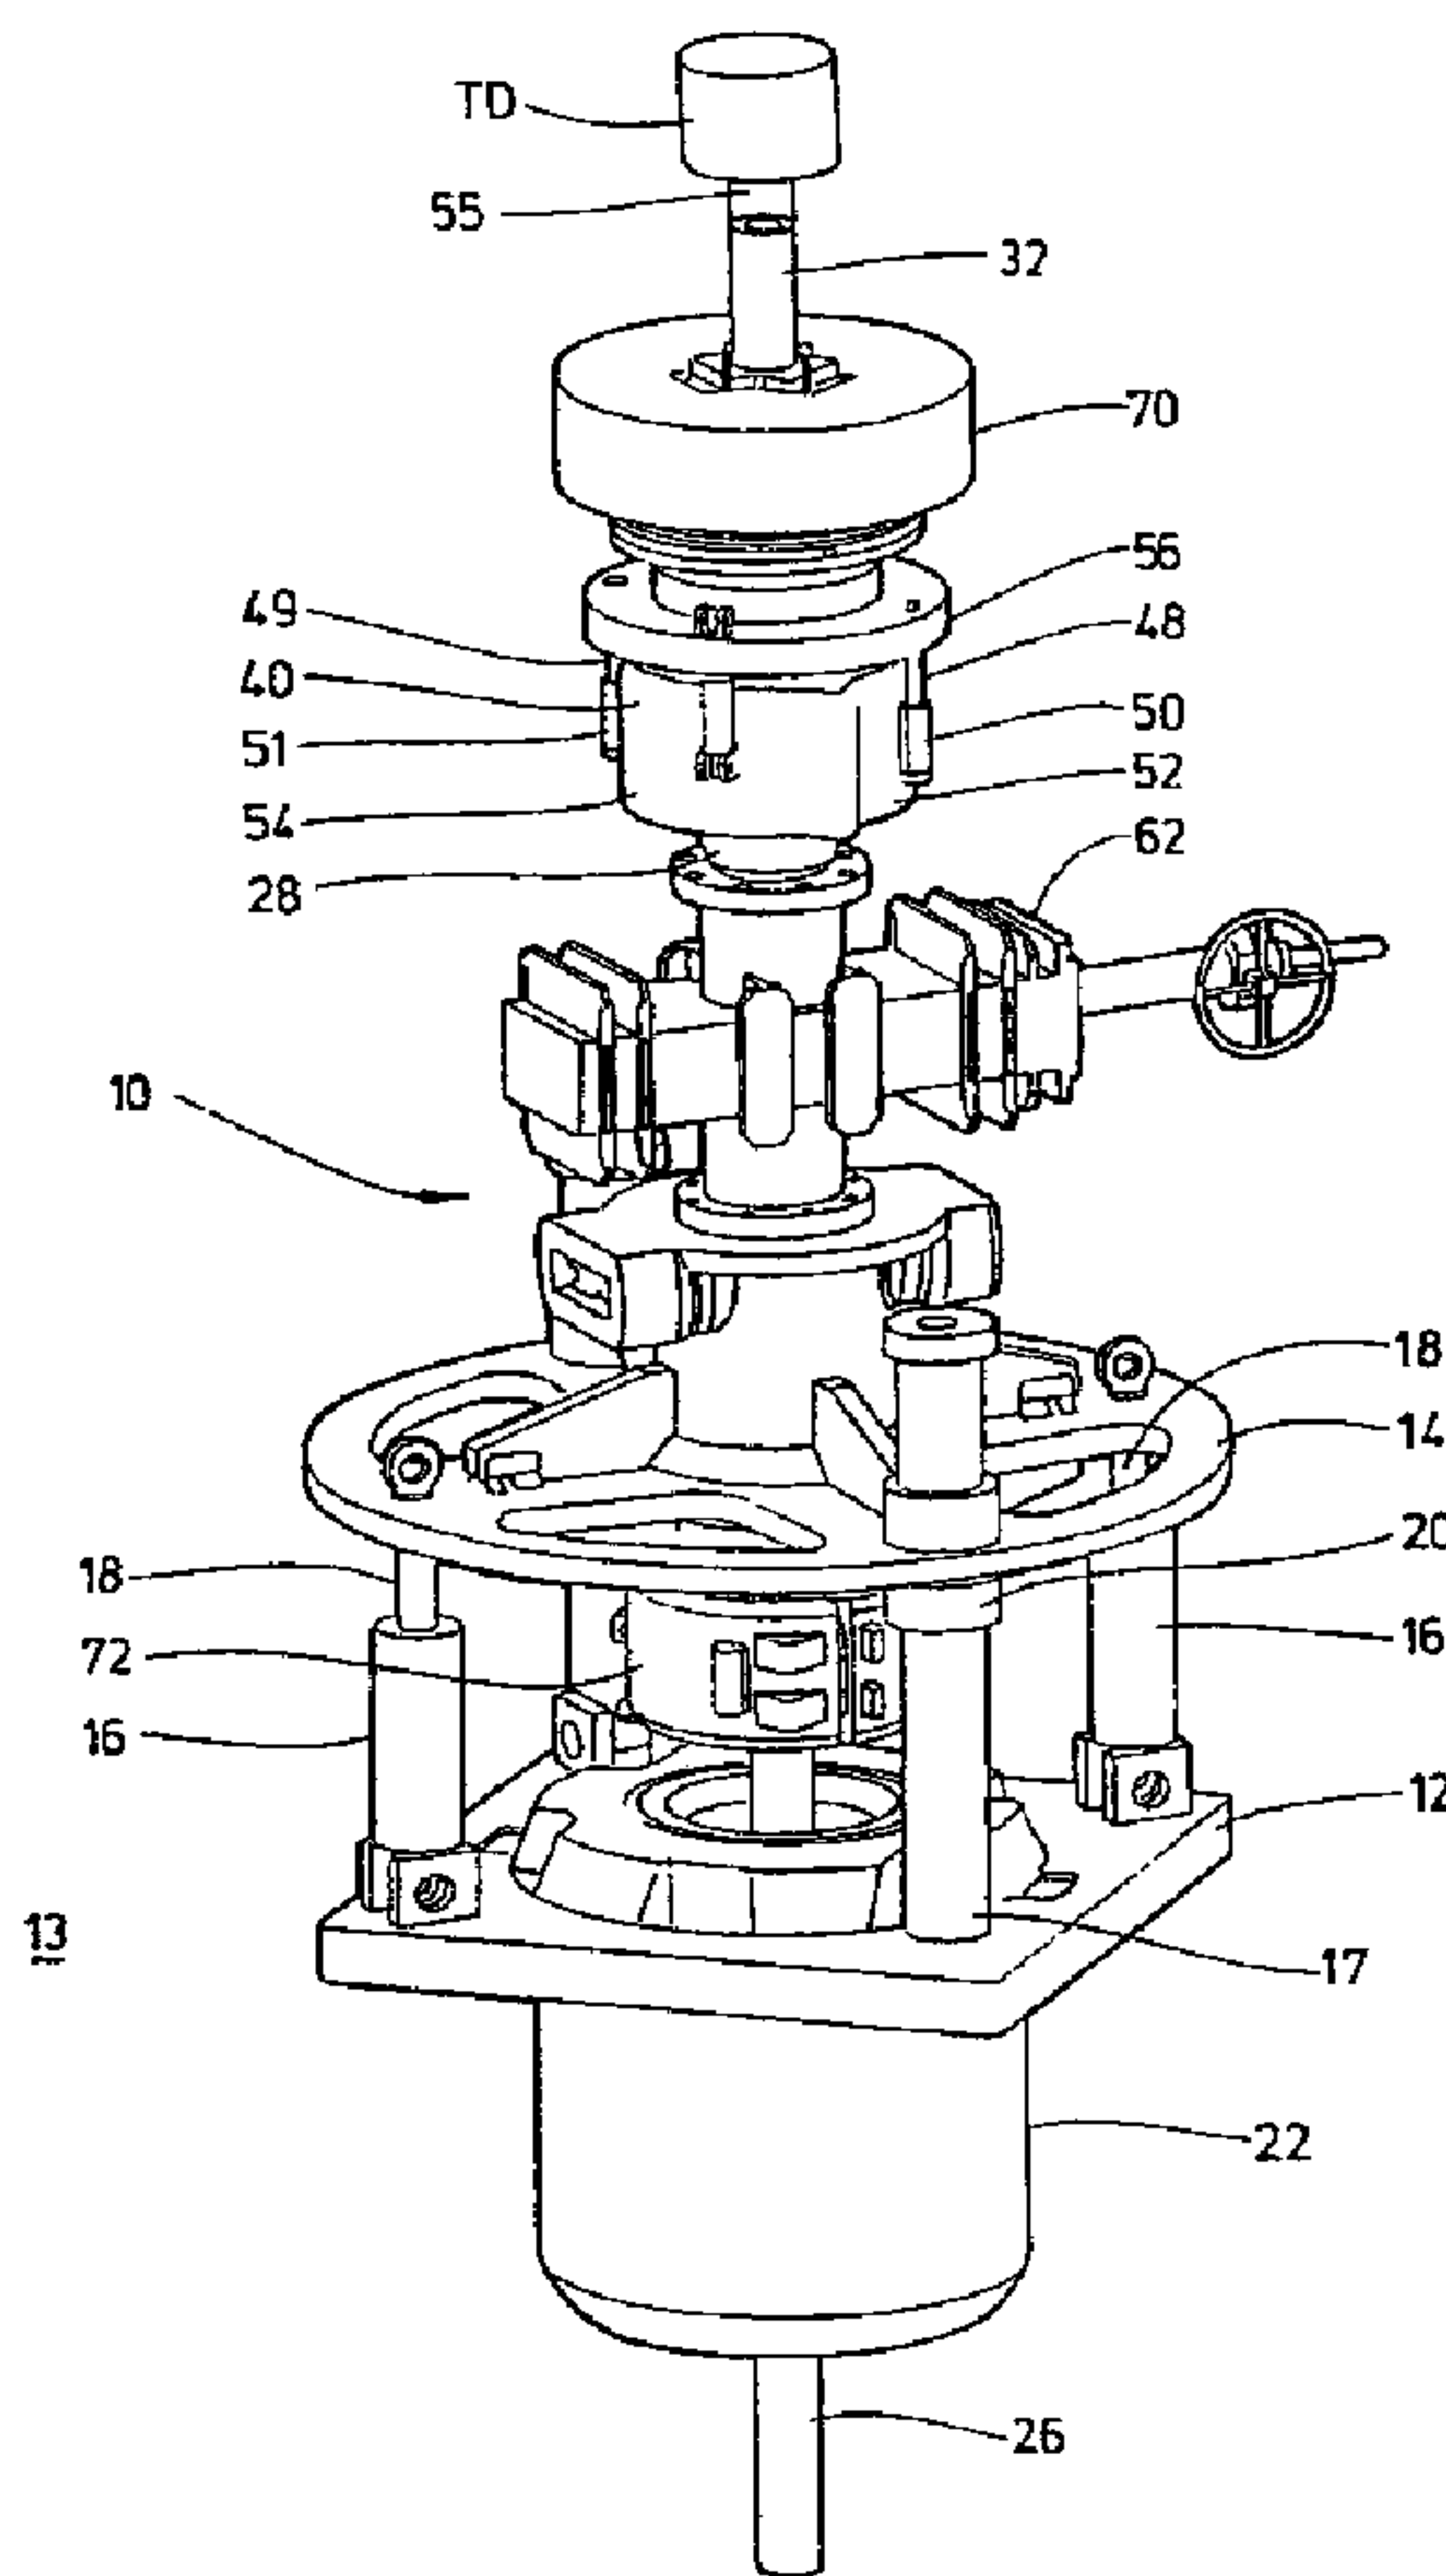

(57) **Abrégé/Abstract:**

A system (10) for continuously circulating fluid to and through a tubular string either of coiled tubing or made up of a plurality of tubulars connected end-to-end while an upper tubular (32) is added to or removed from a top tubular (26) of the plurality of

(57) **Abrégé(suite)/Abstract(continued):**

tubulars, all tubulars having a top-to-bottom fluid flow channel therethrough. The system has an upper chamber (43) with an upper sealing apparatus (34) for sealingly encompassing a portion of the upper tubular, a lower chamber (45) with a lower sealing apparatus (36) for sealingly encompassing a portion of the top tubular (26), one of the upper chamber and the lower chamber sized for accommodating connection and disconnection therein of the upper tubular and the top tubular, and gate apparatus (60) between and in fluid communication with the upper chamber and the lower chamber.

## ABSTRACT

A system (10) for continuously circulating fluid to and through a tubular string either of coiled tubing or made up of a plurality of tubulars connected end-to-end while an upper tubular (32) is added to or removed from a top tubular (26) of the plurality of tubulars, all tubulars having a top-to-bottom fluid flow channel therethrough. The system has an upper chamber (43) with an upper sealing apparatus (34) for sealingly encompassing a portion of the upper tubular, a lower chamber (45) with a lower sealing apparatus (36) for sealingly encompassing a portion of the top tubular (26), one of the upper chamber and the lower chamber sized for accommodating connection and disconnection therein of the upper tubular and the top tubular, and gate apparatus (60) between and in fluid communication with the upper chamber and the lower chamber.

## WELLBORE CIRCULATION SYSTEM

This is a divisional application of Canadian Patent Application Serial No. 2,401,075 filed on March 12, 2001.

5 This invention is related to systems and methods for continuously circulating fluid through two tubulars as they are being connected or disconnected; and, in certain particular aspects, to continuously circulating drilling fluid through two drill pipes as they are being connected or disconnected. It should be understood that the expression "the invention" and the like encompasses the subject matter of both the parent and the divisional applications.

10

In many drilling operations in drilling in the earth to recover hydrocarbons, a drill string of a plurality of threadedly-interconnected pieces of drill pipe with a drill bit at the bottom is rotated to move the drill bit. Typically drilling fluid and/or "mud" is circulated to and through the drill bit to lubricate and cool the bit and to facilitate the removal of  
15 cuttings, debris, etc. from the wellbore that is being formed.

As the drill bit penetrates into the earth and the wellbore is lengthened, more pieces of hollow tubular drill pipe are added to the drill string. This involves stopping the drilling while the tubulars are added. The process is reversed when the drill string is removed, e.g.  
20 to replace the drilling bit or to perform other wellbore operations. Interruption of drilling may mean that the circulation of the mud stops and has to be re-started when drilling resumes. This can be time consuming, can cause deleterious effects on the walls of the well being drilled, and can lead to formation damage and problems in maintaining an open wellbore. Also, a particular mud weight may be chosen to provide a static head relating to  
25 the ambient pressure at the top of a drill string when it is open while tubulars are being added or removed. The weighting of the mud can be very expensive.

To convey drilled cuttings away from a drill bit and up and out of a wellbore being drilled, the cuttings are maintained in suspension in the drilling fluid. If the flow of  
30 fluid with cuttings suspended in it ceases, the cutting tend to fall within the fluid. This is inhibited by using relatively thick drilling fluid; but thicker fluid require more power to pump and "breaking" them to re-start fluid circulation following a cessation of circulation may result in the over pressuring of a formation in which the wellbore is being formed.

WO98/16716 discloses a continuous circulation drilling method in which tubulars are added or removed from a drill string while a drill bit is rotating with mud and drilling fluids being circulated continuously and which are isolated from the environment to reduce pollution. In one aspect of this system a connector is used with  
5 an inlet and an outlet for the mud, etc., and which incorporates rams to seal off and separate the flow of mud as a tubular is added or removed.

U.S. Patent No. 3,559,739 discloses a method and apparatus is disclosed for maintaining continuous circulation of foam in a well through a segmented tubing string  
10 while the tubing string is being made up or broken up. A chamber having a foam entry port is formed around the tubing string above the wellhead. A valve is provided above the foam entry port to close off the upper portion of the chamber when the tubing string is broken and the upper portion thereof raised above such valve. When it is desired to add or remove a tubing section from the tubing string, the tubing string is held by slips  
15 with its open end in the lower portion of the chamber. The upper tubing section is lifted in the chamber to above the valve. The valve is closed and foam is circulated in the chamber through the foam entry port to provide for continuous foam circulation while another section of tubing is added or removed from the tubing string.

20 There has long been a need for an efficient and effective continuous circulation system for tubular connection and disconnections operations. There has long been a need for such a system which can operate with relatively lower viscosity drilling fluids. There has long been a need for such systems that may be used with either a top drive rig or a rotary table/kelly/kelly bushing rig.

25

In accordance with a first aspect of the present invention there is provided a system for continuously circulating fluid to and through a hollow tubular string while an upper hollow tubular is added to or removed from a top of the tubular string, the system comprising

30

chamber means with a bottom opening, a top opening and sealing apparatus for sealingly encompassing a portion of the top of the tubular string, the chamber means being sized for accommodating connection and disconnection therein of the upper hollow tubular to the top of the tubular string, and

apparatus for isolating the upper hollow tubular with a portion in the chamber means from fluid pressure loading within the chamber means.

In another aspect, the invention provides a system for continuously circulating fluid to and through a hollow tubular string while an upper hollow tubular is added to or removed from a top of the tubular string, the system comprising:

chamber means with a bottom opening, a top opening and sealing apparatus for sealingly encompassing a portion of the tubular string, the chamber means being sized for accommodating connection and disconnection therein of the upper hollow tubular to the top of the tubular string; and

inner bushing apparatus with a portion thereof movably disposable within the sealing apparatus for facilitating movement of a tubular with respect to the sealing apparatus.

In another aspect, the invention provides a system for continuously circulating fluid to and through a hollow tubular string while an upper hollow tubular is added to or removed from a top of the tubular string, the system comprising:

chamber means with a bottom opening, a top opening and sealing apparatus for sealingly encompassing a portion of the top of the tubular string, the chamber means being sized for accommodating connection and disconnection therein of the upper hollow tubular to the top of the tubular string;

a frame, the chamber means being selectively movably mounted to the frame;

pedestal apparatus, the frame being selectively movably mounted to the pedestal apparatus;

an offshore rig with a rig floor, the pedestal apparatus being positioned on the rig floor; and

a rig heave compensation system on the rig;

wherein the offshore rig heave compensation system intercommunicates with the system for continuously circulating fluid to selectively move the chamber means with respect to the rig floor to compensate for heaving of the offshore rig.

The hollow tubular string may be coiled tubing. The hollow tubular string may be made up of a plurality of hollow tubulars connected end-to-end, each having a top-to-bottom fluid flow channel therethrough. The hollow tubular string may be a drill string.

3a

In another aspect, the invention provides a system for continuously circulating fluid to and through a tubular string made up of a plurality of tubulars connected end-to-end while an upper tubular is added to or removed from a top tubular of the plurality of tubulars, all tubulars having a top-to-bottom fluid flow channel therethrough, the system comprising:

an upper chamber with a bottom opening, a top opening, and an upper sealing apparatus for sealingly encompassing a portion of the upper tubular;

a lower chamber with a bottom opening, a top opening and a lower sealing apparatus for sealingly encompassing a portion of the top tubular, one of the upper chamber and the lower chamber sized for accommodating connection and disconnection therein of the upper tubular and the top tubular;

gate apparatus between and in fluid communication with the upper chamber and the lower chamber; and

apparatus for isolating a tubular with a portion in the upper chamber from fluid pressure loading within the upper chamber;

wherein the system is connectable to and rotatable by a rotating system for rotating the tubular string.

At least one of the lower chamber and the upper chamber may have inner bushing apparatus with a portion thereof movably disposable within the chamber's sealing apparatus for facilitating movement of a tubular with respect to the chamber's sealing apparatus. The upper chamber may have said inner bushing apparatus.

The system may also comprise movement apparatus for moving the upper chamber bushing apparatus with respect to the upper chamber's sealing apparatus so that the protective portion is selectively positionable with respect to the upper chamber's sealing apparatus.

The upper sealing apparatus may comprise a control head above the upper chamber through which the tubulars are passable, the control head being for sealingly containing fluid pressure in the upper chamber.

3b

The lower sealing apparatus may comprise a control head below the lower chamber and through which the tubulars are passable, the control head for sealingly containing fluid pressure in the upper chamber. The control head may be a rotating control head. The system may also comprise a tong for gripping a portion of a tubular to rotate the tubular. The tong may isolate a tubular with a portion in the upper chamber from fluid pressure loading within the upper chamber. The system may also comprise a backup gripper below the lower chamber for selectively gripping a portion of a tubular.

The system may also comprise fluid flow lines to each of the top and bottom chambers;

a supply of fluid for circulating through the fluid flow lines and the tubular string and through the upper and lower chambers; and

apparatus for continuously moving circulating fluid from the supply through the system into the tubular string.

The system may also comprise a top drive rig with a top drive;

wherein the system for continuously circulating fluid is positioned below the top drive.

The system may also comprise a rotary drive rig with a kelly and a kelly bushing, the rotary drive rig having a rig floor;

wherein the system for continuously circulating fluid positioned is above the kelly bushing on the rig.

The system may also comprise a frame, the upper and lower chambers being selectively movably mounted to the frame. The system may also comprise pedestal apparatus, the frame being selectively movably mounted to the pedestal apparatus.

The system may also comprise an offshore rig with a rig floor, the pedestal apparatus being positioned on the rig floor; and

a rig heave compensation system on the rig;

the offshore rig heave compensation system intercommunicating with the system for continuously circulating fluid to selectively move a chamber with respect to the rig floor to compensate for heaving of the offshore rig.



3c

The gate apparatus may include a valve, which is a ball valve, gate valve, flapper valve, or plug valve. The gate apparatus may include a blow-out preventer, which is BOPS, blind ram-type BOPS, or non-blind CSO type BOPS.

The system may further comprise flow control apparatus for controlling the pressure of fluid flow to the upper and lower chambers.

The system may also comprise alignment apparatus above the upper chamber for axially aligning a tubular with a portion in the upper chamber. The system may also comprise an upper blowout preventer sealingly connected to a top of the upper chamber; and

a lower blowout preventer sealingly connected to a bottom of the lower chamber.

In accordance with a second aspect of the invention there is provided a kelly bushing comprising

a base with a tubular channel therethrough from top to bottom, the base having a plurality of base axle slots,

a roller support on the base, the roller support having a plurality of roller support axle slots,

a plurality of spaced-apart rollers, each roller being mounted on a respective axle, wherein

each axle has a portion movably positioned in a corresponding roller support axle slot so that movement of an axle therein moves its corresponding roller with respect to the tubular channel, and

each axle has a portion movably positioned in a corresponding base axle slot so that movement of an axle therein moves its corresponding roller with respect to the tubular channel, the kelly bushing further comprising

a levelling bar at the top of the roller support, the roller support being movable vertically by moving the levelling bar, wherein

the base axle slots are at an angle to the roller support axle slots so that movement of the levelling bar effects movement of the base axle slots with respect to the roller support thereby moving the rollers with respect to the tubular channel into and out of contact with a kelly within the tubular channel.

3d

In accordance with a third aspect of the invention there is provided a kelly  
comprising  
a tubular body with a top and a bottom,

a flats tubular with a top and a bottom, the top of the body being formed of or secured to the bottom of the flats tubular, the flats portion having a plurality of flat surfaces around a circumference of the flats tubular, and

at least one tool joint having a top and a bottom, the top of the at least one tool joint being connected to the bottom of the tubular body, the tool joint having an outer diameter, wherein

a diameter of the flats across a cross-section of the flats tubular from one flat surface to an opposing flat surface is at least as large as the outer diameter of the at least one tool joint.

10

Also provided is a kelly comprising

a tubular body with a top and a bottom,

a flats tubular with a top and a bottom, the top of the body formed of or secured to the bottom of the flats tubular, the flats portion having a plurality of flat surfaces around a circumference of the flats tubular,

15

a tool joint having a top and a bottom, the top of the tool joint being connected to the bottom of the tubular body,

wherein the tubular body is between five and ten feet (1.5 m and 3 m) in length. The tubular body can be about six feet (2 m) long.

20

According to a fourth aspect of the invention there is provided a tong for use in wellbore operations, the tong comprising

a housing with a hollow interior,

a gear wheel secured to the housing for rotation therewith, the gear wheel having a toothed outer circumference for mating with teeth of a drive shaft of a driving motor,

25

a gear flange mounted on top of the gear wheel so that rotation of the gear wheel does not rotate the gear flange, and

a plurality of spaced-apart jaw assemblies within the housing's hollow interior, each jaw assembly having a jaw for selectively engaging a portion of a tubular to be gripped and rotated by the tong.

30

The tong can further comprise fluid flow apparatus for selectively conveying operating fluid under pressure through the tong to the jaw assemblies for selectively

4a

operating the jaw assemblies. The plurality of spaced-apart jaw assemblies can be three spaced-apart jaw assemblies. Each jaw assembly of the plurality of jaw assemblies can have at least one insert thereon for engaging the tubular. The inserts can be toothed inserts.

5

The inserts can be configured for resisting both axial and radial loading.

Each jaw assembly can comprise

10 a jaw body with an inner chamber having an outer wall with a channel therethrough, and

a piston with a first end in the inner chamber, the first end secured to or formed of an intermediate portion movable in the channel of the outer wall of the inner chamber, and a first end, and a second end secured to or formed of the intermediate portion, the second within the housing of the tong,

15 wherein the jaw body is selectively movable with respect to the piston into and out of engagement with the tubular by selectively applying fluid under pressure on one side of the first end of the piston.

20 The tong can further comprise a plurality of bearings between the gear flange and the gear wheel for facilitating movement of the gear wheel with respect to the gear flange.

The tong's gear flange, gear wheel, jaw assemblies and bearings can be configured and sized to resist axial loading on the tong.

25 The present invention also provides a tong for use in wellbore operations, the tong comprising

a housing with a hollow interior,

a plurality of jaw assemblies movably mounted in the hollow interior of the housing,

30 gear structure on the housing for mating co-action with a tong drive apparatus, and

4b

internal fluid flow apparatus for conducting fluid under pressure through the tong to the jaw assemblies for selectively operation of the jaw assemblies for engaging and disengaging from a tubular to be gripped and rotated by the tong.

5           The present invention, in at least certain preferred embodiments, discloses a continuous circulation system for continuously circulating fluid to a tubular string at the top end of which a tubular is being added or removed while the addition or removal is being done. In particular aspects the tubular string is coiled tubing or a string of drill pipe with a drill bit at its bottom used to drill a wellbore in the earth. Circulation is  
10 maintained on such a string during joint makeup and breakout. The system may include typical tongs, back-ups, and/or grippers for holding and rotating the tubulars. In one aspect a new tong is used that isolates tubulars being handled from high pressure axial

loading, thereby preventing the "launch" of a tubular from the system; and, therefore, these systems can be used with a standard top drive rig or with a standard kelly and rotary rig.

5           In one embodiment positioned between a top chamber and a bottom chamber is a gate apparatus that selectively isolates the two chambers and through which may pass the ends of two tubulars that are joined together, that are to be separated, or that are to be joined together. With suitable valving, pumps, control apparatus and devices, and flow lines, fluid flow is maintained to the tubular string beneath the system through the  
10 chambers of the system during both "break out" and "make up" operations while undesirable leakage of fluid from the system is inhibited or prevented. Seals around each tubular C an upper tubular being added (or removed) from the string and a top tubular of the string situated beneath the upper tubular C prevent fluid from flowing out of the chambers to the environment.

15

          In certain particular aspects the seals in the top chamber and bottom chamber are the stripper rubbers of control heads (rotating or non-rotating). In particular aspects there is an inner bushing or "sabot" that facilitates a tubular's entry into and removal from the chamber. This inner bushing or "sabot" is movably mounted in the system so  
20 that it is selectively movable with respect to the stripper rubber to facilitate entry of a tubular end into and through the stripper rubber.

          In various particular embodiments the gate apparatus uses one of a variety of structures for sealingly and selectively isolating the top chamber from the bottom  
25 chamber; and for providing a selectively operable area through which tubulars may pass during continuous fluid circulation. These gate apparatuses include, in at least certain preferred embodiments, apparatus with a flapper valve, ball valve, plug valve, gate valve or with a blowout preventer (e.g. annular ram-type blind or "CSO" type).

30

          In certain preferred embodiments systems and methods according to the present invention are particularly suited for underbalanced drilling operations and for extended reach drilling operations. For operations associated with rotary/kelly type drilling, in at least certain preferred embodiments according to the present invention a new kelly

bushing with rollers with selectively variable extension is provided and, in other aspects, a new kelly to facilitate use of the continuous circulation system according to the present invention.

5           In certain embodiments of systems and methods according to the present invention, faster connection time is achieved. In certain particular aspects in underbalanced drilling with single-phase or two-phase fluids in the wellbore, the need for check valves (or "string floats") in a drill string is reduced or eliminated; gas pockets do not need to be bled; and continuous fluid circulation can be maintained. There is  
10 no need to wait while circulation is shut off to let gas pressure in the wellbore balance with the atmosphere before a connection can be broken.

          By controlling the fluid flow rate within chambers of systems according to the present invention, the threads of tubulars within the chambers are not damaged by the  
15 fluid under pressure. In certain systems according to the present invention, the chambers are movable both with respect to a system frame and with respect to a rig floor on which the system is mounted. In certain aspects this allows for heave compensation on offshore rigs. In certain aspects an axial alignment apparatus aligns an upper tubular held by the system.

20

          It is an object of at least certain preferred embodiments of the present invention to provide:

          New, useful, unique, efficient, nonobvious systems and methods for  
25 continuously circulating fluid through a tubular string when a tubular is being connected to or disconnected from the top of the string;

          Such systems and methods useful in wellbore drilling operations, including, but not limited to, underbalanced drilling operations and extended reach drilling operations;

30

          Such systems and methods useful with top drive rigs and rotary/kelly rigs;

Such systems and methods with inner bushings or "sabots" for facilitating tubulars' movement with respect to tubular seals or stripper rubbers;

5 Such systems and methods in which a variety of interchangeable gate apparatuses may be used to provide a sealed central chamber for tubular connection and disconnection;

10 Such systems and methods with a kelly bushing with rollers whose extension into the bushing is selectively variable to permit removal of a kelly through and from the bushing, so that a kelly itself and drill pipe connected to it can be raised through the kelly bushing;

15 Such systems with a new kelly that is removable through a kelly bushing, such a kelly in certain aspects with a width (distance) between flats greater than the diameter of a tool joint connected to the kelly;

Such systems and methods that permit operations to be conducted with relatively low viscosity drilling fluid or mud;

20 Such system and methods that produce wellbores with relatively greater stability due to no or lower pressure shocks to the bore by using relatively low viscosity drilling fluid, by keeping drilling fluid pressure constant and in certain aspects below formation pressure, and without the need to "break" circulation;

25 Such systems and methods whose use reduces the risk of stuck pipe by continuously maintaining drilled cuttings in circulation;

30 Such systems and methods that permit constant or almost constant drilling fluid and mud flow from the wellbore being formed to the equipment that processes the fluids;

Such systems that are closed in which the top of the drill pipe string is not open to the atmosphere; and



Such systems and methods that permit faster connection time in underbalanced drilling operations with two-phase fluids.

In another aspect, the invention provides a system for continuously circulating fluid to and through a hollow tubular string while an upper hollow tubular is added to or removed from a top of the tubular string, the system comprising:

chamber means with a bottom opening, a top opening and sealing apparatus for sealingly encompassing a portion of the tubular string, the chamber means being sized for accommodating connection and disconnection therein of the upper hollow tubular to the top of the tubular string; and

inner bushing apparatus with a portion thereof movably disposable within the sealing apparatus for facilitating movement of a tubular with respect to the sealing apparatus.

In another aspect, the invention provides a system for continuously circulating fluid to and through a tubular string made up of a plurality of tubulars connected end-to-end while an upper tubular is added to or removed from a top tubular of the plurality of tubulars, all tubulars having a top-to-bottom fluid flow channel therethrough, the system comprising:

an upper chamber with a bottom opening, a top opening, and an upper sealing apparatus for sealingly encompassing a portion of the upper tubular;

a lower chamber with a bottom opening, a top opening and a lower sealing apparatus for sealingly encompassing a portion of the top tubular, one of the upper chamber and the lower chamber sized for accommodating connection and disconnection therein of the upper tubular and the top tubular;

gate apparatus between and in fluid communication with the upper chamber and the lower chamber; and

apparatus for isolating a tubular with a portion in the upper chamber from fluid pressure loading within the upper chamber;

wherein the system is connectable to and rotatable by a rotating system for rotating the tubular string; and

wherein at least one of the lower chamber and the upper chamber has inner bushing apparatus with a portion thereof movably disposable within the chamber's sealing

8a

apparatus for facilitating movement of a tubular with respect to the chamber's sealing apparatus.

In another aspect, the invention provides a system for continuously circulating fluid to and through a tubular string while an upper tubular is connected or disconnected from the top tubular of the tubular string, the system comprising:

an upper chamber for receiving the upper tubular of the tubular string, said upper chamber having a bottom opening and a top opening;

a lower chamber for receiving the top tubular of the tubular string, said lower chamber having a bottom opening and a top opening, one of said upper chamber and said lower chamber sized for accommodating connection and disconnection therein of the upper tubular and the top tubular;

an upper sealing apparatus within said upper chamber for sealingly encompassing a portion of the upper tubular within said upper chamber, said sealing apparatus defining an upper control head having a through-opening, an upper stripper rubber for circumferentially engaging the upper tubular within said upper chamber, and an upper chamber bushing extending through said through-opening of said upper control head and receiving the upper tubular, said upper chamber bushing residing between a portion of said upper stripper rubber and the upper tubular;

a lower sealing apparatus within said lower chamber for sealingly encompassing a portion of the top tubular within said lower chamber; and

an apparatus for isolating the upper chamber from fluid pressure loading within the lower chamber during connection or disconnection of the upper tubular and the top tubular.

In another aspect, the invention provides a sealing apparatus for use in a system for continuously circulating fluid to and through a tubular string while an upper tubular is connected or disconnected from the top tubular of the tubular string, the continuous circulation system comprising:

an upper chamber for receiving the upper tubular, the upper chamber having a bottom opening and a top opening;

a lower chamber for receiving the top tubular, the lower chamber having a bottom opening and a top opening, one of said upper chamber and lower chamber being sized for

8b

accommodating connection and disconnection therein of the upper tubular and the top tubular;

an apparatus for isolating the upper chamber from fluid pressure loading within the lower chamber during connection or disconnection of the upper tubular and the top tubular; and

the continuous circulation system being connectable to and rotatable by a rotating system for rotating the tubular string; the sealing apparatus comprising:

an upper control head in said upper chamber having a through-opening;

an upper stripper rubber for circumferentially and sealingly engaging the upper tubular below said upper control head and within the upper chamber;

an upper chamber bushing extending through said through-opening of said upper control head and receiving the upper tubular, said upper chamber bushing movably extending from a first retracted position where said upper chamber bushing is not materially expanding said upper stripper rubber, to a second extended position where said upper chamber bushing is between said upper stripper rubber and the upper tubular, said upper chamber bushing being sized to expand said upper stripper rubber when said upper chamber bushing is moved to its second extended position in the upper chamber, thereby facilitating movement of the upper tubular through said upper stripper rubber; and

movement apparatus for moving said upper chamber bushing with respect to said upper stripper rubber so that said upper chamber bushing is selectively extendable into the upper chamber between its first retracted position and its second extended position.

Some preferred embodiments of the invention will now be described by way of example only and with reference to the accompanying drawings, in which:

Fig. 1A is a perspective view of system according to the present invention. Fig. 1B is a cross-section view of part of the system of Fig. 1A. Figs. 1C and 1D are side views of the system of Fig. 1A;

Fig. 2 is a cross-section view of the system of Fig. 1A;

8c

**Fig. 3 is a cross-section view of a system according to the present invention;**

**Fig. 4A is a perspective view of a system according to the present invention;**

**Fig. 4B is a side view and Fig. 4C is a front view of the system of Fig. 4A;**

**Fig. 5 is a perspective view of a system according to the present invention;**

**Fig. 6 is a perspective view of a system according to the present invention;**

**Fig. 7 is a perspective view of a prior art kelly and kelly bushing;**

**Fig. 8A is a side view of a kelly bushing according to the present invention;**

**Fig. 8B is a cross-section view along line 8B-8B of Fig. 8A;**

**Fig. 8C is a side view of the kelly bushing of Fig. 8A;**

**Fig. 8D is a cross-section view along line 8D-8D of Fig. 8C of the kelly bushing as shown in Fig. 8C;**

Fig. 9A is a side view of a kelly according to the present invention;

Fig. 9B is a cross-section view along line 9B-9B of Fig. 9A;

5

Figs. 9C and 9D are cross-section views of kellys according to the present invention;

Fig. 10A is a side view of a kelly bushing according to the present invention;

10

Fig. 10A is a view along line 10A-10A of Fig. 10B;

Fig. 10B is a cross-section view along line 10B-10B of Fig. 10A;

15

Fig. 10C is a top view of a body for the kelly of Fig. 10A;

Fig. 11 is a schematic view of a typical prior art rotary rig with which circulation systems disclosed herein according to the present invention may be used;

20

Fig. 12A is a side view of a prior art derrick and top drive with which circulation systems according to the present invention may be used;

Fig. 12B is a perspective view of the top drive of Fig. 12A;

25

Fig. 13A is a perspective view of a tong and motors according to the present invention;

Fig. 13B is a cutaway view of the tong of Fig. 13A;

30

Fig. 13C is an exploded view of the tong of Fig. 13A;

Fig. 14A is a perspective view of an insert according to the present invention for a tong;

Fig. 14B is a side view of a tooth profile for an insert according to the present invention;

5 Fig. 14C is a side view of inserts of a system according to the present invention;

Figs. 15A - 15G illustrate steps in a method according to the present invention using a continuous circulation system according to the present invention;

10 Fig. 16A is a perspective view of a system according to the present invention;  
and

Fig. 16B is a cross-section view of the system of Fig. 16A.

15 Figs. 1A - 2 show a system 10 according to the present invention with a platform 12 mounted above a rotary table 13 and a platform 14 movably mounted to and above the platform 12. Two cylinders 16 each has a movable piston 18 movable to raise and lower the platform 14 to which other components of the system 10 are connected. Any suitable piston/cylinder may be used for each of the cylinders 16/pistons 18 with  
20 suitable known control apparatuses, flow lines, consoles, switches, etc. so that the platform 14 is movable by an operator or automatically. Guide posts 17 (one shown in Fig. 1A) secured to the platform 12 move through tubulars 20 of the platform 14 to guide and control movement of the platform 14. Optionally, a top drive TD is used to rotate the drill string. An optional saver sub SS is interconnected between the top drive  
25 and the drill string.

A spider 22 including, but not limited to, known flush-mounted spiders, or other apparatus with selectively emplaceable slips extends beneath the platform 12 and accommodates typical movable slips 24 for releasably engaging and holding a tubular  
30 26 which is the top tubular of a tubular string, e.g. a string of drill pipe, extending down from the rotary table 14 into a wellbore (not shown). The spider, in one aspect, may have keyed slips, e.g. slips held with a key that is received and held in recesses in the spider body and slip so that the slips do not move or rotate with respect to the body.

The system 10 has upper control head 28 and lower control head 30. These may be known commercially available rotating control heads. An upper tubular 32 is passable through a stripper rubber 34 of the upper control head 28 to an upper chamber 43 and the top tubular 26 passes through a stripper rubber 36 of the lower control head 30 to a lower chamber 45. The top tubular 26 is passable through a "sabot" or inner bushing 38. The sabot 38 is releasably held within the upper chamber by an activation device 40. Similarly, the top tubular 26 of the string passes through a sabot or inner bushing 42.

10

Within housings 44, 46 are, respectively, the upper chamber 43 and the lower chamber 45. The "stripper rubbers" seal around tubulars and wipe them. The sabots or inner bushings 38, 42 protect the stripper rubbers from damage by tubulars passing through them. The sabots also facilitate the tubulars' entry into the stripper rubbers.

15

Movement of the sabots or inner bushing 38 with respect to the stripper rubber 34 is accomplished by the activation device 40 which, in one aspect, involves the expansion or retraction of pistons 48, 49 of cylinders 50, 51. The cylinders 50, 51 are secured to clamp parts 52, 54, (which are releasably clamped together) respectively, of the control heads 28, 30. The pistons 48, 49 are secured, respectively, to a ring 56 to which the sabots themselves are secured. The cylinders 50, 51 may be any known suitable cylinder/piston assembly with suitable known control apparatuses, flow lines, switches, consoles, etc. so that the sabots are selectively movable by an operator (or automatically) as desired, e.g. to expand the stripper rubbers and protect them during tubular joint passage therethrough, then to remove the sabots to permit the stripper rubbers to seal against the tubulars.

20

25

Disposed between the housings 44, 46 is a gate apparatus 60 which includes movable apparatus therein to sealingly isolate the upper chamber 43 from the lower chamber 45. Joint connection and disconnection may be accomplished in the lower chamber or in the upper chamber.

30

In a particular embodiment of the system 10, the gate apparatus 60 is a gate valve 62 with a movable gate 64 and an inner space that defines a central chamber 66 within which the connection and disconnection of tubulars can be accomplished.

5 In certain embodiments, the tong 70 is isolated from axial loads imposed on it by the pressure of fluid in the chamber(s). In one aspect lines, e.g. ropes or cables, or fluid operated (pneumatic or hydraulic cylinders) connect the tong to platform 14. another aspect a gripping device such as, but not limited to a typical rotatably mounted snubbing spider, grips the tubular below the tong and above the control head or above the tong,  
10 the snubbing spider connected to the platform 14 to take the axial load and prevent the tong 70 from being subjected to it. Alternatively the tong itself may have a jaw mechanism that can handle axial loads imposed on the tong. A power tong 70 (shown schematically in Fig. 1A) with a typical back-up apparatus 72, e.g. but not limited to, a suitable known back-up tong or gripper may be used with the system 10 (and with any  
15 system according to the present invention disclosed herein). In one preferred aspect the tong uses bi-directional inserts or dies.

Fig. 1B illustrates one fluid power/control circuit for a system according to the present invention like the system 10. Fluid is pumped from a fluid supply reservoir  
20 ("TANK") by a pump 74 through a line J and is selectively supplied to the lower chamber 45 with valves 76, 78, 82, 84 closed and a valve 80 open. Fluid is selectively supplied to the upper chamber 43 with the valves 78, 80, 82, 84 closed and the valve 76 open. Fluid in both chambers 43, 45 is allowed to equalize by opening valve 84 with valves 78, 82 closed. By providing fluid to at least one of the chambers 43, 45 when the  
25 chambers are isolated from each other or to both chambers when the gate apparatus is open, continuous circulation of fluid is maintained to the tubular string through the top tubular 26. This is possible with the gate apparatus opened (when the tubulars' ends are separated or joined); with the gate apparatus closed (with flow through the lower chamber 45 into the top tubular 26); or from the upper chamber 43 into the lower  
30 chamber when the gate apparatus is closed. A choke 75 (or other suitable flow controller) controls the rate of fluid pressure increase so that fluid at desired pressure is reached in one or both chambers and damage to the system and items therein is inhibited or prevented.



Fig. 3 shows a system 100 according to the present invention with an upper chamber 102 (defined, e.g. by a housing as is the upper chamber 43 in the system 10, Fig. 1A) and a lower chamber 104 (defined, e.g. by a housing as is the lower chamber 45 in the system 10, Fig. 1A). Slips 106 are like the slips 24 of the system 10 and the system 100 is usable on a rotary rig like that with the rotary table 14 of the system 10. Upper and lower control heads 108, 110 have, respectively, stripper rubbers 112, 114. In certain preferred embodiments the control heads are rotating control heads as are well known and commercially available.

10

A gate apparatus 120 separates the chambers 102, 104 and is selectively openable so that the chambers are in fluid communication. Any gate apparatus disclosed herein may be used for the gate apparatus 120. - A tong 116 is shown schematically gripping a lower end 118 of an upper tubular 122; but it is within the scope of this invention for any embodiment for a tong to be positioned anywhere in or on the system where it can conveniently and effectively grip a tubular.

15

An axial alignment mechanism 124 with a tong 116 that grips the tubular has an inner throat or channel 126 for receiving the upper tubular 122. Pistons 121 of cylinders 123 are movable up and down to move the tong 116 to axially align a tubulars. Known control apparatuses, flow lines, switches, consoles, etc. (wired or wireless; operator controlled and/or automatic) may be used to effect correct axial positioning of the tubulars.

20

A "sabot" or inner bushing 130 encircles the upper tubular 122 and facilitates movement of the upper tubular 122 with respect to a stripper rubber 112 of a control head. A top guide 132 with a wiper 134 encompasses the upper tubular 122, guides the upper tubular through the stripper rubber 112 and protects the stripper rubber from damage by the tubular its travel with respect to the tong and the system's chambers. A bottom guide 136 with a wiper 138 encompasses a top tubular 140 of a tubular string 142 extending into a wellbore 144; protects the system's chambers from damage; guides the upper tubular through the lower stripper rubber, reducing wear on it; retains the

30

lower stripper rubber in place; and guides the tubular 140 in its travel with respect to system's chambers.

5 Figs 4A-4B show a system 150 according to the present invention with support pedestals 152 on a rig floor 153 of a rig (not shown; e.g. a typical rotary table rig). The system 150 is used to either connect or disconnect an upper tubular 154 and a top tubular 156 of a string of tubulars (not shown) extending beneath the rig into a wellbore.

10 Components of the system 150 supported by the pedestals 152 are movable with respect to the pedestals 152 by extending or retracting pistons 158 of cylinders 160 (one shown) one on the side of each of the pedestals. At one end (bottom end) the pistons 158 are secured to the pedestals and at the other end (top end) the cylinders 160 are secured to a frame 162 that holds components of the system 150 between the pedestals 152. Frame connections 165 move in slots (not shown) in the pedestals.

15

The system 150 includes a lower gripper or back-up tong 164 above which is mounted a typical blow-out preventer 166. Above the blow-out preventer 166 is a gate apparatus 170 which may be any gate apparatus disclosed herein. A blow-out preventer 168 is mounted above the gate apparatus 170.

20

A tong 172 is mounted above the blow-out preventer 168 for gripping and rotating the tubular 154. In one aspect the tong 172 is a power tong powered by tong motors 174. This system 150 may include control heads and one or more movable sabots or inner bushings as in the system 10 above.

25

The tong 172 is movable with respect to the back-up tong 164 movable with respect to the blow-out preventer 168 and items below it by expanding and contracting pistons 176 of cylinders 178. The lower end of the cylinders 168 are secured to the frame 165.

30

When used in a top drive drilling system, in a system according to the present invention whatever is gripping the tubulars of the string rotates when the top drive shaft rotates.

Figs 5 and 6 illustrate alternative embodiments for upper and lower chambers and gate apparatuses for systems according to the present invention. Fig. 5 shows a system 190 according to the present invention with a housing 192 having an upper chamber 194 in which is removably positioned a lower end of an upper tubular 196 that extends through an upper stripper rubber 198; and a lower chamber 200 in which is removably positioned a top end of a top tubular 202 (e.g. a top tubular of a string, e.g. a drill string of drill pipe) that extends through a lower stripper rubber 204. A channel 206 between the upper chamber 194 and the lower chamber 200 is selectively openable and closable with a flapper valve 210.

Drilling fluid is selectively pumped to the chambers 194, 200 from a mud system 208 (any suitable known drilling fluid/mud processing system C also usable with any system disclosed herein) via lines 212, 214 controlled by valves 216, 218. Fluid is evacuated from the chambers to a reservoir 228 via lines 220, 222 and 230 in which flow is controlled by a valve 224. A check valve 226, in one aspect a ball-type check valve 226 prevents backflow when circulating from the bottom chamber only. The valve 210 automatically opens or closes by the action of a tubular end, e.g. by contact with the pin end of the upper tubular. To open the valve 210 pressure between the upper and lower chambers is equalized and then the pin end of the upper tubular is pulled down by moving a tong downwardly with its associated movement cylinders (not shown, like those of the system 10 or of the system 150). The valve 210 closes automatically when a tubular's end is raised up through the channel 206. Such automatic closing can be effected with a spring 195, counter weight, or other apparatus or structure for supplying a closing force to the valve. The valve 224 may be set to allow fluid flow only from the upper chamber, only from the lower chamber, or to equalize fluid pressure in the two chambers.

A system 230 according to the present invention as shown in Fig. 6 has a housing 232 that defines an upper chamber 234 and a lower chamber 236. An upper tubular 238 has a lower end extending (removably) down into the lower chamber 236. A top tubular 242 of a tubular string (e.g. any string disclosed herein) extends (removably) up into the lower chamber 236. The upper tubular 238 extends through a

stripper rubber 240 and the top tubular 242 extends through a stripper rubber 244. The lower chamber 236 is sized and configured for connection and disconnection therein of the tubulars.

5 A gate apparatus 250, in this case a ball or plug valve 246, controls fluid flow between the two chambers via a channel 248.

Any control heads, alignment mechanisms, top and bottom guides, tongs, back-ups raising and lower devices, and/or guides and wipers disclosed herein may be used  
10 with the systems of Figs. 3, 4, 5, and 6.

Fig. 7 shows a prior art kelly K and a prior art kelly bushing B as are typically used with prior art rotary/kelly rigs.

15 Figs. 8A and 8B show a kelly bushing 260 according to the present invention with a plurality of spaced-apart rollers 262 each rotatably mounted on an axle 264 which is movable up/down, in and out in a slot 266 of a support 268 on a base 270. The rollers 262 are positioned so their outer diameters contact flat surfaces 272 of a kelly 274. The position of the rollers 262 is adjustable by moving a levelling bar 275 up and  
20 down which raises and lowers the axles 264 in the slots 266 and slots 280. Moving the levelling bar 275 in effect moves the intersections of the slots 266 and 280 toward and away from the apparatus center line.

Guide rods 276 guide the movement of the levelling bar 275 with respect to the  
25 base 270 and resist bending forces imposed on guide bushings 278. The guide bushings 278 maintain the levelling bar 275 perpendicular to the guide rods and, therefore, level with respect to the base 270 so, preferably, the rollers are maintained equidistant from the center line of the device. Raising and lowering the leveling bar 275 moves the roller axles 264 and hence the rollers 262 out (Figs. 8C, 8D) or in (Figs. 8A, 8B) respectively.  
30 When the rollers move out, they allow the tool joint of the kelly to pass. When the rollers move in, they press against the flats of the kelly. This allows torque to be transmitted from the kelly bushing base to the kelly. Each of the axles 264 moves in two slots, a slot 280 in the support 282 and in a base slot 266 in the support 268. The

action of the axles 264, slots 266 and 280, leveling bar 275, guide bushings 278, and guide rods 270 maintains the rollers 262 level and equi-distant from the kelly.

Fig. 9A and 9b show a kelly 290 according to the present invention with a hex-shaped portion 292 and round portion 294. A lower end 296 of the kelly 290 is threadedly connected to an upper end of a tubular 298, e.g. a tool joint or drill pipe. The flats of the kelly 290 have a spread that is equal to or greater than the diameter of the kelly tool joint of drill pipe tool joint. This allows the drill pipe or kelly to pass through the kelly bushing. Thus the kelly bushing remains in place when the rig lifts the kelly or drill string.

In certain aspects the kelly 290 has a diameter across the flat surfaces (i.e., from one flat surface across the cross-section of the kelly to the other) is as large or larger than the largest diameter of the tool joint 298 and others connected to it, allowing the tool joints (and pipes in a drill string) to pass through a kelly bushing according to the present invention unimpeded without the need to remove the kelly bushing. Fig. 9D shows an alternative form 290a of the kelly 290 of Fig. 9A which has a round portion 294a corresponding to the round portion 294, Fig. 9A. Edges 291 of the flat sections 292a of the kelly 290a are rounded off, but the flat surfaces are still of sufficient size when the diameter from one flat surface to the other is as stated above, for effective rotation of the kelly. Fig. 9C illustrates an alternative form for a kelly 293 which has a round portion 299 (like the round portion 294, Fig. 9A) and a plurality of lobed surfaces 297 in a kelly portion 295. In certain preferred embodiments of systems according to the present invention, the kelly is sufficiently long that part of the extension or tool joint portion of the kelly is present in the desired chamber of the system while a portion of the tool joint (rather than a hex or flats portion) is also presented to the tong. In certain preferred embodiments the body (e.g. the body 294 or the body 294a) is sufficiently long that a part of the tool joint below the body (e.g. tool joint 298) is within the upper chamber and part is adjacent the tong for gripping and rotating, i.e. so the tong does not grip or attempt to grip the "hex" part of the kelly and so no seal against the "hex" part is attempted. In one particular aspect the body of the new kelly is between 5 and 10 feet long; and in one aspect, about 6 feet long.

Figs. 10A and 10B show a new kelly bushing 300 with a new slip bowl 312 according to the present invention for use in a typical adapter bushing 302 in a rotary 304 of a rotary rig (not shown) having a rig floor 306.

5 A lip 308 of the slip bowl 312 rests on a corresponding recess 309 of the bushing 302. A plurality of rollers 310 are rotatably mounted to a slip bowl 312 extending down into the rotary table and beneath the rig floor. Each roller 310 contacts one or more flat surfaces 313 of a kelly 314. Fig. 10C shows another embodiment for the body 300 in which two halves 300a and 300b are selectively releasably secured  
10 together, e.g. by plates 330, 331 and their corresponding bolts 332, 333 extending through the plates and into one of the body halves; or by bolts (not shown) bolting the two halves together.

Using the new kelly bushing according to the present invention provides a new  
15 rotary table or rig floor with a kelly bushing below (or with a major portion below) the table or floor upper level with kelly rollers beneath the table (or floor) rather than on it. Using such a new kelly bushing also permits the use of hand slips within the slip bowl 312 associated with the new kelly bushing. The adapter bushing 302 is optional. A new kelly bushing according to the present invention of appropriate size and  
20 configuration may be provided that is emplaced in the rotary table without an adapter bushing (like the bushing, 302).

With a circulation system according to the present invention, a longer saver sub  
25 may be used below the top drive on a top drive rig or below the hex part of a kelly on a rotary rig.

Fig. 11 shows a typical prior art rotary rig and derrick with which a continuous circulation system according to the present invention may be used. A kelly and/or kelly bushing according to the present invention may also be used with the rig of Fig. 11  
30 instead of the prior art kelly and/or kelly bushing shown in Fig. 11. Systems according to the present invention may be used with any known prior art rotary rig.

Figs. 12A and 12B show a typical prior art top drive and derrick (from U.S. Patent 4,593,773 incorporated fully herein for all purposes) with which a continuous circulation system according to the present invention (any disclosed herein) may be used. Systems according to the present invention may be used with any known prior art  
5 top drive system.

### Methods For Top Drive Rigs

In certain particular methods for "breaking out" tubulars according to the present  
10 invention in which a continuous circulation system ("CCS") according to the present invention (e.g. as in Fig. 1A or 4) is used in a top drive drilling rig, the top drive is stopped with a joint to be broken positioned within a desired chamber of the CCS or at a position at which the CCS can be moved to correctly encompass the joint. By stopping the top drive, rotation of the drill pipe string ceases and the string is held stationary. A  
15 spider is set to hold the string. Optionally, although the continuous circulation of drilling fluid is maintained, the rate can be reduced to the minimum necessary, e.g. the minimum necessary to suspend cuttings. If necessary, the height of the CCS with respect to the joint to be broken out is adjusted. If the CCS includes upper and lower BOP's, they are now set. One or more BOP's are optional for all systems according to  
20 the present invention.

The drain valve 82 is closed so that fluid may not drain from the chambers of the CCS and the balance valve 84 is opened to equalize pressure between the upper and lower chambers of the CCS. At this point the gate apparatus is open. The valve 76 is  
25 opened to fill the upper and lower chambers with drilling fluid. Once the chambers are filled, the valve 76 is closed and the valve 80 is opened so that the pump 74 maintains pressure in the system and fluid circulation to the drill string. The top tong and lower back-up now engage the string and the top drive and/or top tong apply torque to the upper tubular (engaged by the top tong) to break its joint with the top tubular held by  
30 the back-up) of the string. Once the joint is broken, the top drive spins out the upper tubular from the top tubular.

The upper tubular (and any other tubulars connected above it) is now lifted so that its lower end is positioned in the upper chamber. The gate is now closed, isolating the upper chamber from the lower chamber, with the top end of the top tubular of the drill string held in position in the lower chamber by the back-up (and by the slips).

5

The valve 78 (previously open to permit the pump to circulate fluid to a drilling swivel DS and from it into the drill string (as shown in Fig. 1B) and the balance valve 84 are now closed. The drain valve 82 is opened and fluid is drained from the upper chamber. The upper BOP's seal is released. The top tong and back-up gripper are released from their respective tubulars and the upper tubular and interconnected tubulars, a "drill stand," (e.g. a drill pipe and/or a stand of a plurality of drill pipes) is lifted with the top drive out from the upper chamber and out from the upper chamber of the CCS while the pump 74 maintains fluid circulation to the drill string through the lower CCS chamber.

10  
15

An elevator is attached to the drill stand and the top drive separates the drill stand from a saver sub (shown schematically in Fig. 1A). The separated drill stand is moved into the rig's pipe rack with any suitable known pipe movement/manipulating apparatus.

20

A typical breakout wrench or breakout foot typically used with a top drive is released from gripping the saver sub and is then retracted upwardly, allowing the saver sub to enter a chamber of the system. The saver sub or pup joint is now lowered by the top drive into the upper chamber of the CCS and is engaged by the top tong. The upper BOP is set.

25

The drain valve 82 is closed, the valve 76 is opened, and the upper chamber is pumped full of drilling fluid. Then the valve 76 is closed, the valve 78 is opened, and the balance valve 84 is opened to balance the fluid in the upper and lower chambers.

30

The gate is now opened and the top tong is used to guide the saver sub into the lower chamber and then the top drive is rotated to connect the saver sub to the new top tubular of the drill string (whose end is positioned and held in the lower chamber).



Once the connection has been made, the top drive is stopped, the valve 80 is opened, the drain valve 82 is opened, and the upper and lower BOP's and the top tong are released. The spider is released, releasing the drill string for raising by the top drive apparatus. Then the break-out sequence described above is repeated.

5

In a method with the top drive and CCS used for break-out (as described above), the top drive is stopped so that rotation of the drill string ceases. The spider is set to hold the drill string. Optionally, the drilling fluid pump rate is minimized. The height of the CCS and its position with respect to a joint to be made up are adjusted if necessary. The upper and lower BOP's are set. The drain valve 82 is closed, the balance valve 84 is opened, the valve 76 is opened and then closed (once the upper chamber is full. The valve 80 is then opened and the top tong engages the saver sub.

10

The top drive is activated and reversed to apply some of the torque necessary to break the connection, e.g., between 40% to 90% of the needed torque, and, in certain embodiments between 75% and 90% of the torque needed, and, in one particular aspect, about 75% of the torque needed. The top tong applies the remaining necessary torque to the saver sub. In another aspect the top tong supplies all of the needed torque. The saver sub is then spun out from a top tubular of the drill string by the top drive and lifted, by the top tong and/or top drive, into the upper chamber of the CCS.

20

The gate is closed to isolate the upper chamber from the lower chamber. The valve 78 is closed, the balance valve 84 is closed and the drain valve 82 is opened to evacuate the upper chamber. During these steps the pump 74 continues to pump drilling fluid to the drill string as it does throughout the process.

25

The BOP's and top tong and back-up are released. The saver sub is then raised out of the CCS and the top drive itself is then raised within the mast so that the next stand of drill pipe can be picked up. The new stand is then lowered into the CCS and connected to the top tubular of the drill string by rotating the new stand with the top drive. This is done by setting the tong and setting the upper BOP; closing the drain valve 82; opening the valve 76; filling the upper chamber with drilling fluid; closing the valve 76; opening the valve 78; balancing the two chambers by opening the valve 84;

30

applying spin-up torque with the top drive; opening the gate; lowering the lower end of the new stand into the lower chamber; connecting the lower end of the new stand to the top end of the top tubular of the drill string by rotating the top drive.

5           The valve 80 is then closed, the drain valve 82 is opened, the BOP's are released, the back-up is released ; the spider is released; the drill string is lifted as the spider is released and drilling is resumed.

#### Methods For Rotary Table Rigs

10

In certain methods according to the present invention using a continuous circulation system ("CCS") according to the present invention (as in Fig. 1A), a break-out procedure is begun by removing the kelly from the drill string and then connecting the kelly extension tool joint (with the kelly removed) to the top of the drill string to  
15 begin removal of the drill string.

The rotary is stopped and the travelling block is lifted to lift the kelly and the extension tool joint ("ETJ") into position within the CCS. The drawworks brake is set to hold the traveling block stationary and the slips of the rotary table are set to hold the  
20 drill string. Optionally, the pumping rate of the continuously circulating drilling fluid (continuously circulated by the CCS throughout this procedure) is minimized. If needed, the position of the CCS is adjusted.

The back-up is energized to engage and hold the drill string and the drain valve  
25 82 is closed. The balance valve 84 is opened and the valve 76 is opened to fill the system's chambers with drilling fluid. Then the valve 80 is opened and the valve 76 is closed. The top tong is energized and engages the ETJ. Rotating the ETJ with the tong separates the ETJ from the drill string, freeing the drill string and apparatus etc. above it.

30

The kelly is then lifted away from the ETJ and raised into the upper chamber. The chambers are isolated as described above for top drive procedures and the kelly is removed from the CCS and placed to the side, e.g. in a mouse hole. The saver sub (also

called "saver pup joint") is disconnected from the kelly (e.g. with manual tongs) and the saver sub (still connected to the kelly and suspended from the traveling block) is swung back over the CCS. The next joint is now lowered into the upper chamber and the top tong engages it. The chambers are filled and balanced as described above for top drive procedures and then the gate is opened and the pin end of the next joint is lowered into the lower chamber where it is then connected, by rotating the tong, to the box end of the top tubular of the drill string whose upper end is in the lower chamber. The main valve 82 is opened, the tong is released; the spider is released; and the drill string is raised until the next tool joint (drill pipe joint) to be broken is correctly positioned in the CCS.

10 This next joint is then broken-out as described above.

To make-up joints with the rotary table/kelly rig, the kelly is disconnected from the drill string within the CCS while the pump 74 continuously supplies drilling fluid to the drill string. The kelly is then removed from the CCS by raising the traveling block.

15

The saver sub is then re-connected to the kelly (e.g. using a kelly spinner and manual tongs). The kelly is then raised with the traveling block above the CCS and lowered into its upper chamber. The top tong engages the kelly and connects it to the top tubular of the drill string within the lower chamber of the CCS, all while drilling fluid is continuously provided to the drill string by the CCS.

20

With the kelly connected to the drill string, the rotary rotates the kelly to resume drilling.

25

In certain aspects when a system according to the present invention as described above is used offshore with a top drive rig, the cylinders of the frame (which is connected to the rig floor) serve the function of heave compensators. A typical heave compensation system interfaces with the cylinders (e.g. the cylinders 16, Fig. 1A or Fig. 4A) causing the cylinders to react (the pistons move) to compensate for heaving of the rig.

30

Figs. 13A - 13B show one embodiment of a tong 170 with motors 174 (as shown in Figs. 4A - 4C above). As shown in Fig. 13A, an optional hydraulic swivel HS may

be used with a tong 170 or, as discussed below, hydraulic fluid under pressure used by the tong may be supplied via lines within the tong itself through hoses connected to the tong. The hydraulic swivel HS, when used, may be located at any appropriate location, although it is shown schematically in Fig. 13A above the tong.

5

The tong motors 174 are supported by a frame 402. It is within the scope of this invention to use any suitable motor, including, but not limited to, air motors and hydraulic motors. In certain aspects the motors are low speed high torque motors without a gear box. In other aspects, as shown in Fig. 13A, the motors are high speed  
10 low torque motors with associated planetary gear boxes 404 and drive gears 406.

The tong 170 as shown in Figs. 13A - 13C has a gear flange 408 movably mounted on a gear wheel 409 with teeth 410 that mesh with teeth of the gears 406 for rotating the tong 170. Rotating the gear wheel 409 rotates a housing 412 to which the  
15 gear wheel 409 is secured.

A hollow interior of the housing 412 contains three jaw assemblies 420 (two shown) each with a jaw 414 having a gripping insert or inserts 416 releasably secured to an end 417 thereof. It is within the scope of this invention to have two, three, four or  
20 more jaw assemblies 420 around the circumference of the housing 412. It is within the scope of this invention to use any suitable known gripping inserts for the inserts 416, including, but not limited to, inserts as disclosed in U.S. Patents 5,221,099; 5,451,084; 3,122,811 and in the references cited in each of these patents C all of which patents and references are incorporated fully herein for all purposes. The inserts 416 may be  
25 secured to and/or mounted on the jaws 414 by any known means or structure.

Each jaw 414 has an inner chamber 418 in which is movably disposed an end 422 of a piston 430. Another end 424 of each of the pistons 430 is movably disposed in the housing 412. The piston 430 has a central portion that sealingly extends through a  
30 channel 426 in the jaw 414. As is described in detail below, pumping fluid into a space 425 in the chamber 418 between the piston end 422 and the jaw end 417 moves the jaw and its insert into contact with a tubular within the tong. Pumping fluid into the chamber 418 on the other side of the piston end 422, a space 423 between the piston end

422 and an outer wall 415 of the jaws 414, moves the jaw out of engagement with a tubular in the tong.

Fluid under pressure is provided to the chamber 418 via "flow line 435 into the space 423 and via a flow line 436 into the space 425. Fluid is provided to these lines via lines 449, 450 in the housing 412. Of course the extent of the spaces 423, 425 changes as the piston 430 moves. Fluid is supplied to the flow lines 449, 450 via holes 437, 438 in the gear wheel 409. There is a set of such lines (449, 450) and holes (437, 438) for each jaw assembly. The holes 437, 438 are in fluid communication with grooves 433, 434 in the gear wheel 409 and corresponding grooves 441, 442 in the gear flange 408. Fluid is pumped through hoses 432 (e.g. in fluid communication with a typical rig hydraulic-fluid-under-pressure supply system) to channels 443, 444 which are in fluid communication with the grooves 433, 443 and 434, 444, respectively. This fluid is continuously supplied to the jaw assemblies through the tong. Alternatively, an apparatus is provided on or in the gear flange for selectively providing fluid under pressure to the lines 449, 450 of each jaw assembly.

The gear flange 408 is movable with respect to the gear wheel 409 so that as the gear wheel 409 and housing 412 are rotated by the motors 174, the gear flange 408 can remain substantially stationary. A plurality of bearings 445 in grooves 446 and 447 facilitate rotation of the gear wheel 409 with respect to the gear flange 408.

A tubular within the tong 170 extends through a channel 452 in the gear flange 408, through a channel 454 in the gear wheel 409, through a channel 453 in the housing 412, and in the space between the outer surfaces of the inserts 416 and a channel 455 defined by a lower inner edge of the jaws 414.

In certain embodiments the inserts 416 of the tong 170 are "bi-directional" inserts or dies designed for handling torsion and axial loading. It is within the scope of this invention to use any suitable known inserts and/or dies for slips and/or tongs for the inserts 416, including, but not limited to inserts as shown in U.S. Patent 5,451,084 and in the prior art cited therein. Fig. 14A shows an insert 460 for use as the inserts 416 which is similar to the inserts of U.S. Patent 5,451,084, incorporated fully herein for all

purposes. The insert 460 has a body 461 with a plurality of recesses 462 in each of which is secured a gripper bar 464 made, e.g., of metals such as steel, stainless steel, brass, bronze, aluminum, aluminum alloy, zinc, zinc alloy, titanium, copper alloy, nickel-based alloy, cermet, ceramic or a combination thereof, each bar with a plurality  
5 of teeth 466 for engaging a tubular in the tong 170. In one aspect the body 461 is plastic, rubber, urethane, polyurethane or elastomeric material. Fig. 14B shows one particular configuration and profile for teeth 465 of a gripper bar 467 which can be used for the gripper bars 464. Fig. 14C shows two inserts 416 of a jaw assembly 420 engaging a tubular TB (one side shown) in a tong 170 (not shown). The structure of the  
10 tong 170 as shown in Figs. 13A - 13C including the gear flange, the gear wheel, the bearings, and the jaw assemblies (jaws, pistons), also contributes to the tong's ability to withstand an axial force applied to a tubular held by the tong, e.g. an axial force applied to the tubular by fluid under pressure in a chamber of a circulation system according to the present invention as described herein.

15

Figs. 15A - 15G illustrate a system 500 according to the present invention and steps in a method according to the present invention. The system of Fig. 1A uses one set of cylinders to move the tong with respect to the upper chamber and another set of cylinders to move the frame with respect to the pedestal. In the system 500 a single  
20 cylinder/piston moves a tong 503 and an upper chamber 532 in unison, eliminating the need for a second set of cylinders.

A cylinder 511 with a movable piston 519 has a lower end mounted on a base 501. The piston's upper end is fixed to a first plate 551 which is secured to a hollow  
25 post 552. The upper chamber 532 is secured to a second plate 553 which is also secured to the post 552. The tong 503 is above a third plate 554 and beneath and secured to a fourth plate 555 which is secured to the post 552. Both plates 554 and 555 are secured to the post 552.

30

The post 552 is movable up and down by the cylinder 511/piston 519. The post 552 is hollow and moves on a tube 502 secured to the base 501. In one aspect the tube 502 and the post 552 are non-round to resist torsion and/or bending.

A lower chamber 531 is mounted on or secured to the first plate 551. A spider 536 (e.g. but not limited to commercially available flush-mounted spiders) with slips 537 acts as the lower gripper or back-up. The spider 536 is mounted on a rig (not shown) as is the system shown in Fig. 1A. A main gate apparatus 506 acts as does the gate of the system in Fig. 1A and control heads 561, 562 are like the control heads of the system of Fig. 1A. The movable sabot or inner bushing of the system of Fig. 1A may be used with the system 500.

A kelly bushing 538 with rollers 539 facilitates movement of the kelly 509.

10

As shown in Fig. 15A a kelly 509 is connected to a top joint 508 of a drill string. In Fig. 15B, the kelly 509 has been raised (e.g. by suitable means as discussed for the system of Fig. 1A) so that the kelly/tool joint connection is in the upper chamber 532. The tool joint portion of the kelly 509 is gripped by the tong 503 and the upper chamber is filled with fluid while continuous fluid circulation is maintained, e.g. with a system as in Fig. 1B. The drill string is gripped by the slips 537 of the spider 538. Using the tong 503, the connection is broken in the upper chamber. As the connection is being broken and the kelly is being separated from the top joint of the drill string, the tong 503 (and kelly) is moved up by extension of the piston 519, which also moves the upper chamber up. The piston 519/cylinder 511 is controlled and powered by the system's control system, e.g. as in the system of Figs. 1A, 1B. The movement of the tong and of the upper chamber moves the lower chamber 531 around the top end of the top tool joint of the drill string. The gate 506 is closed (Fig. 15C), the tong 503 is released and the kelly 509 is removed from the upper chamber 532 (Fig. 15D). Fluid circulation to the drill string is maintained during all these steps as in the system of Fig. 1A.

15  
20  
25

As shown in Fig. 15E, the lower end of a new tool joint 570 (connected to the kelly C not shown in Fig. 15E) has been introduced through the tong 503 into the upper chamber 532. The gate 506 is opened. The piston 519 is retracted lowering the tong 503 and the upper chamber 532 so that the top end of the drill string enters the upper chamber 532. The tong 503 grips the tool joint 570 (Fig. 15G) and makes-up the connection. Fluid is continuously circulated to the drill string throughout the method as in the system of Fig. 1A.

30

Figs. 16A and 16B show a system 600, like the system of Fig. 4A, but with the side cylinders 160 deleted. The system 600 has a new kelly bushing 602 (like the kelly bushing of Fig. 10A). A pedestal 604 is mountable on a track on a rig (not shown) e.g.  
5 as a prior art "Iron Roughneck" is mounted on a track on a rig.

As shown in Fig. 16A a system module SM may be releasably secured to a lower portion LP of the pedestal 604 so that the module SM is selectively removable from and emplaceable on the pedestal lower portion. A single set of selectively  
10 operable cylinders 606 is mounted to a frame 608 for moving the system portion SP. Upper chamber 632, lower chamber 631 and tong 603 (like the tong 172, Fig. 4A) are interconnected by plates 621, 622 625 and members 623, 624. A back-up gripper 610 is like the back-up 72 of Fig. 1A. The chambers 632, 631 are like the upper and lower chambers of previously-described systems herein with the same sabots, control heads,  
15 sealing apparatus and control system. A kelly bushing 630 is like that of Fig. 10A. A gate apparatus 636 is like that of previously-described systems.



The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A kelly bushing, comprising:
  - a base with a tubular channel therethrough from top to bottom, the base having a plurality of base axle slots;
  - a roller support on the base, the roller support having a plurality of roller support axle slots;
  - at least one roller having an axle, wherein the axle has a first portion movably positioned in a corresponding roller support axle slot of the roller support so that movement of the axle there moves the at least one roller with respect to the tubular channel, and wherein the axle has a second portion movably positioned in a corresponding base axle slots of the base so that movement of the axle therein moves the at least one roller with respect to the tubular channel; and
  - a leveling bar at the top of the roller support, wherein the roller support is movable vertically by moving the leveling bar;
  - wherein the base axle slots are at an angle to the roller support axle slots so that movement of the leveling bar effects movement of the base axle slots with respect to the roller support thereby moving the at least one roller with respect to the tubular channel into and out of contact with a kelly within the tubular channel.
2. The kelly bushing of claim 1, further comprising:
  - a plurality of spaced-apart guide rods extending upwardly from the base and through openings in the leveling bar to guide movement of the leveling bar with respect to the base thereby guiding movement of the at least one roller.
3. An apparatus for use with a torque transmission member, comprising:
  - a body;
  - a channel extending through the body for receiving the torque transmission member;
  - and
  - one or more engagement members coupled to the body, wherein the one or more engagement members are adapted to engage the torque transmission member;

wherein the one or more engagement members is coupled to two intersecting guide members and changing a point of intersection between the two intersecting guide members causes the one or more engagement members to engage or disengage the torque transmission member.

4. The apparatus of claim 3, wherein the one or more engagement members include an axle for mating with the two intersecting guide members.
5. The apparatus of claim 4, wherein the axle is movable along the two intersecting guide members.
6. The apparatus of claim 3, 4 or 5, wherein the body comprises two body portions.
7. The apparatus of claim 6, wherein the two body portions are releasably connected.
8. The apparatus of any one of claims 3 to 7, wherein the one or more engagement members comprises a profile for engaging the torque transmission member.
9. The apparatus of claim 8, wherein the profile is adapted to transfer torque to the torque transmission member.
10. The apparatus of any one of claims 3 to 9, wherein the apparatus is coupled to a rotary table.
11. The apparatus of any one of claims 3 to 10, wherein the one or more engagement members are radially movable to engage or disengage from the torque transmission member.
12. The apparatus of any one of claims 3 to 11, further comprising an actuating member for moving the two intersecting guide members.

13. The apparatus of claim 12, wherein the actuating member is adapted to change the point of intersection between the two intersecting guide members.
14. The apparatus of any one of claims 3 to 13, wherein the apparatus comprises a bushing and the torque transmission member comprises a kelly.
15. The apparatus of claim 14, wherein the kelly comprises a polygonal profile.
16. The apparatus of any one of claims 3 to 15, wherein the apparatus is positionable on a rig floor with the one or more engagement members beneath the rig floor.
17. The apparatus of any one of claims 3 to 16, wherein the one or more engagement members comprise one or more rollers.
18. An apparatus for use with a downhole tool, comprising:
  - a kelly coupled to the downhole tool; and
  - a kelly bushing which comprises:
    - a body;
    - a channel extending through the body for receiving the kelly;
    - a roller coupled to the body, the roller adapted to engage the kelly;
    - at least two intersecting guide members movably coupled to the body; and
    - an actuating member for changing a point of intersection between the two intersecting guide members;wherein movement of the roller along the at least two intersecting guide members causes the roller to engage or disengage the kelly.
19. The apparatus of claim 18, further comprising a rotary table for rotating the kelly bushing.
20. The apparatus of claim 19, wherein torque generated by the rotary table is transmitted to the kelly through the kelly bushing.

21. The apparatus of claim 18, 19 or 20, wherein the roller comprises a profile for engaging the kelly.
22. The apparatus of claim 21, wherein the kelly comprises a complementary profile for mating with the profile of the roller.
23. The apparatus of claim 22, wherein the complementary profile comprises a polygonal profile.
24. The apparatus of any one of claims 18 to 23, wherein the downhole tool comprises a wellbore tubular.
25. The apparatus of claim 24, wherein the wellbore tubular is selected from the group consisting of a drill pipe, a tool joint, and combinations thereof.
26. The apparatus of any one of claims 18 to 25, wherein a diameter of the kelly is larger than a diameter of the downhole tool.
27. The apparatus of any one of claims 18 to 26, wherein the kelly comprises a tubular.
28. A kelly bushing comprising:
  - a base with a tubular channel therethrough from top to bottom, the base having a plurality of base axle slots;
  - a roller support on the base, the roller support having a plurality of roller support axle slots; and
  - a plurality of spaced-apart rollers, each roller being mounted on a respective axle; wherein each axle has a portion movably positioned in a corresponding roller support axle slot so that movement of an axle therein moves its corresponding roller with respect to the tubular channel; and
  - wherein each axle has a portion movably positioned in a corresponding base axle slot so that movement of an axle therein moves its corresponding roller with respect to the tubular channel;

the kelly bushing further comprising:

a leveling bar at the top of the roller support, the roller support being movable vertically by moving the leveling bar, wherein the base axle slots are at an angle to the roller support axle slots so that movement of the leveling bar effects movement of the base axle slots with respect to the roller thereby moving the rollers with respect to the tubular channel into and out of contact with a kelly within the tubular channel.

29. A kelly bushing as claimed in claim 28, further comprising a plurality of spaced-apart guide rods extending upwardly from the base and through openings in the leveling bar to guide movement of the leveling bar with respect to the base thereby guiding movement of the rollers.

30. A kelly bushing comprising:

a body with a tubular channel therethrough from top to bottom; and  
a plurality of rollers connected to the body and spaced-apart around the bottom of the body, each roller having a portion projecting into the tubular channel for contacting flats of a kelly projecting through the body.

31. A kelly bushing as claimed in claim 30, further comprising:

a slip bowl formed of and within the body for receiving and holding slips therein for gripping a portion of a kelly extending through the kelly bushing.

32. A kelly bushing as claimed in claim 30 or 31, wherein the kelly bushing is positioned on a rig floor with the rollers beneath the rig floor.

33. A kelly bushing comprising:

a body having an opening therethrough for the passage of tubulars through the kelly bushing; and

roller apparatus connected to the body for facilitating tubular movement through the body;

wherein the opening is sufficiently large that a kelly, tool joints and drill pipe are movable therethrough, the kelly having a hex part and a tool joint part.

34. A kelly bushing comprising:  
a body with a tubular therethrough from top to bottom; and  
a plurality of rollers connected to the body and spaced-apart around the body, each roller with a portion projecting into the tubular channel for contacting flats of part of a kelly projecting through the body;  
wherein the body comprises two selectively separable halves releasably joined together.
35. A tong for use in wellbore operations, the tong comprising:  
a housing with a hollow interior;  
a gear secured to the housing, the gear having a toothed portion for mating with teeth of a drive shaft of a driving motor;  
a gear flange mounted on top of the gear so that rotation of the gear does not rotate the gear flange;  
one or more bearings disposed between the gear flange and the gear for dissipating stress when the gear and the gear flange are moved axially relative to each other; and  
a plurality of spaced-apart jaw assemblies within the housing's hollow interior, each jaw assembly having a jaw for selectively engaging a portion of a tubular to be gripped and rotated by the tong, wherein each jaw assembly and the one or more bearings are configured for resisting both axial and radial loading.
36. The tong of claim 35, wherein each jaw assembly comprises a piston having one end disposed within a chamber of a jaw.
37. The tong of claim 36, further comprising supporting the jaw with a plurality of support surfaces to resist axial loading.
38. The tong of claim 37, wherein the plurality of support surfaces comprises a first contact surface between the piston and the jaw and a second contact surface between the jaw and the housing.

39. The tong of any one of claims 35 to 38, wherein each jaw assembly further comprises at least one toothed insert, the at least one toothed insert being used by each jaw to engage the tubular.
40. The tong of claim 39, wherein the plurality of spaced-apart jaw assemblies defines three spaced-apart jaw assemblies.
41. The tong of any one of claims 35 to 40, wherein the bearings between the gear flange and the gear facilitate the movement of the gear with respect to the gear flange.
42. The tong of any one of claims 35 to 41, wherein the tong's gear, gear flange, jaw assemblies and bearings are configured and sized to resist axial loading on the tong.
43. The tong of claim 42, further comprising fluid flow apparatus for selectively conveying operating fluid under pressure through the tong to the jaw assemblies for selectively operating the jaw assemblies into and out of engagement with the tubular.
44. The tong of claim 43, wherein each jaw assembly further comprises:  
a jaw having a first end, a second end, and a chamber wall therebetween, the first end being sealed by a face, and the second end having an opening therein;  
a chamber defined within the chamber wall of the jaw;  
a piston having a first end within the chamber of the jaw, the first end of the piston being movable within the chamber by selectively applying fluid under pressure on one side of the first end of the piston, and a second end external to the jaw but being secured within the housing of the tong;  
and wherein the toothed insert is disposed adjacent the face of the jaw and external to the chamber for engaging the tubular when the jaw is actuated, the insert being configured for resisting both axial and radial loading.
45. A tong for use in wellbore operations, the tong comprising:  
a housing with a hollow interior;  
a plurality of jaw assemblies, at least one of which is movably mounted in the hollow interior of the housing for selectively engaging a portion of a tubular to be gripped and

rotated by the tong, the jaw assemblies configured to resist both axial and rotational movement of the tubular upon engagement therewith;

a gear structure on the housing for mating co-action with a tong drive apparatus;

a gear retention member for axially retaining the gear structure; and

a bearing between the gear retention member and the gear structure for facilitating movement of the gear structure with respect to the gear retention member and for dissipating axial stress when the gear structure and the gear retention member are moved axially relative to each other.

46. The tong of claim 45, wherein each of the jaw assemblies further comprises an insert having teeth to aid in resisting both axial and rotational movement of the tubular upon engagement therewith.

47. The tong of claim 45 or 46, wherein the gear retention member and the bearing are sized and configured to resist axial loading.

48. The tong of claim 45, 46 or 47, wherein the plurality of jaw assemblies defines three spaced-apart jaw assemblies.

49. The tong of any one of claims 45 to 48, further comprising internal fluid flow apparatus for conducting fluid under pressure through the tong to the jaw assemblies for selective operation of the jaw assemblies for engaging and disengaging the tubular.

50. The tong of any one of claims 45 to 49, wherein said tong is used as part of a system for continuously circulating fluid to and through a tubular string while an upper tubular is connected or disconnected from a top tubular of the tubular string, the system comprising:

an upper chamber for receiving the upper tubular of the tubular string, said upper chamber having a bottom opening and a top opening;

a lower chamber for receiving the top tubular of the tubular string, said lower chamber having a bottom opening and a top opening, one of said upper chamber and said lower chamber sized for accommodating connection and disconnection therein of the upper tubular and the top tubular by the tong;



an upper sealing apparatus within said upper chamber for sealingly encompassing a portion of the upper tubular within said upper chamber;

a lower sealing apparatus within said lower chamber for sealingly encompassing a portion of the top tubular within said lower chamber; and

an apparatus for isolating the upper chamber from fluid pressure loading within the lower chamber during connection or disconnection of the upper tubular and the top tubular.

51. The tong of claim 50, wherein the tong isolates the upper tubular from fluid pressure loading within the upper chamber.

52. A method for rotationally connecting two threaded tubulars, wherein at least one of the tubulars is subjected to an axial force created by a fluid pressure acting over at least a portion of a cross-sectional area of the at least one tubular, comprising the steps of:

providing a tong which is sized and configured to withstand the axial force, the tong having:

a housing with a hollow interior; and

a plurality of jaw assemblies, at least one of which is movably mounted in the hollow interior of the housing for selectively engaging a portion of the at least one tubular;

gripping the at least one tubular with the tong;

rotating the at least one tubular with the tong, thereby relatively manipulating the threads between the two tubulars; and

dissipating axial stress through a bearing.

53. The method of claim 52, wherein providing a tong comprises providing a tong having:

a gear structure on the housing for mating co-action with a tong drive apparatus;

a gear retention member for axially retaining the gear; and

wherein the bearing between the gear retention member and the gear for facilitating movement of the gear with respect to the gear retention member, and wherein the bearing

and the plurality of jaw assemblies are configured to resist both axial and rotational movement of the at least one tubular upon engagement therewith.

54. The method of claim 53, wherein providing a tong further comprises providing each of the jaw assemblies with an insert having teeth to aid in resisting both axial and rotational movement of the at least one tubular upon engagement therewith.

55. The method of claim 53 or 54, wherein the gear retention member and the bearing are sized and configured to resist axial loading.

56. The method of claim 55, wherein the plurality of jaw assemblies defines three spaced-apart jaw assemblies.

57. The method of claim 56, wherein providing a tong further comprises providing a tong having an internal fluid flow apparatus for conducting fluid under pressure through the tong to the jaw assemblies for selective operation of the jaw assemblies for engaging and disengaging from the tubular to be gripped and rotated by the tong.

58. A system for continuously circulating fluid to and through a tubular string while an upper tubular is connected or disconnected from a top tubular of the tubular string, the system comprising:

a tong having:

a housing with a hollow interior;

a gear secured to the housing, the gear having a toothed portion for mating with teeth of a drive shaft of a driving motor;

a gear flange mounted on top of the gear so that rotation of the gear does not rotate the gear flange; and

one or more bearings disposed between the gear and the gear flange; and

a plurality of spaced-apart jaw assemblies within the housing's hollow interior, each jaw assembly having a jaw for selectively engaging a portion of a tubular to be gripped and rotated by the tong, wherein each jaw assembly and the one or more bearings are configured for resisting both axial and radial loading;

an upper chamber for receiving the upper tubular of the tubular string, said upper chamber having a bottom opening and a top opening;

a lower chamber for receiving the top tubular of the tubular string, said lower chamber having a bottom opening and a top opening, one of said upper chamber and said lower chamber sized for accommodating connection and disconnection therein of the upper tubular and the top tubular by the tong;

an upper sealing apparatus within said upper chamber for sealingly encompassing a portion of the upper tubular within said upper chamber;

a lower sealing apparatus within said lower chamber for sealingly encompassing a portion of the top tubular within said lower chamber; and

an apparatus for isolating the upper chamber from fluid pressure loading within the lower chamber during connection or disconnection of the upper tubular and the top tubular.

59. The system of claim 58, wherein the tong isolates the upper tubular from fluid pressure loading within the upper chamber.

60. A tong for use in wellbore operations, the tong comprising:

a housing with a hollow interior;

a gear wheel secured to the housing for rotation therewith, the gear wheel having a toothed outer circumference for mating with teeth of a drive shaft of a driving motor;

a gear flange mounted on top of the gear wheel so that rotation of the gear wheel does not rotate the gear flange; and

a plurality of spaced-apart jaw assemblies within the housing's hollow interior, each jaw assembly having a jaw for selectively engaging a portion of a tubular to be gripped and rotated by the tong.

61. A tong as claimed in claim 60, further comprising fluid flow apparatus for selectively conveying operating fluid under pressure through the tong to the jaw assemblies for selectively operating the jaw assemblies.

62. A tong as claimed in claim 60 or 61, wherein the plurality of spaced-apart jaw assemblies is three spaced-apart jaw assemblies.

63. A tong as claimed in claim 60, 61 or 62, wherein each jaw assembly of the plurality of jaw assemblies has at least one insert thereon for engaging the tubular.
64. A tong as claimed in claim 63, wherein the inserts are toothed inserts.
65. A tong as claimed in claim 63 or 64, wherein the inserts are configured for resisting both axial and radial loading.
66. A tong as claimed in any one of claims 60 to 65, wherein each jaw assembly comprises:  
a jaw body with an inner chamber having an outer wall with a channel therethrough;  
and  
a piston with a first end in the inner chamber, the first end secured to or formed of an intermediate portion movable in the channel of the outer wall of the inner chamber, and a first end, and a second end secured to or formed of the intermediate portion, the second within the housing of the tong;  
wherein the jaw body is selectively movable with respect to the piston into and out of engagement with the tubular by selectively applying fluid under pressure on one side of the first end of the piston.
67. A tong as claimed in any one of claims 60 to 66, further comprising a plurality of bearings between the gear flange and the gear wheel for facilitating movement of the gear wheel with respect to the gear flange.
68. A tong as claimed in claim 67, wherein the tong's gear flange, gear wheel, jaw assemblies and bearings are configured and sized to resist axial loading on the tong.
69. A tong for use in wellbore operations, the tong comprising:  
a housing with a hollow interior;  
a plurality of jaw assemblies movably mounted in the hollow interior of the housing;  
gear structure on the housing for mating co-action with a tong drive apparatus; and

internal fluid flow apparatus for conducting fluid under pressure through the tong to the jaw assemblies for selectively operation of the jaw assemblies for engaging and disengaging from a tubular to be gripped and rotated by the tong.

70. A system for continuously circulating fluid to and through a hollow tubular string while an upper hollow tubular is added to or removed from a top of the tubular string, the system comprising:

chamber means with a bottom opening, a top opening and sealing apparatus for sealingly encompassing a portion of the top of the tubular string, the chamber means being sized for accommodating connection and disconnection therein of the upper hollow tubular to the top of the tubular string;

a frame, the chamber means being selectively movably mounted to the frame;

pedestal apparatus, the frame being selectively movably mounted to the pedestal apparatus;

an offshore rig with a rig floor, the pedestal apparatus being positioned on the rig floor; and

a rig heave compensation system on the rig;

wherein the offshore rig heave compensation system intercommunicates with the system for continuously circulating fluid to selectively move the chamber means with respect to the rig floor to compensate for heaving of the offshore rig.

71. A kelly comprising:

a tubular body with a top and a bottom;

a flats tubular with a top and a bottom, the top of the body being formed of or secured to the bottom of the flats tubular, the flats portion having a plurality of flat surfaces around a circumference of the flats tubular; and

at least one tool joint having a top and a bottom, the top of the at least one tool joint being connected to the bottom of the tubular body, the tool joint having an outer diameter;

wherein a diameter of the flats across a cross-section of the flats tubular from one flat surface to an opposing flat surface is at least as large as the outer diameter of the at least one tool joint.

72. A kelly comprising:

a tubular body with a top and a bottom;

a flats tubular with a top and a bottom, the top of the body formed of or secured to the bottom of the flats tubular, the flats portion having a plurality of flat surfaces around a circumference of the flats tubular;

a tool joint having a top and a bottom, the top of the tool joint being connected to the bottom of the tubular body;

wherein the tubular body is between five and ten feet in length.

73. A kelly as claimed in claim 72, wherein the tubular body is about six feet long.

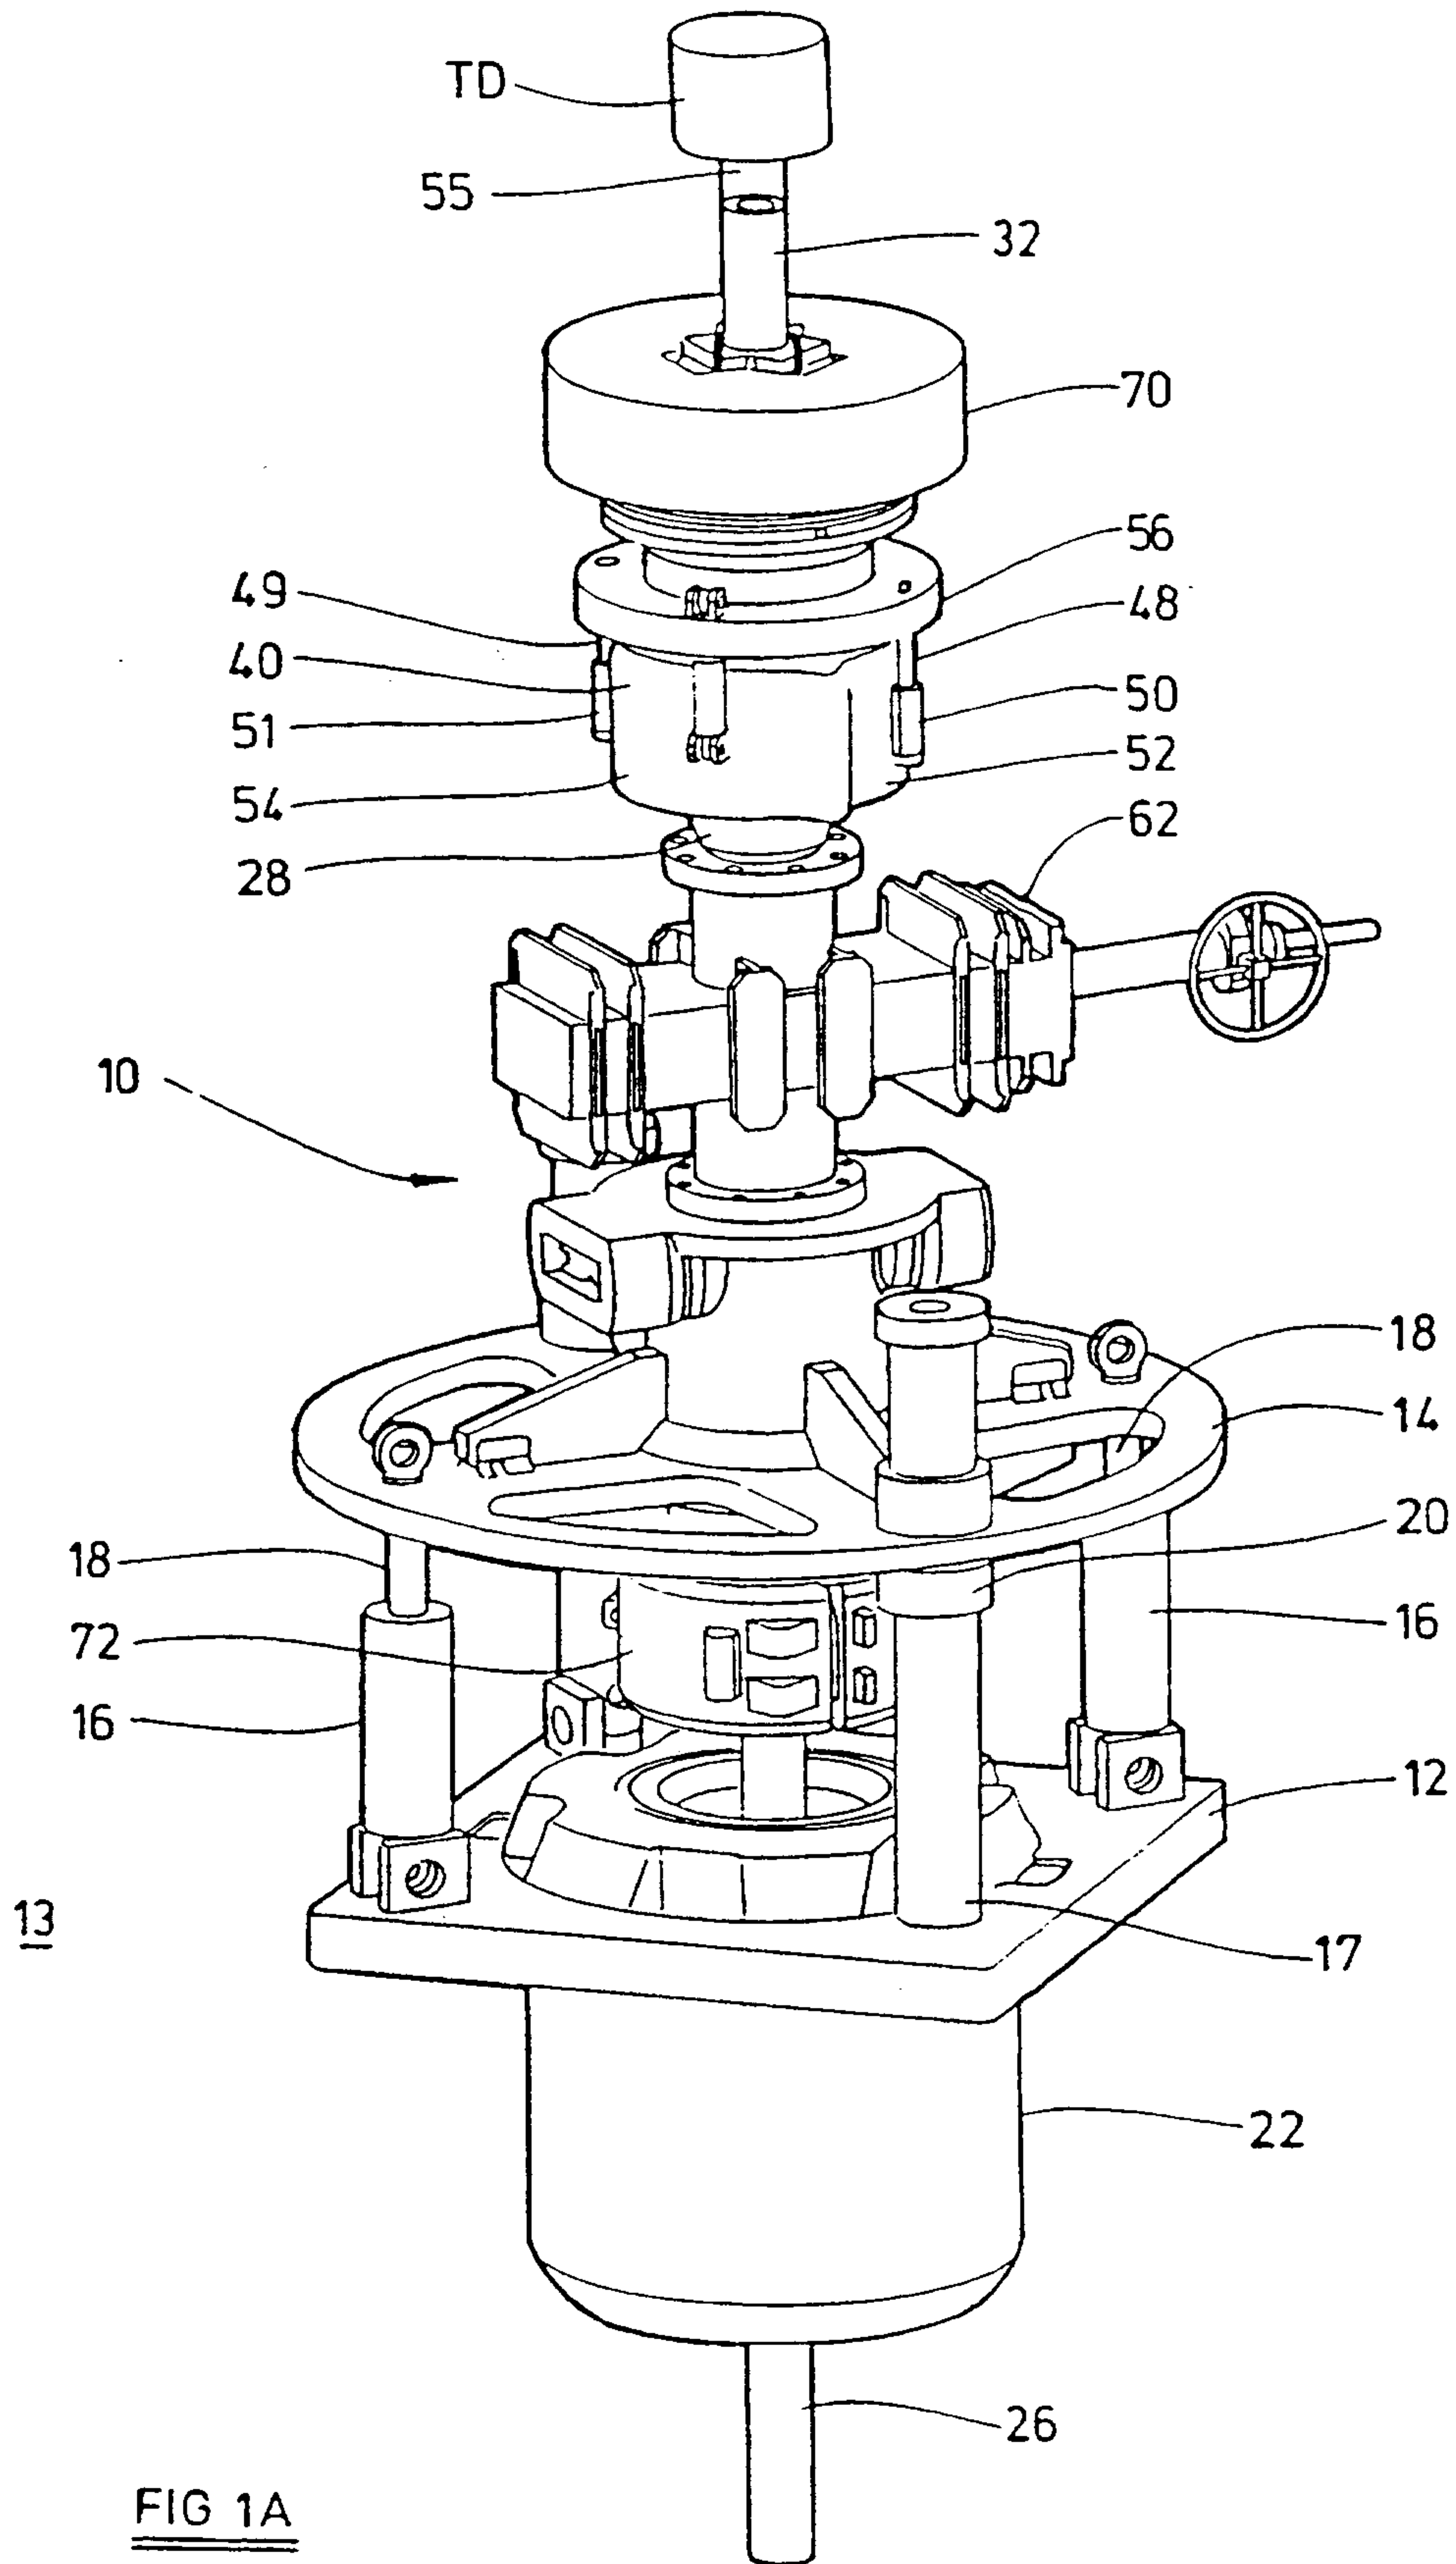


FIG 1A

2 / 26

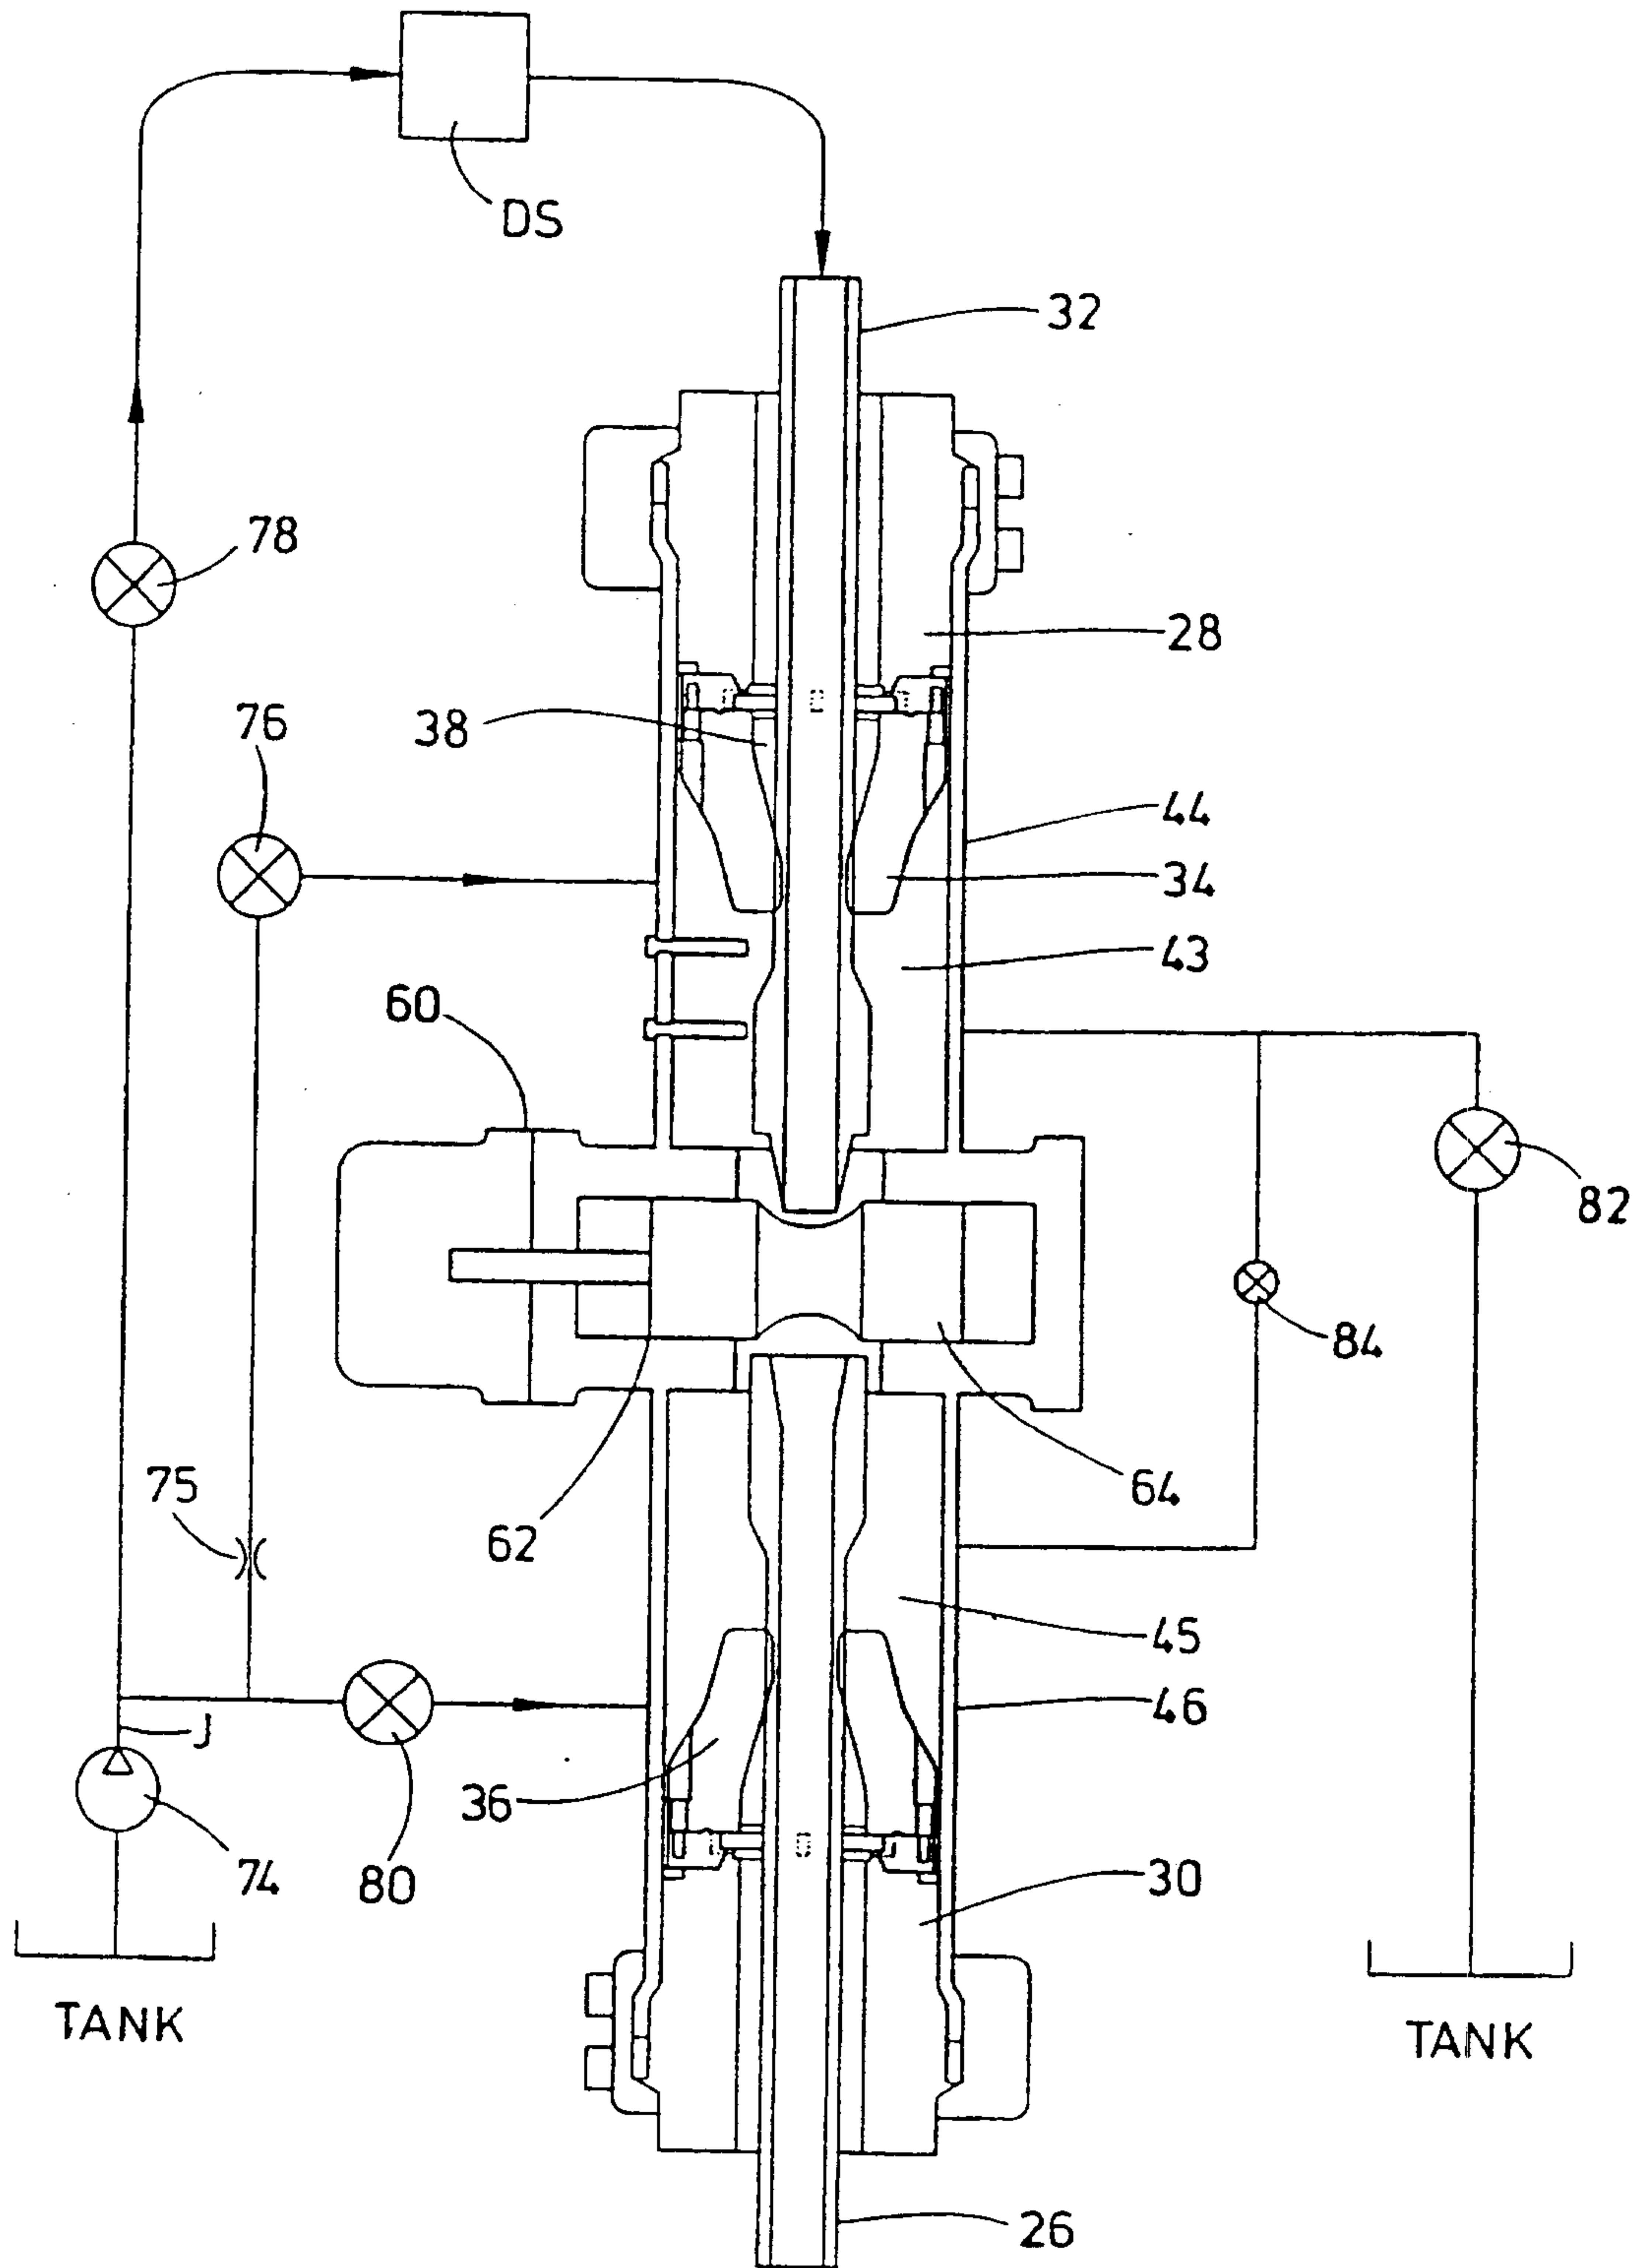


FIG 1B





4 / 26

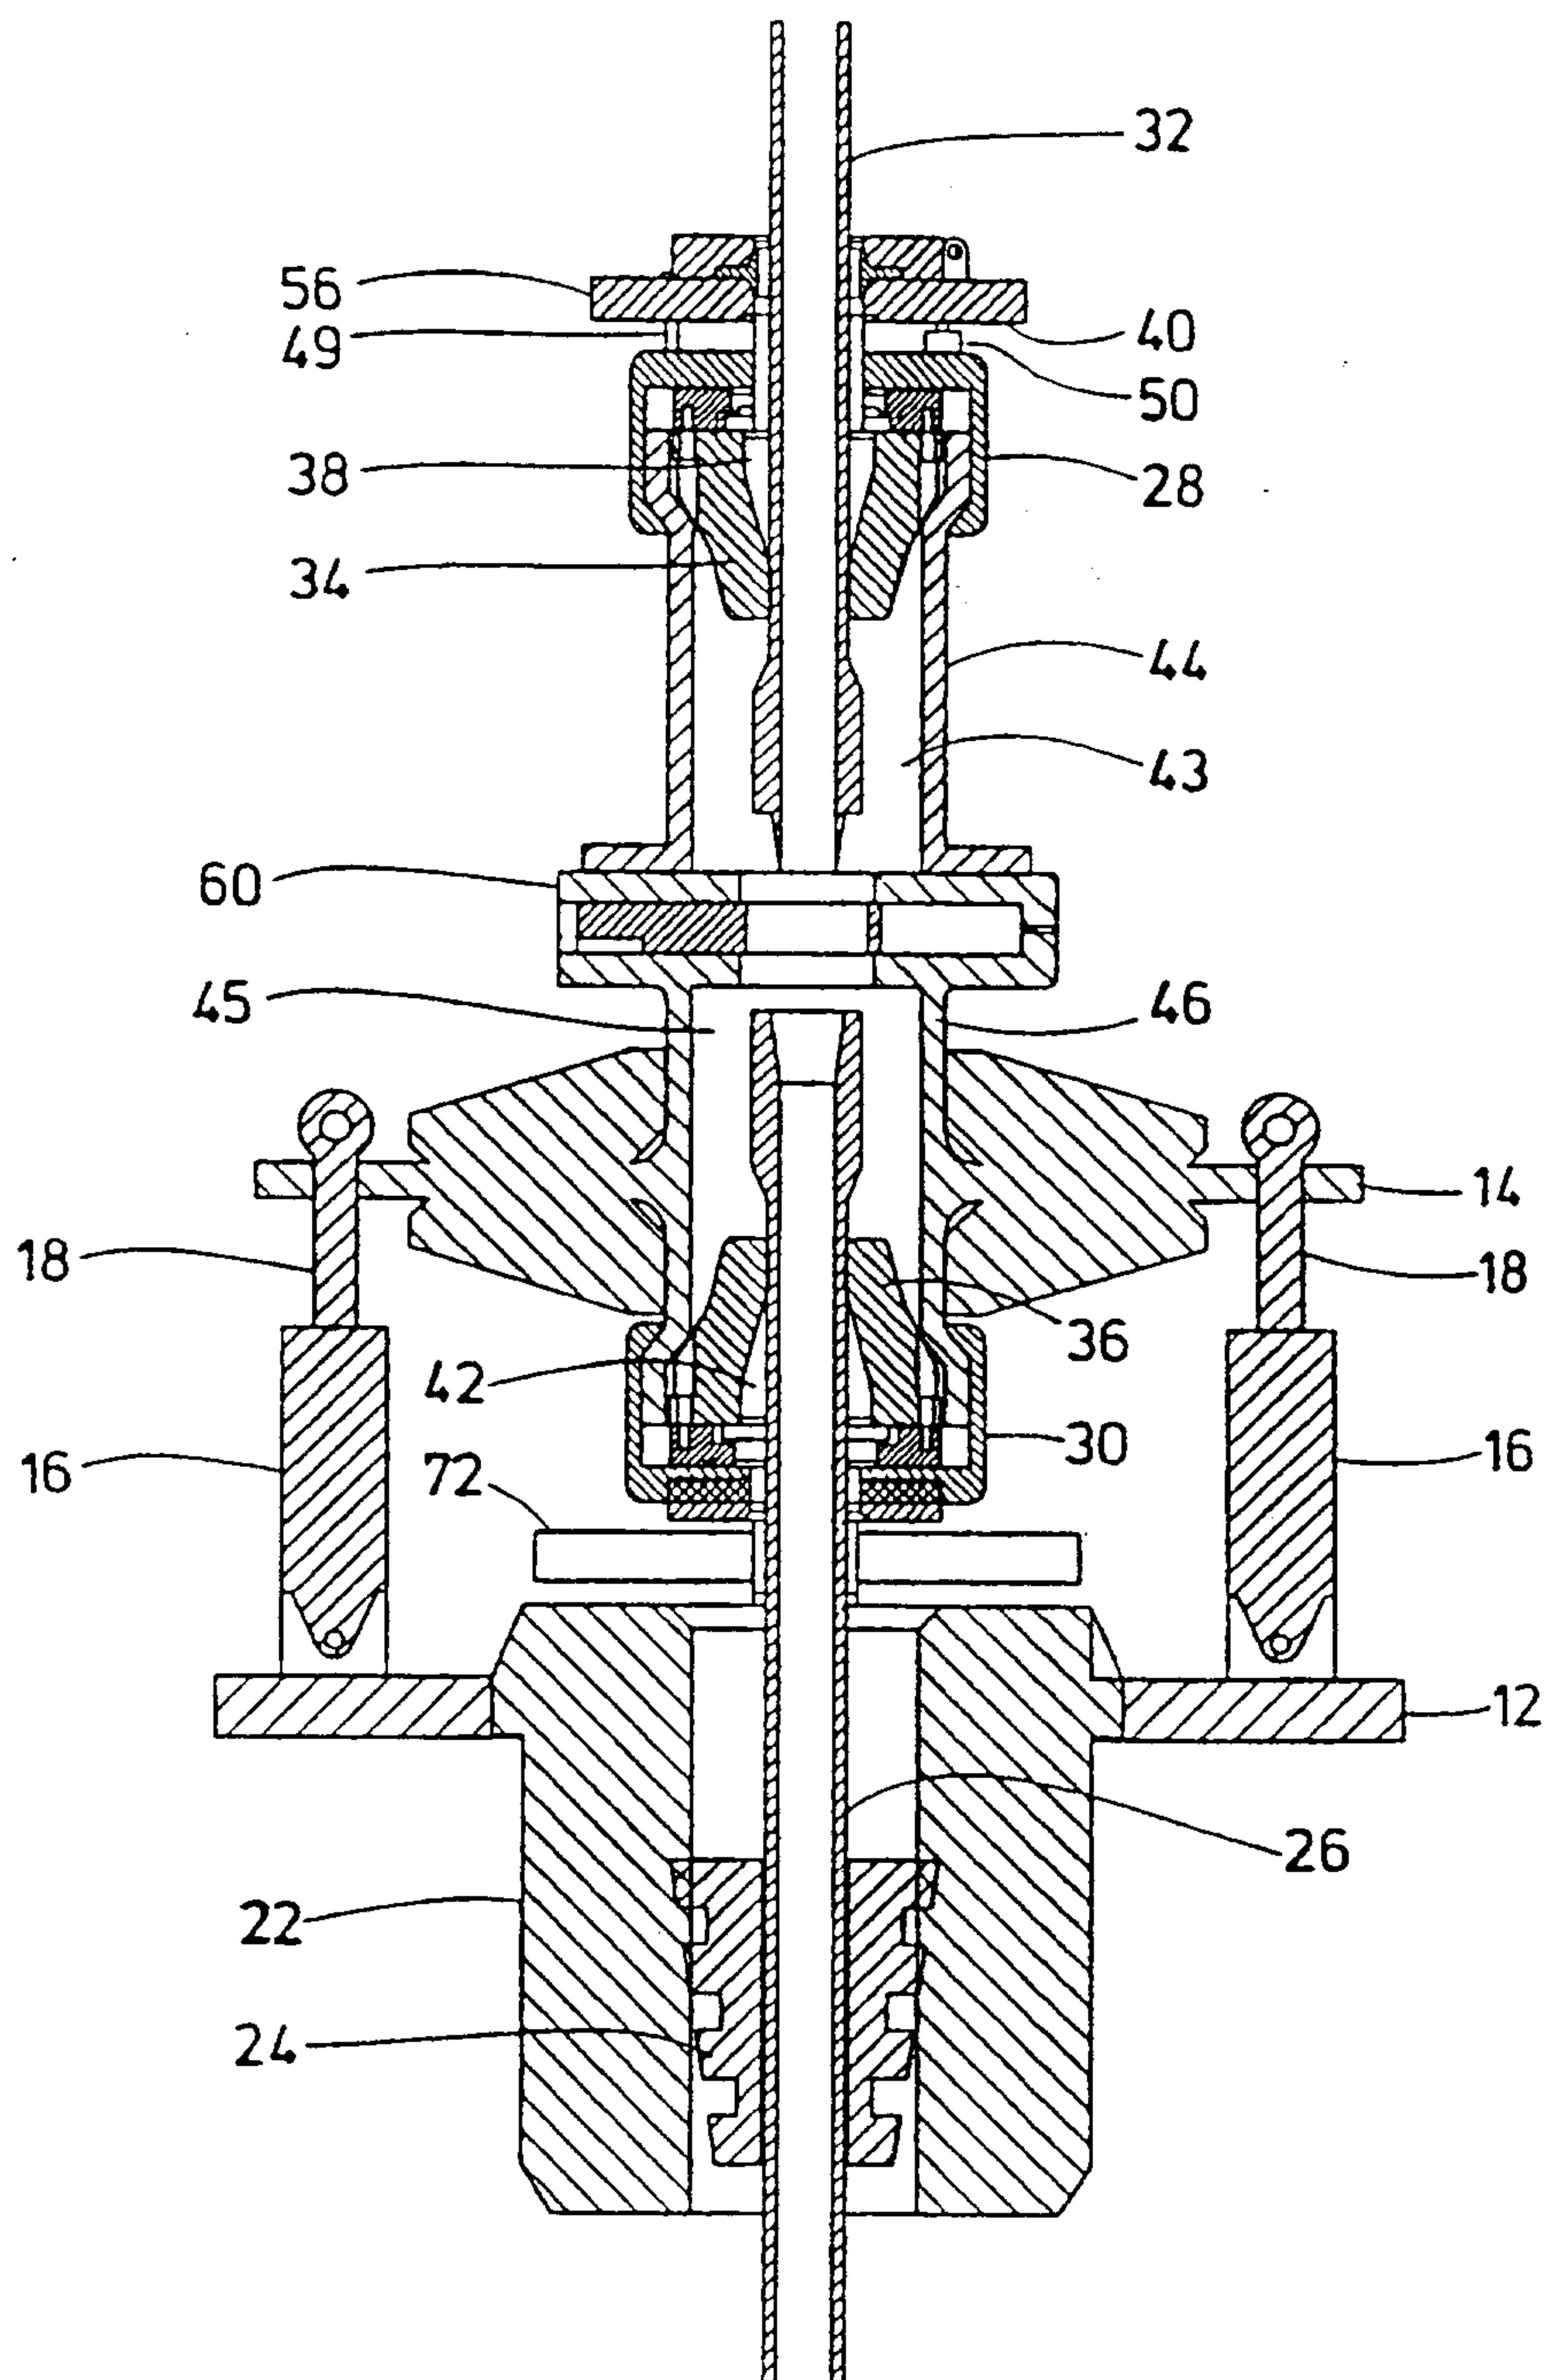


FIG 2

5 / 26

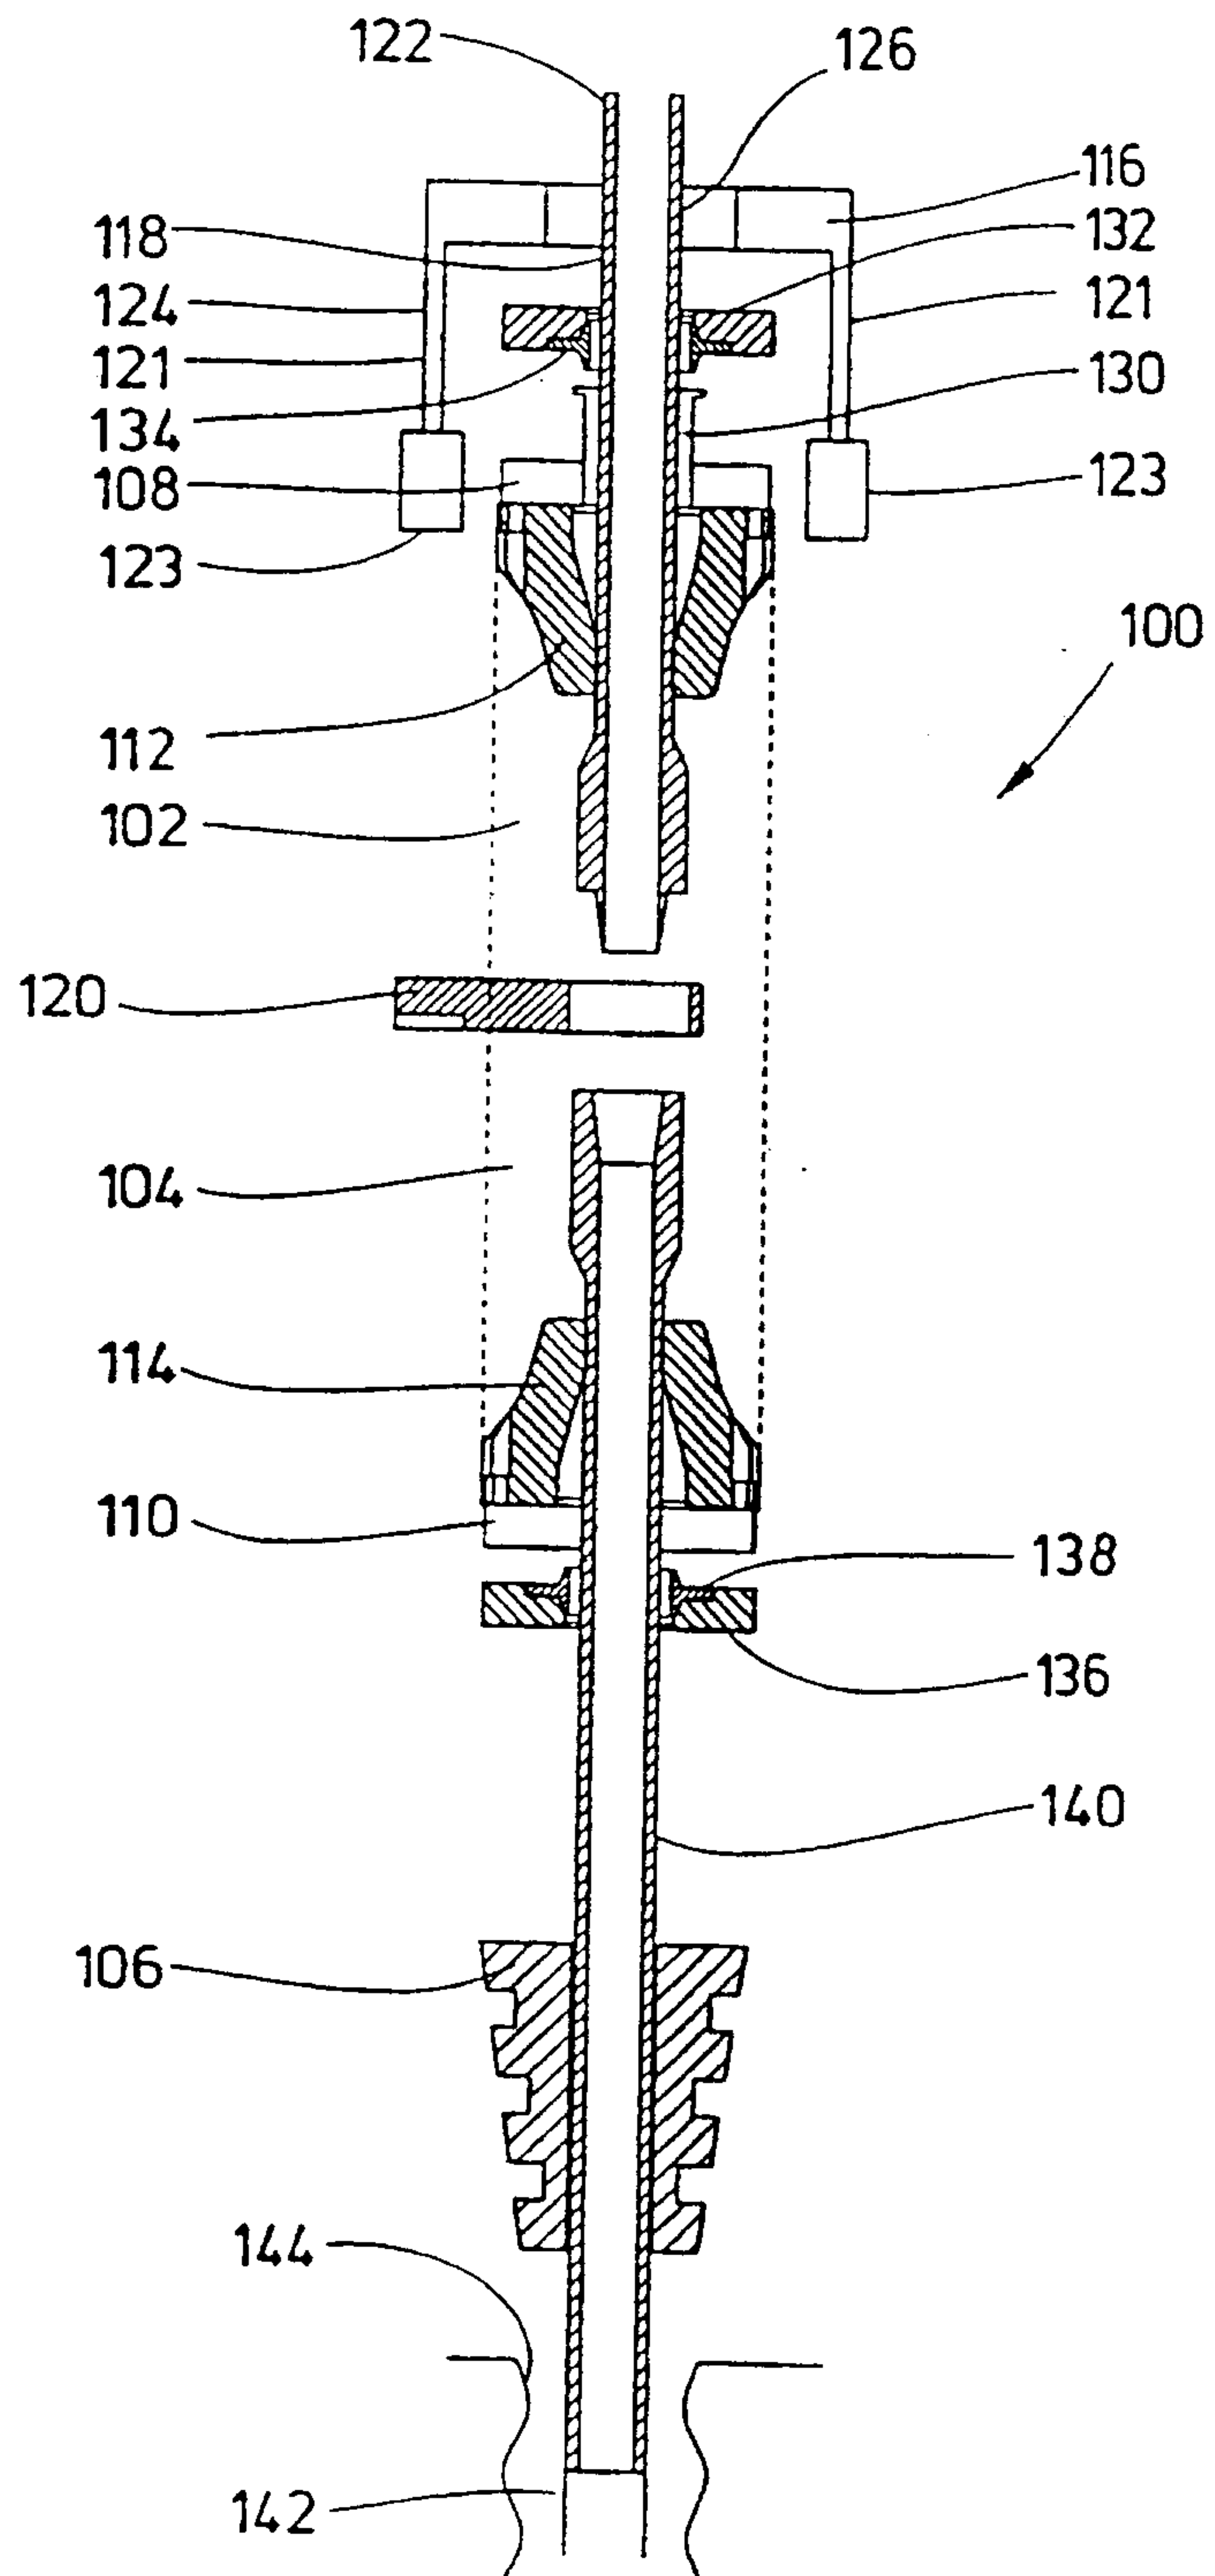


FIG 3


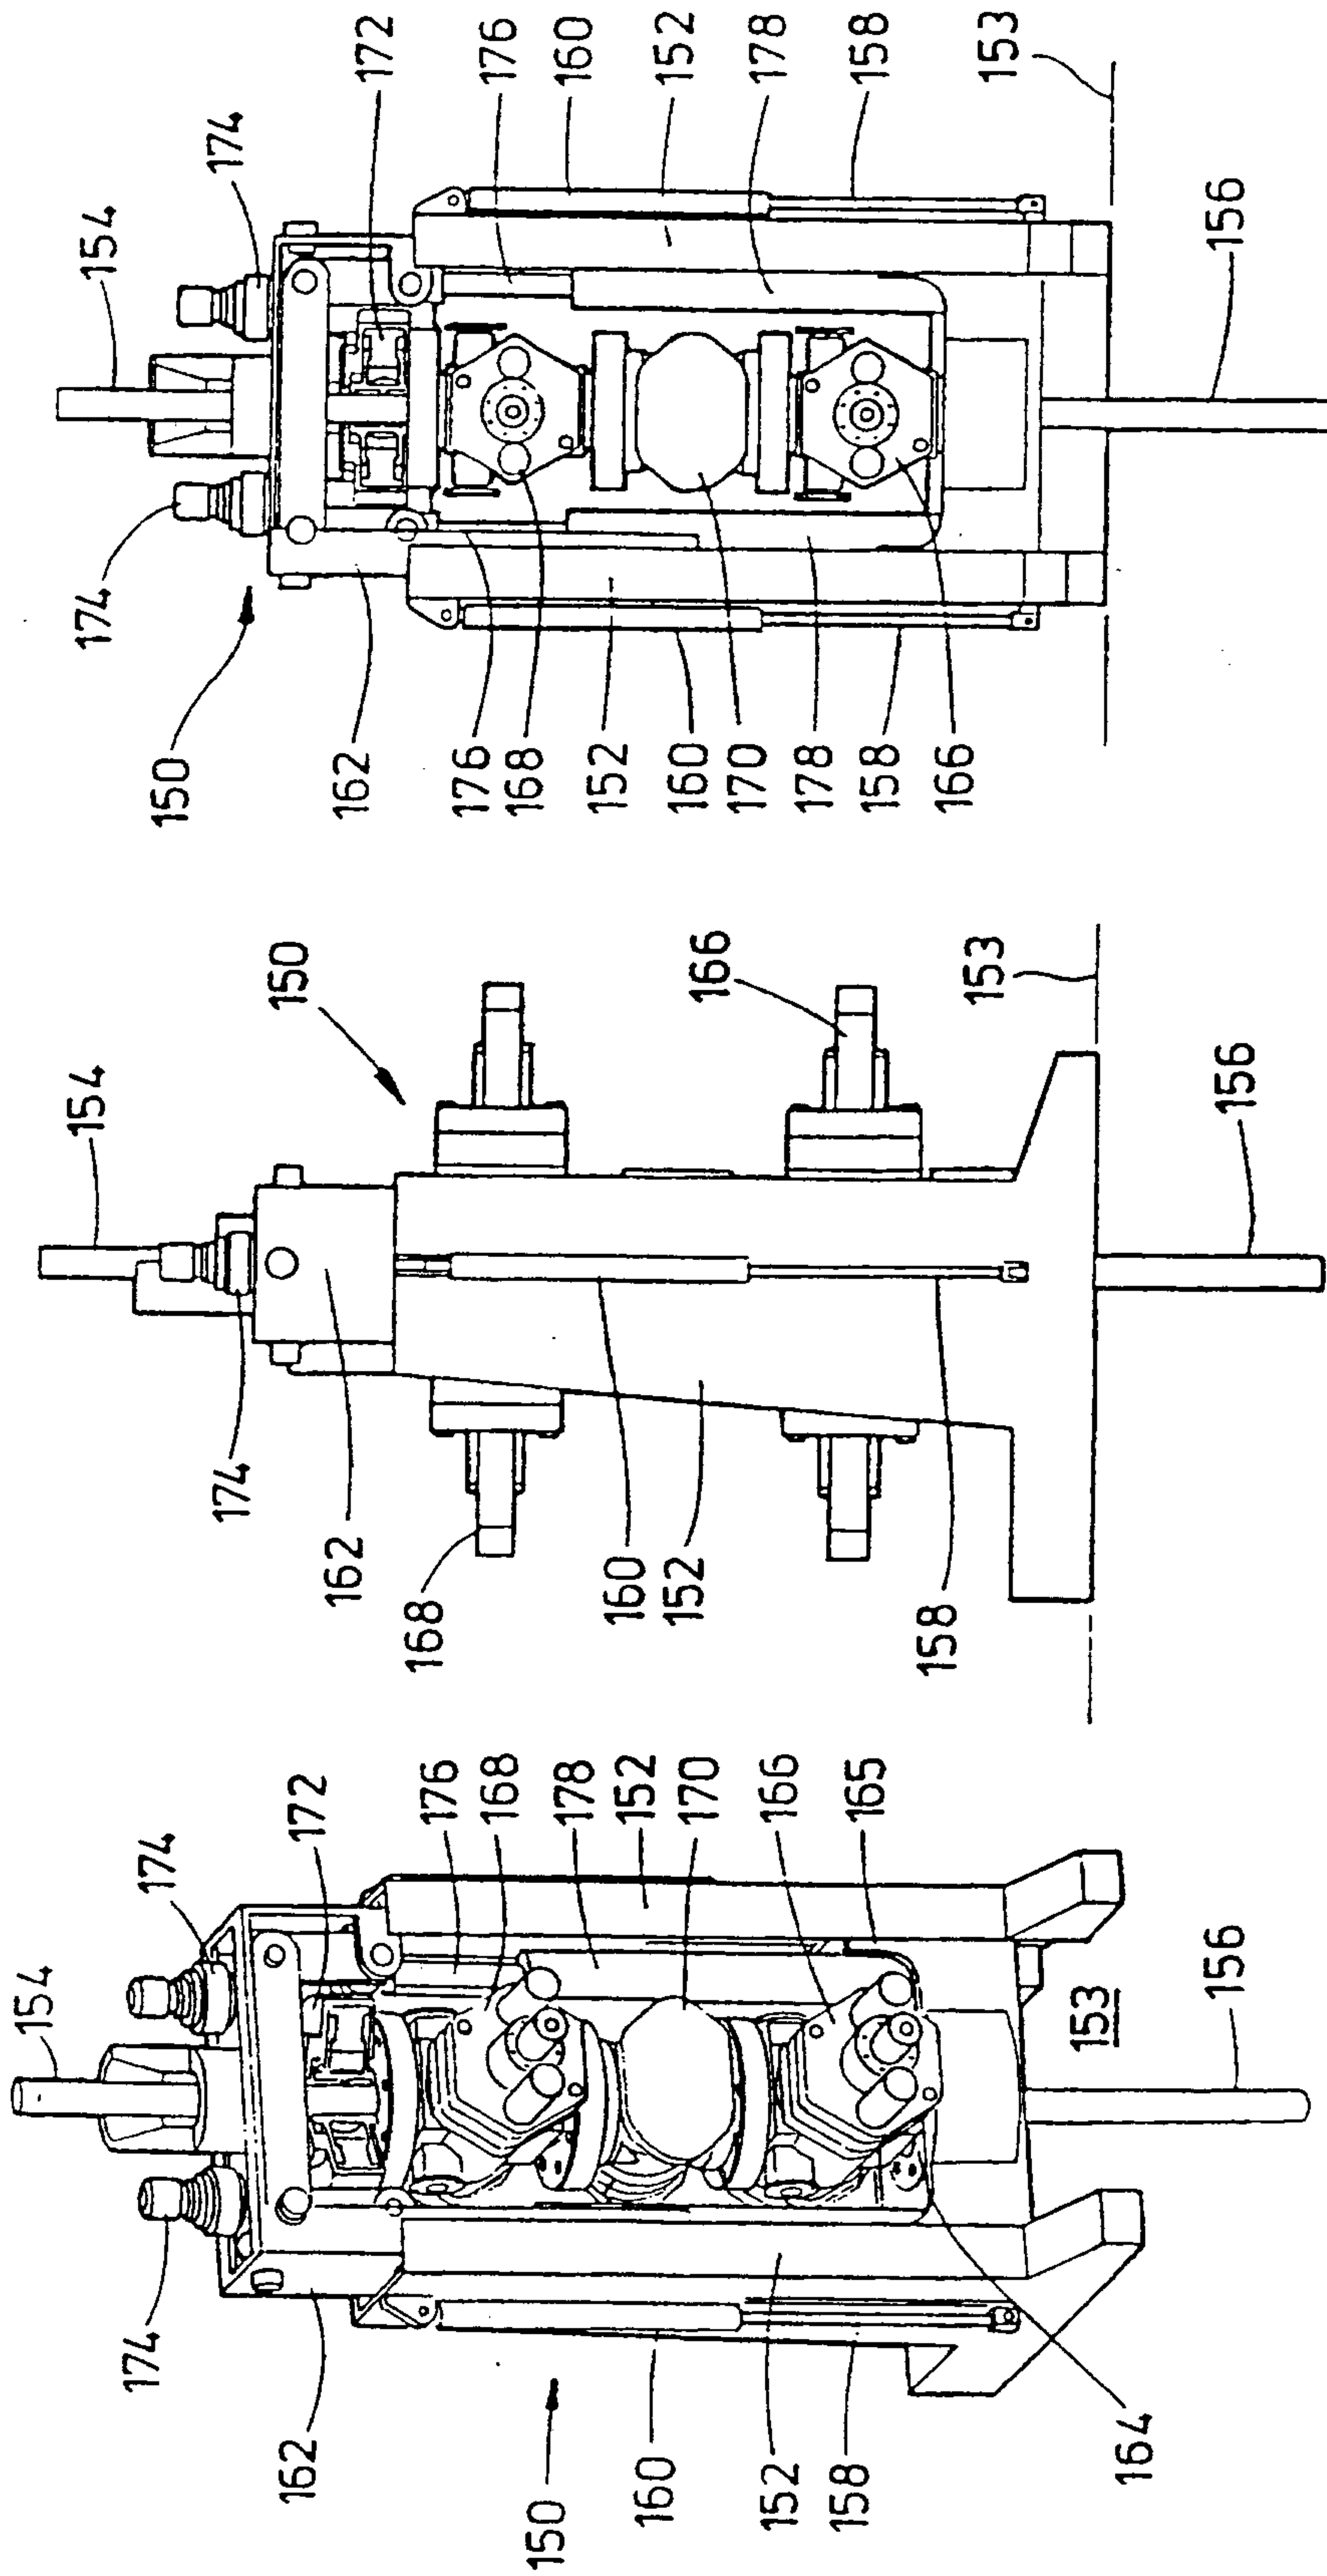


FIG 4C

FIG 4B

FIG 4A

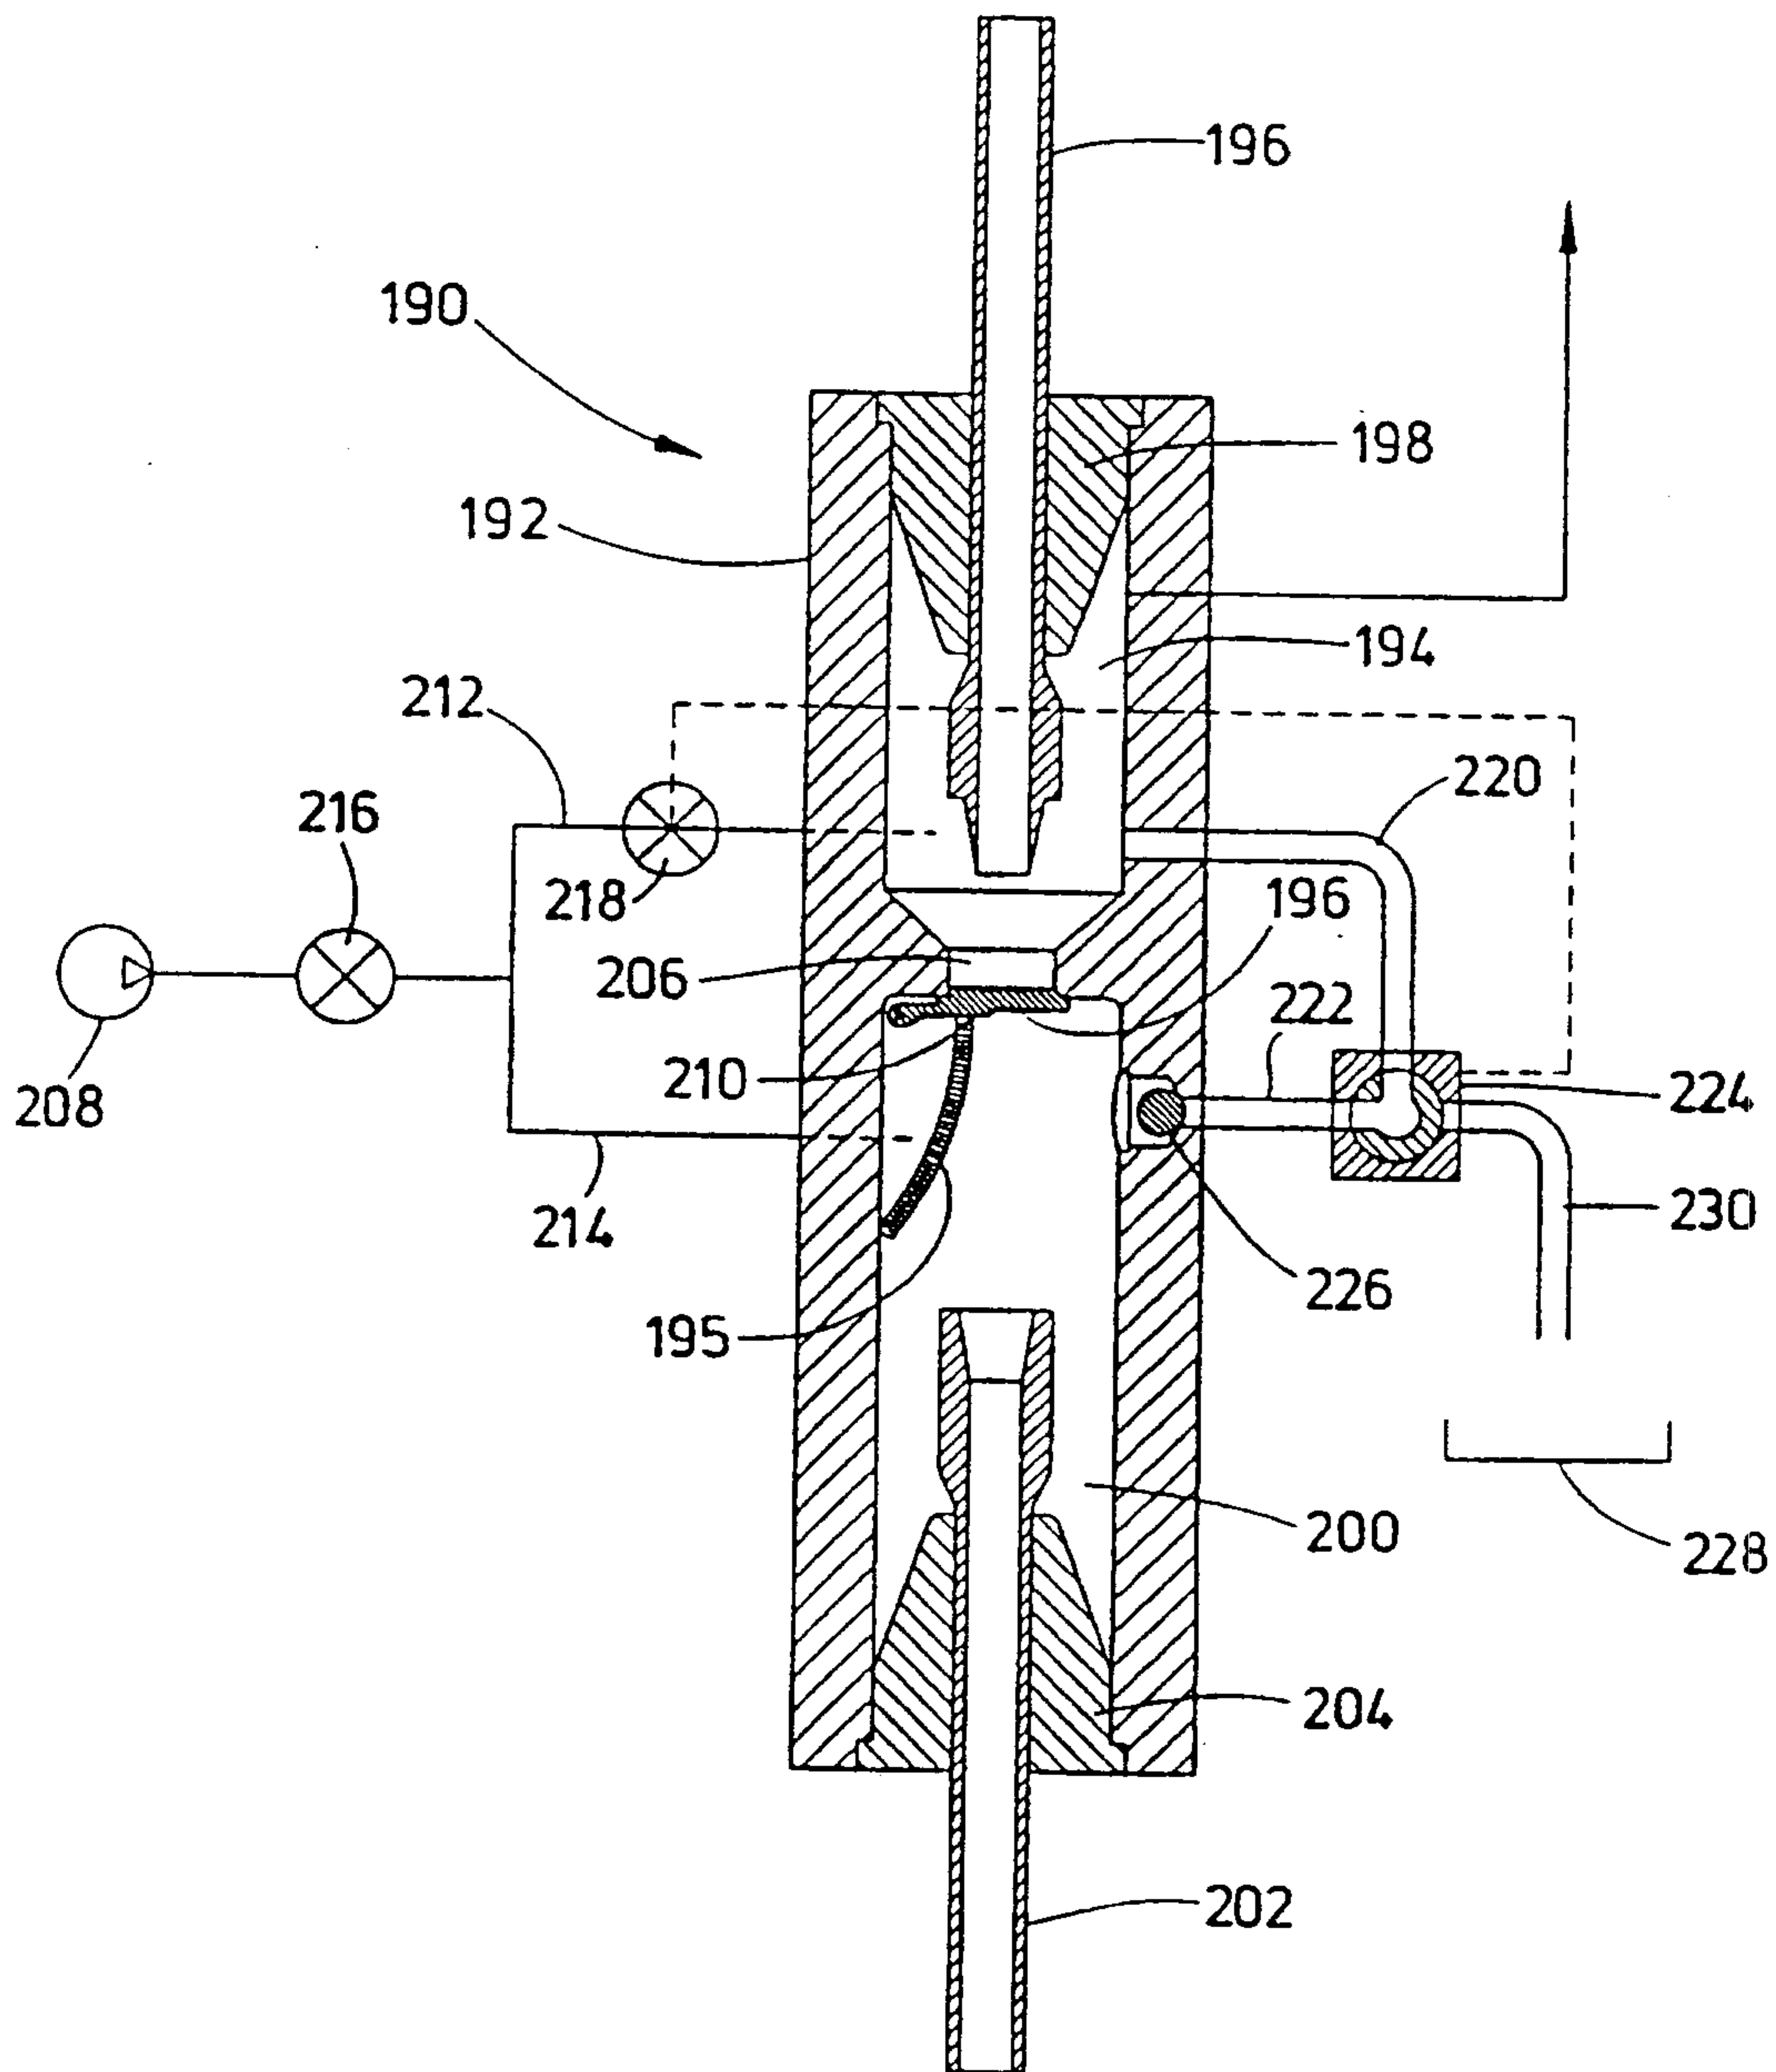

8 / 26

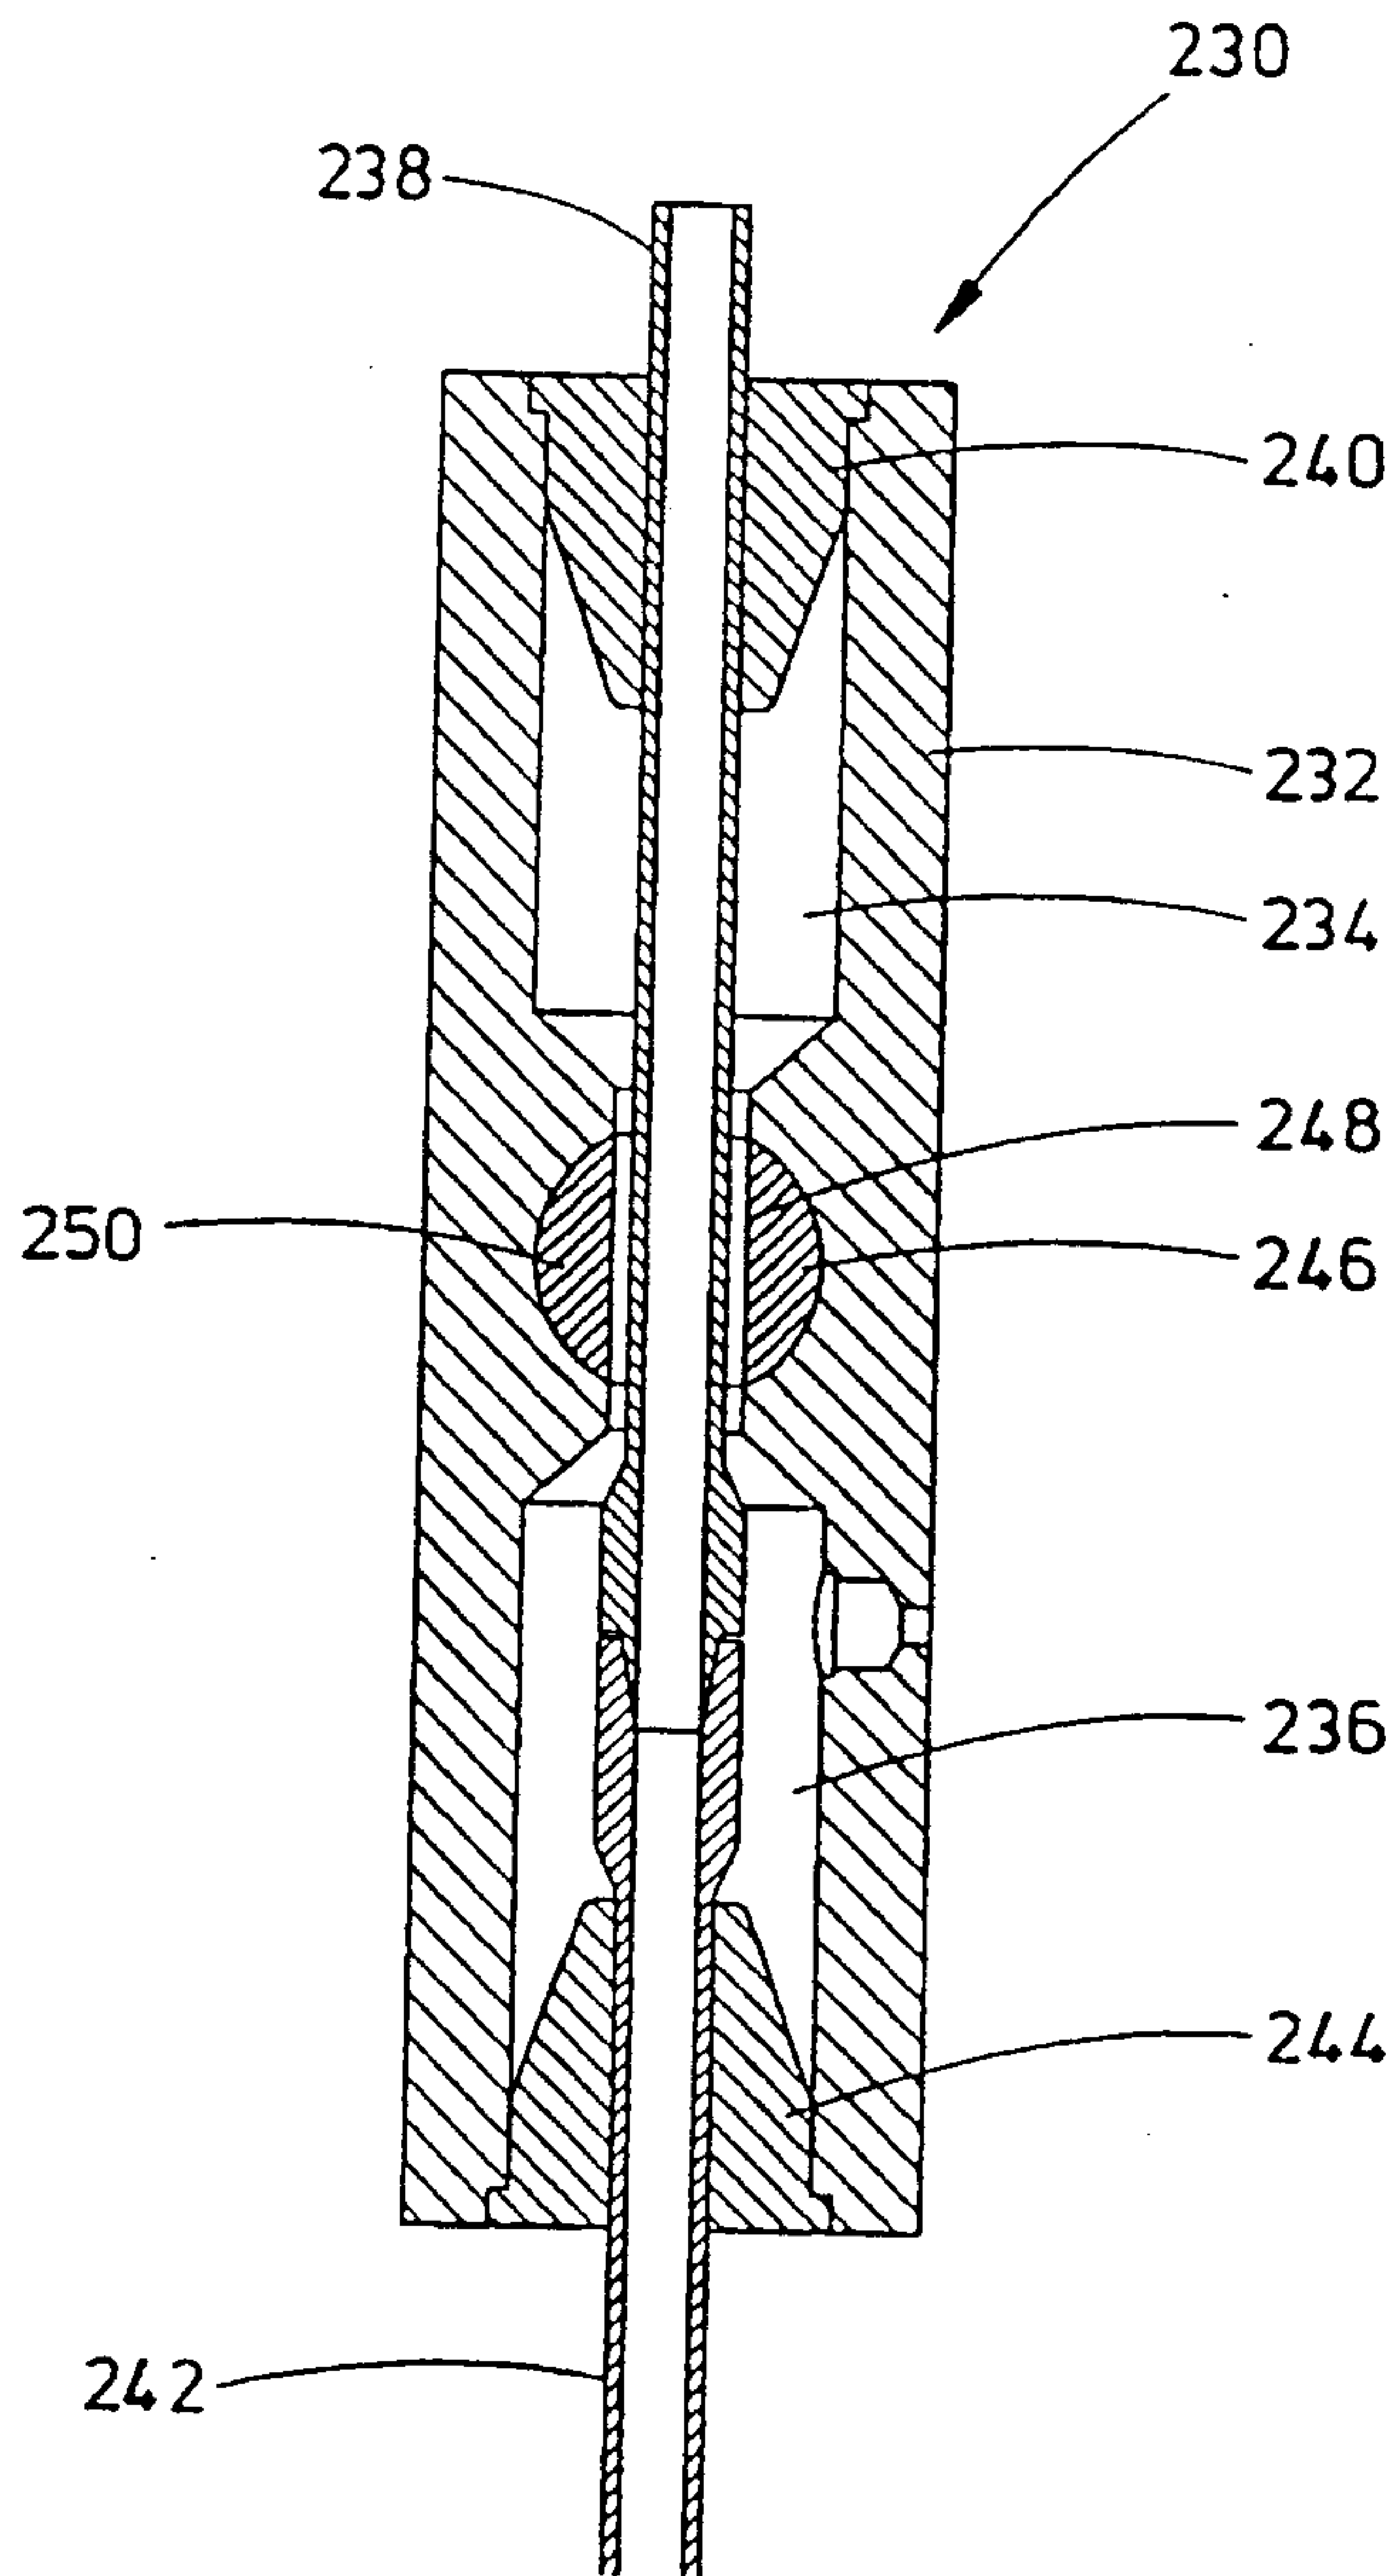


FIG 6

9 / 26

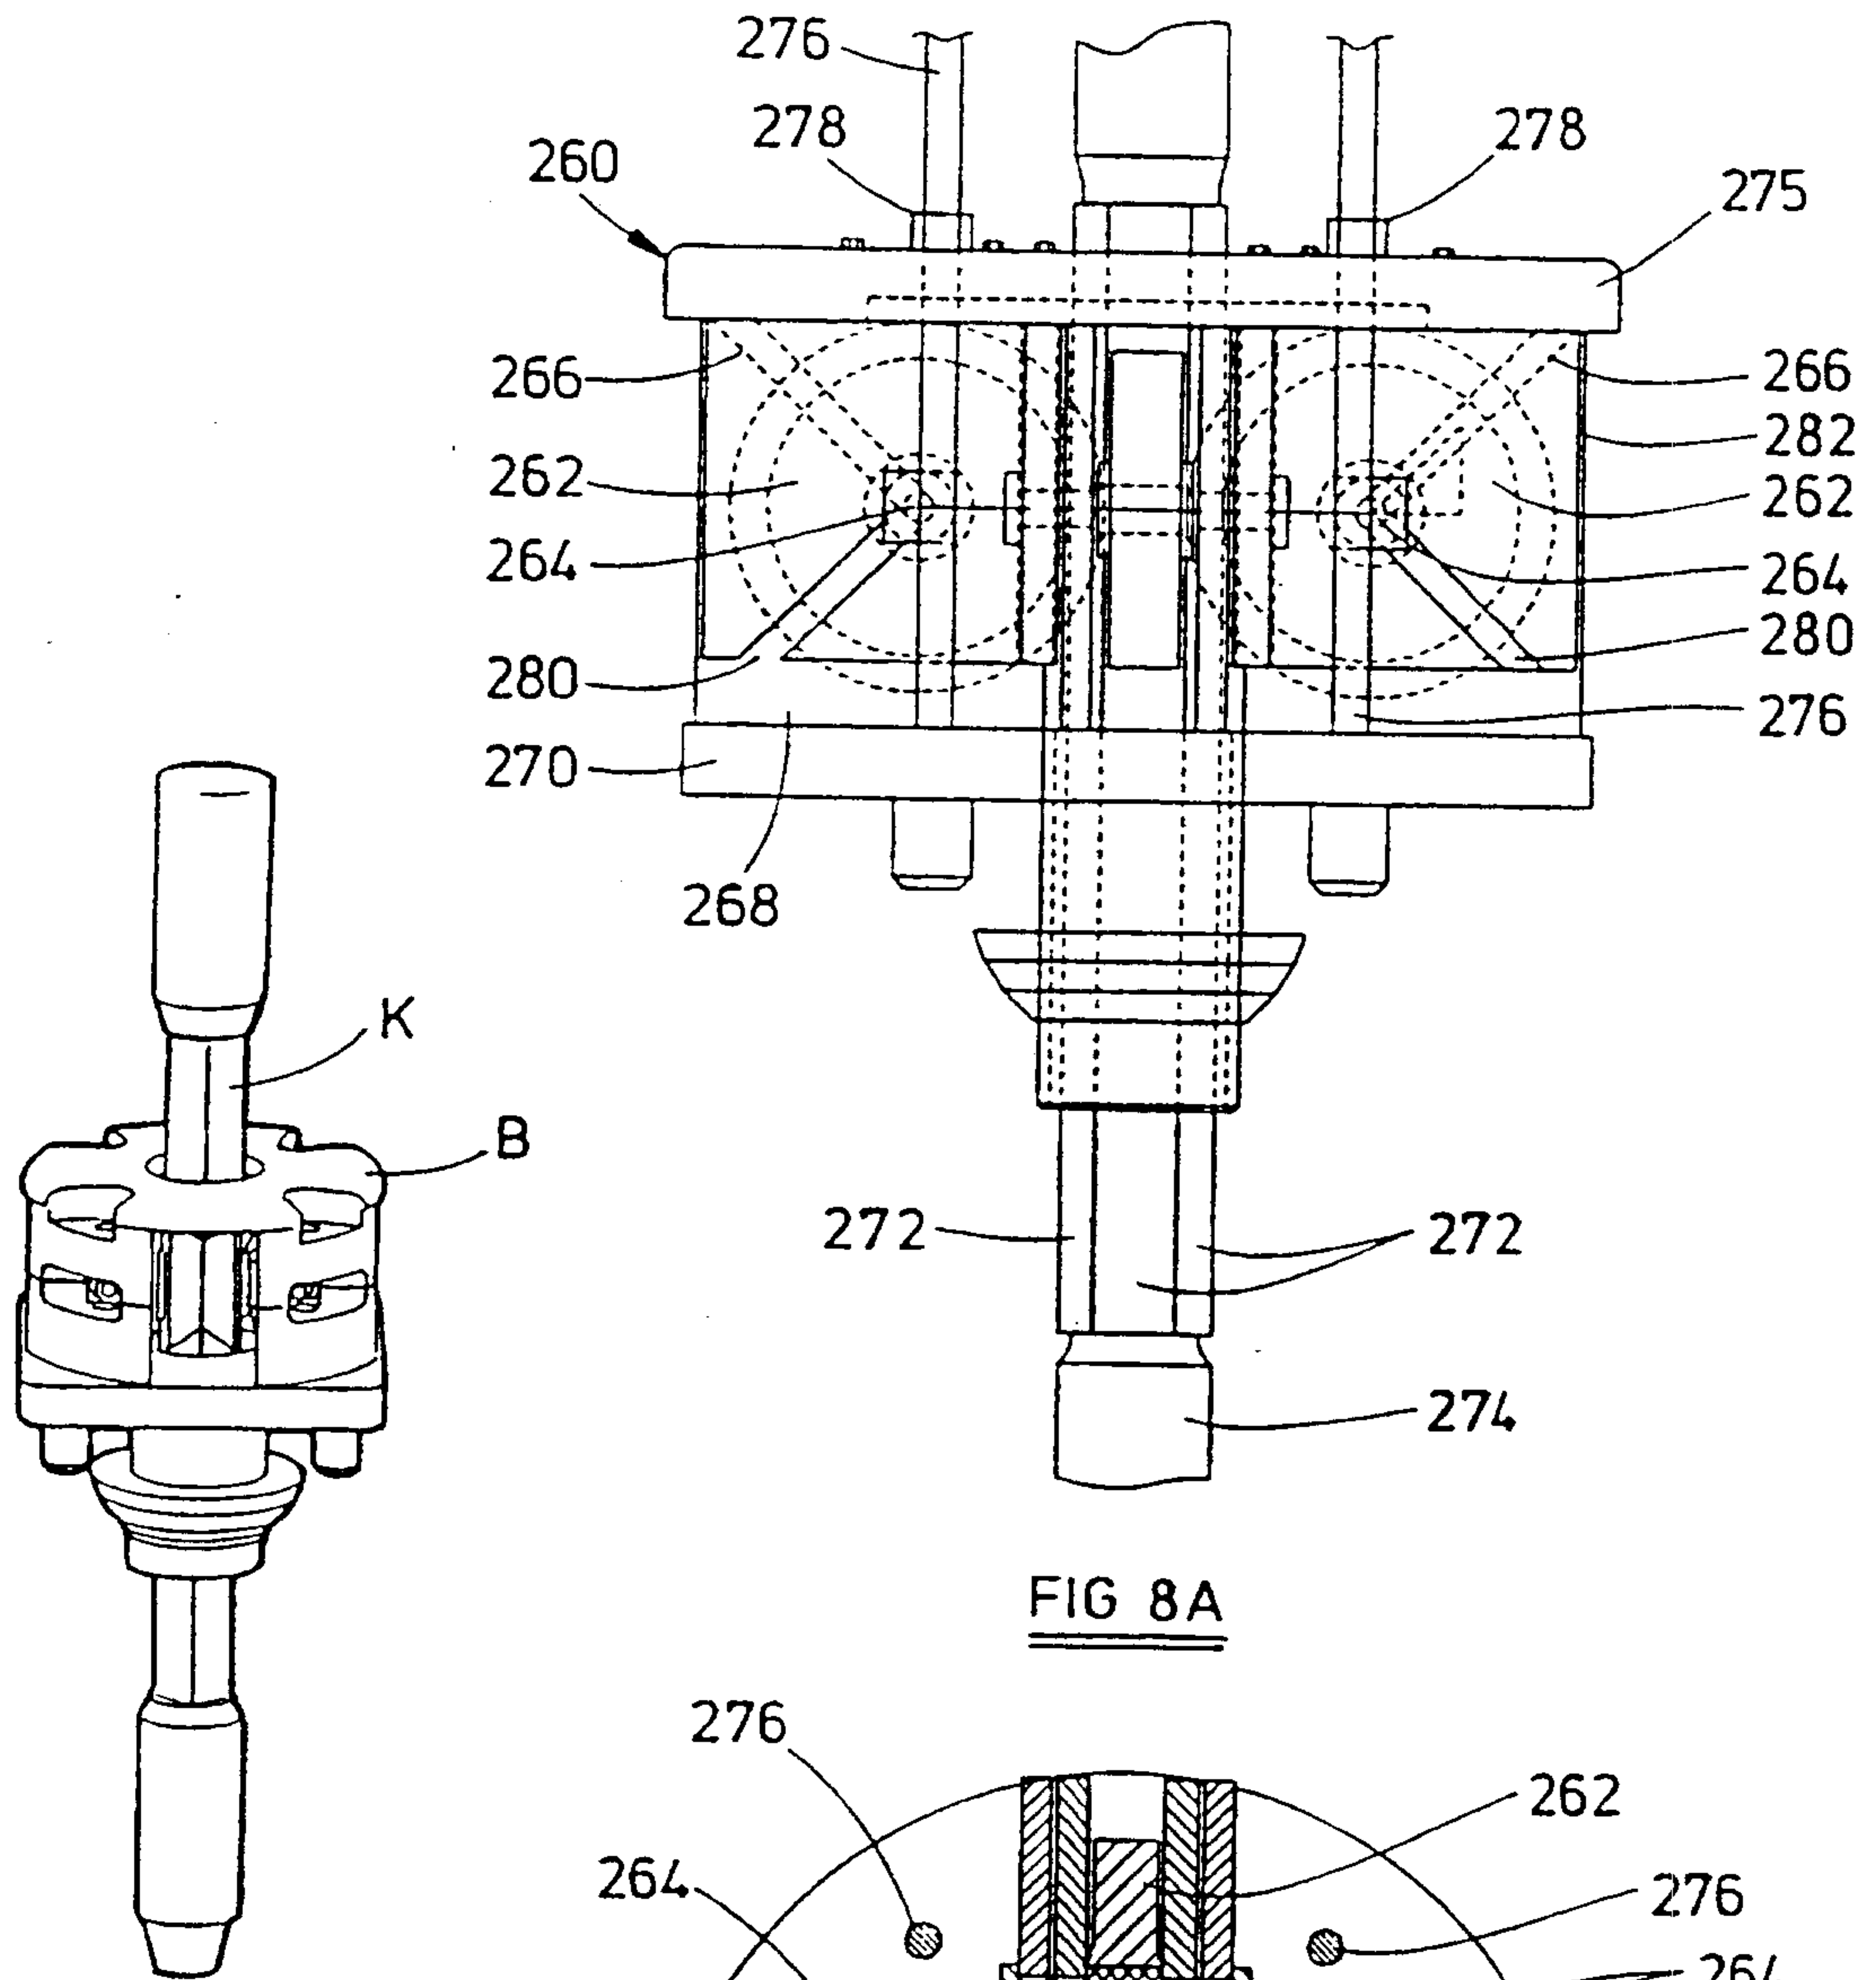


FIG 8A

FIG 7  
Prior Art

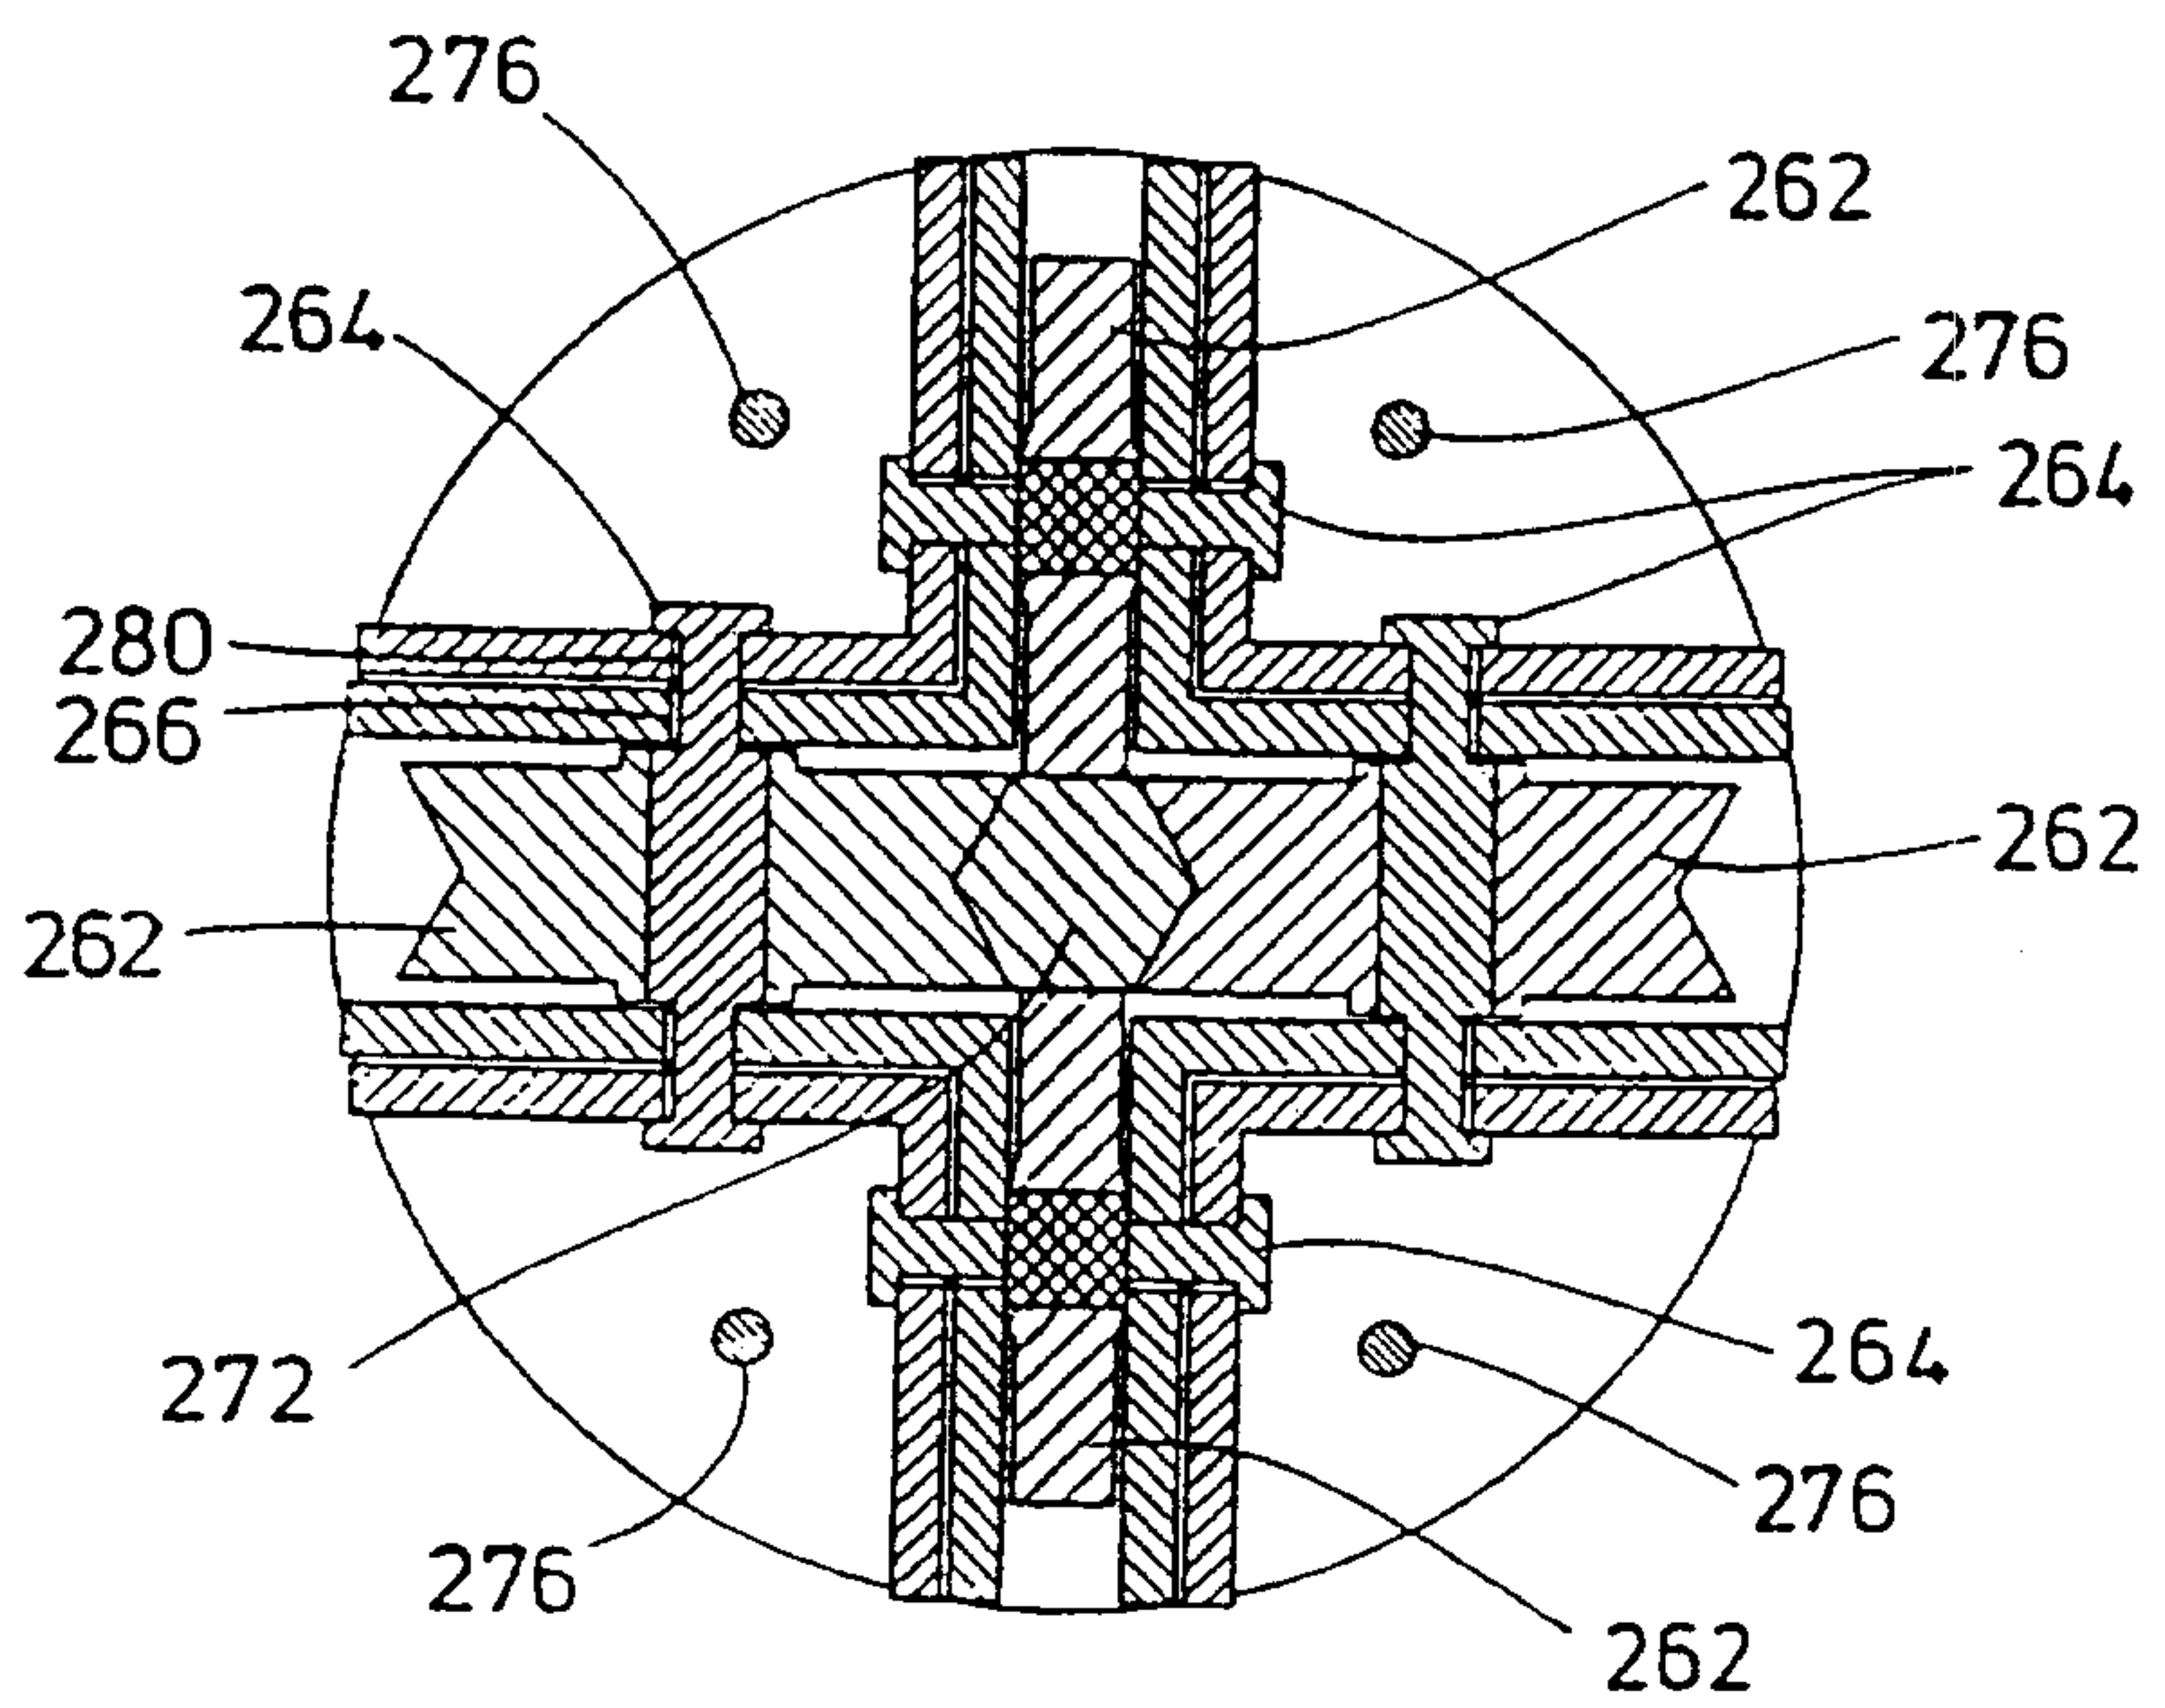


FIG 8B

10 / 26

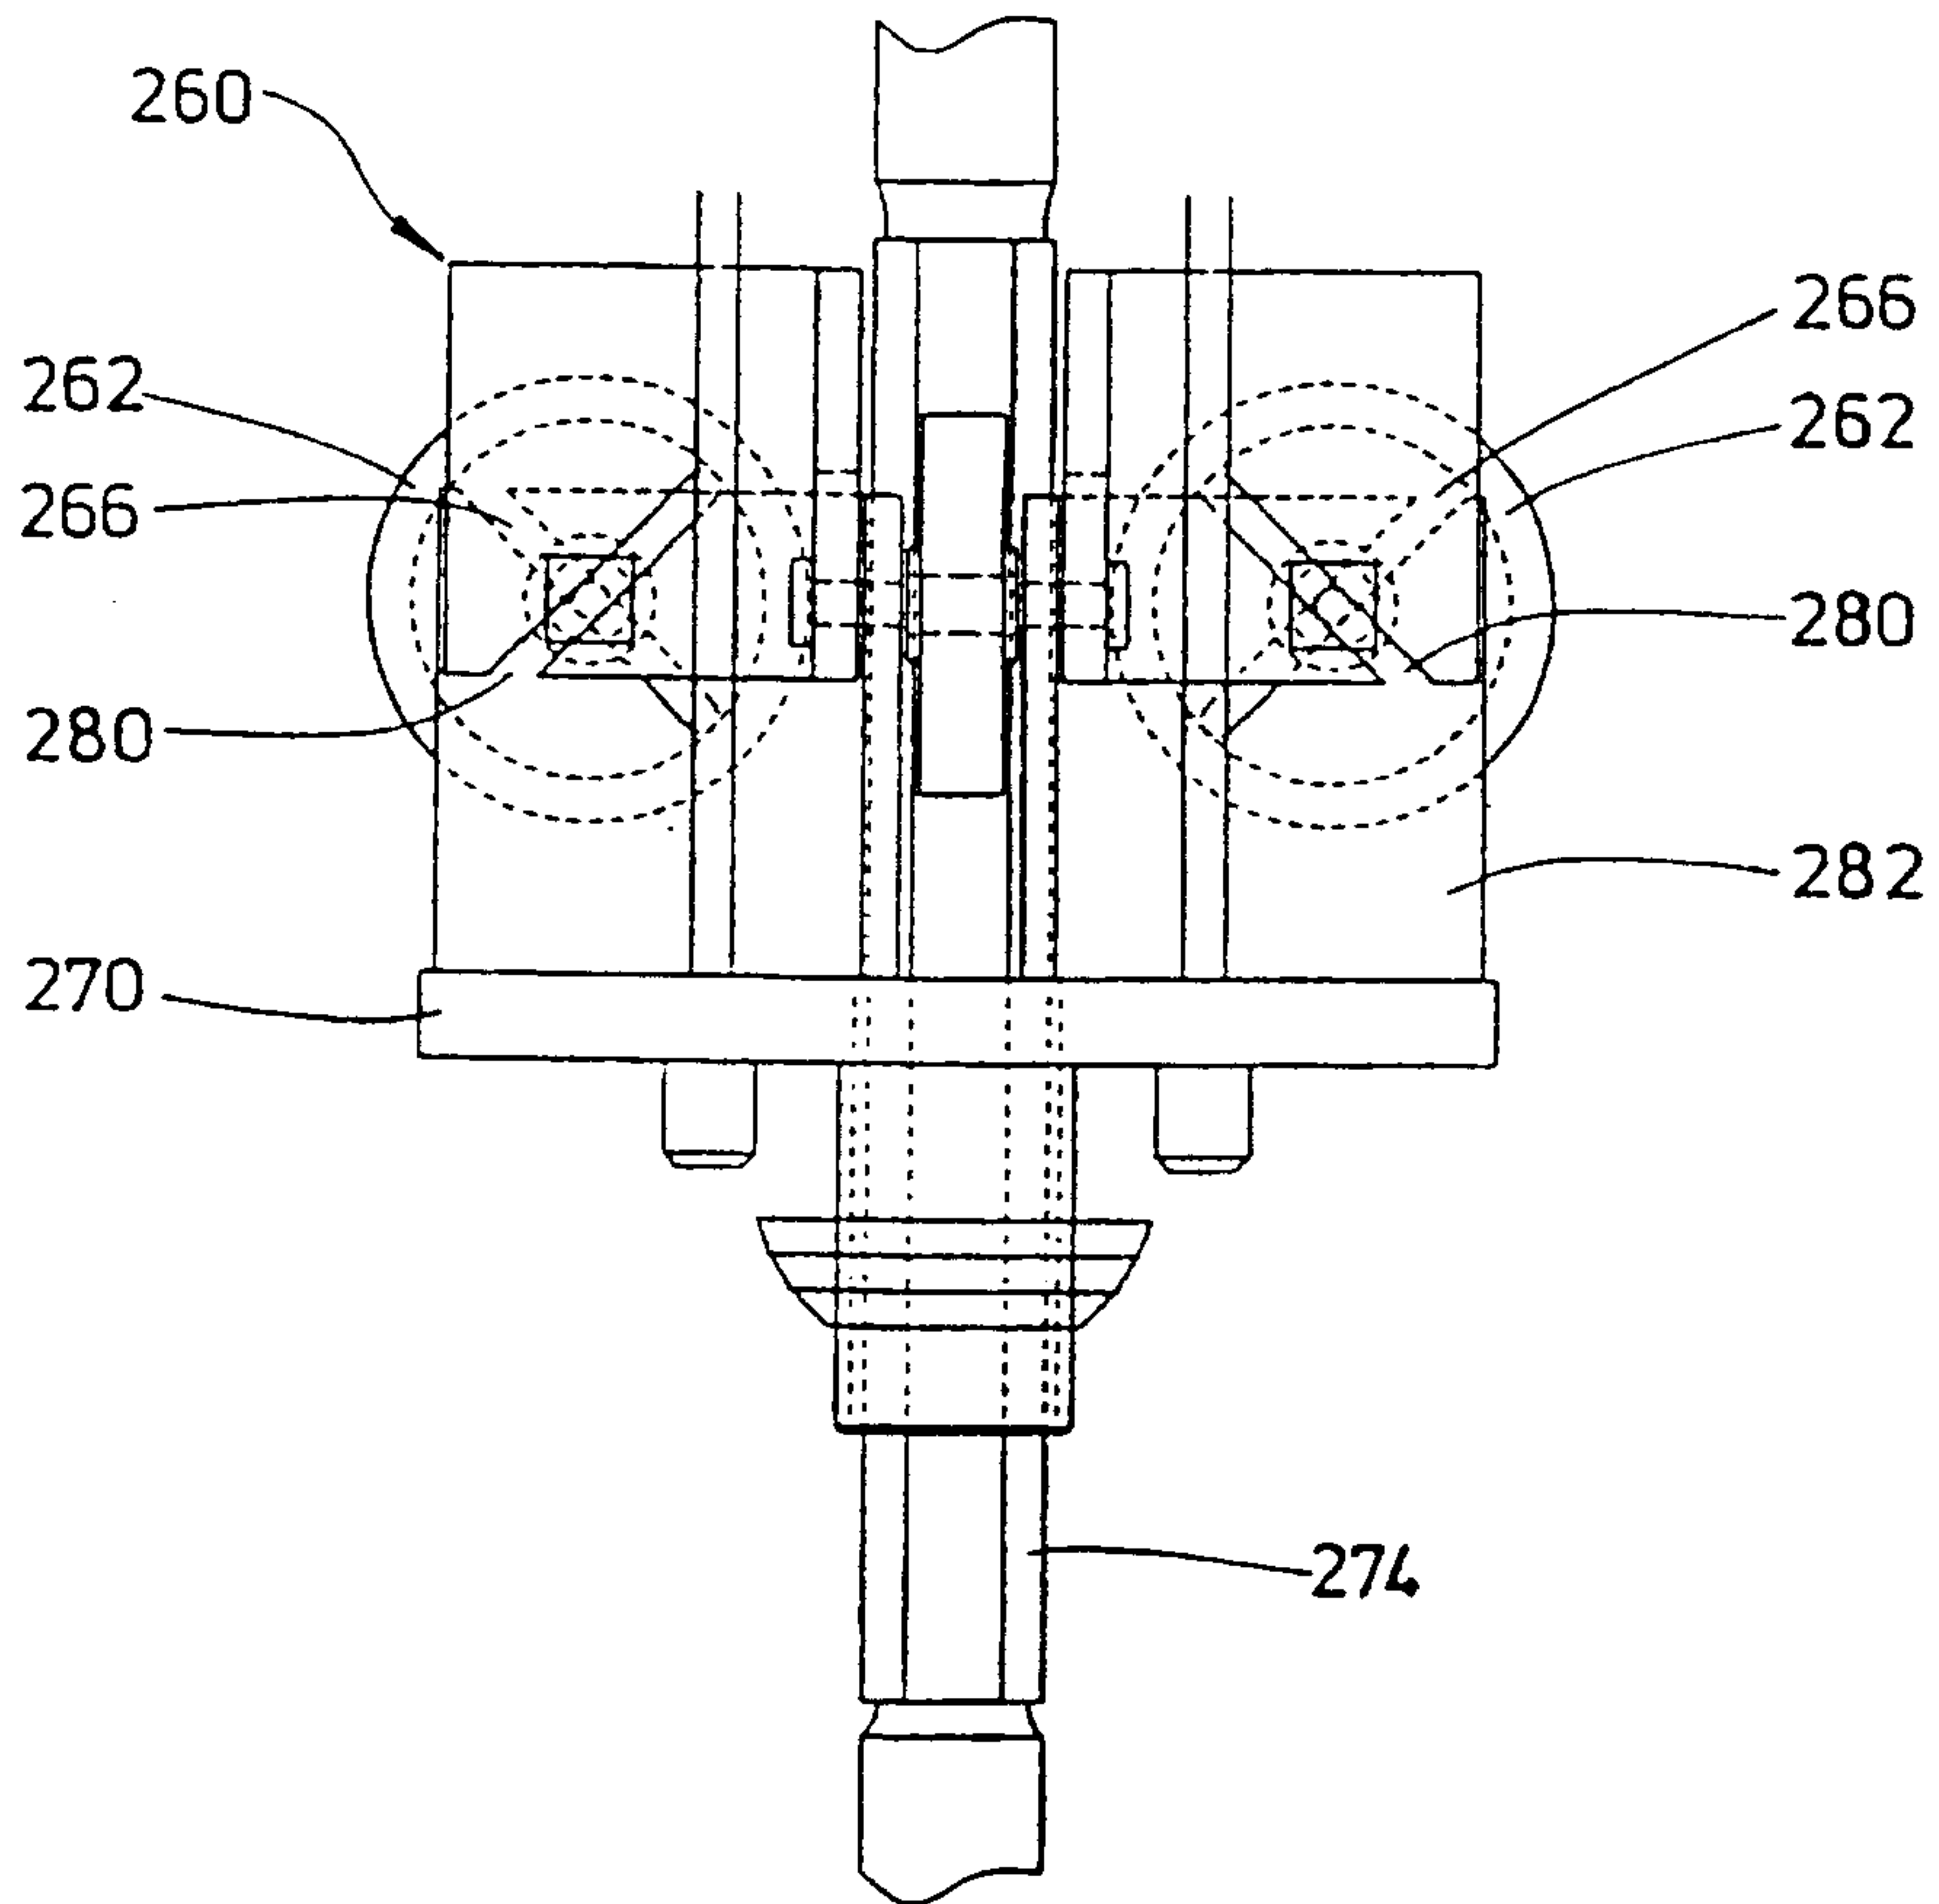


FIG 8C

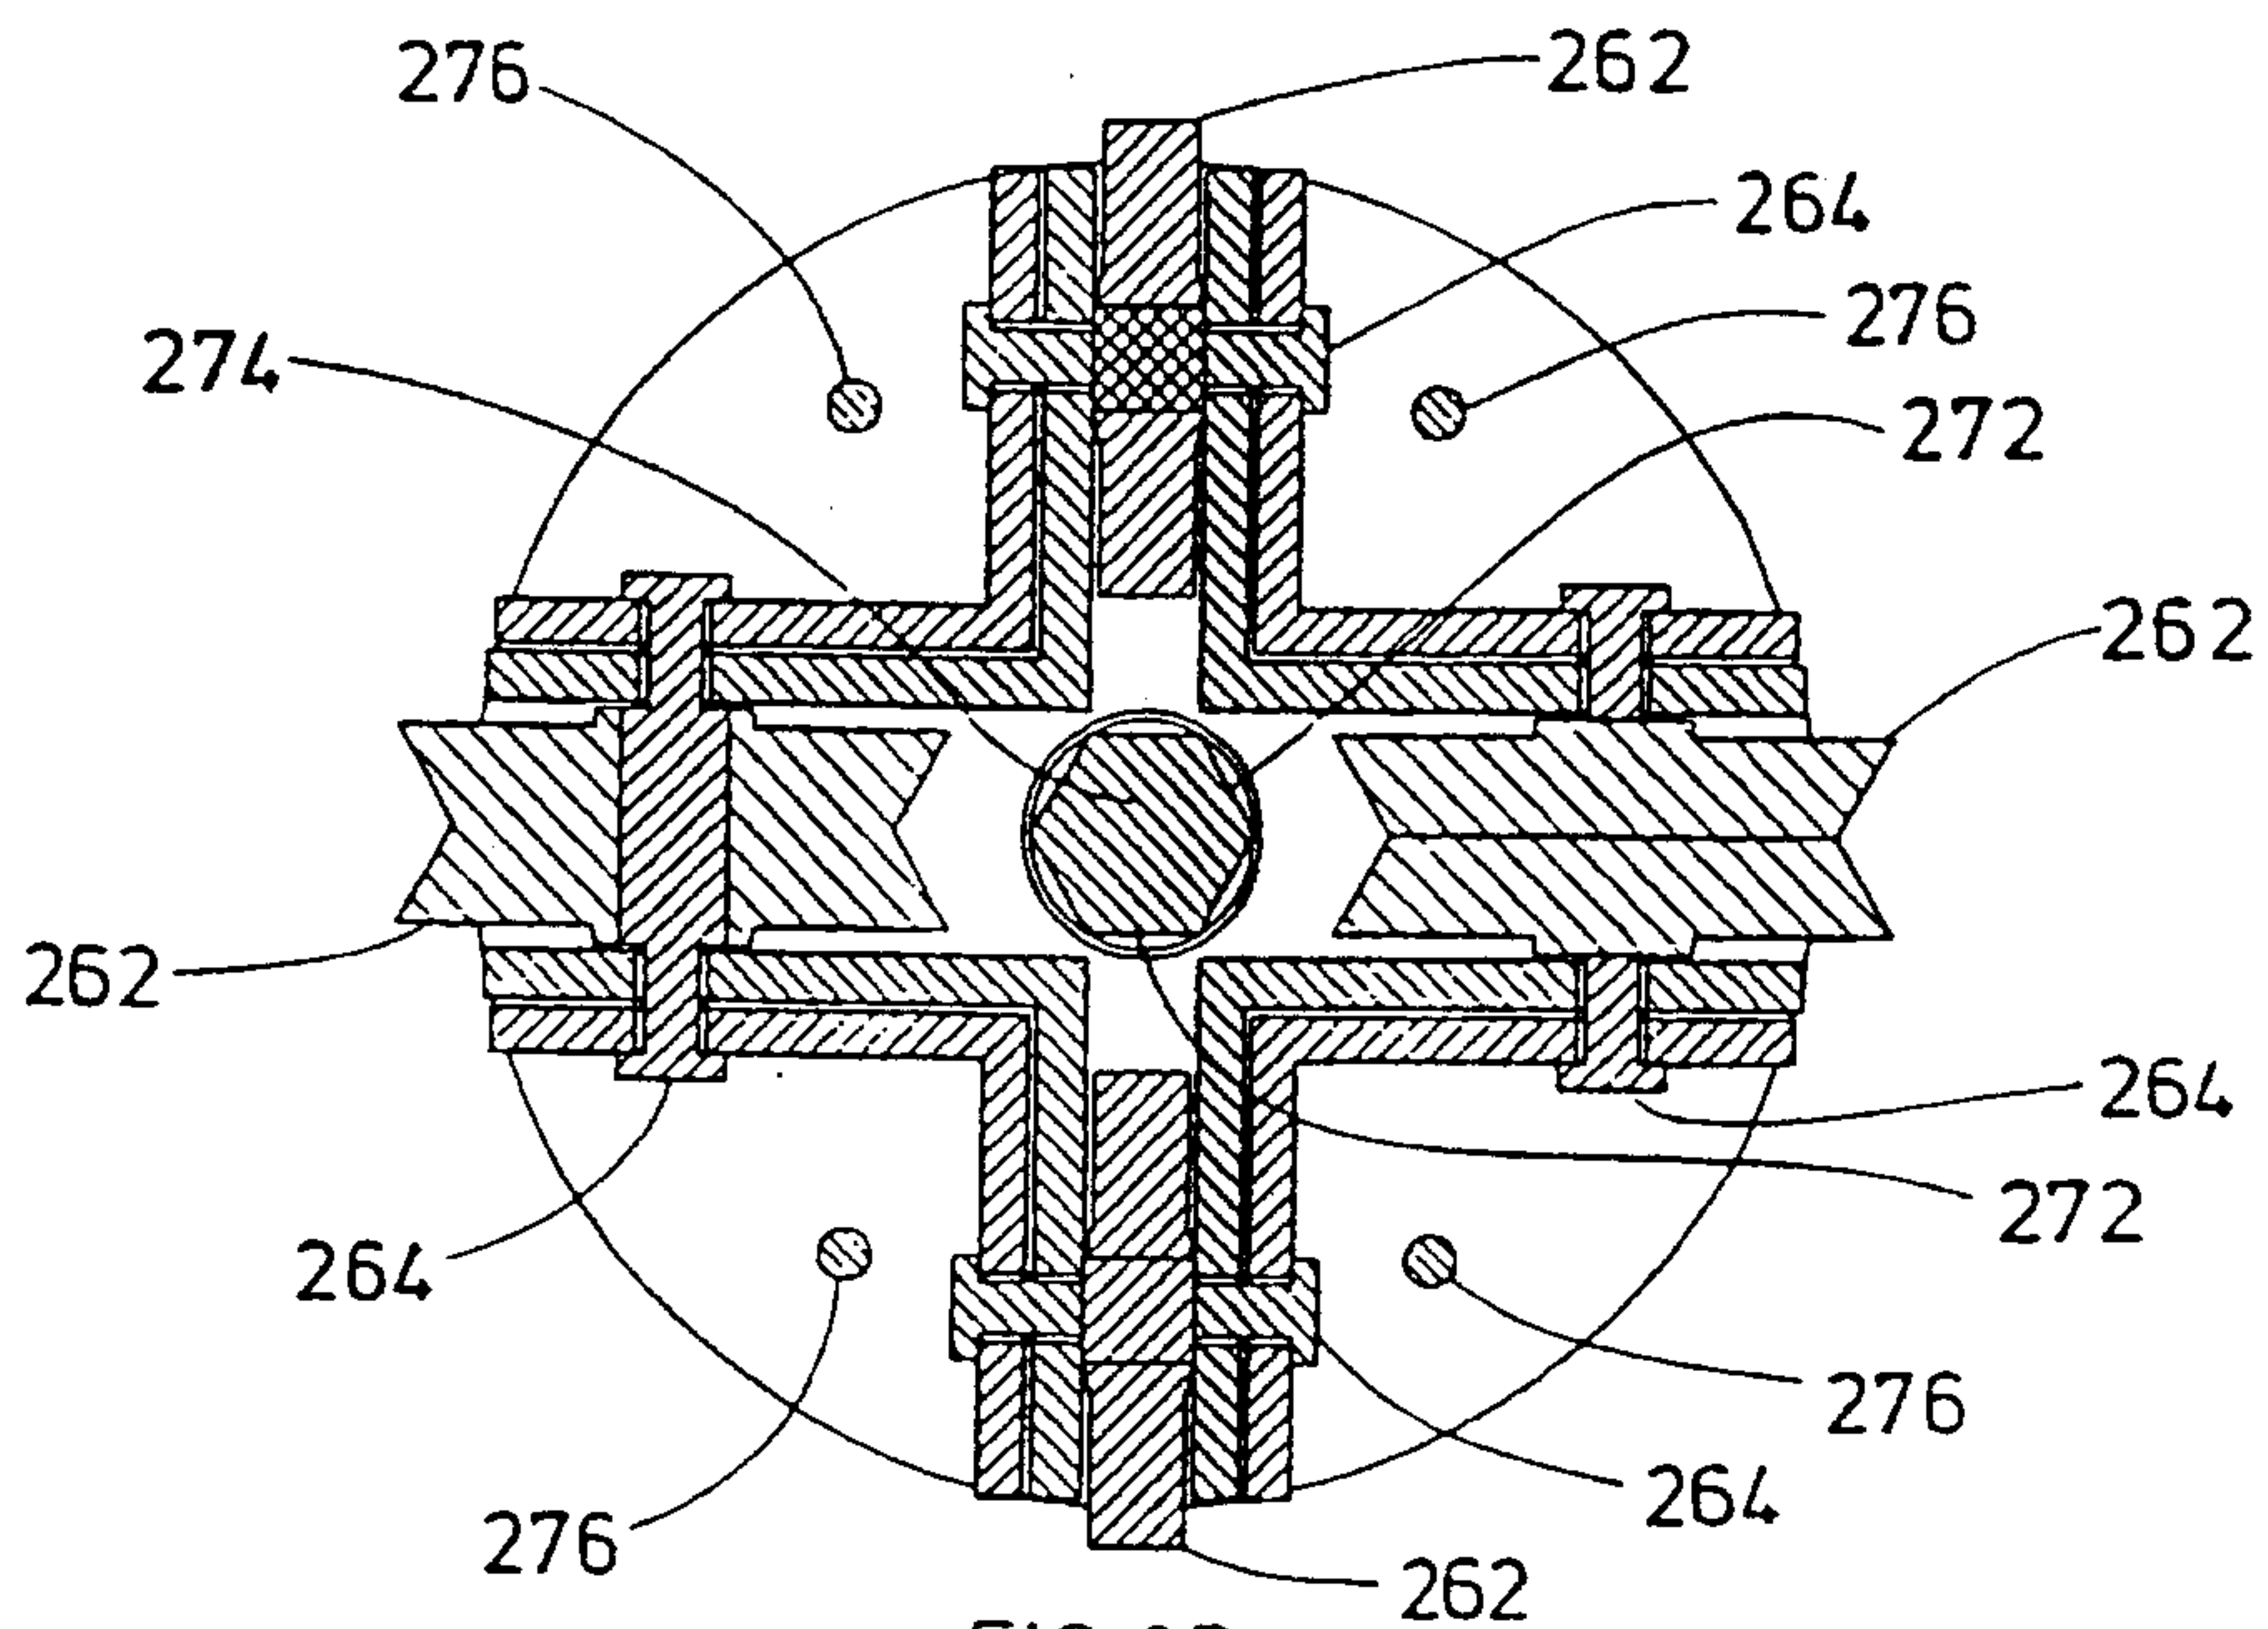


FIG 8D



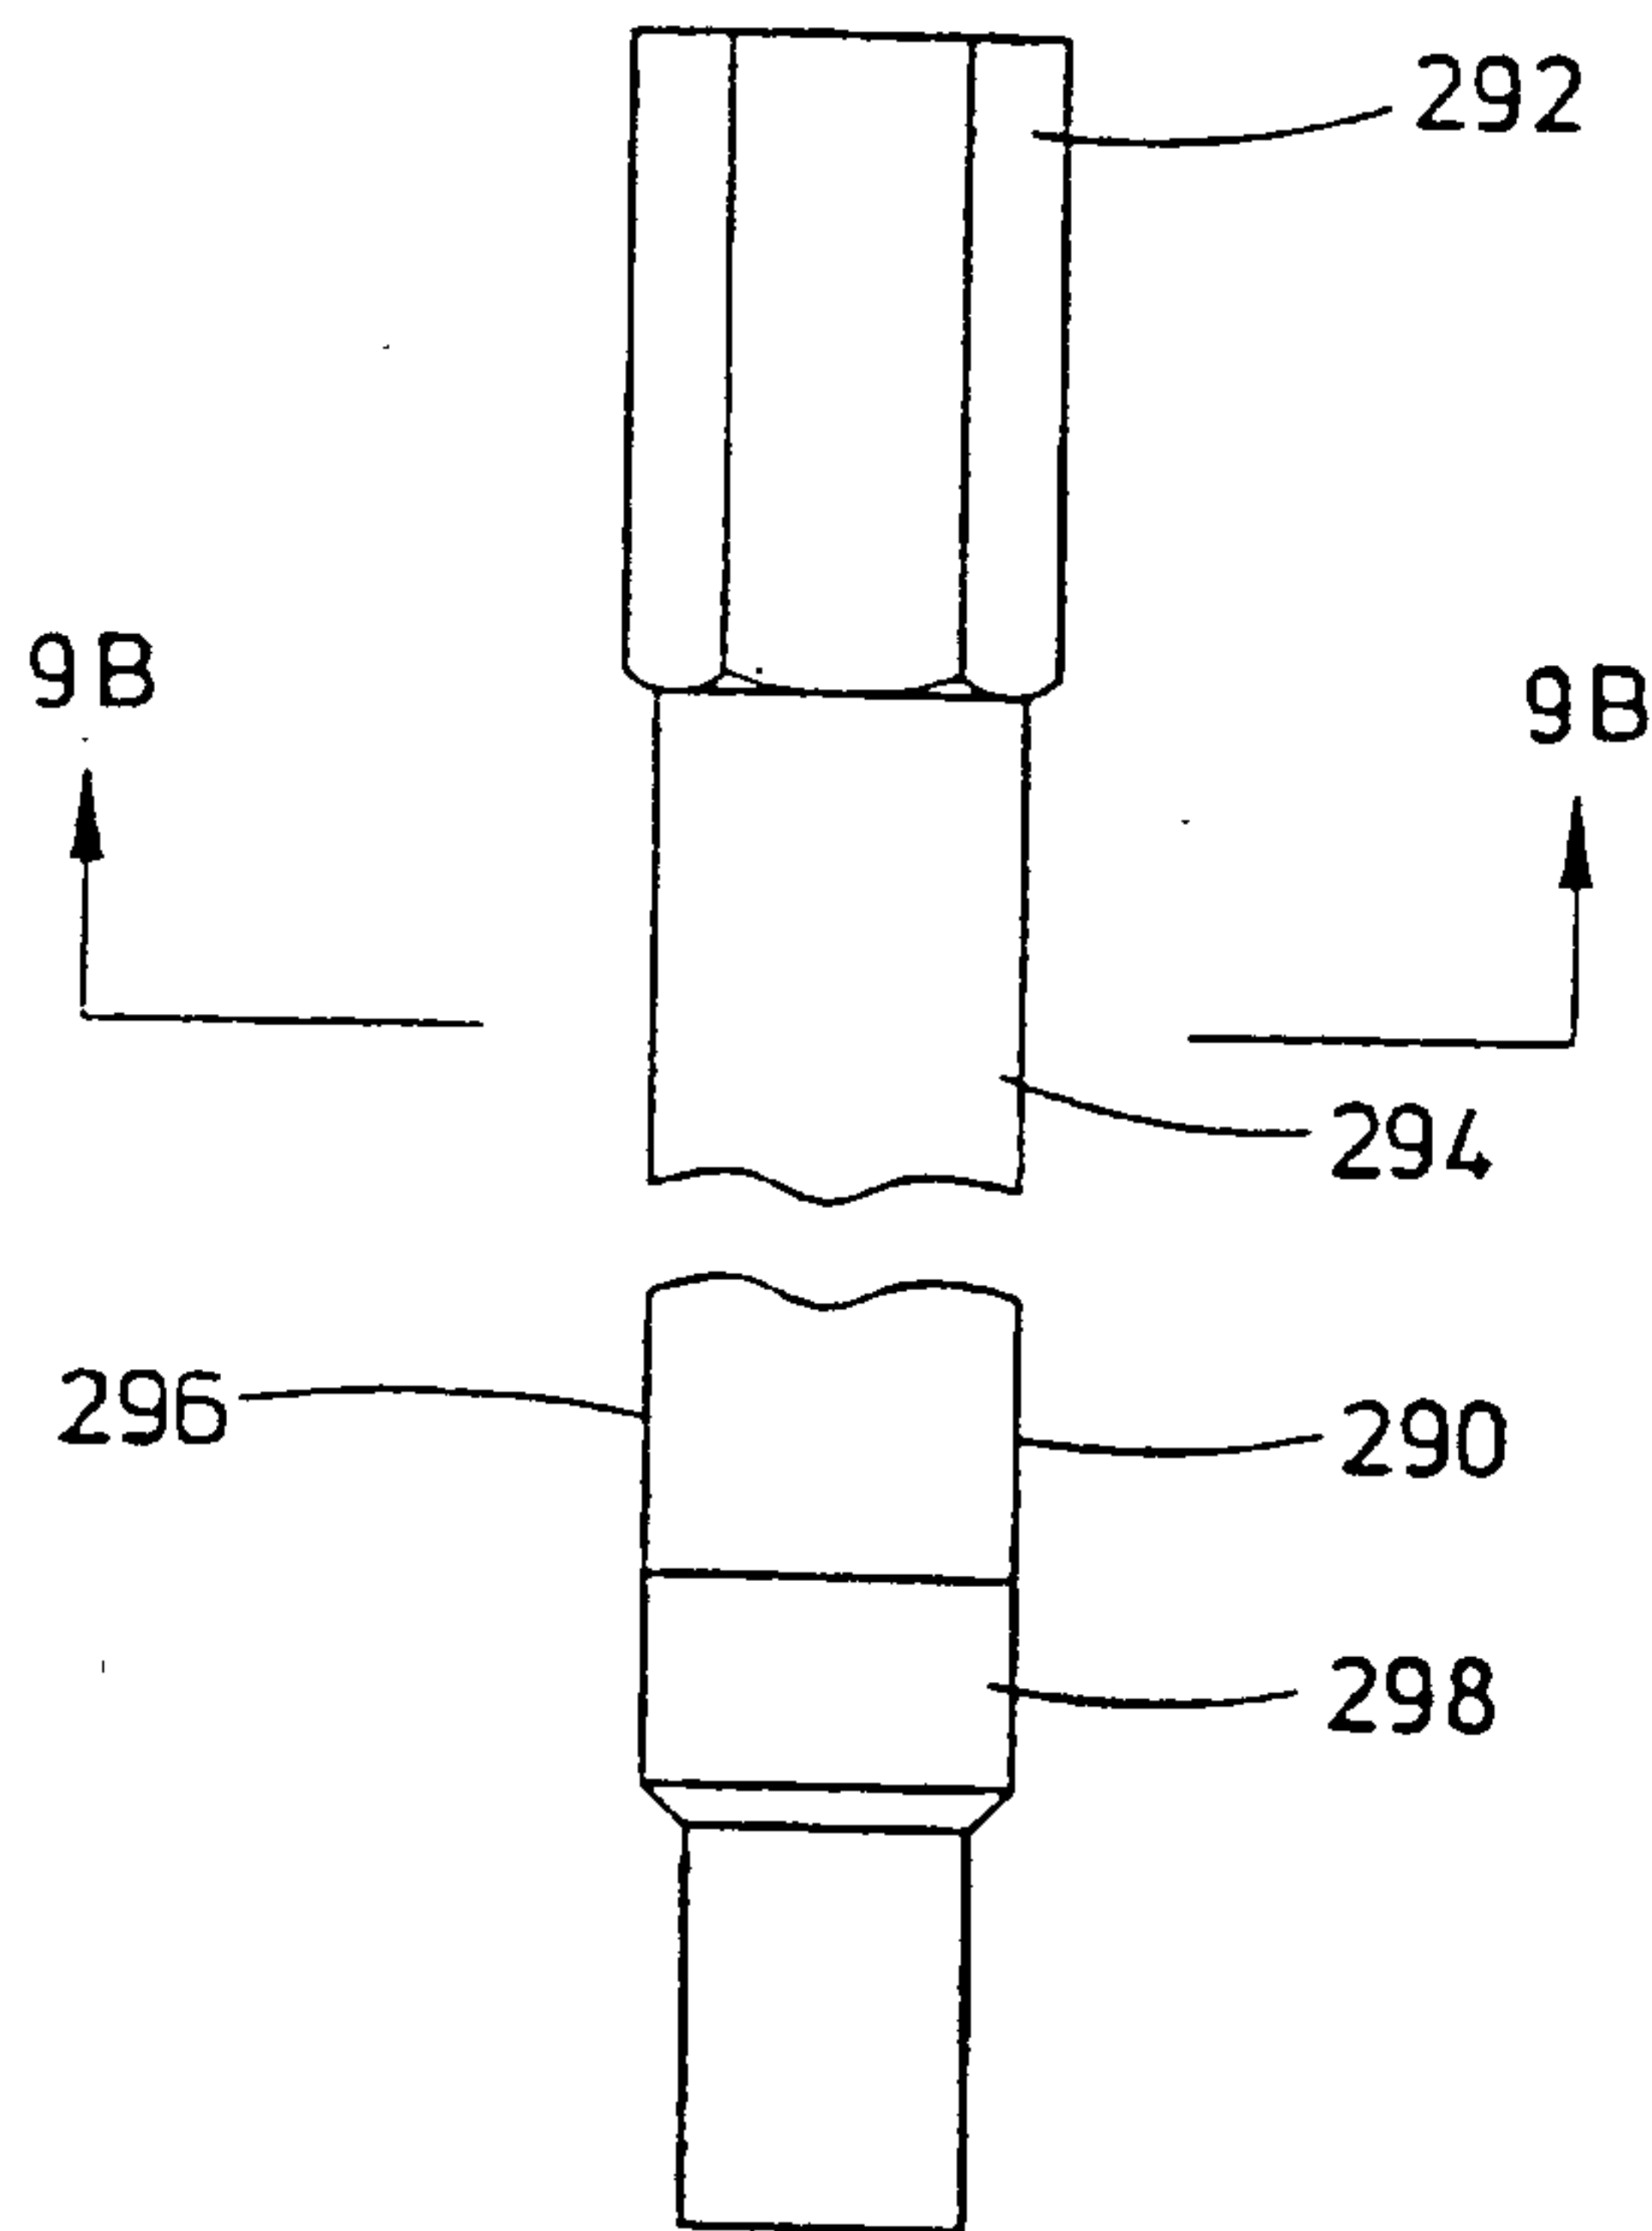


FIG 9A

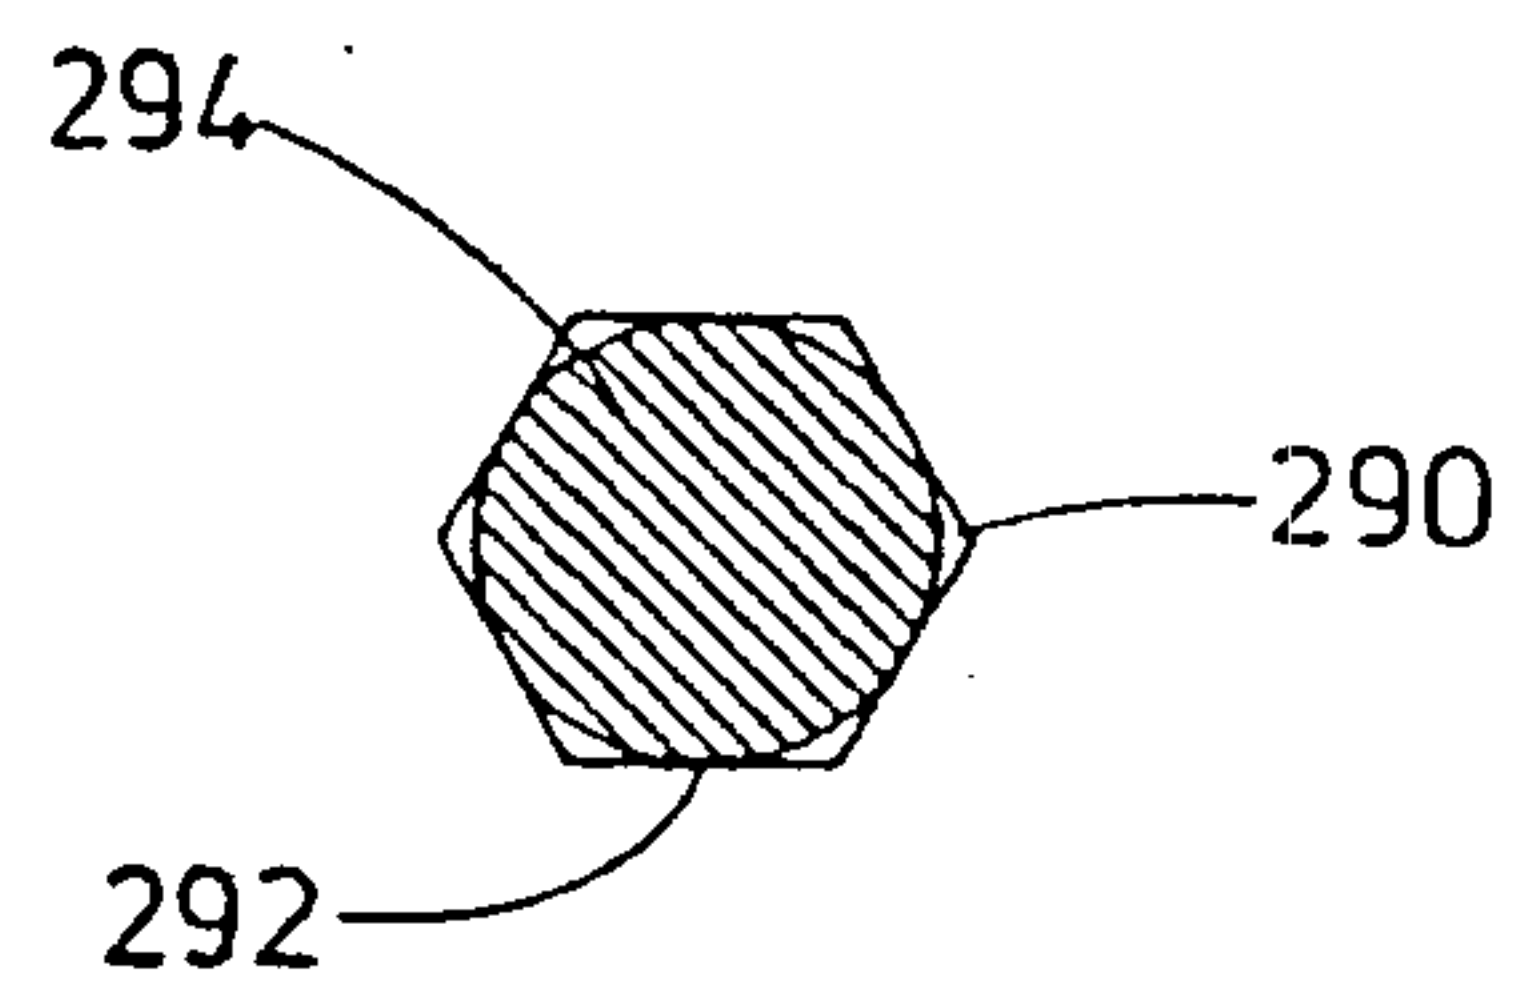


FIG 9B

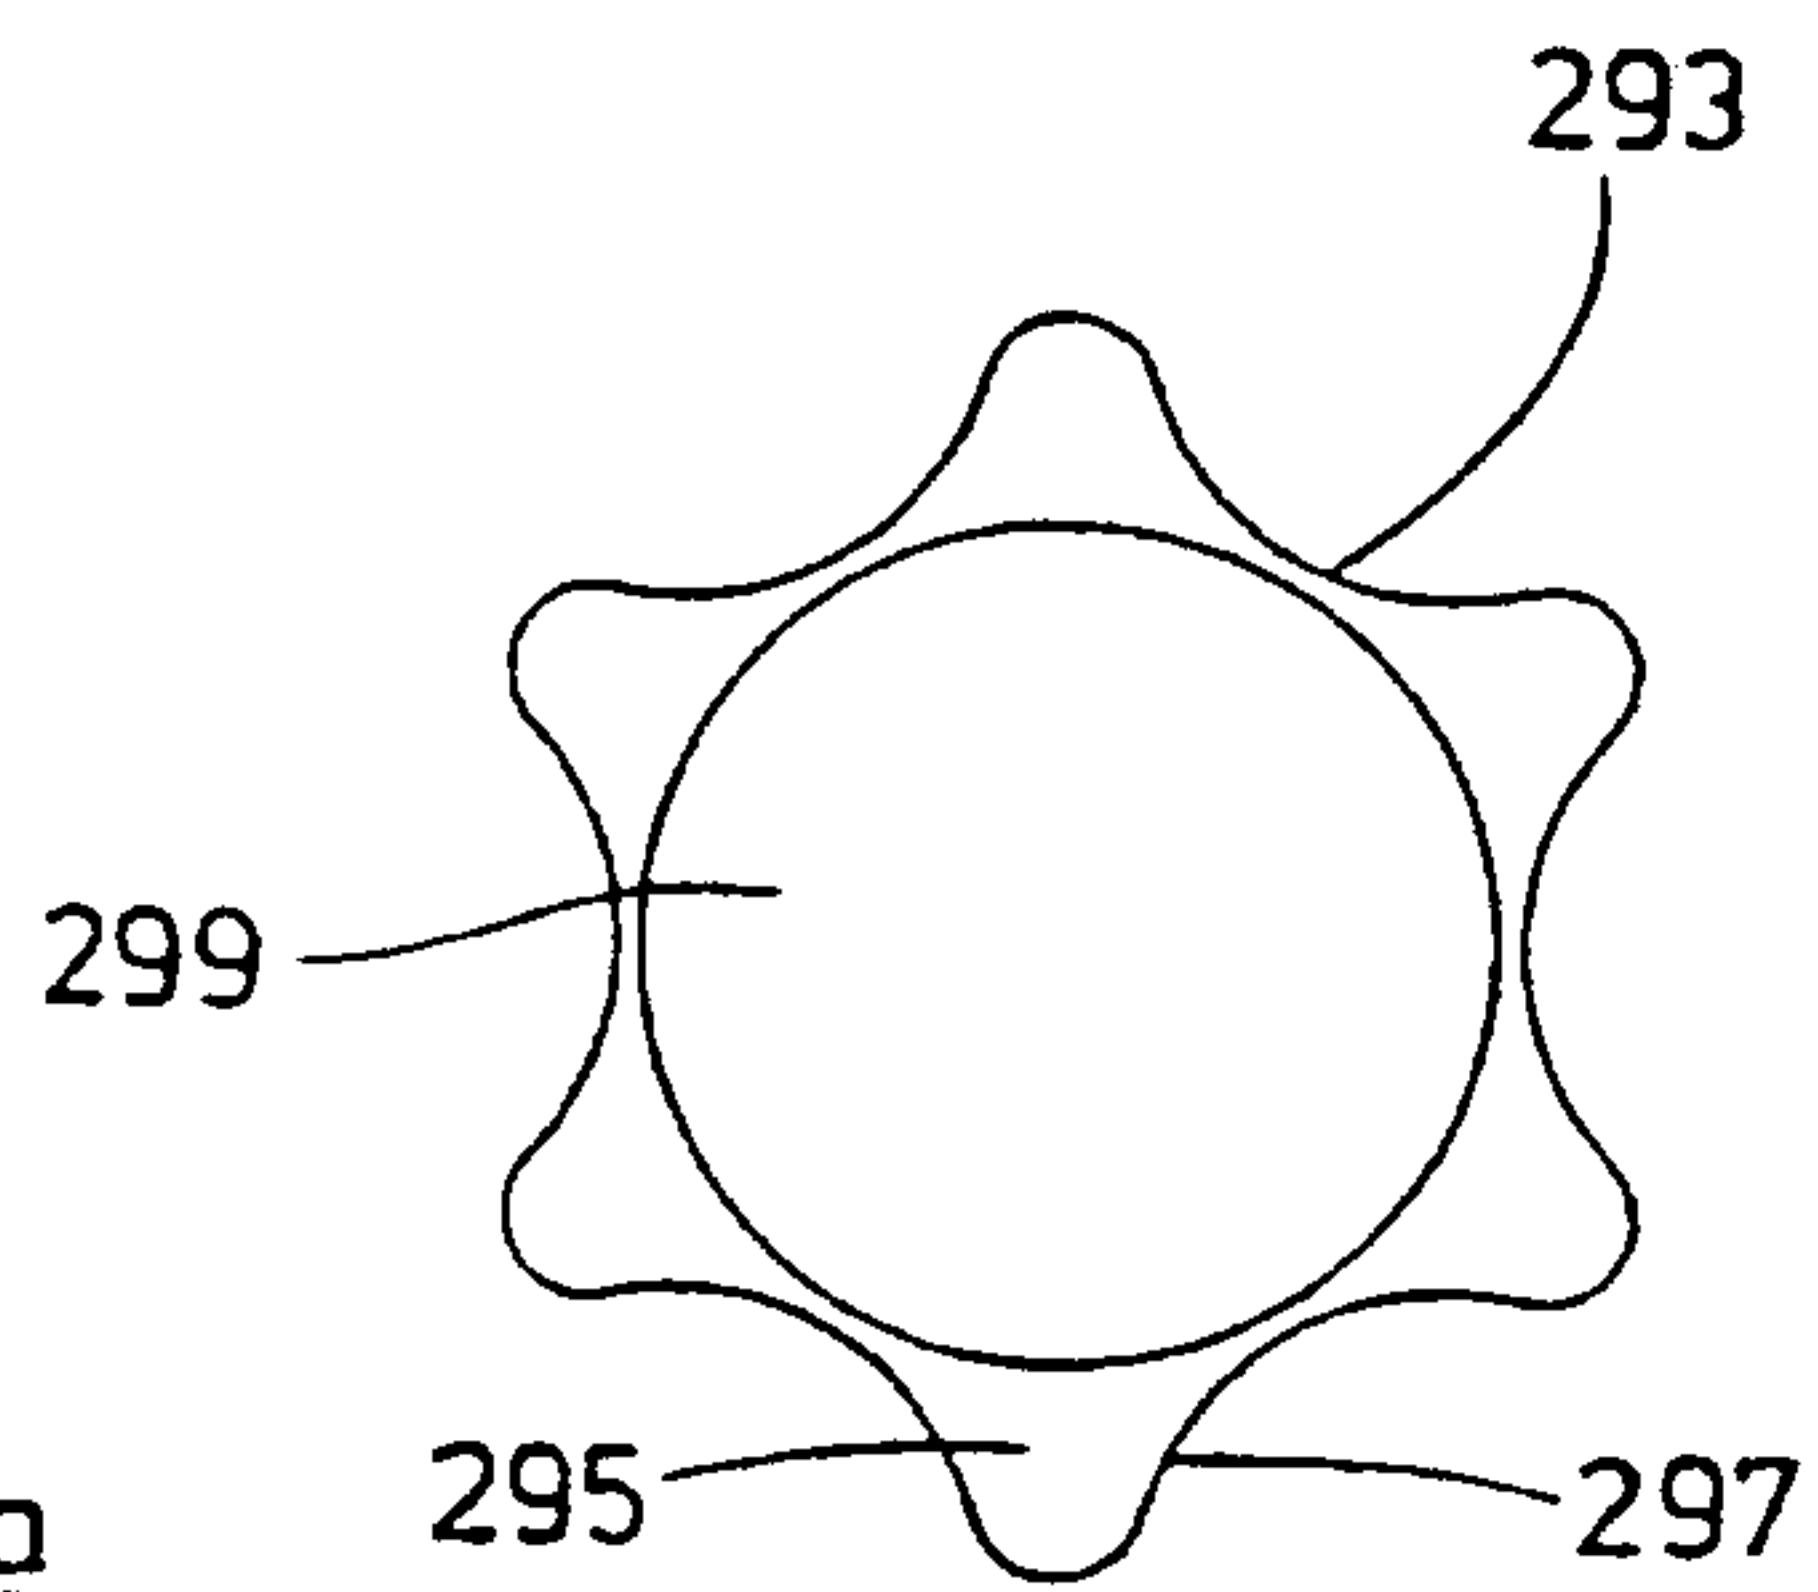


FIG 9C

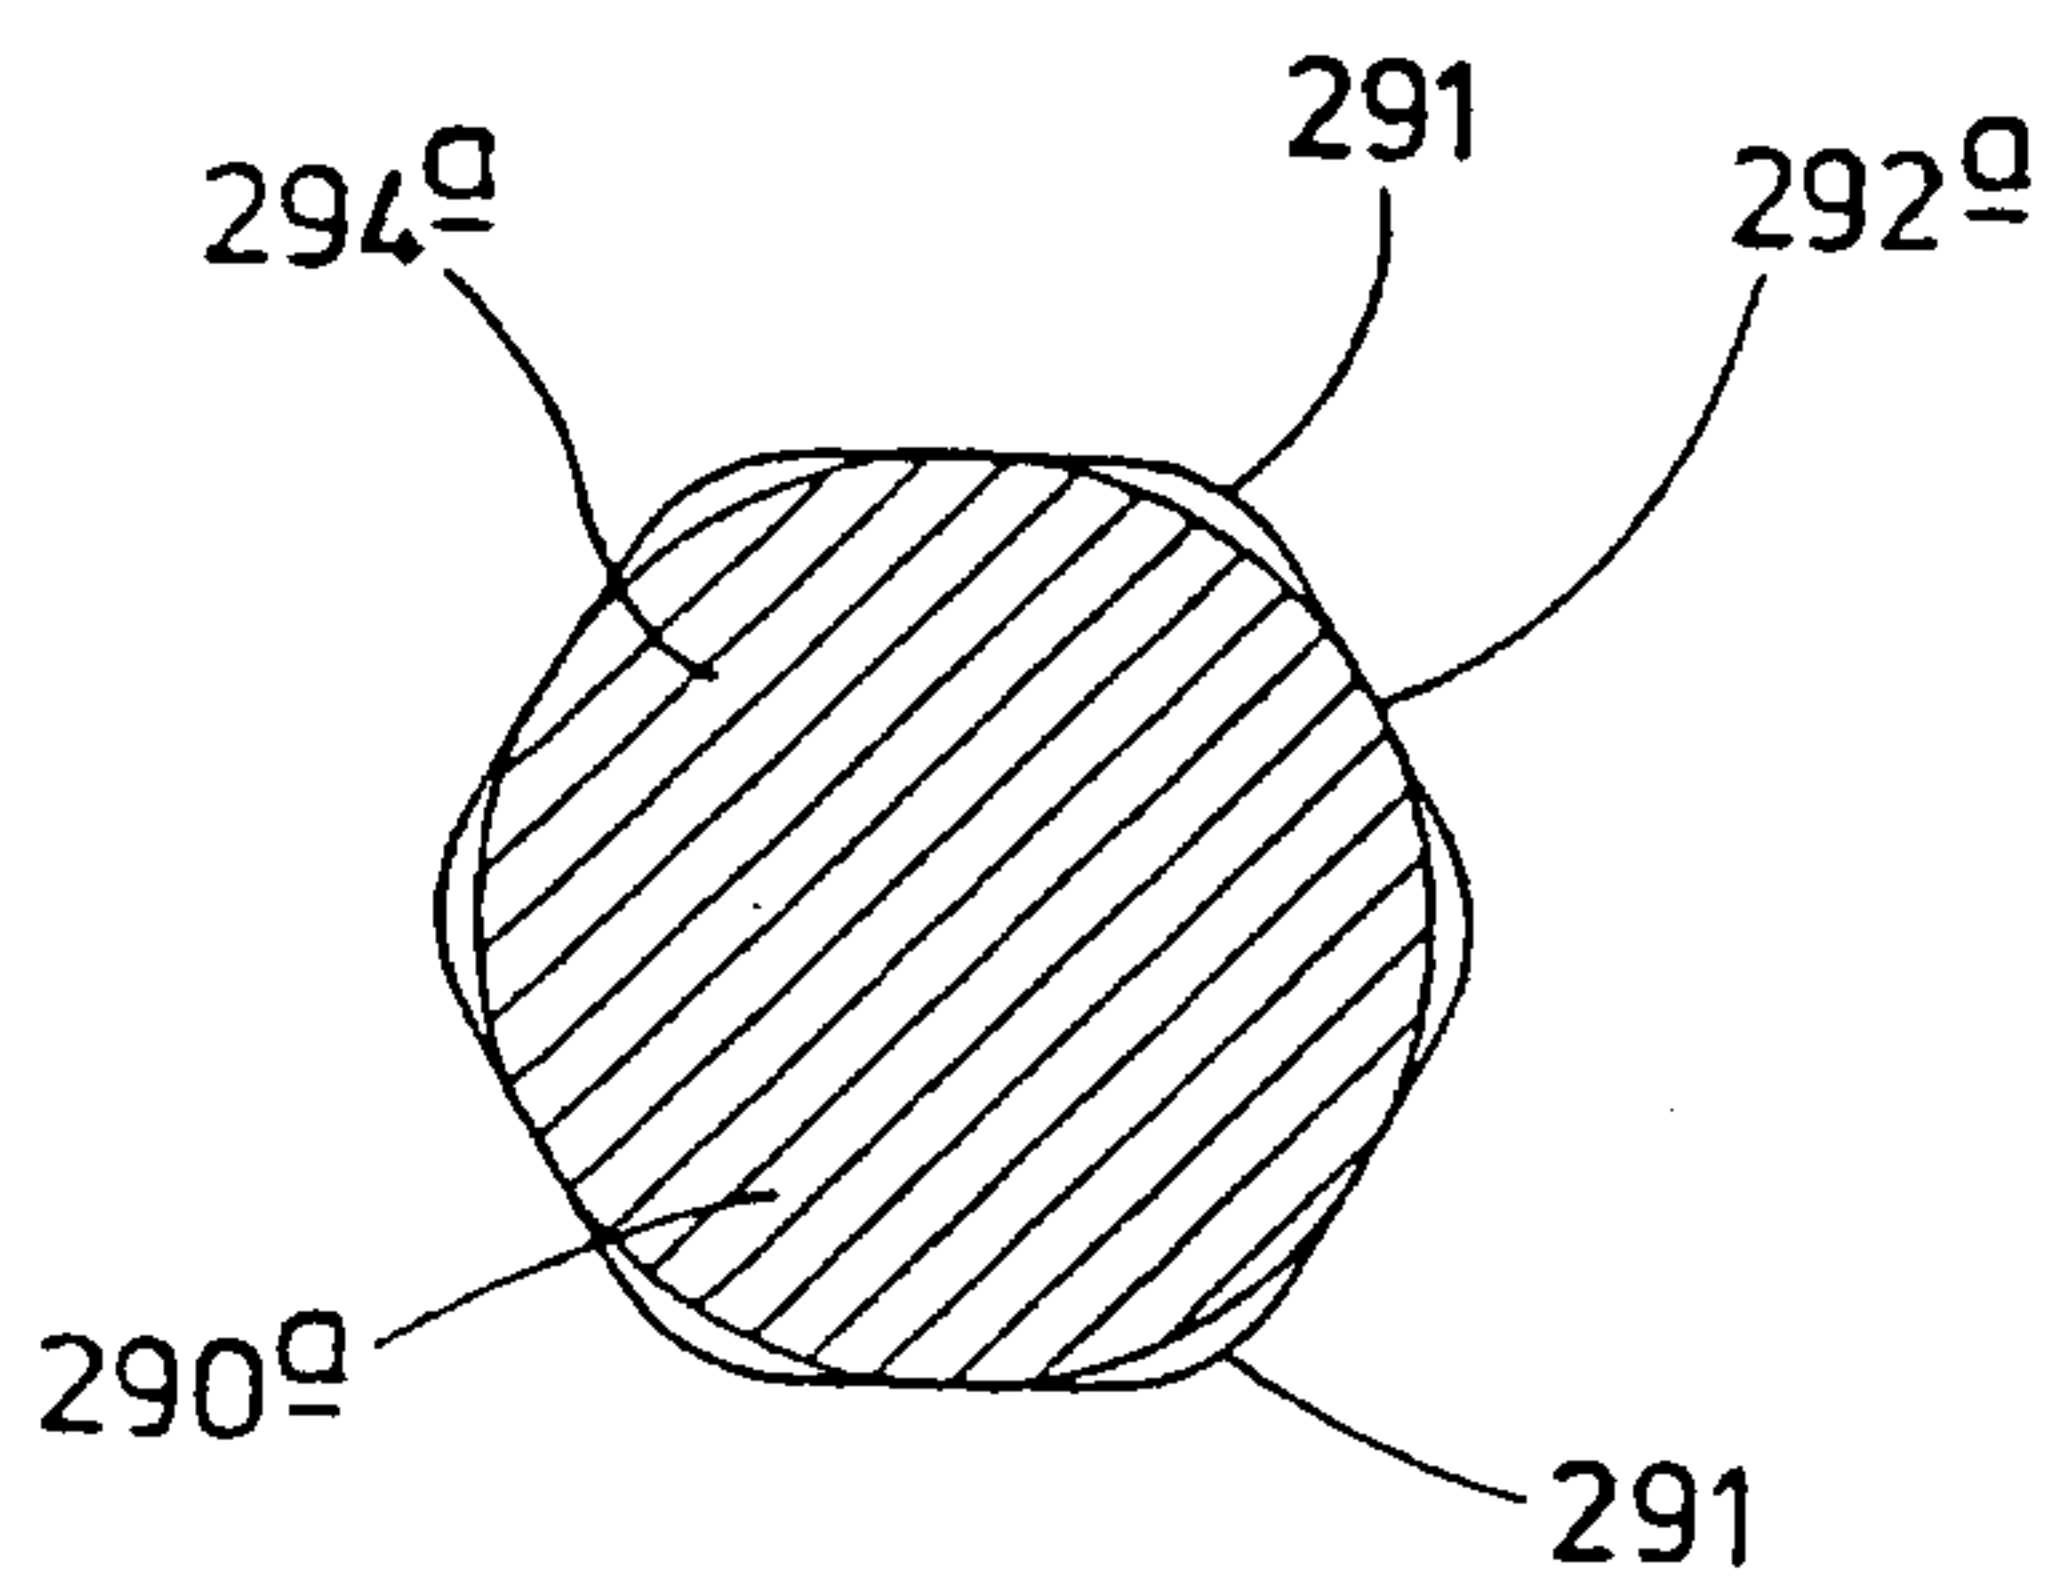


FIG 9D

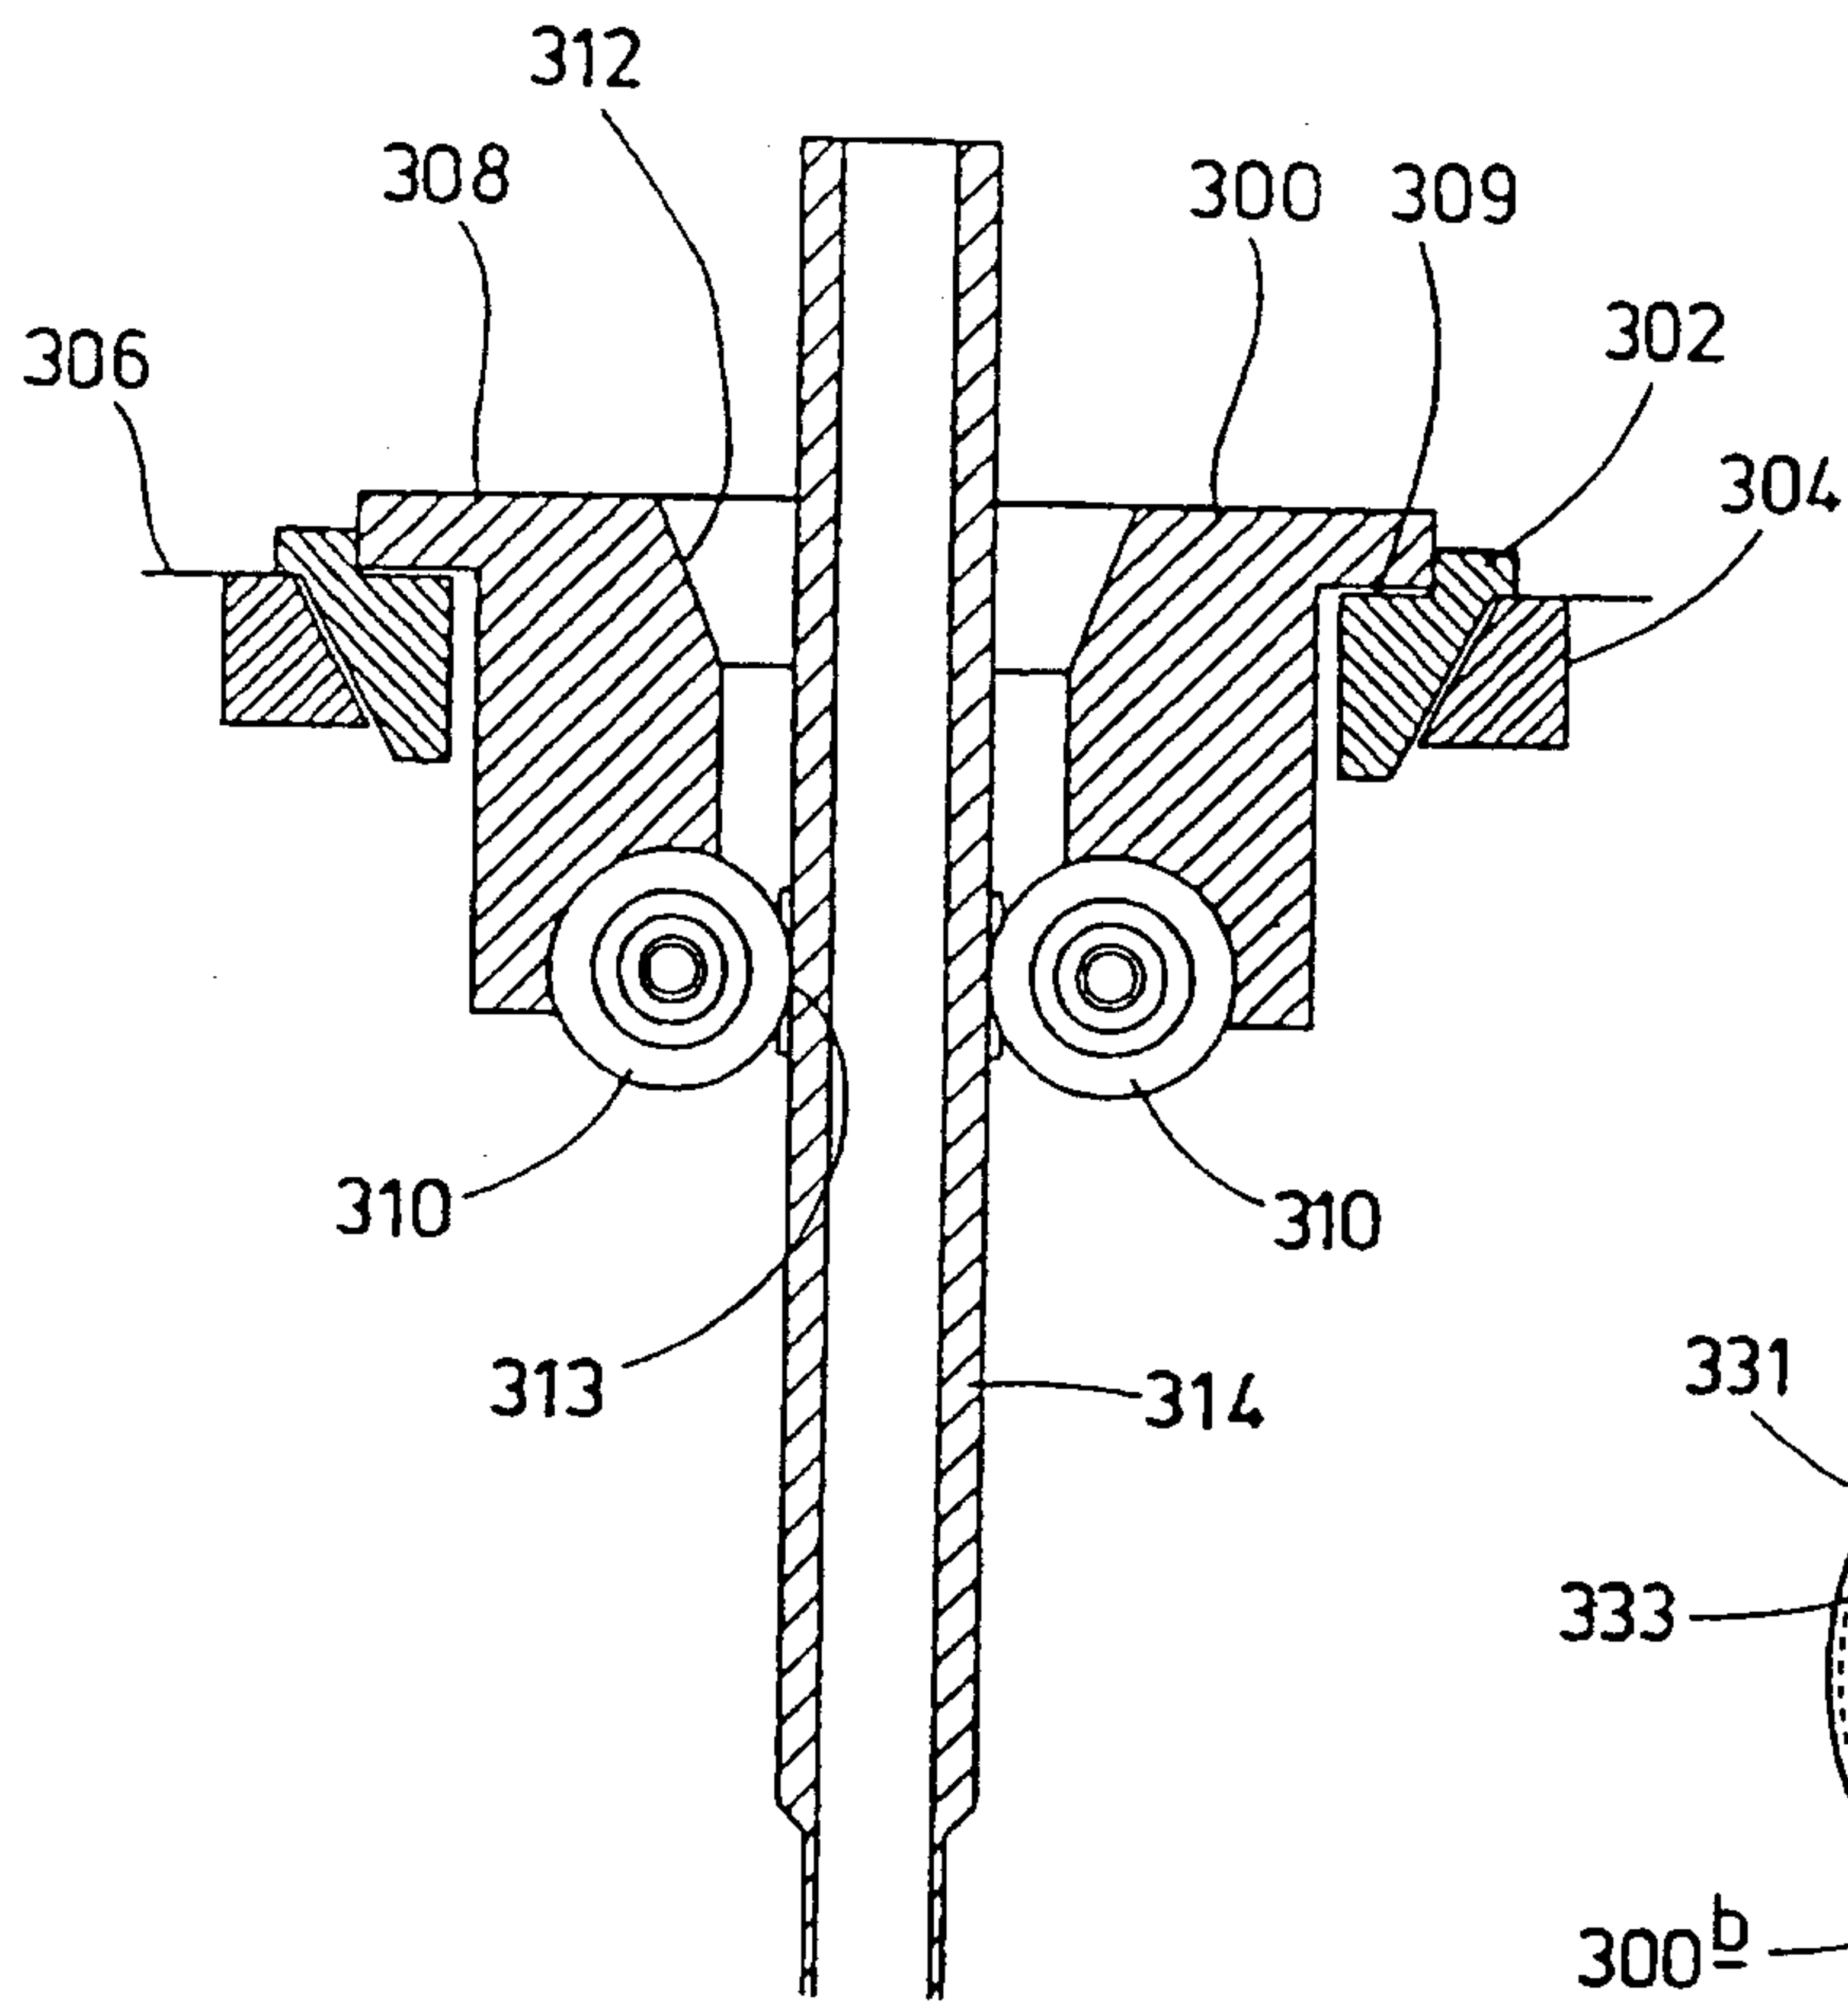


FIG 10A

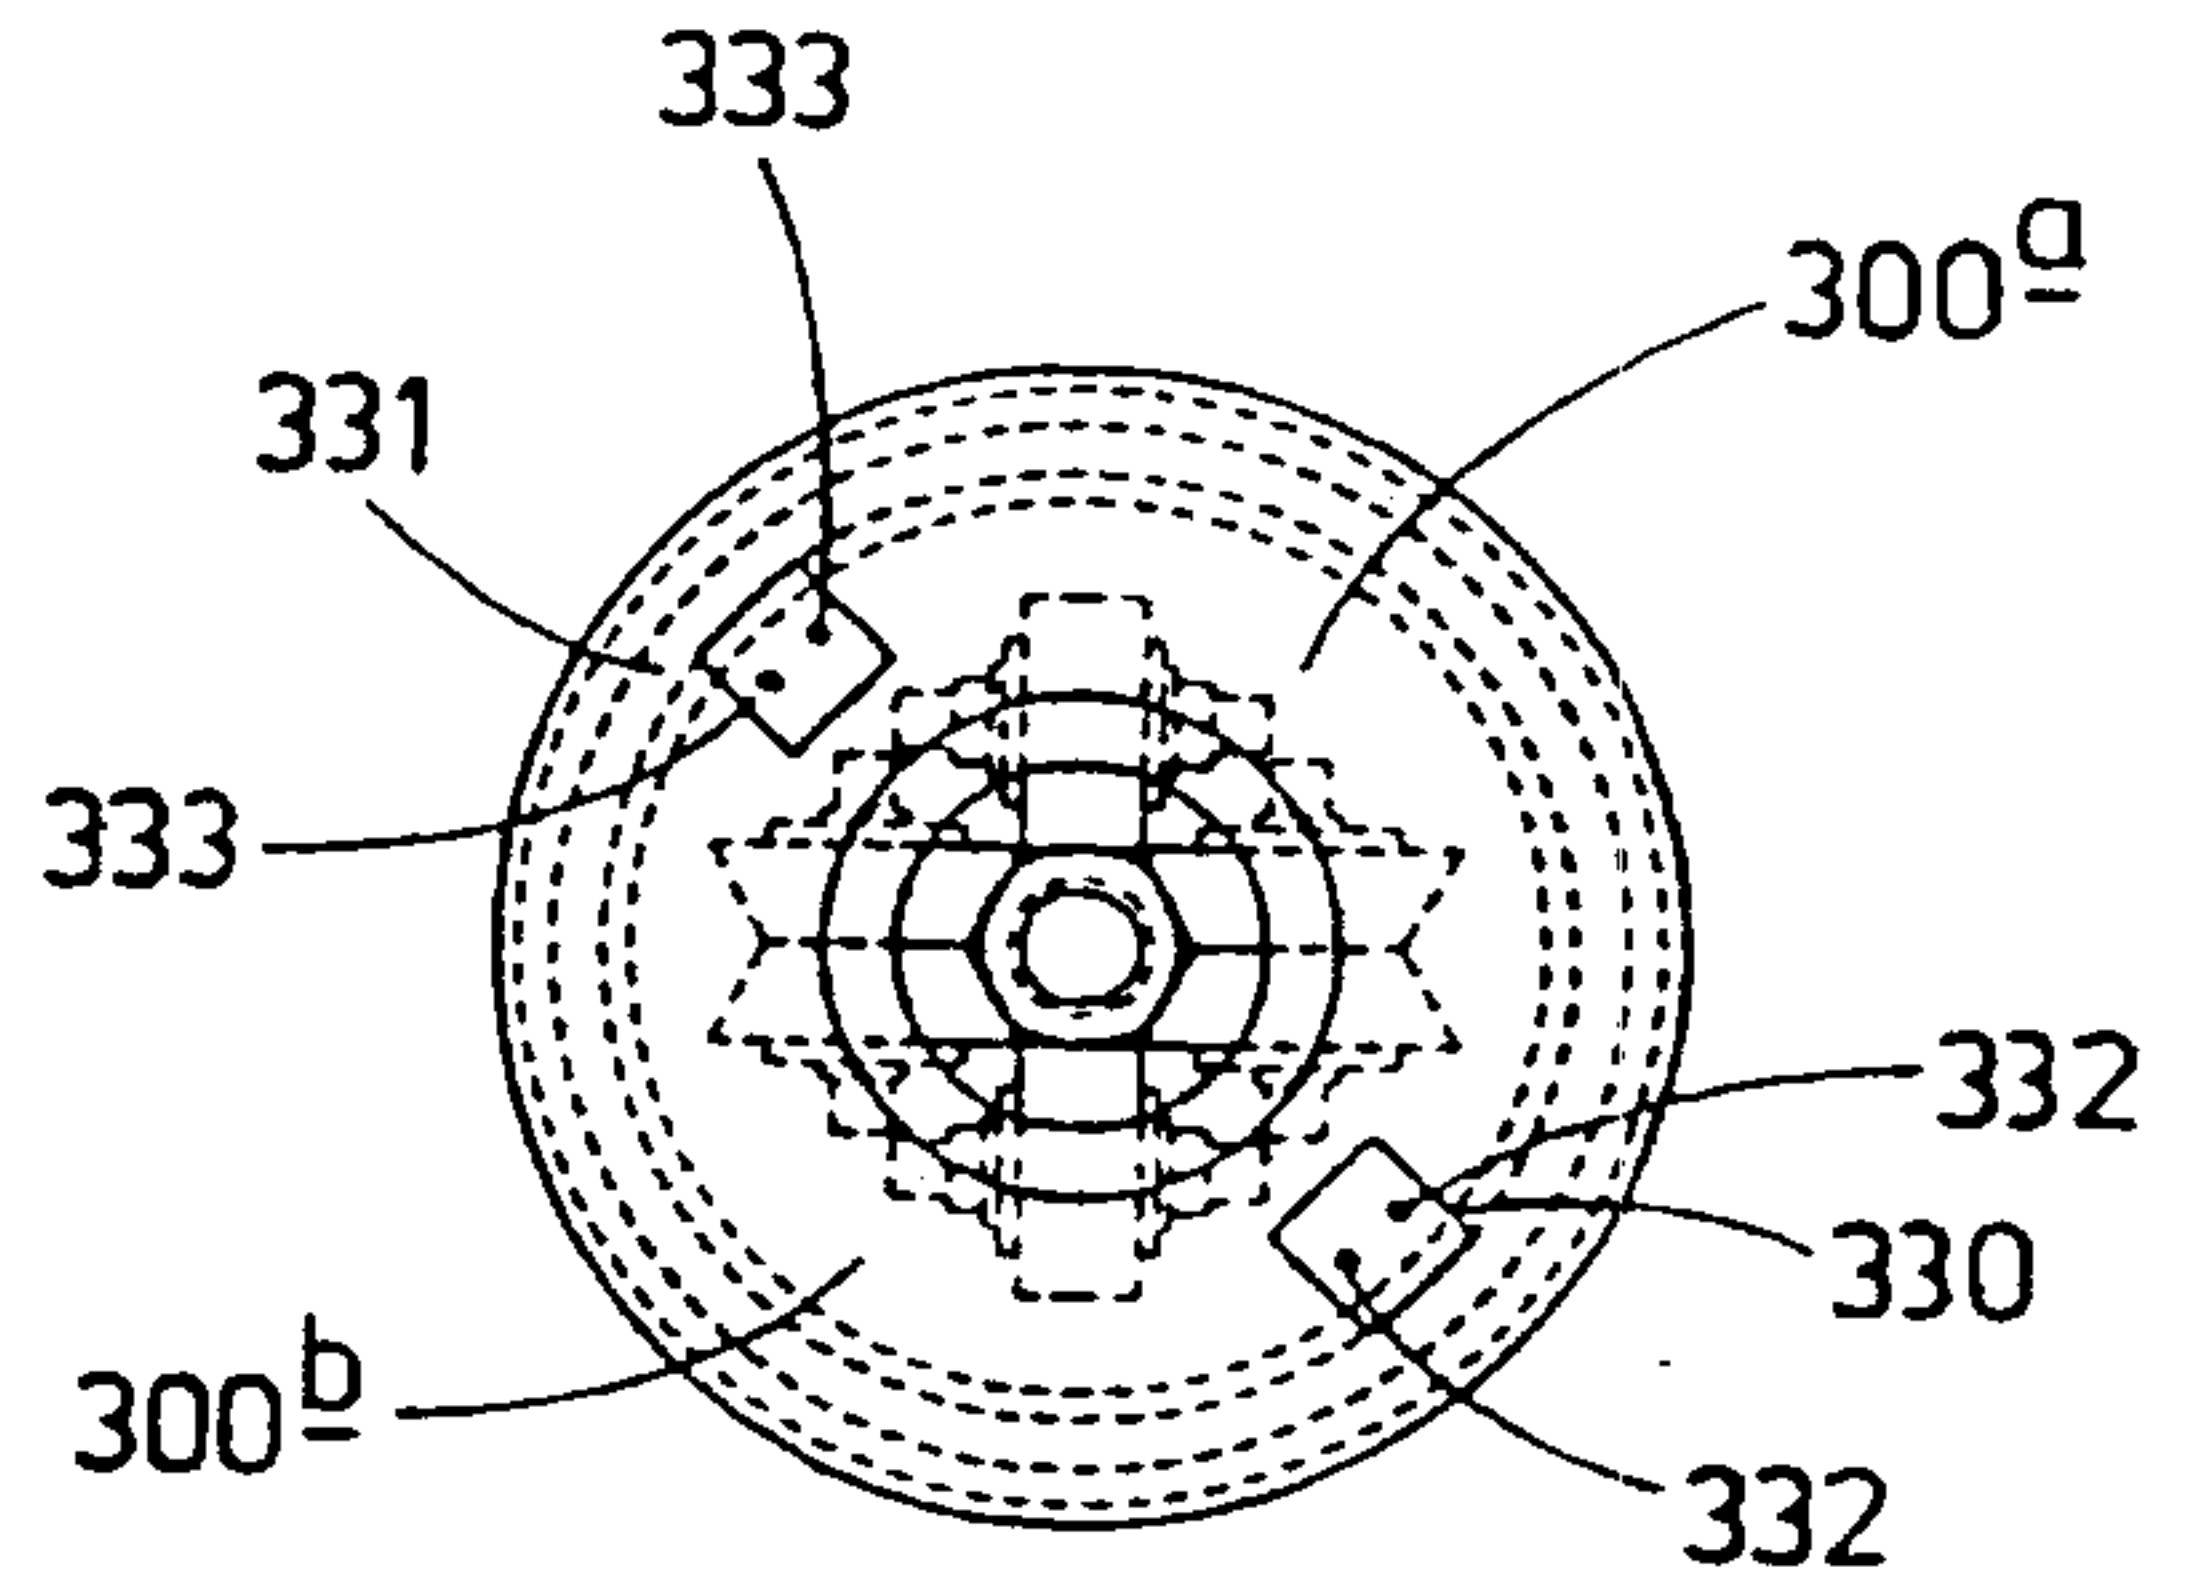


FIG 10C

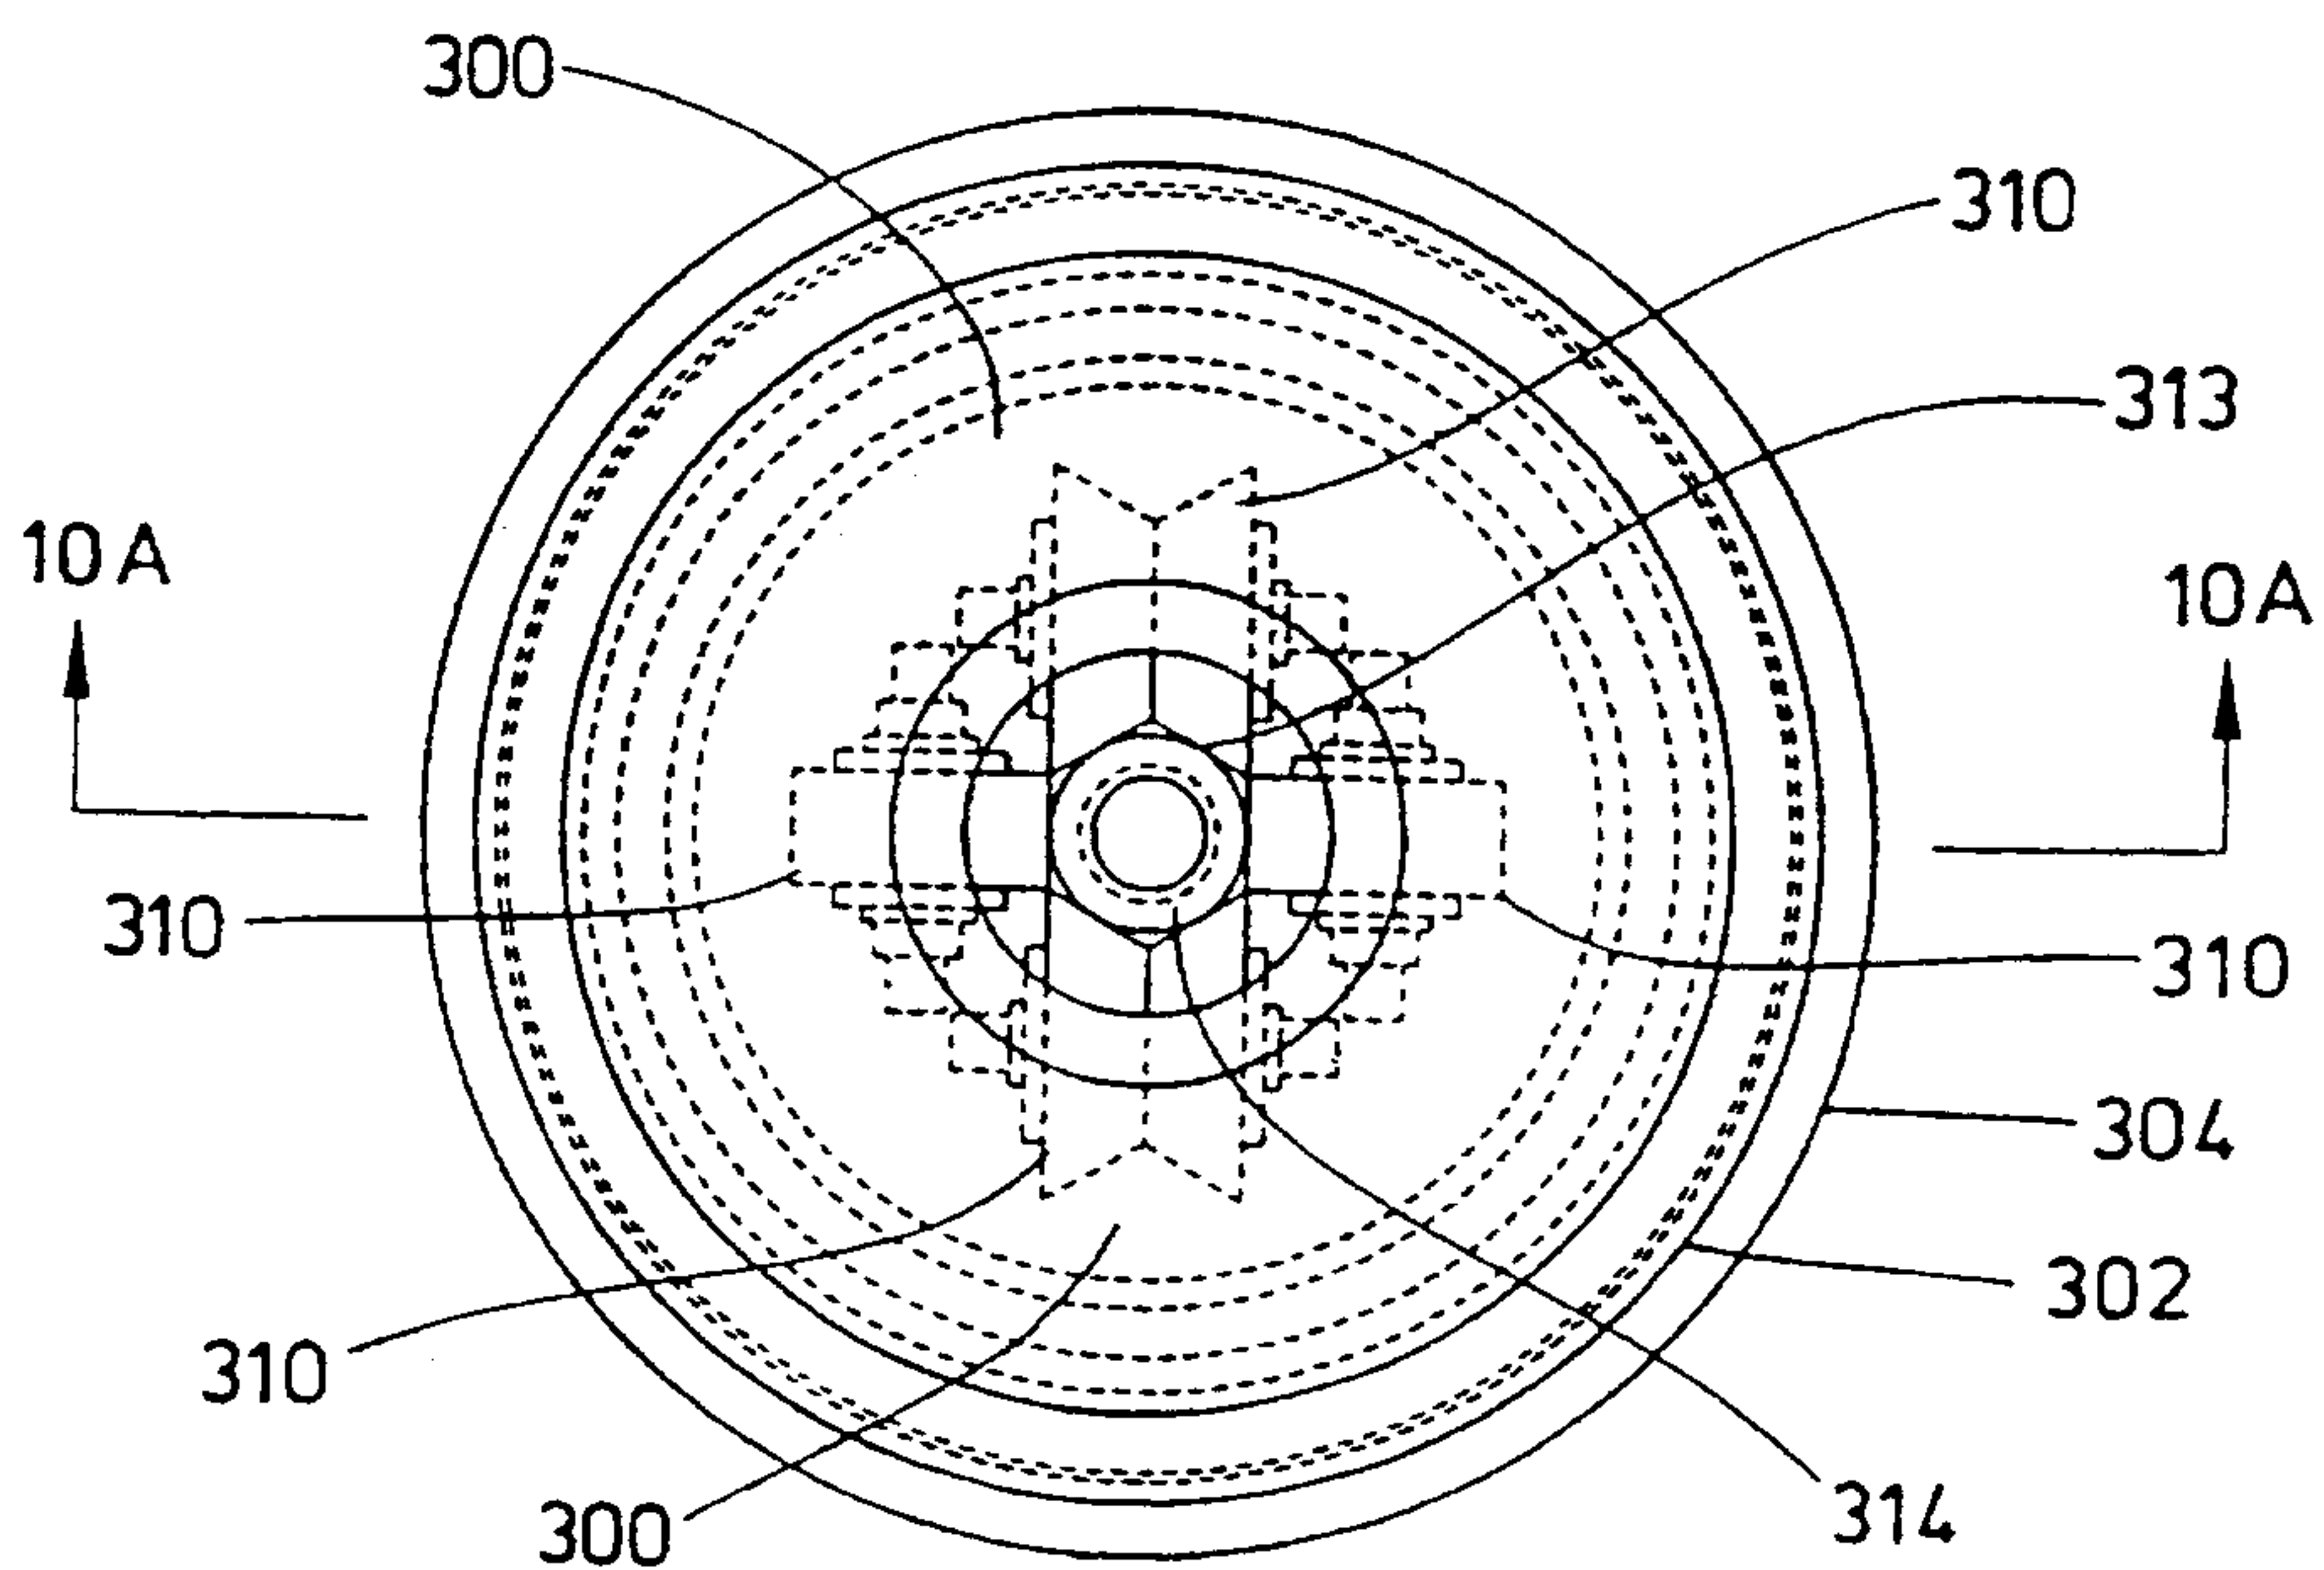


FIG 10B

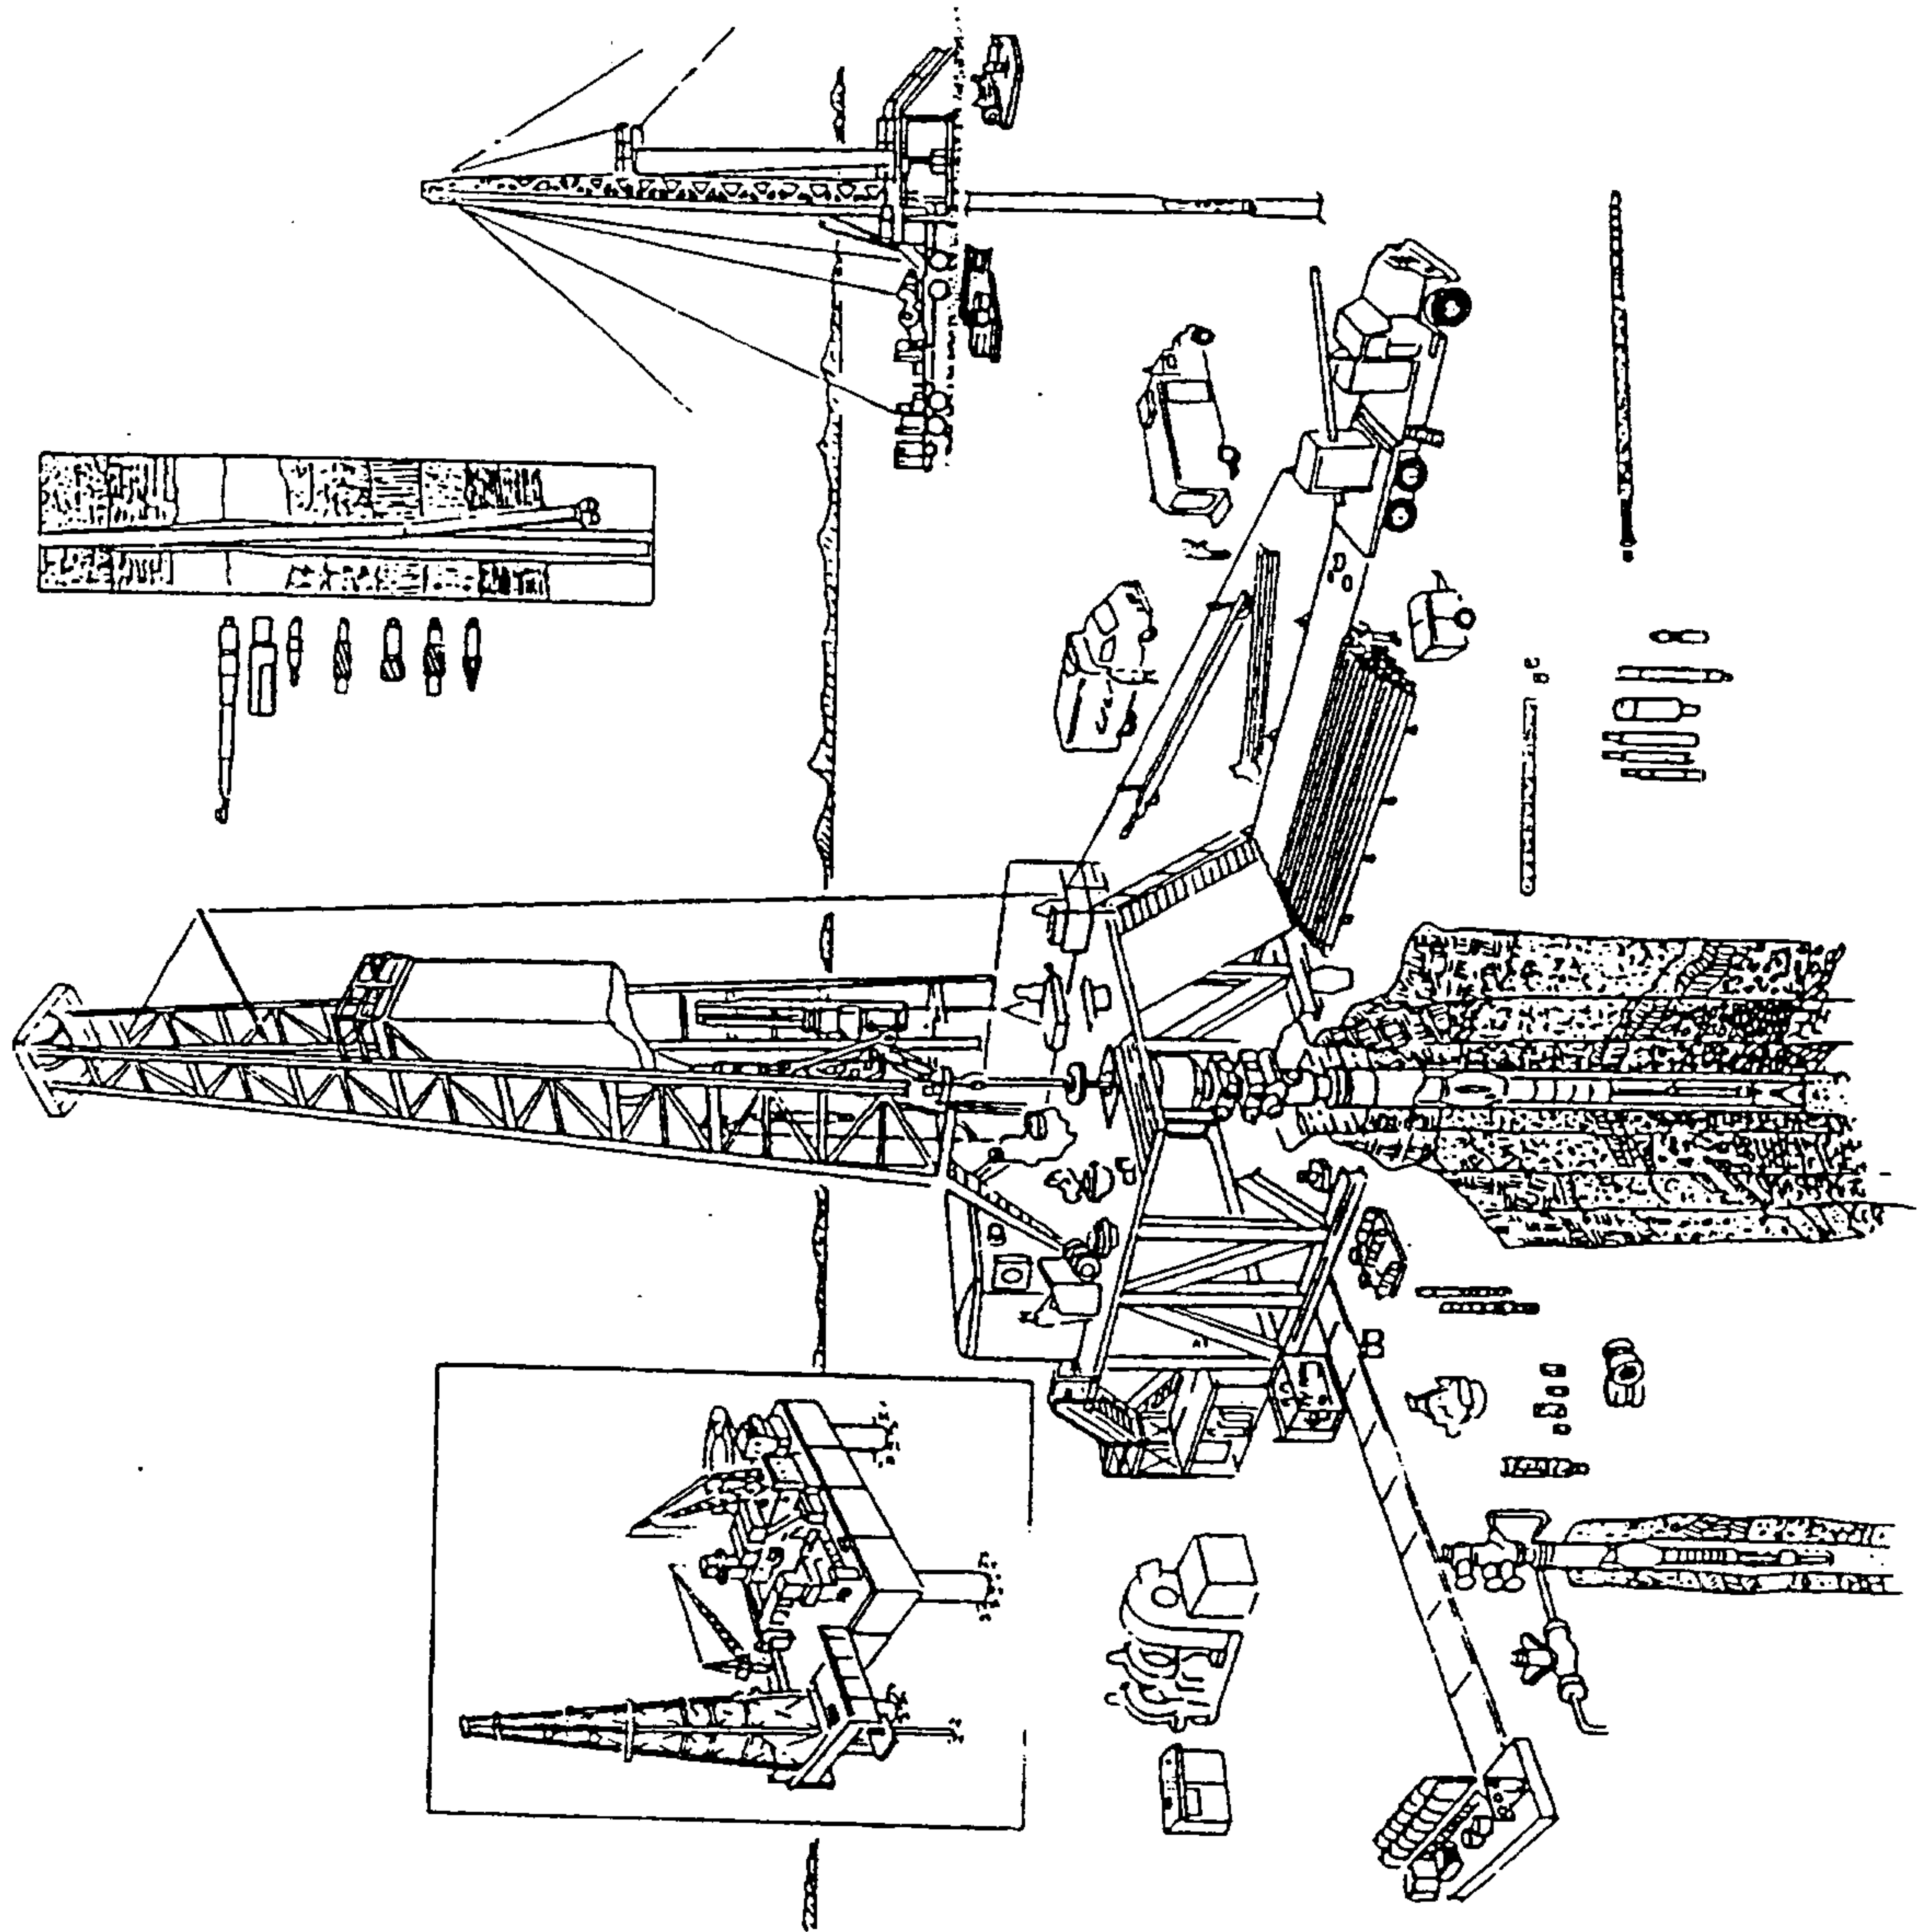


FIG 11  
Prior Art

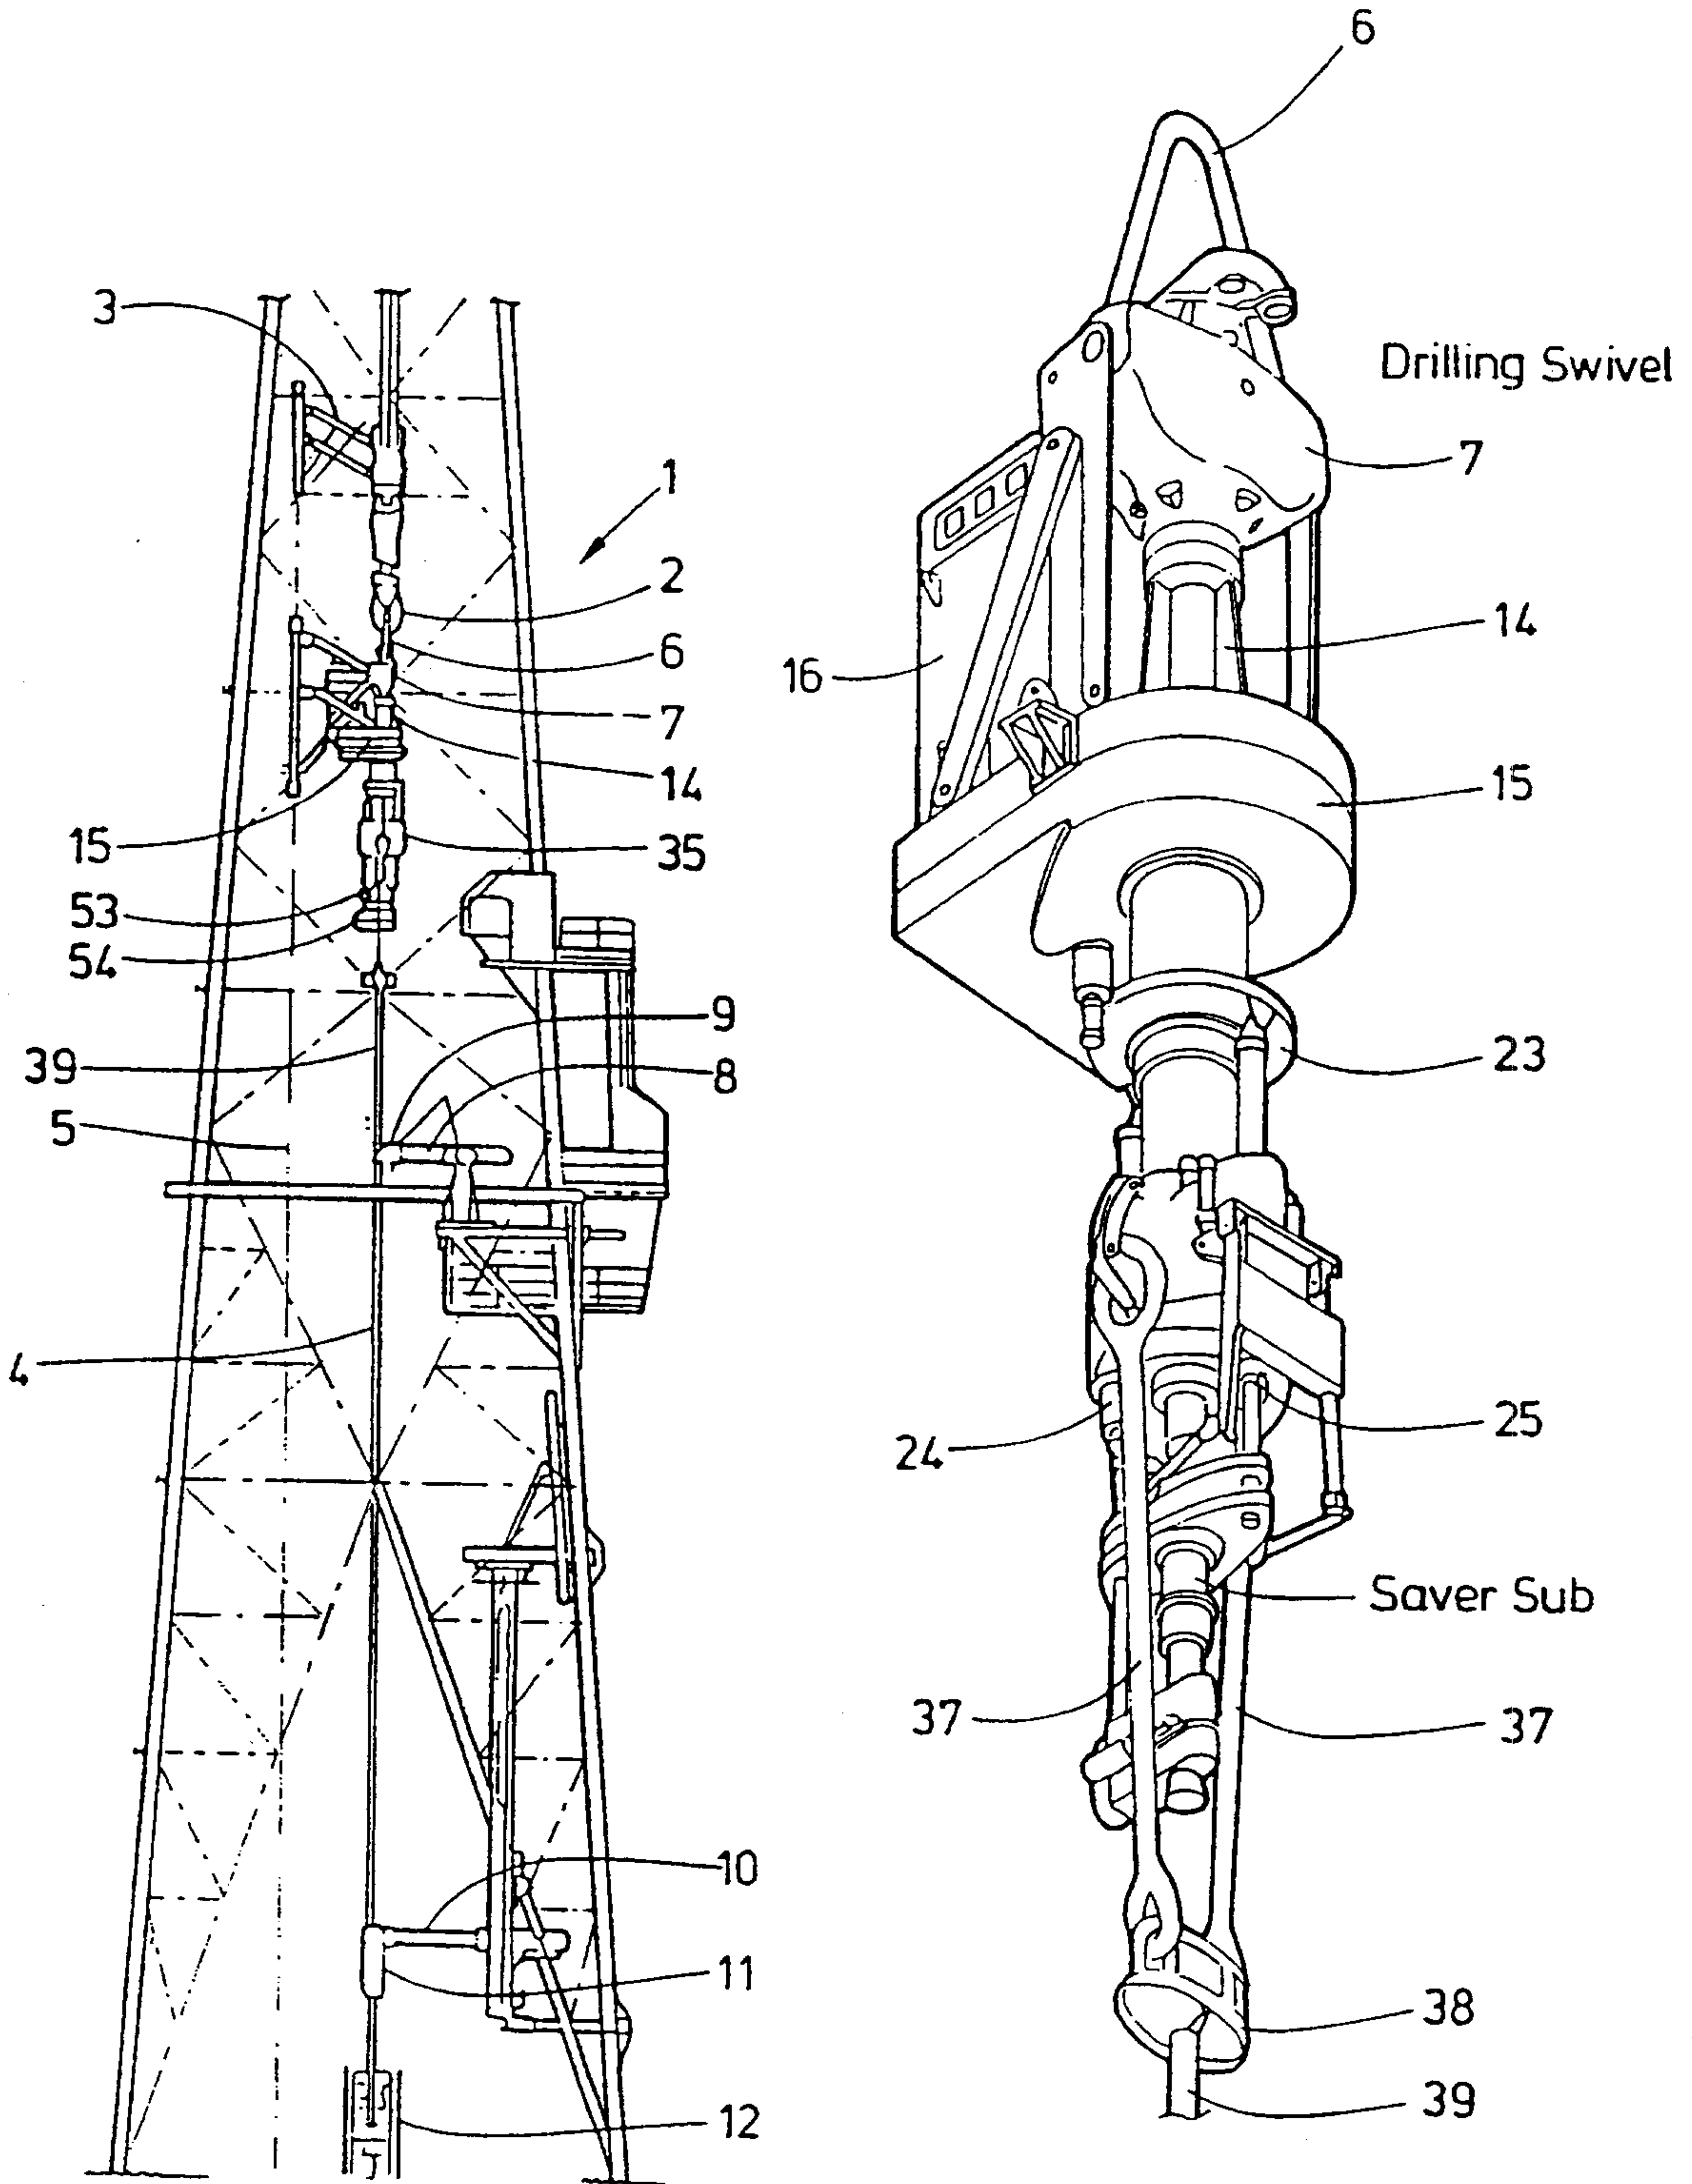


FIG 12A  
Prior Art

FIG 12B  
Prior Art

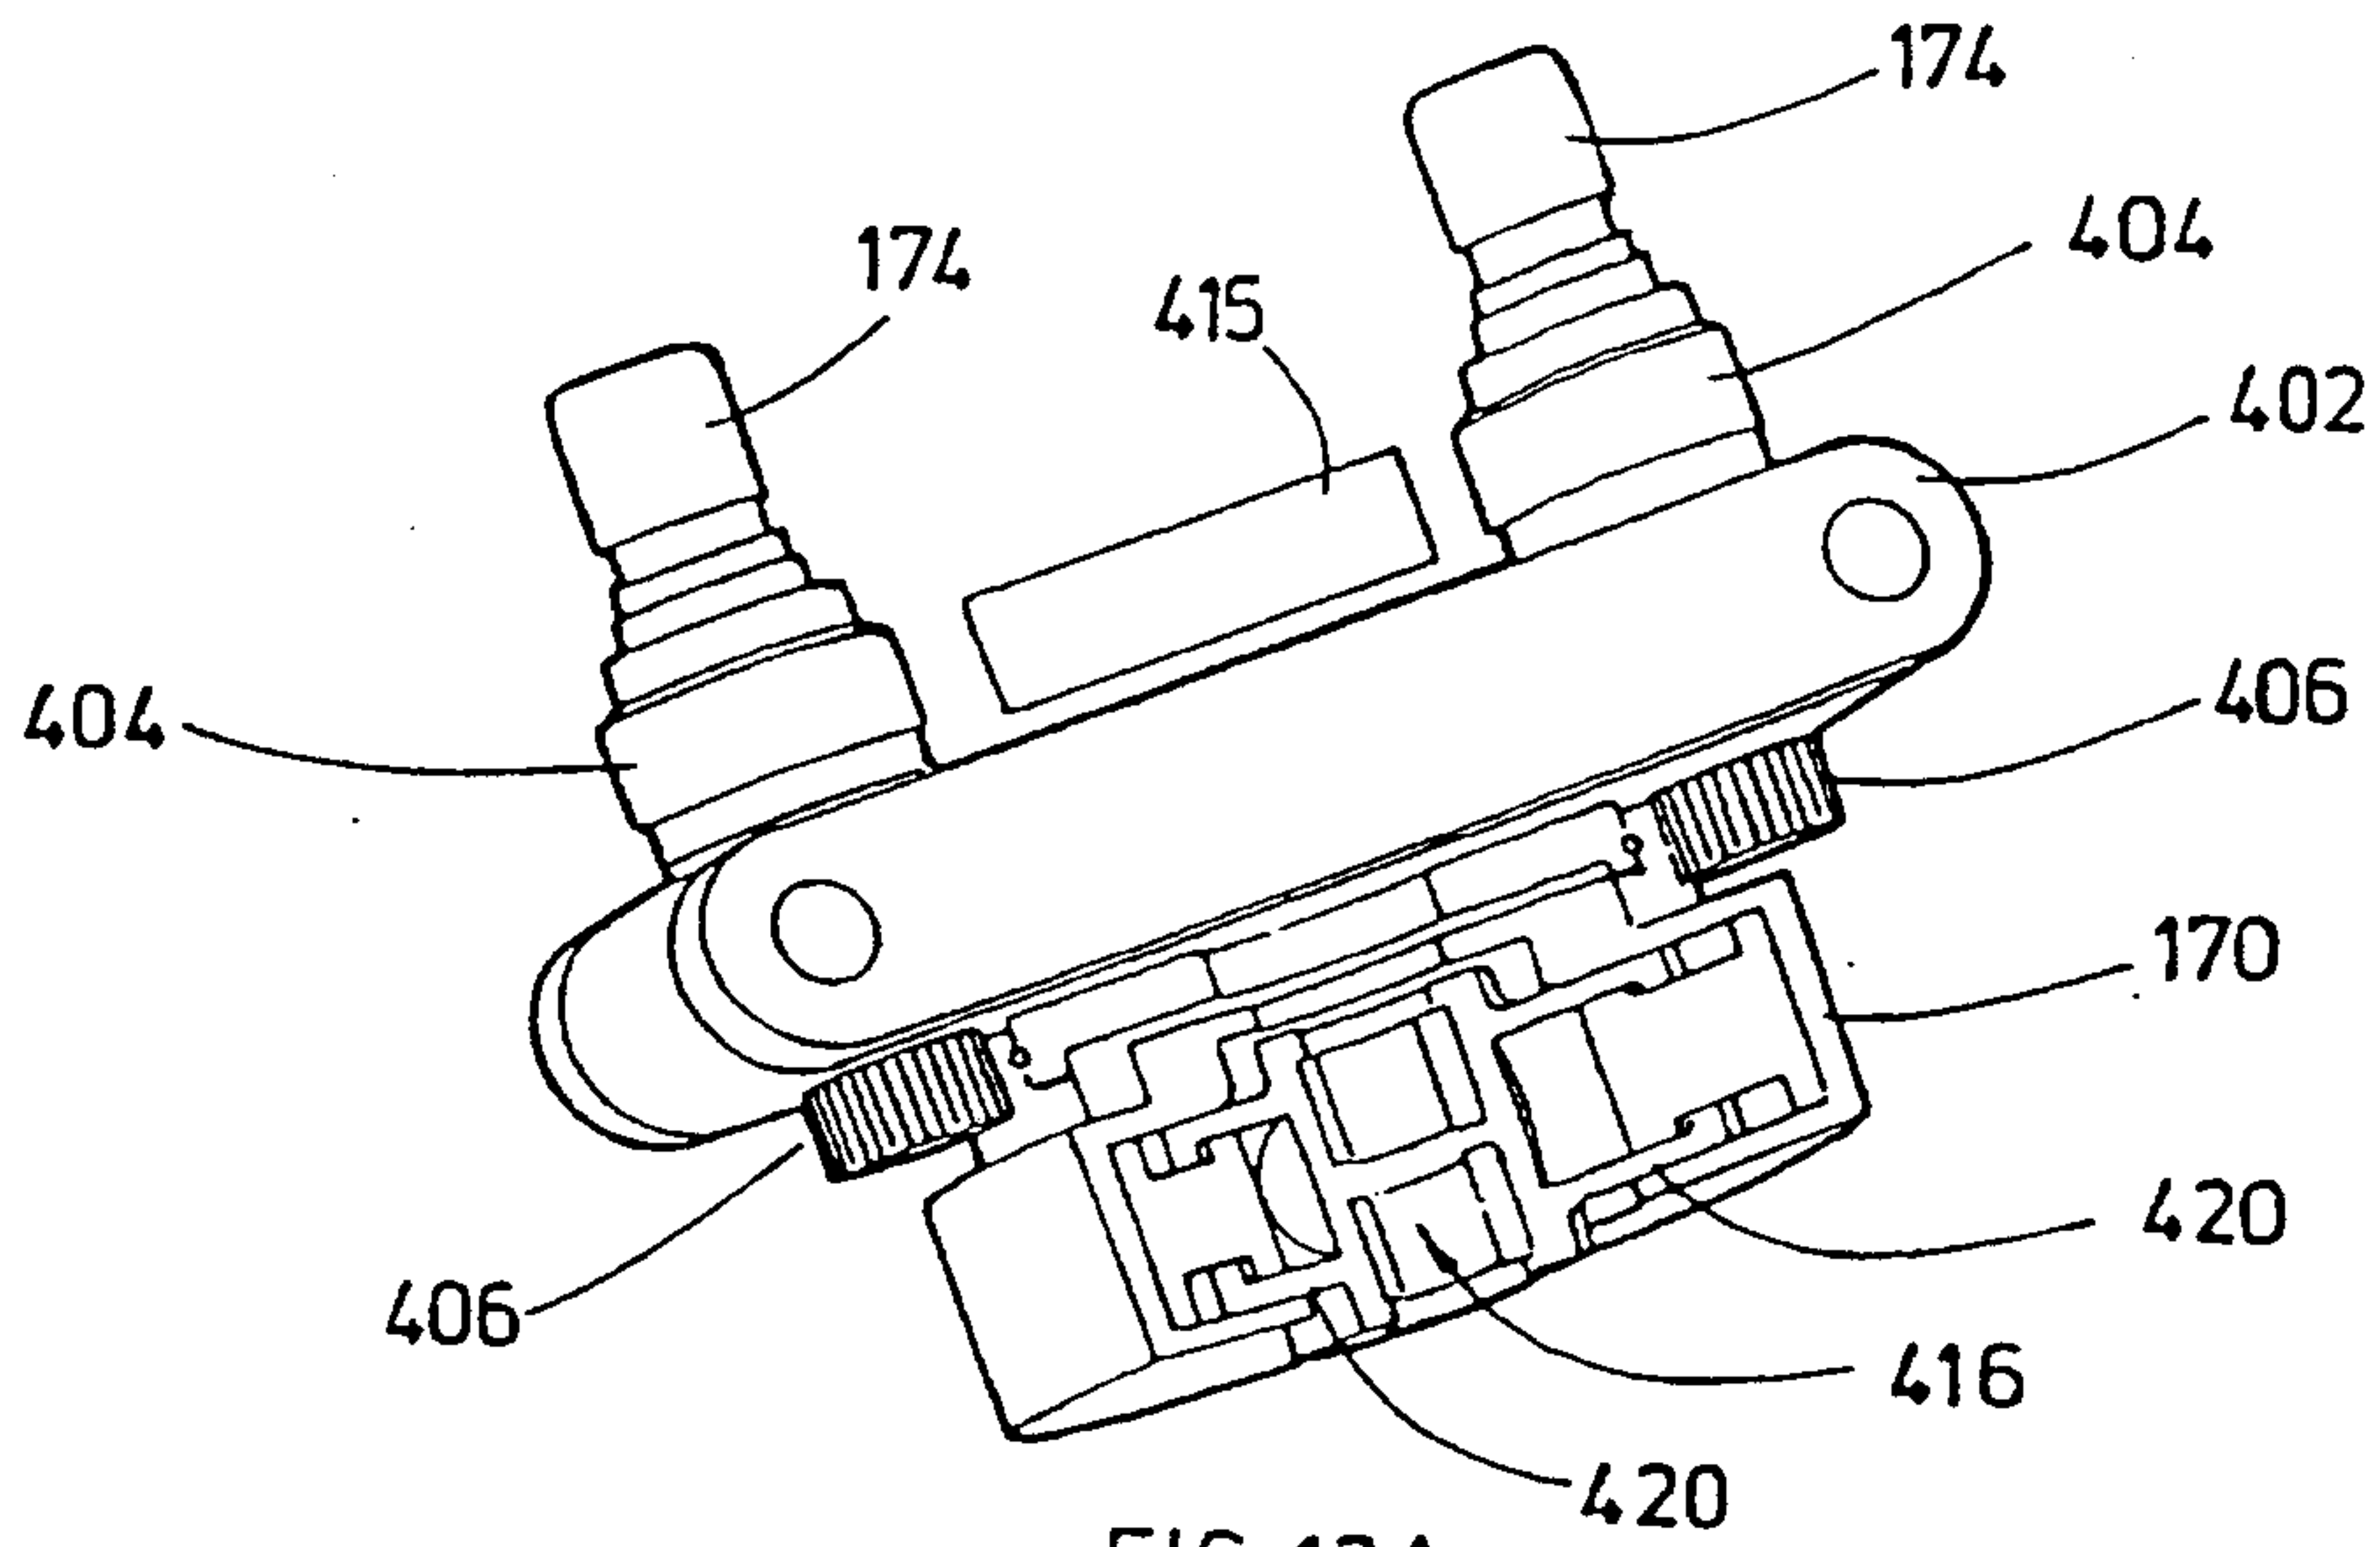


FIG 13A

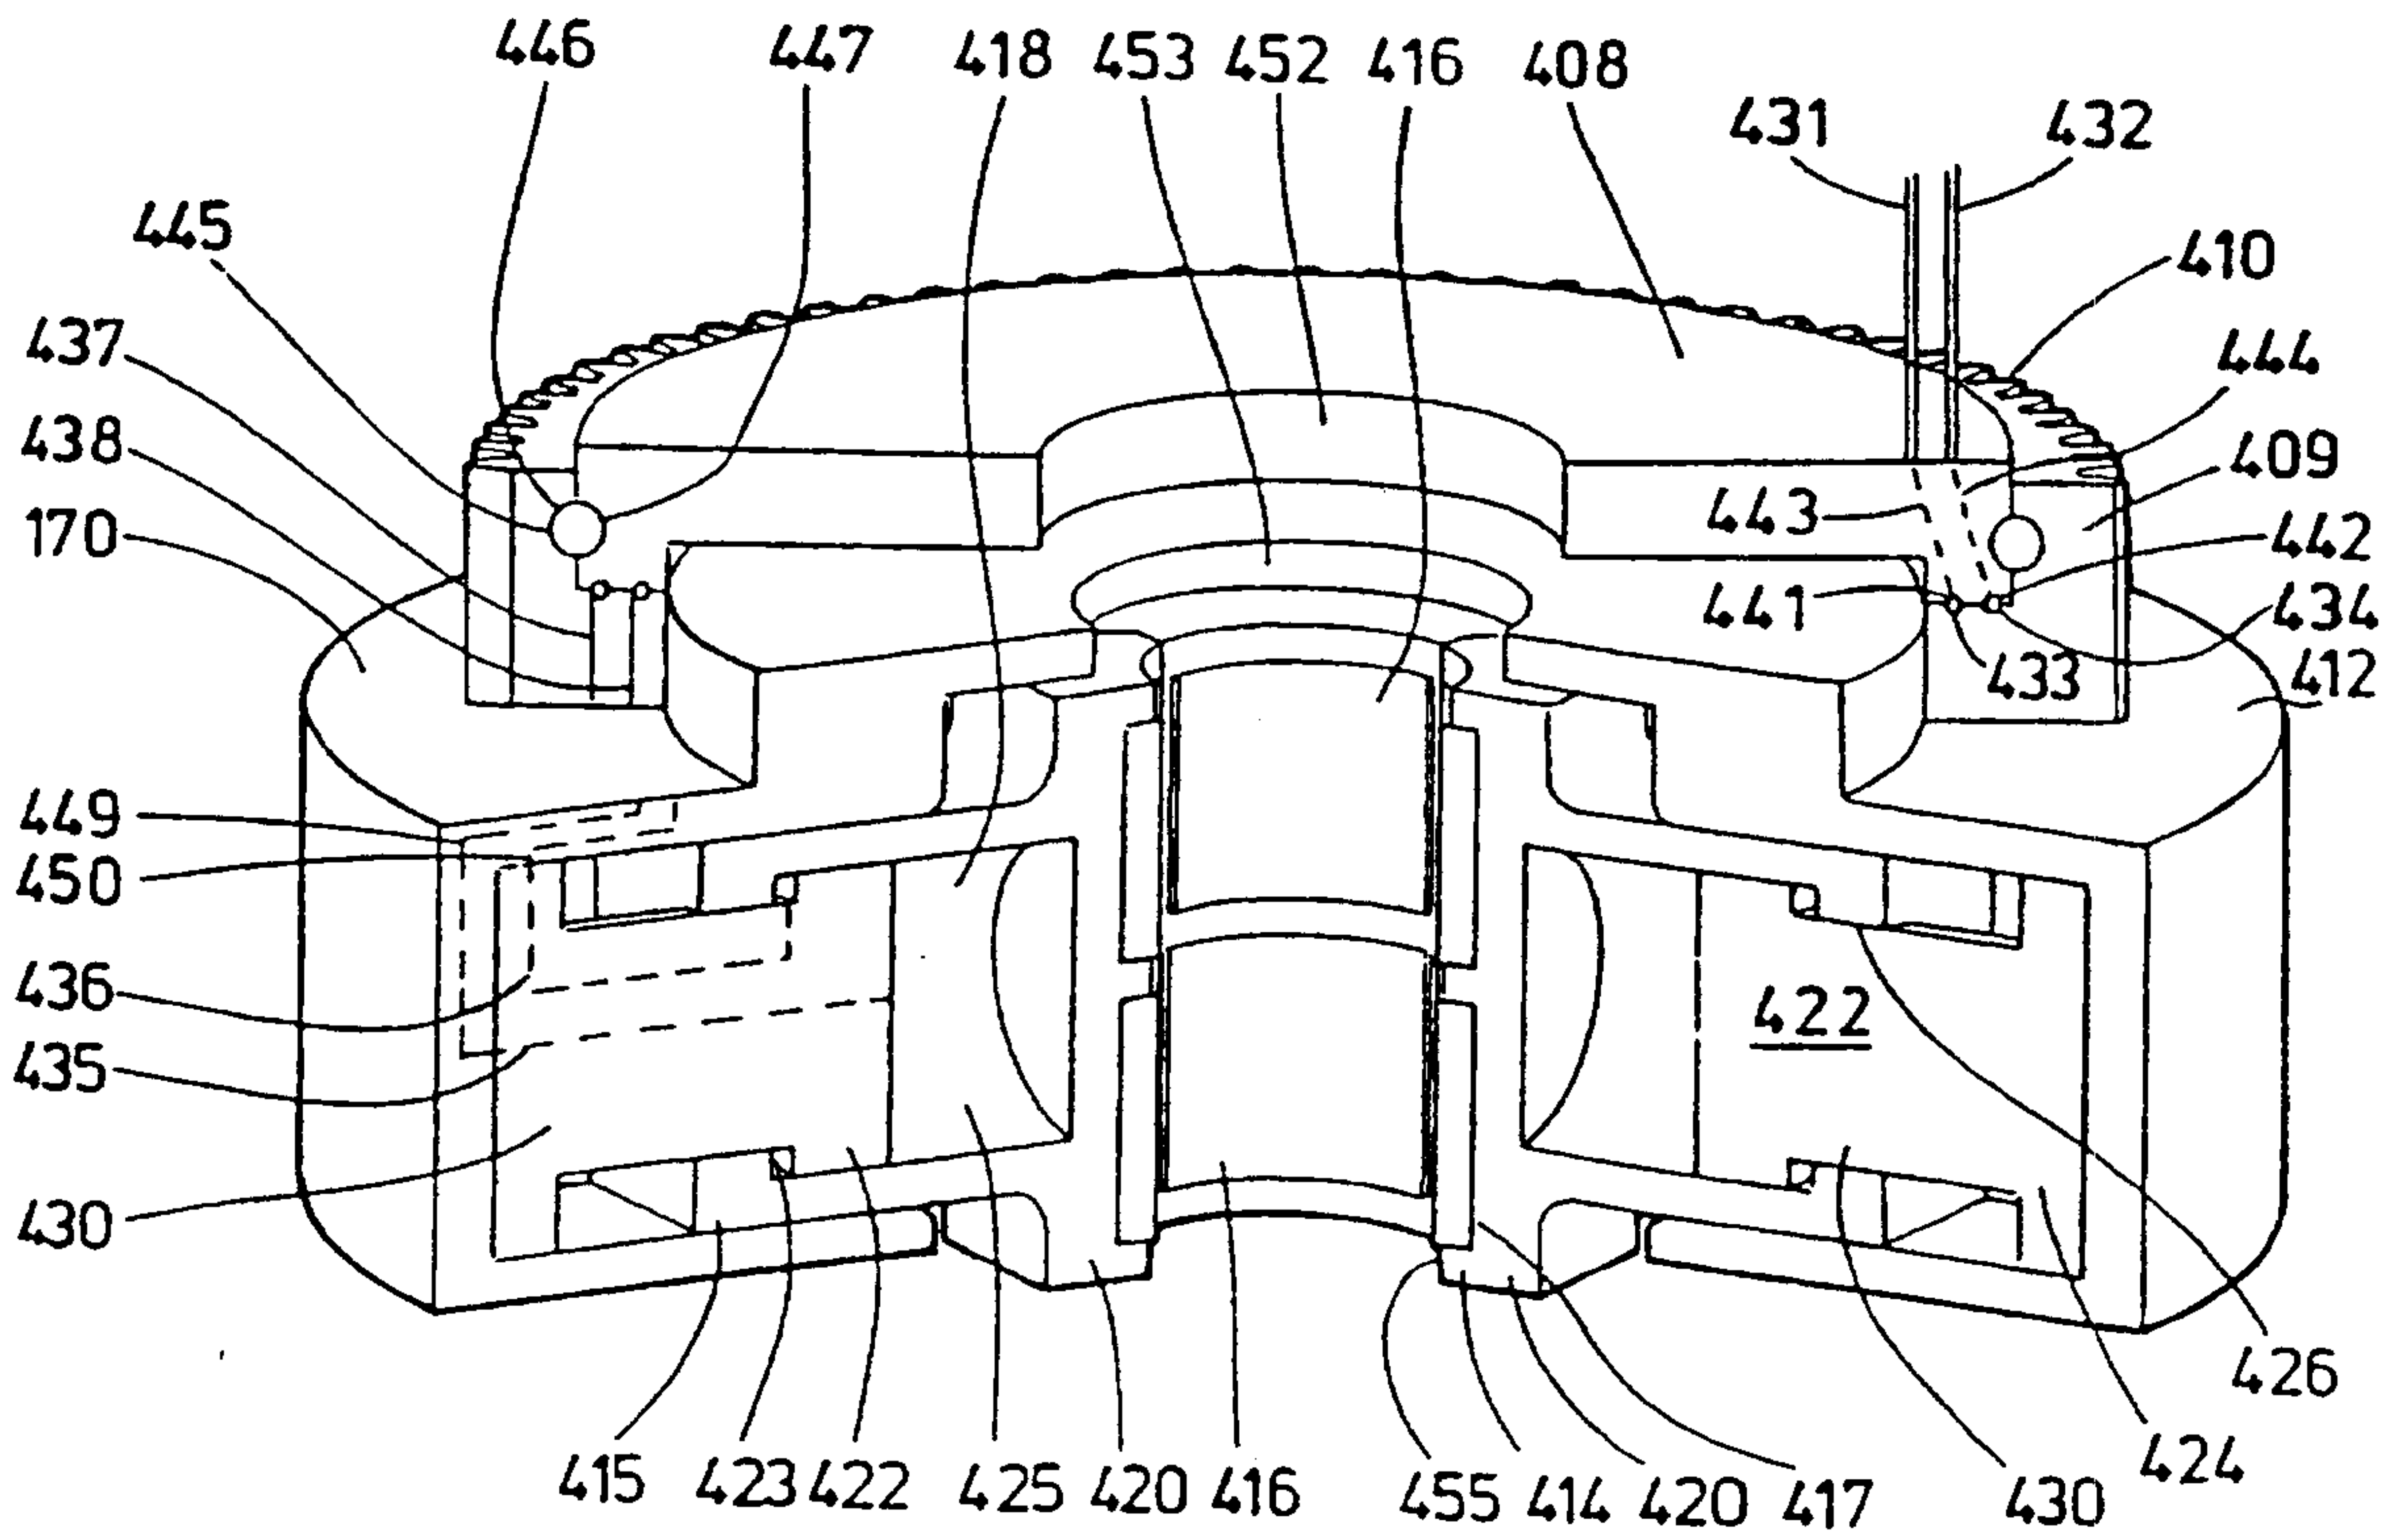


FIG 13B

16 / 26

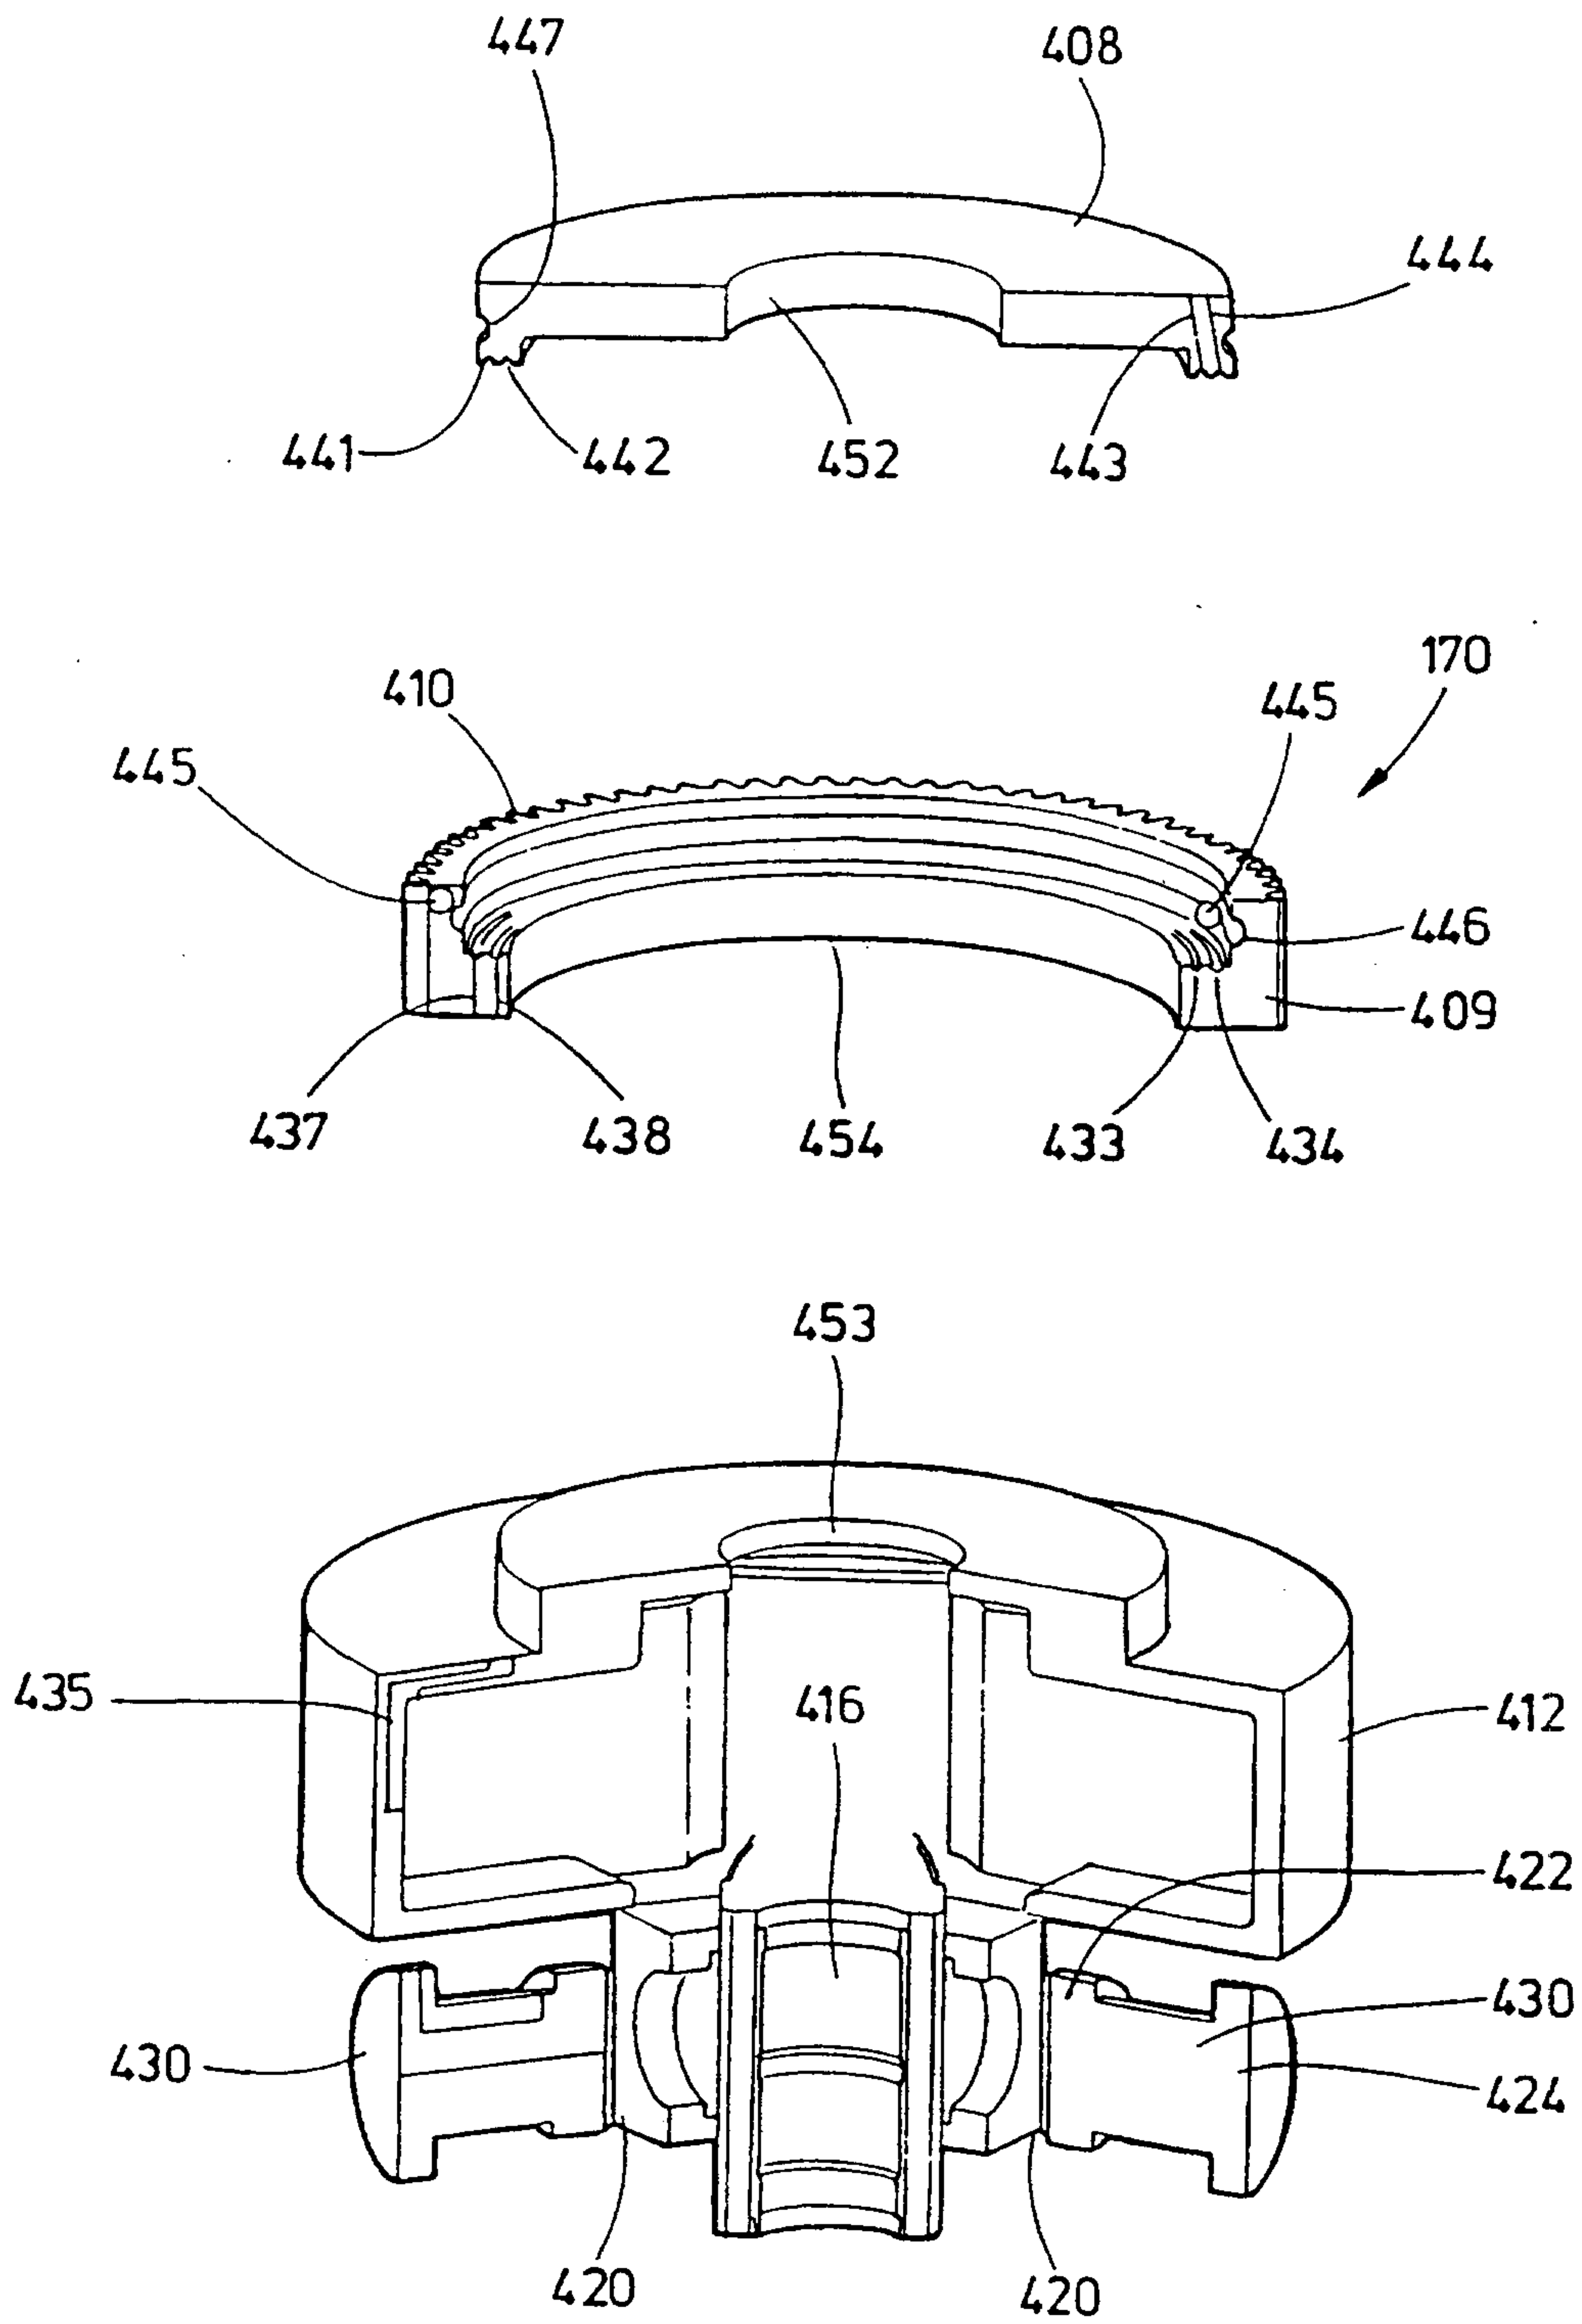


FIG 13C

17 / 26

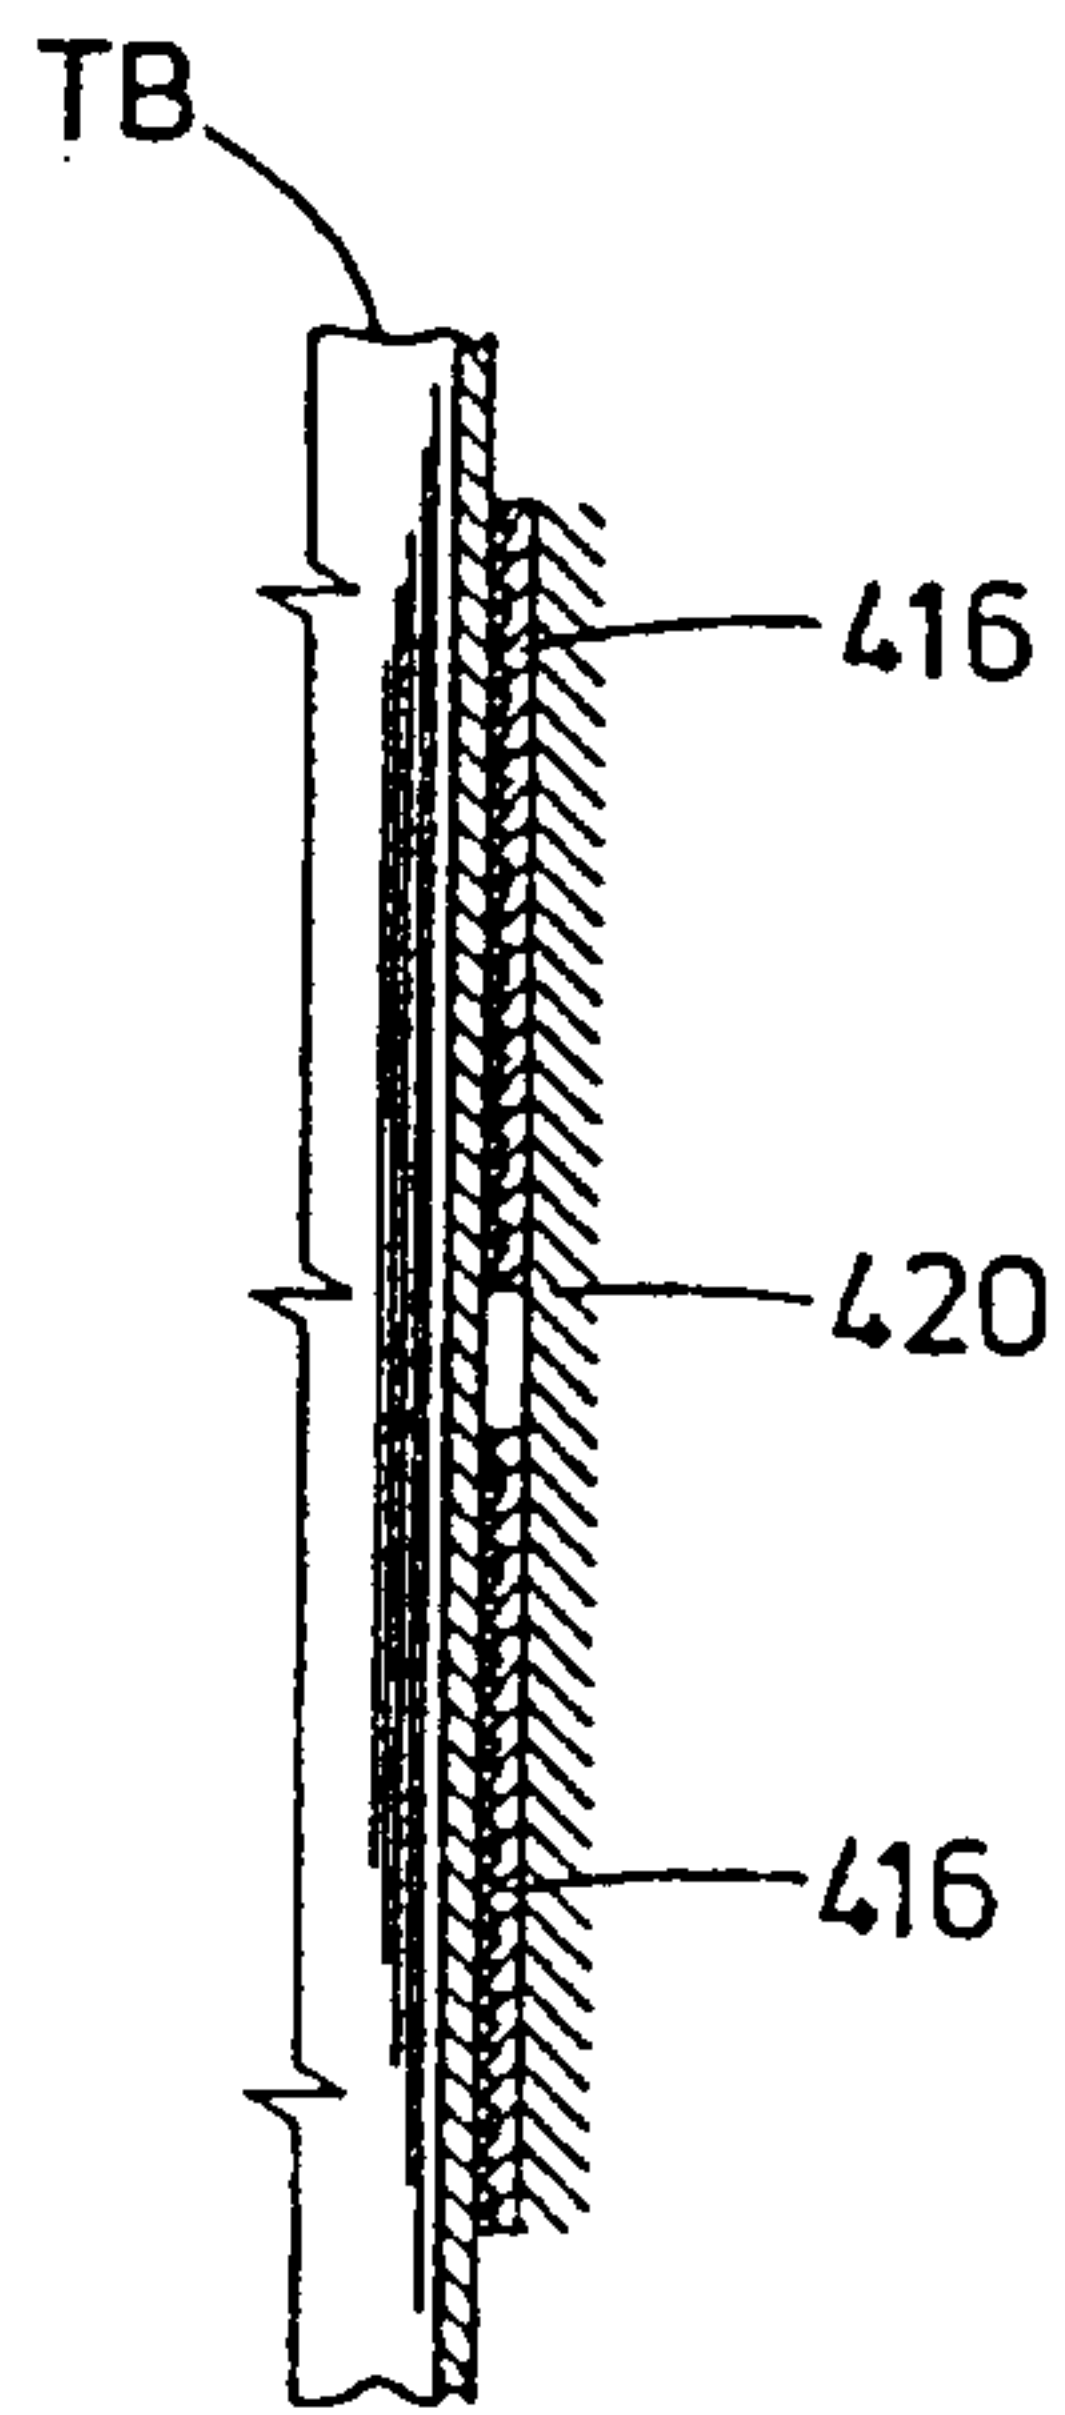
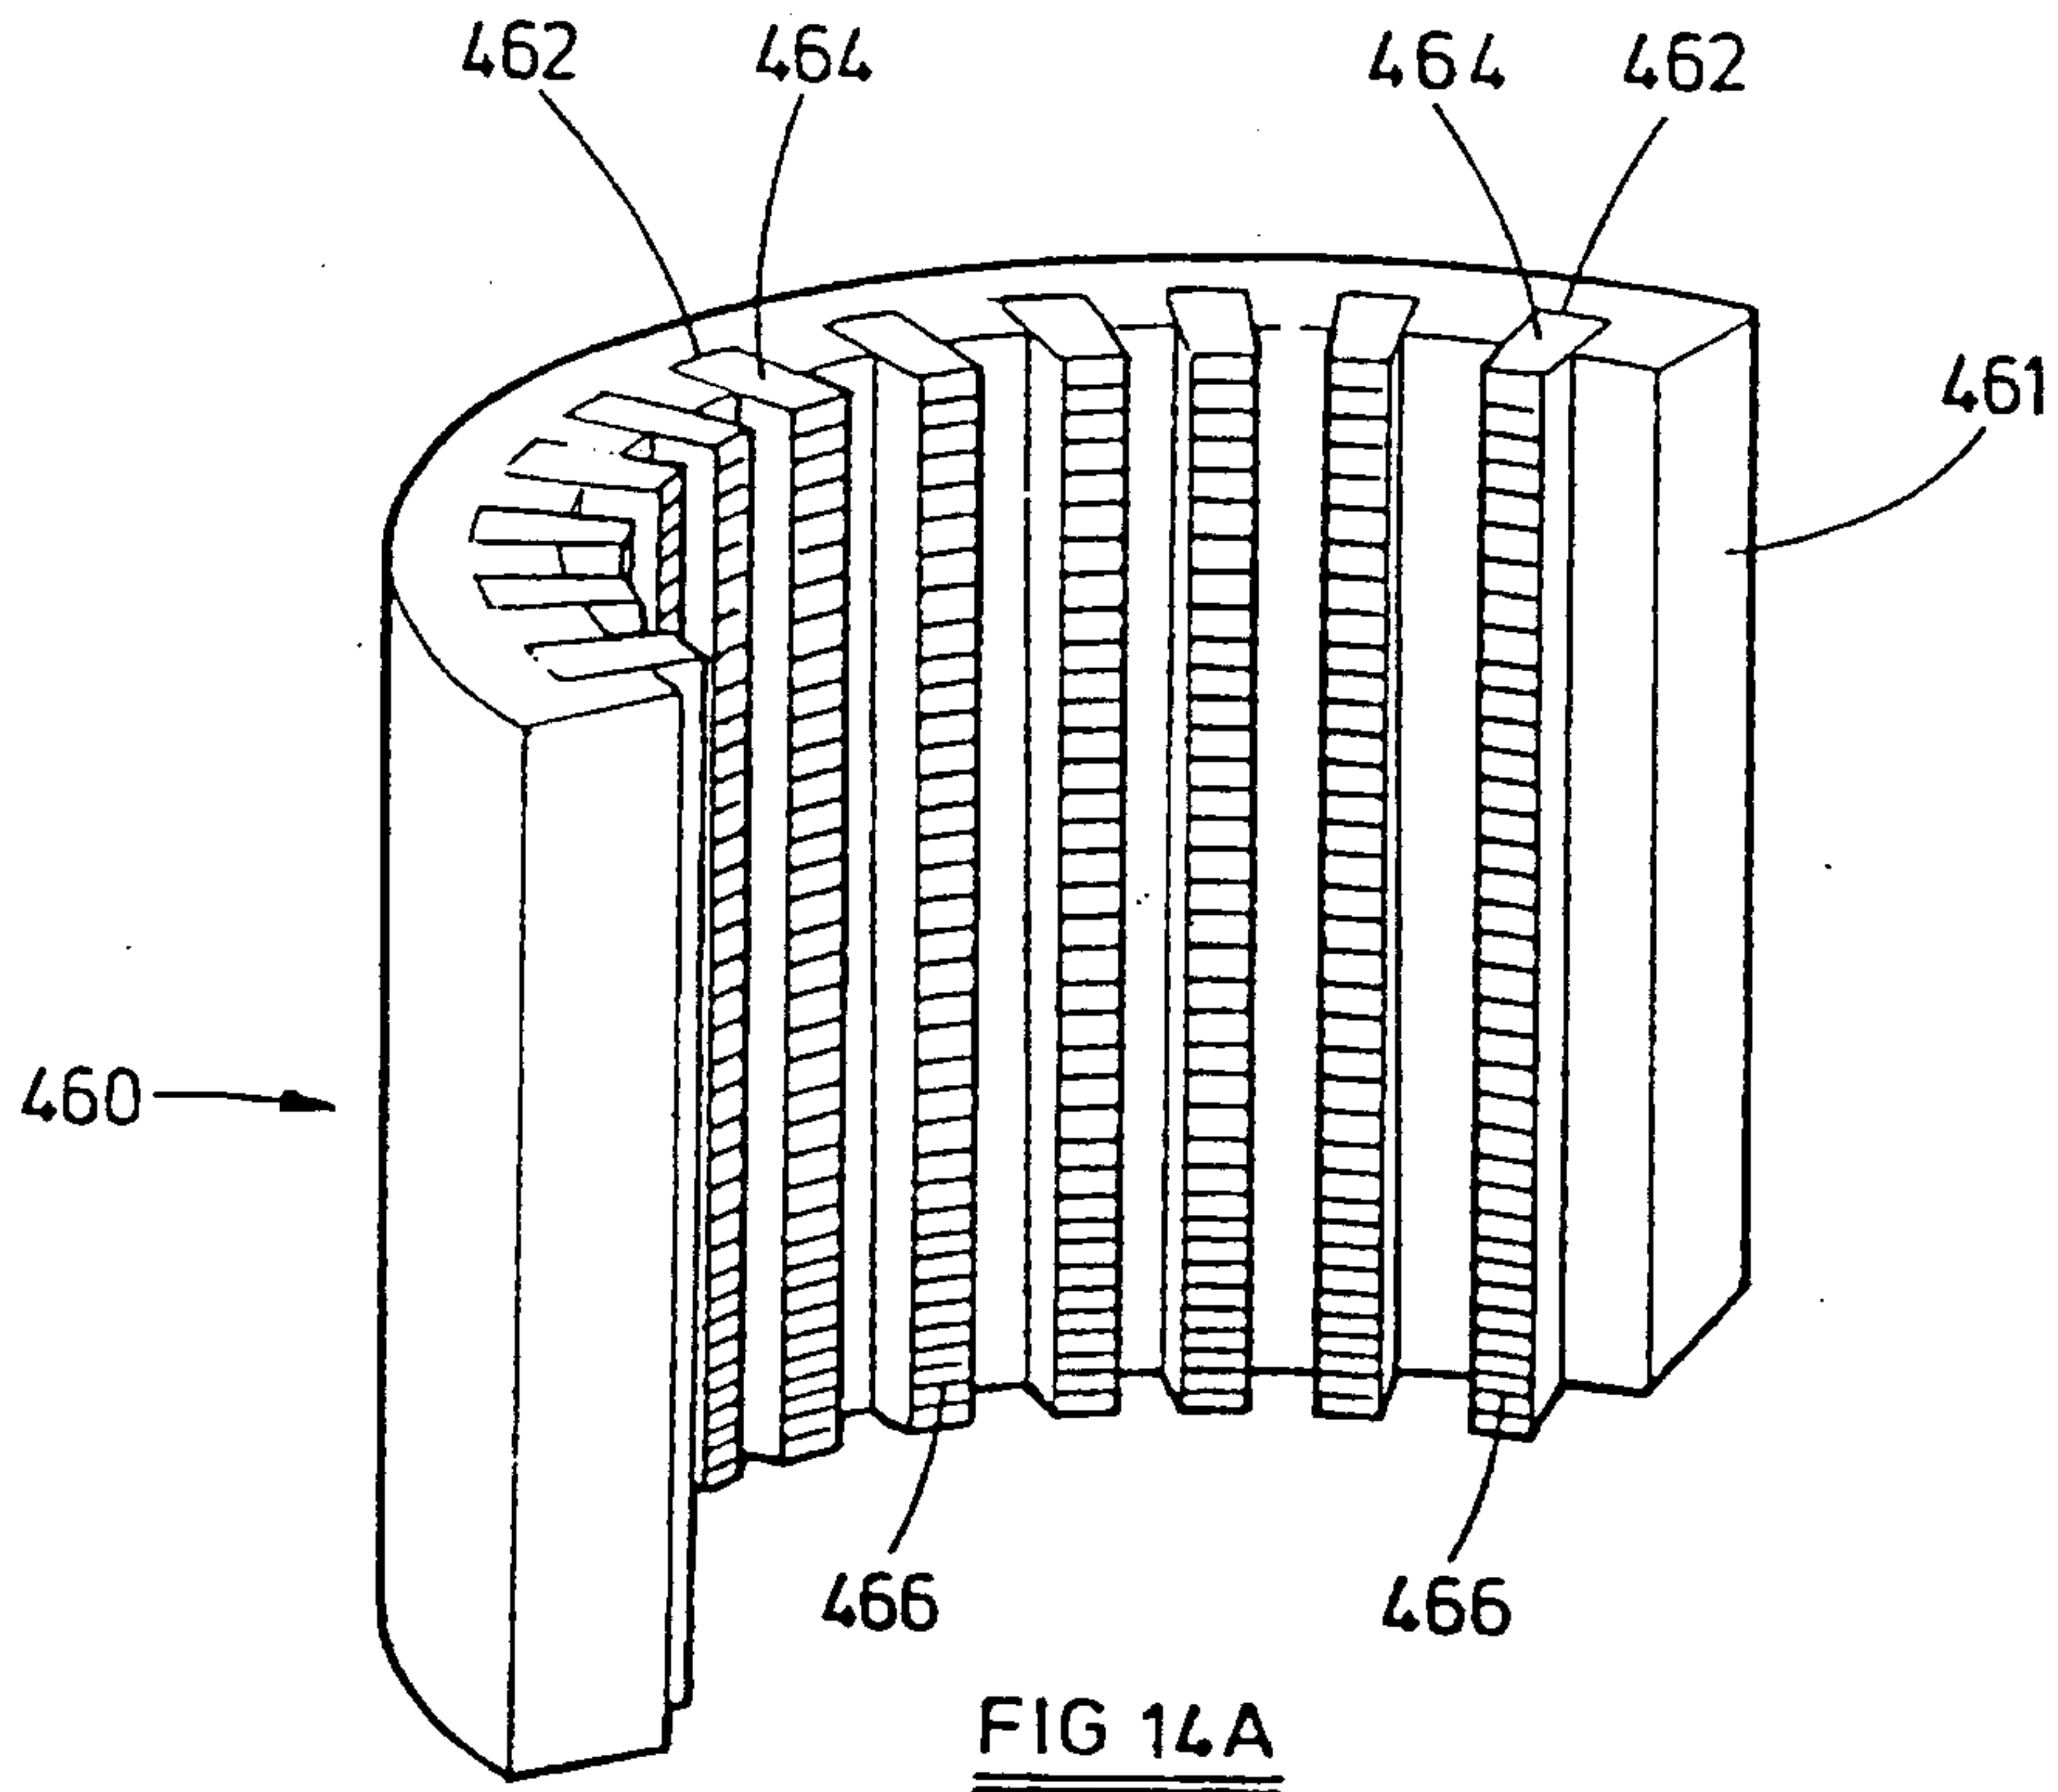


FIG 14C

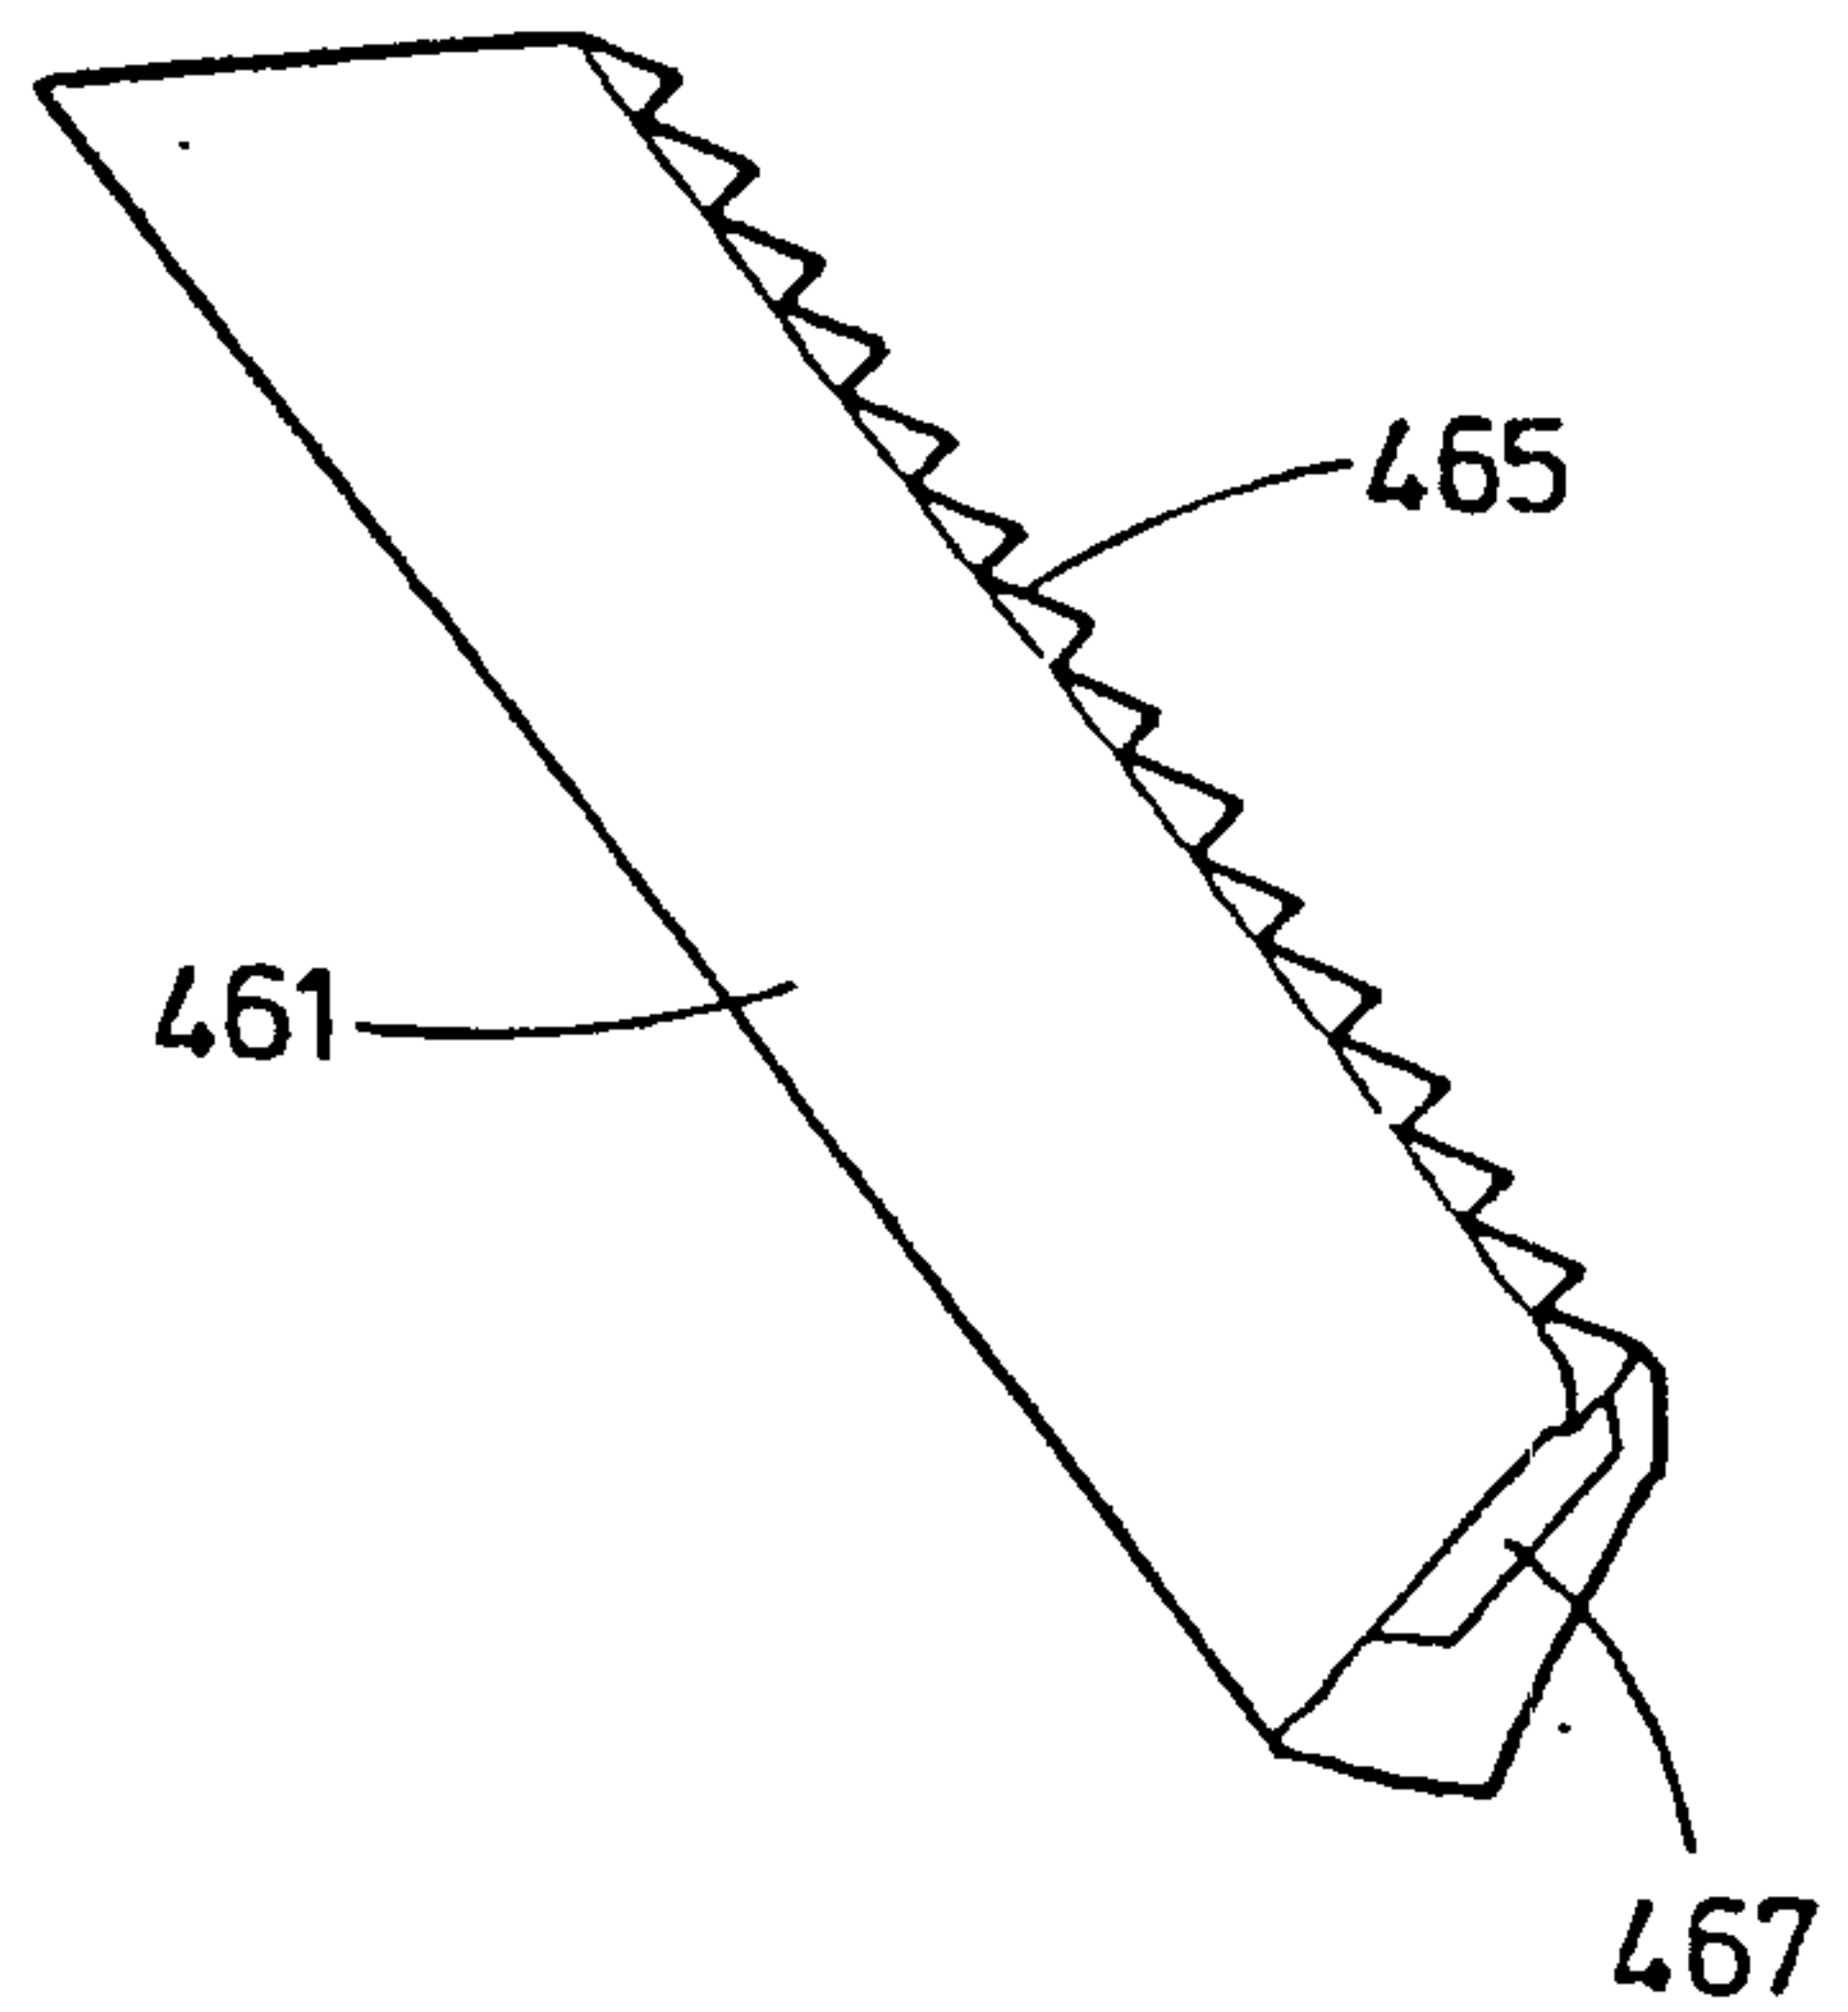


FIG 14B

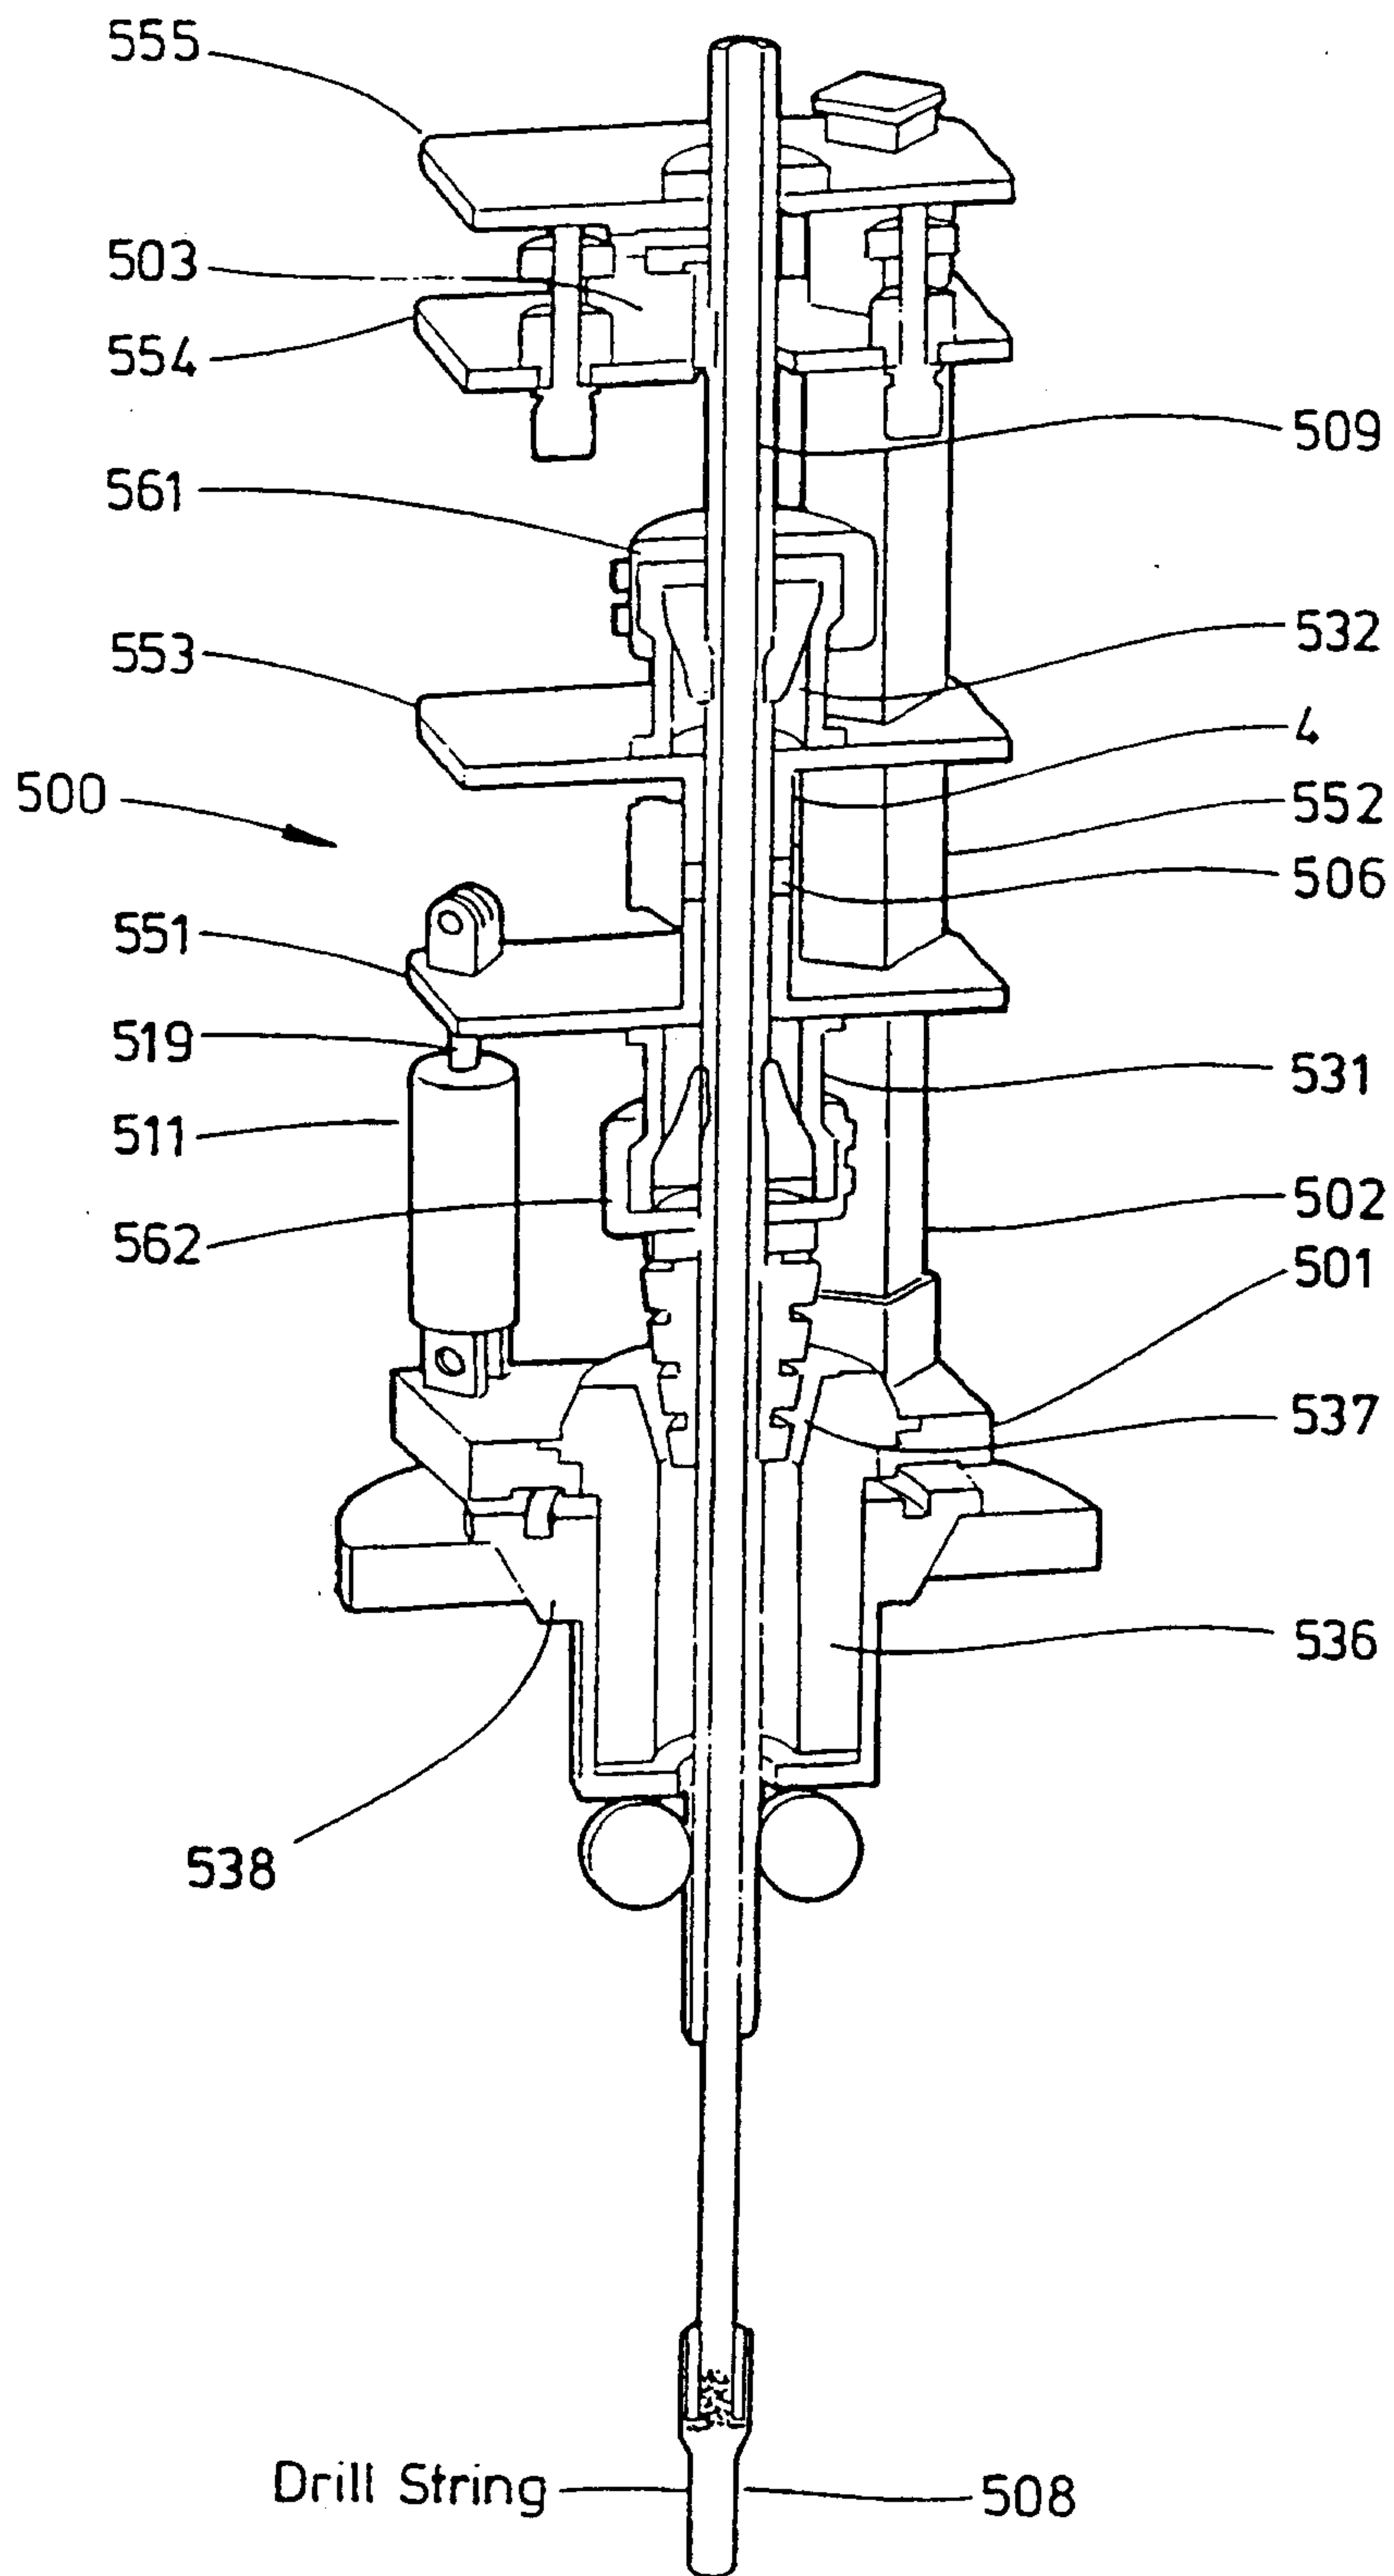


FIG 15A



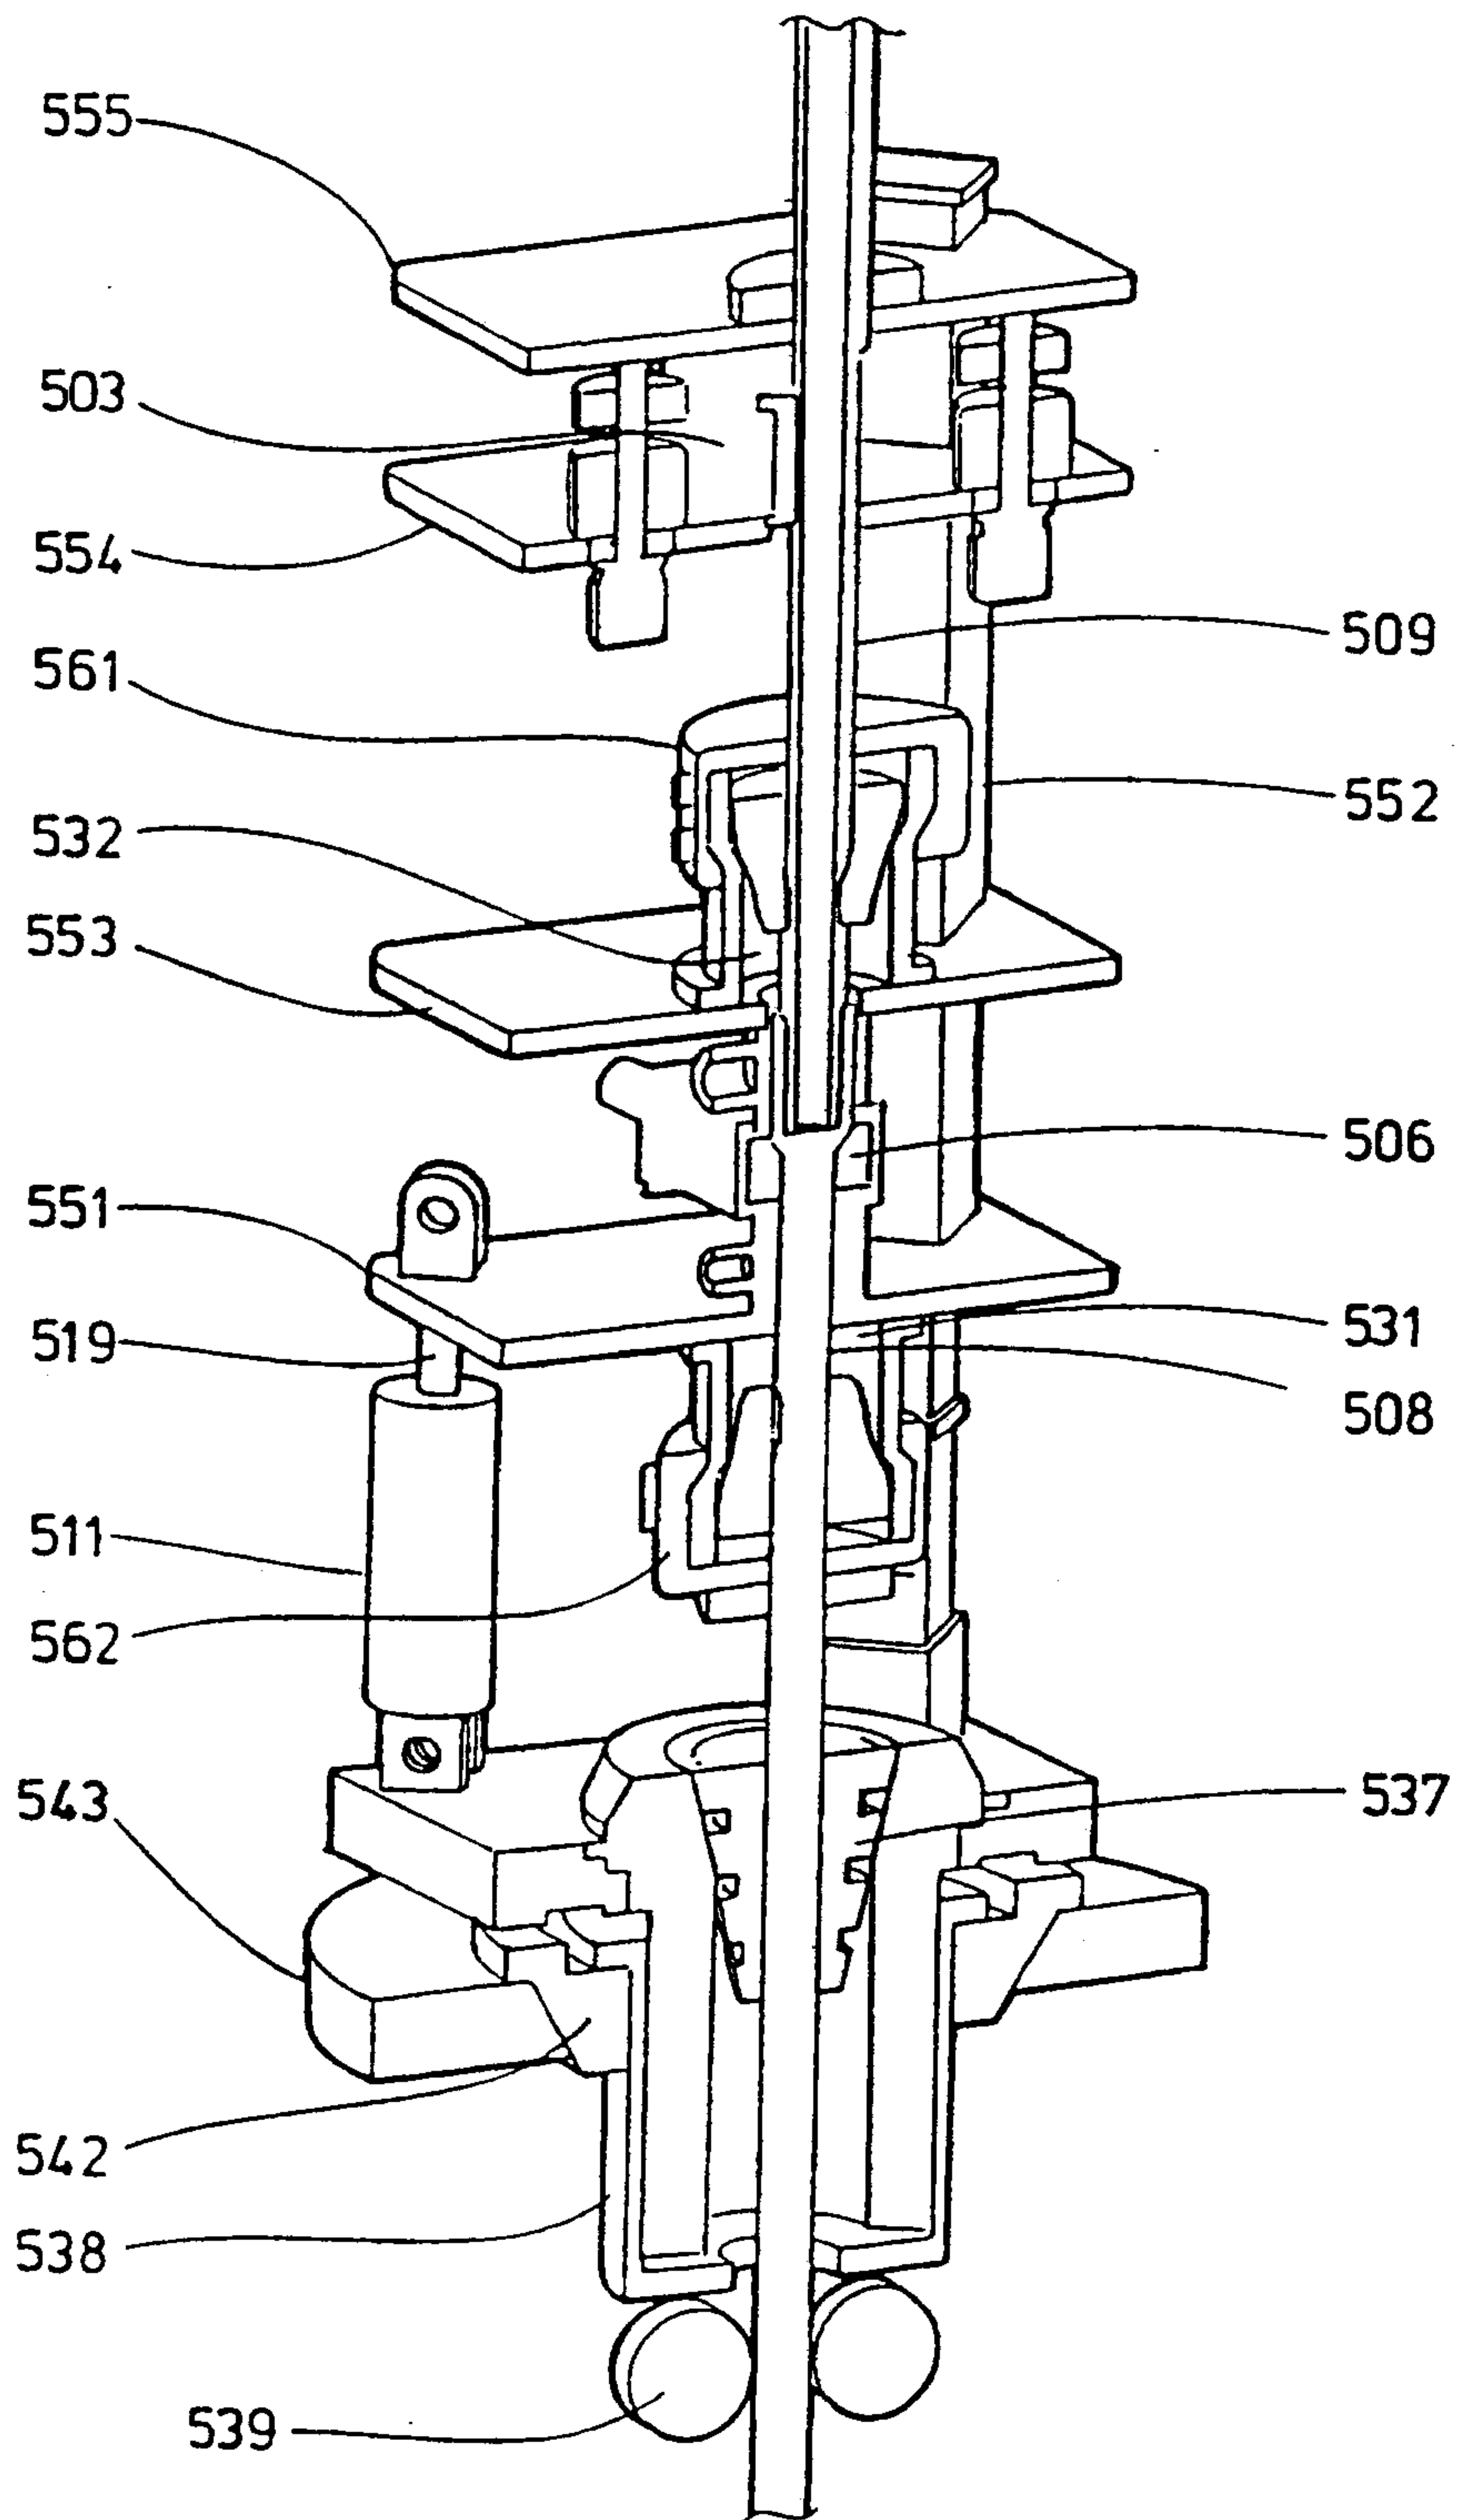


FIG 15 B

20 / 26

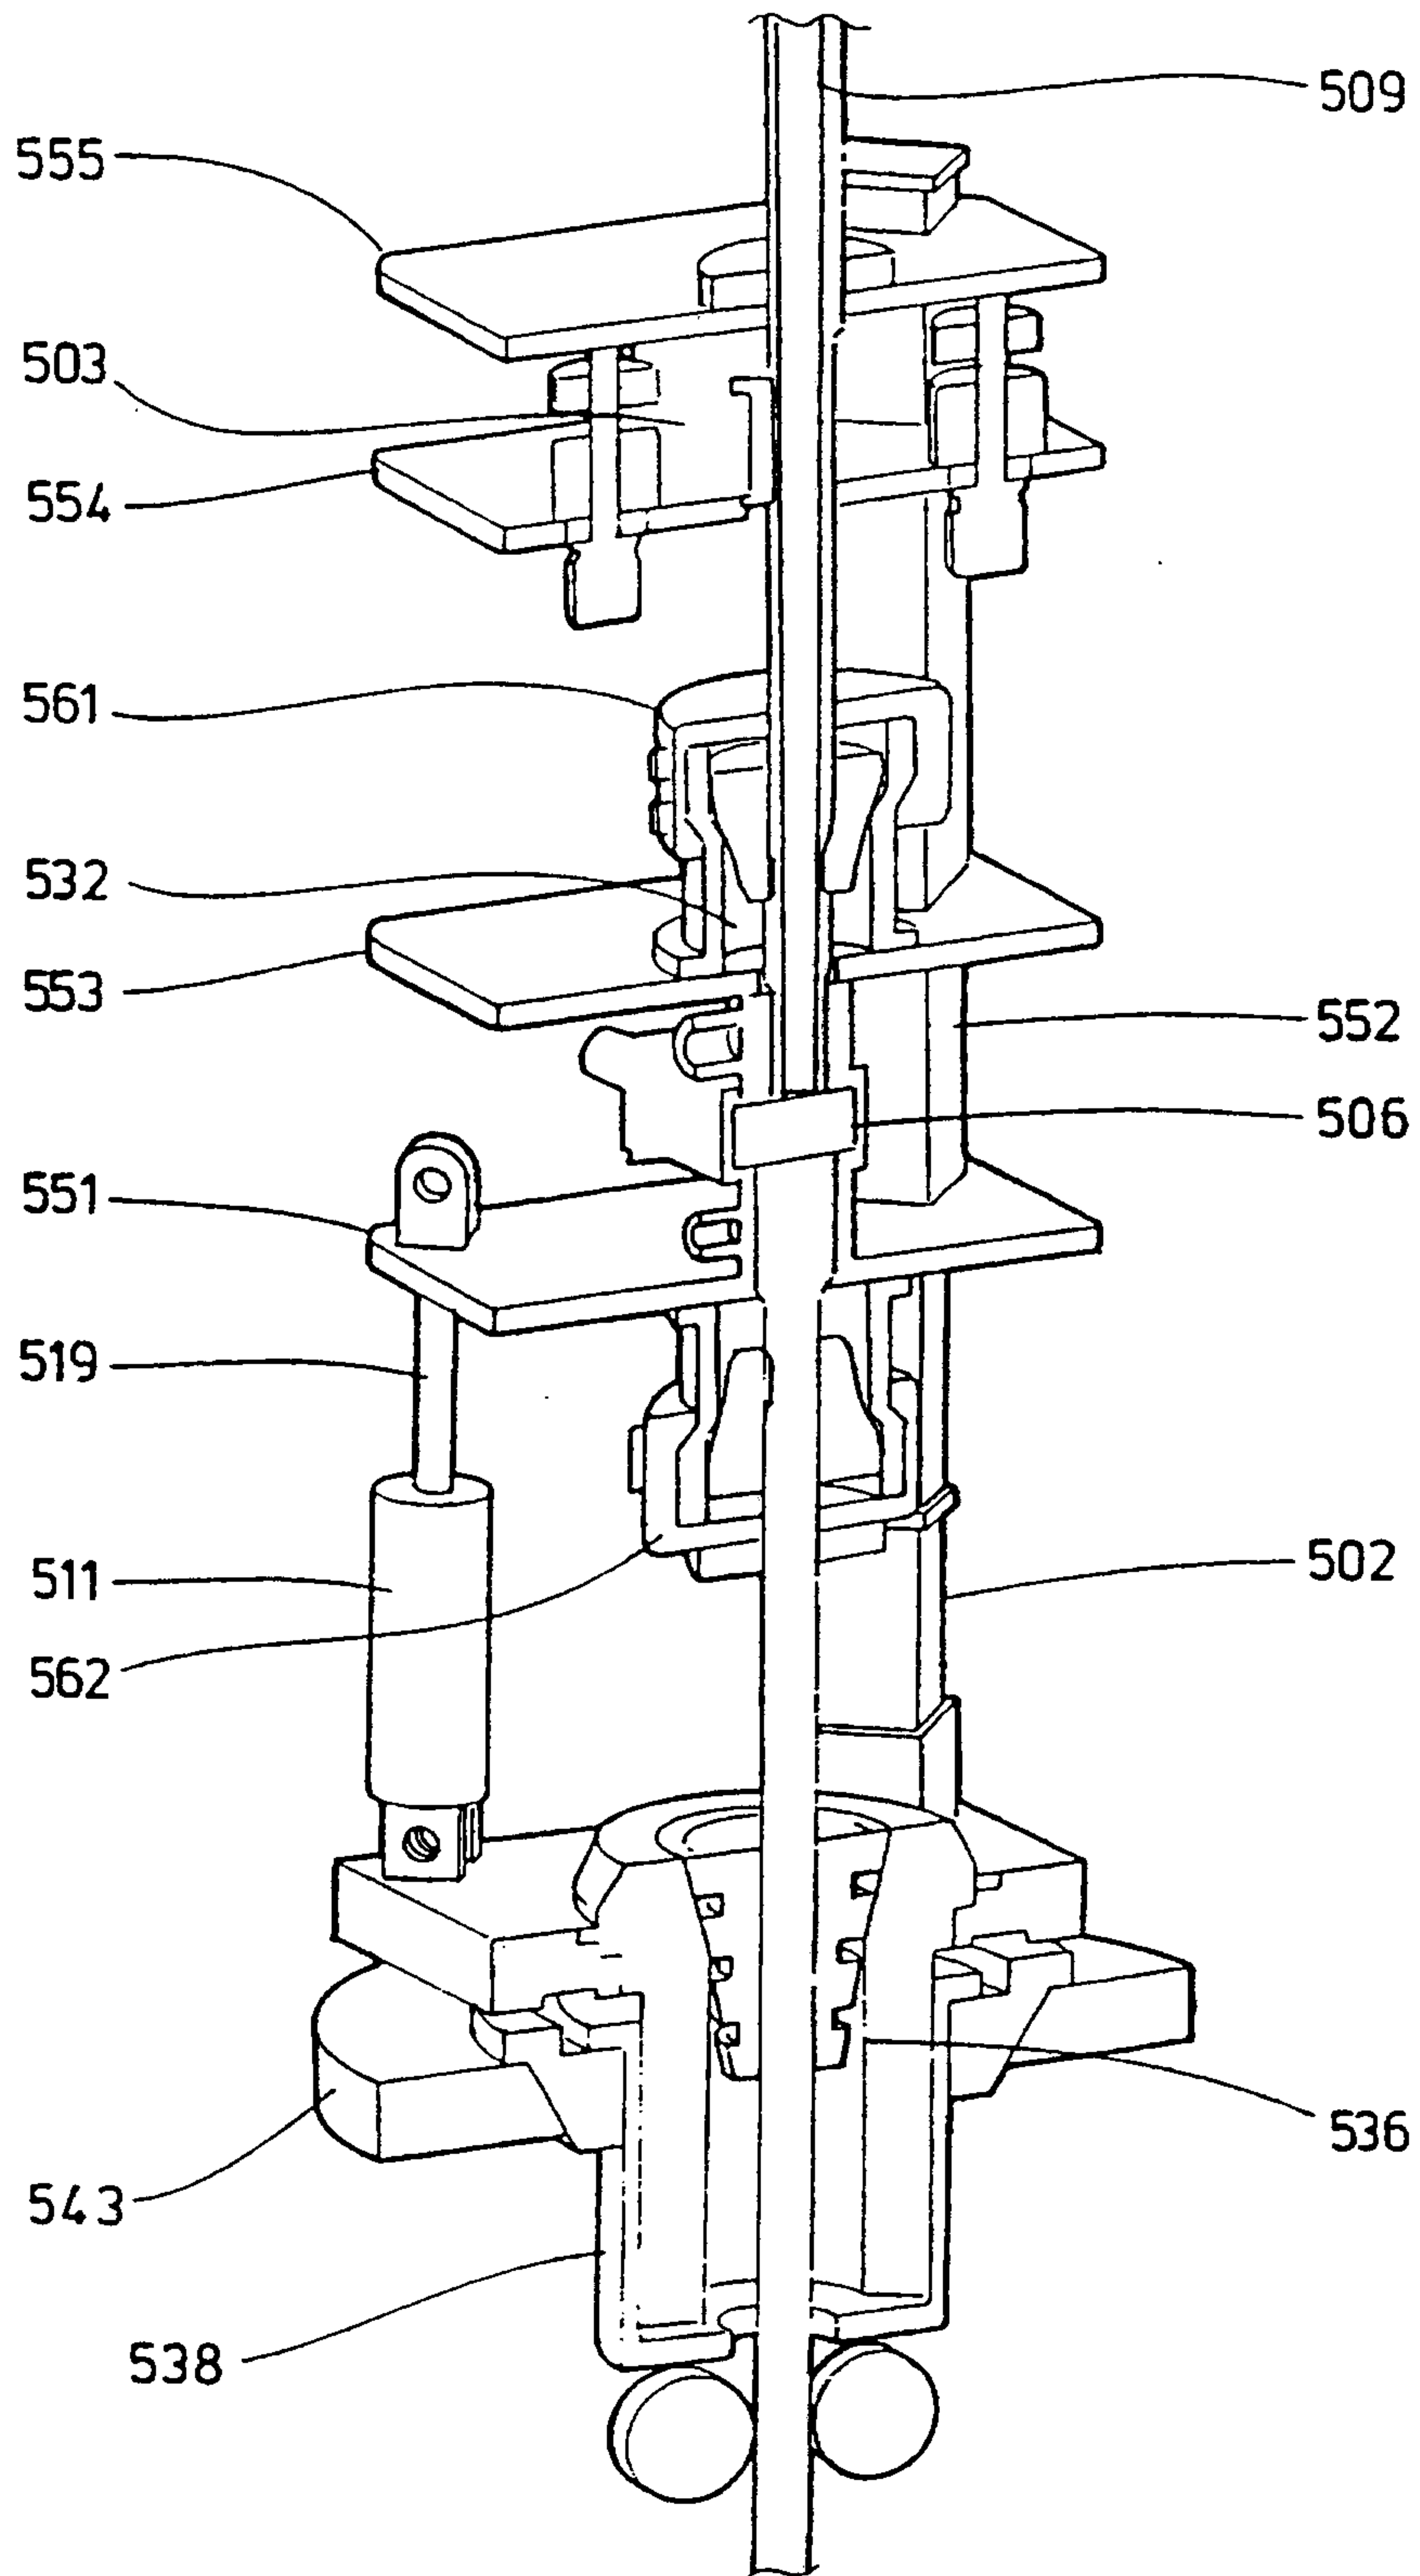


FIG 15 C

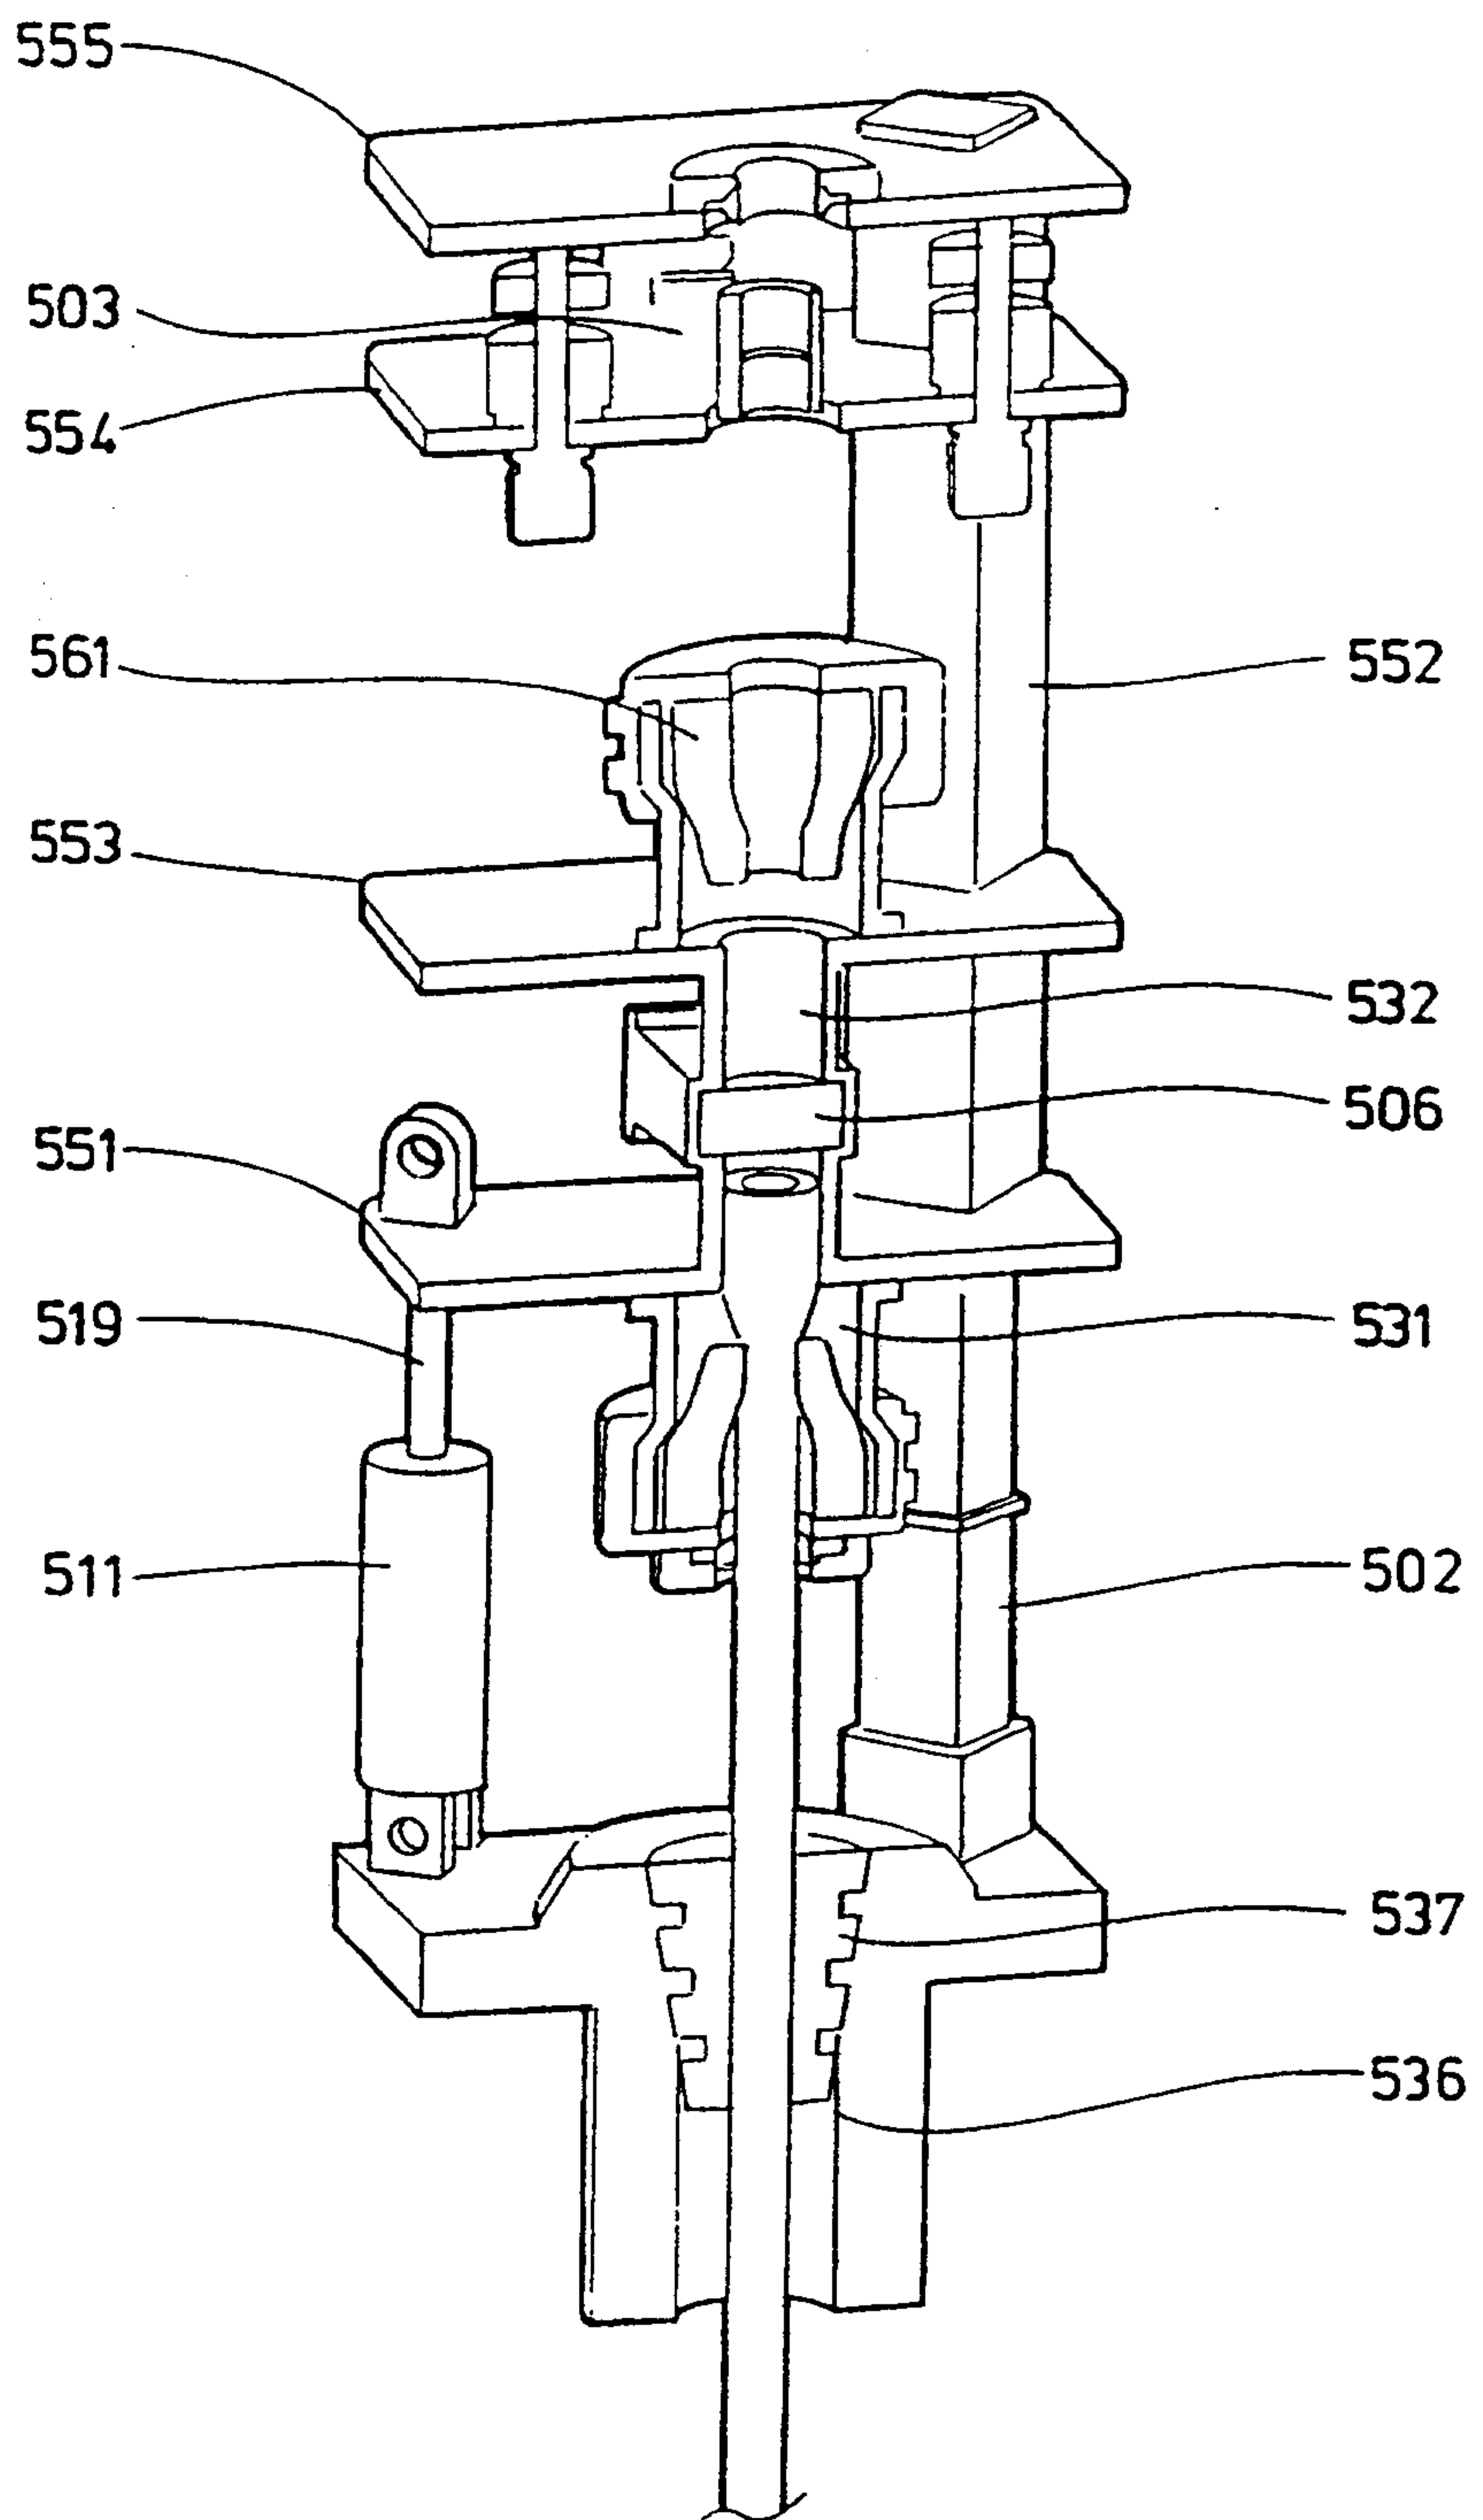


FIG 15D

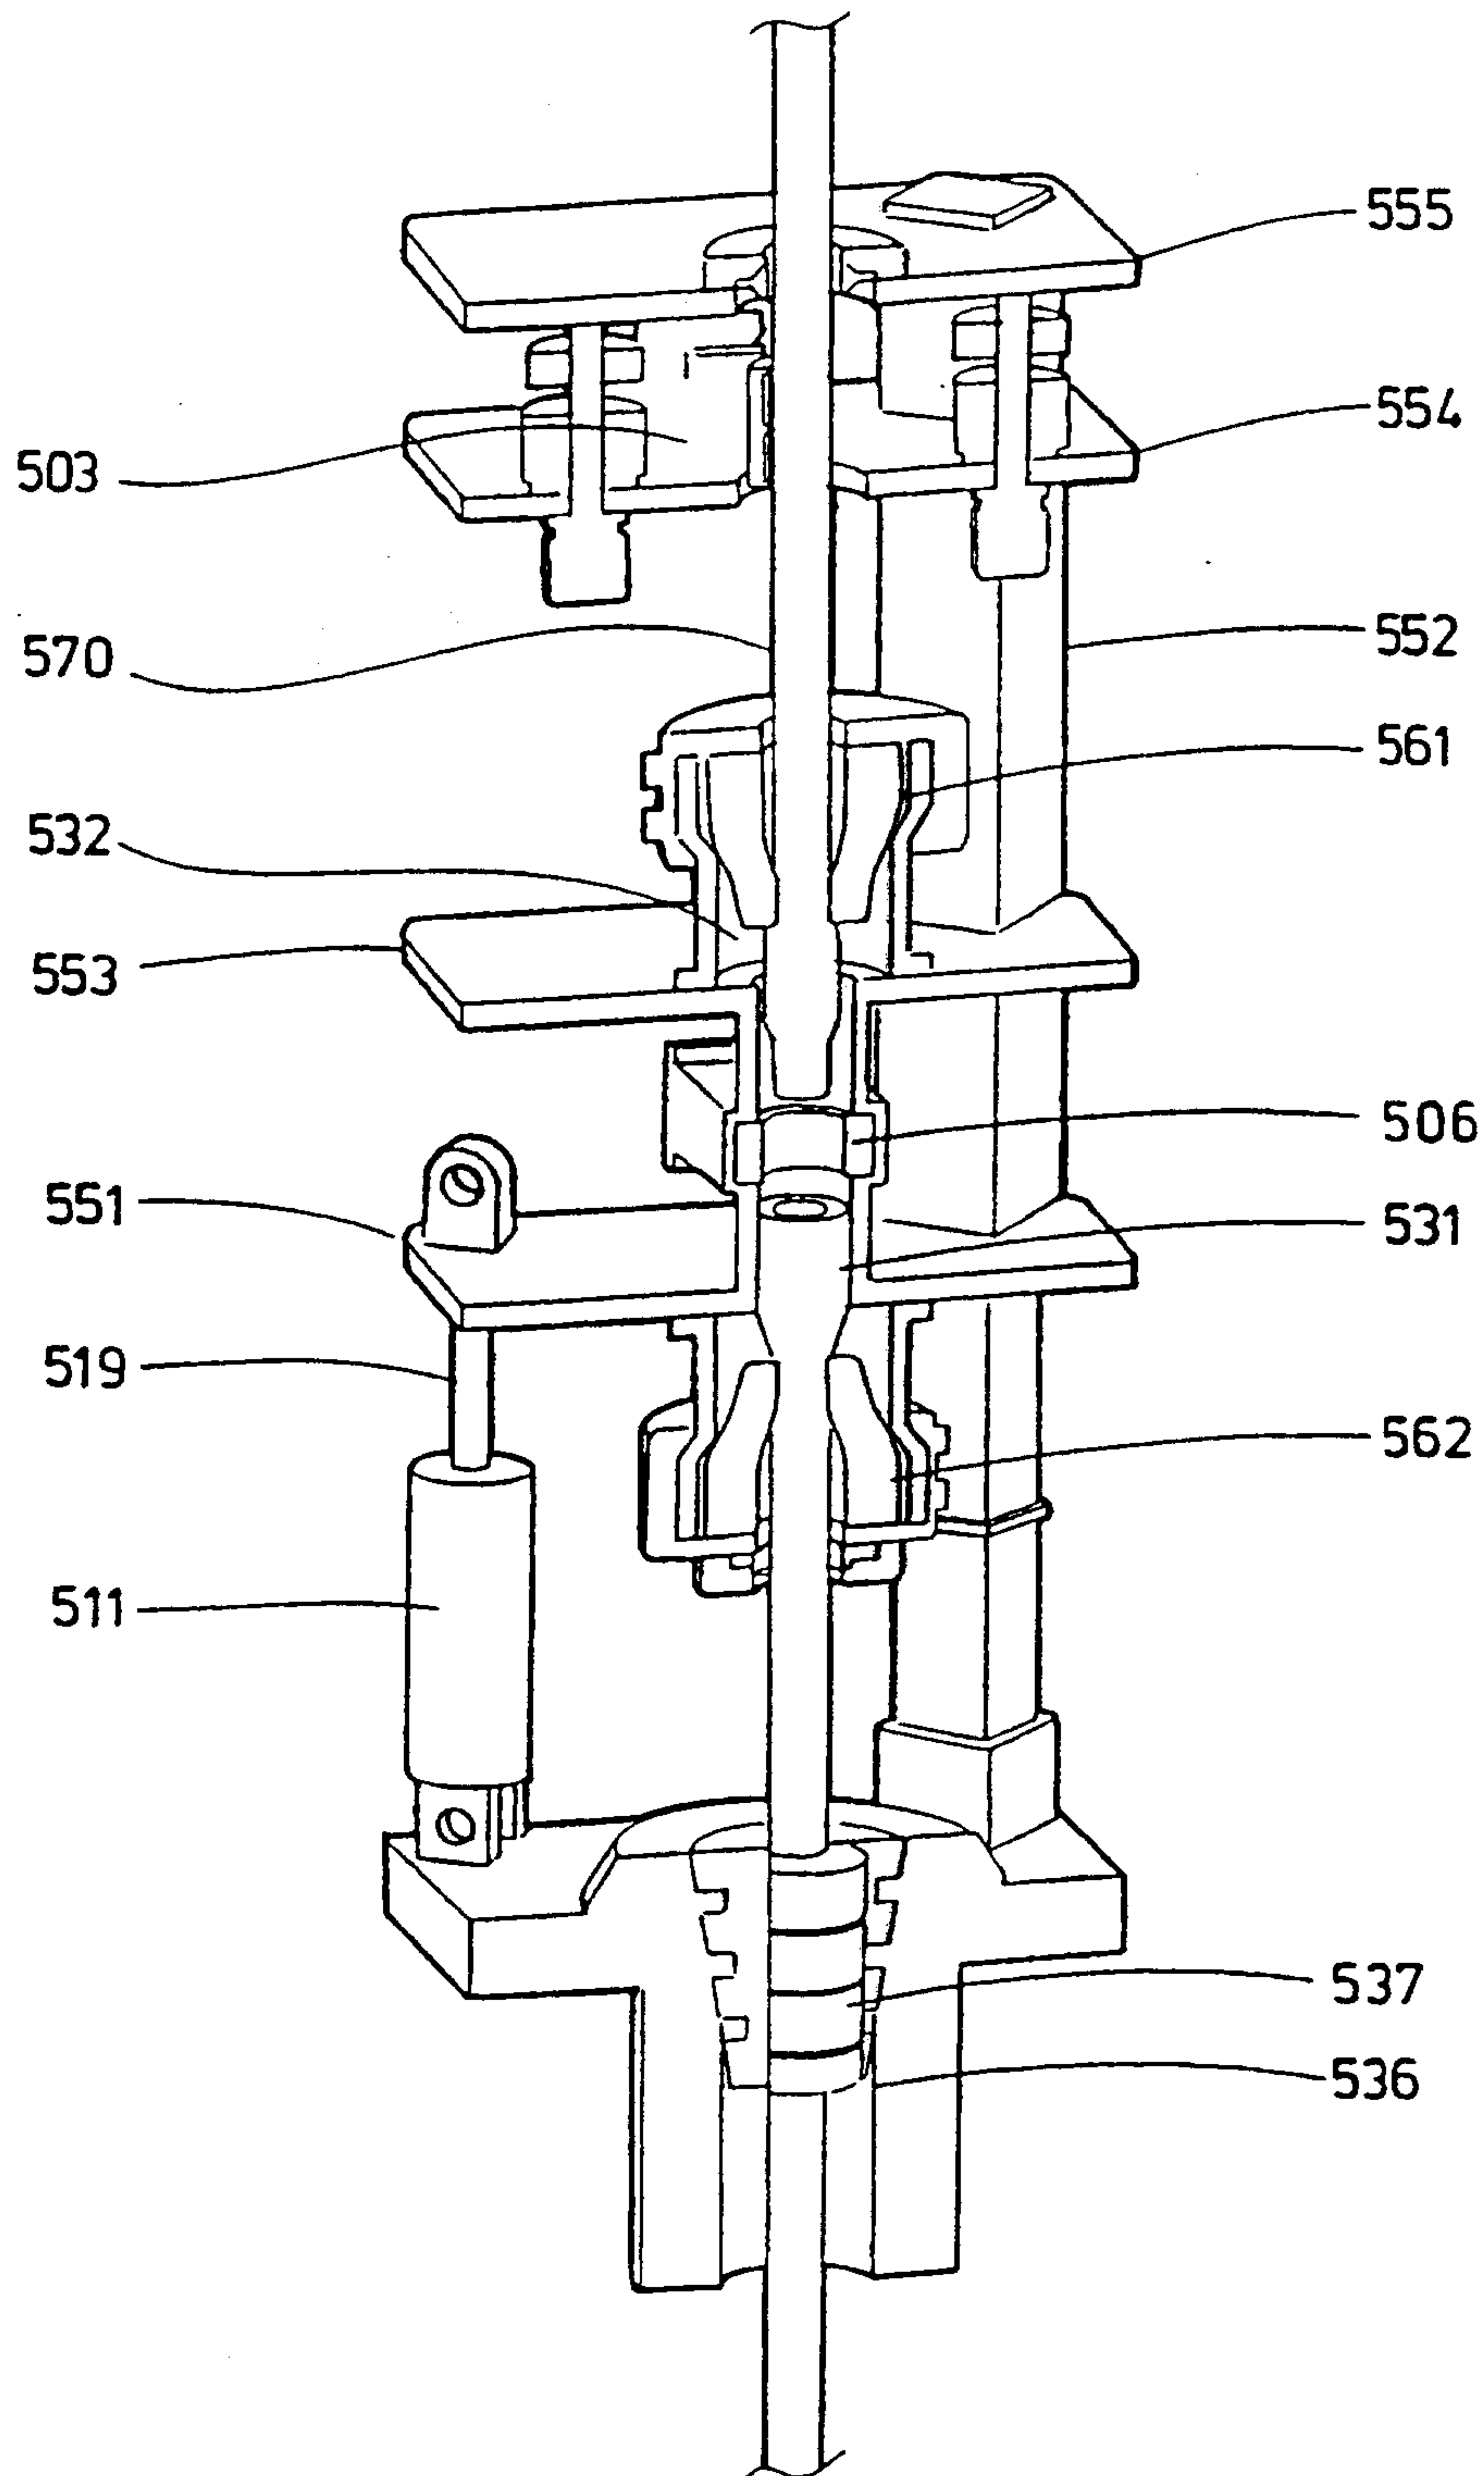


FIG 15E

23 / 26

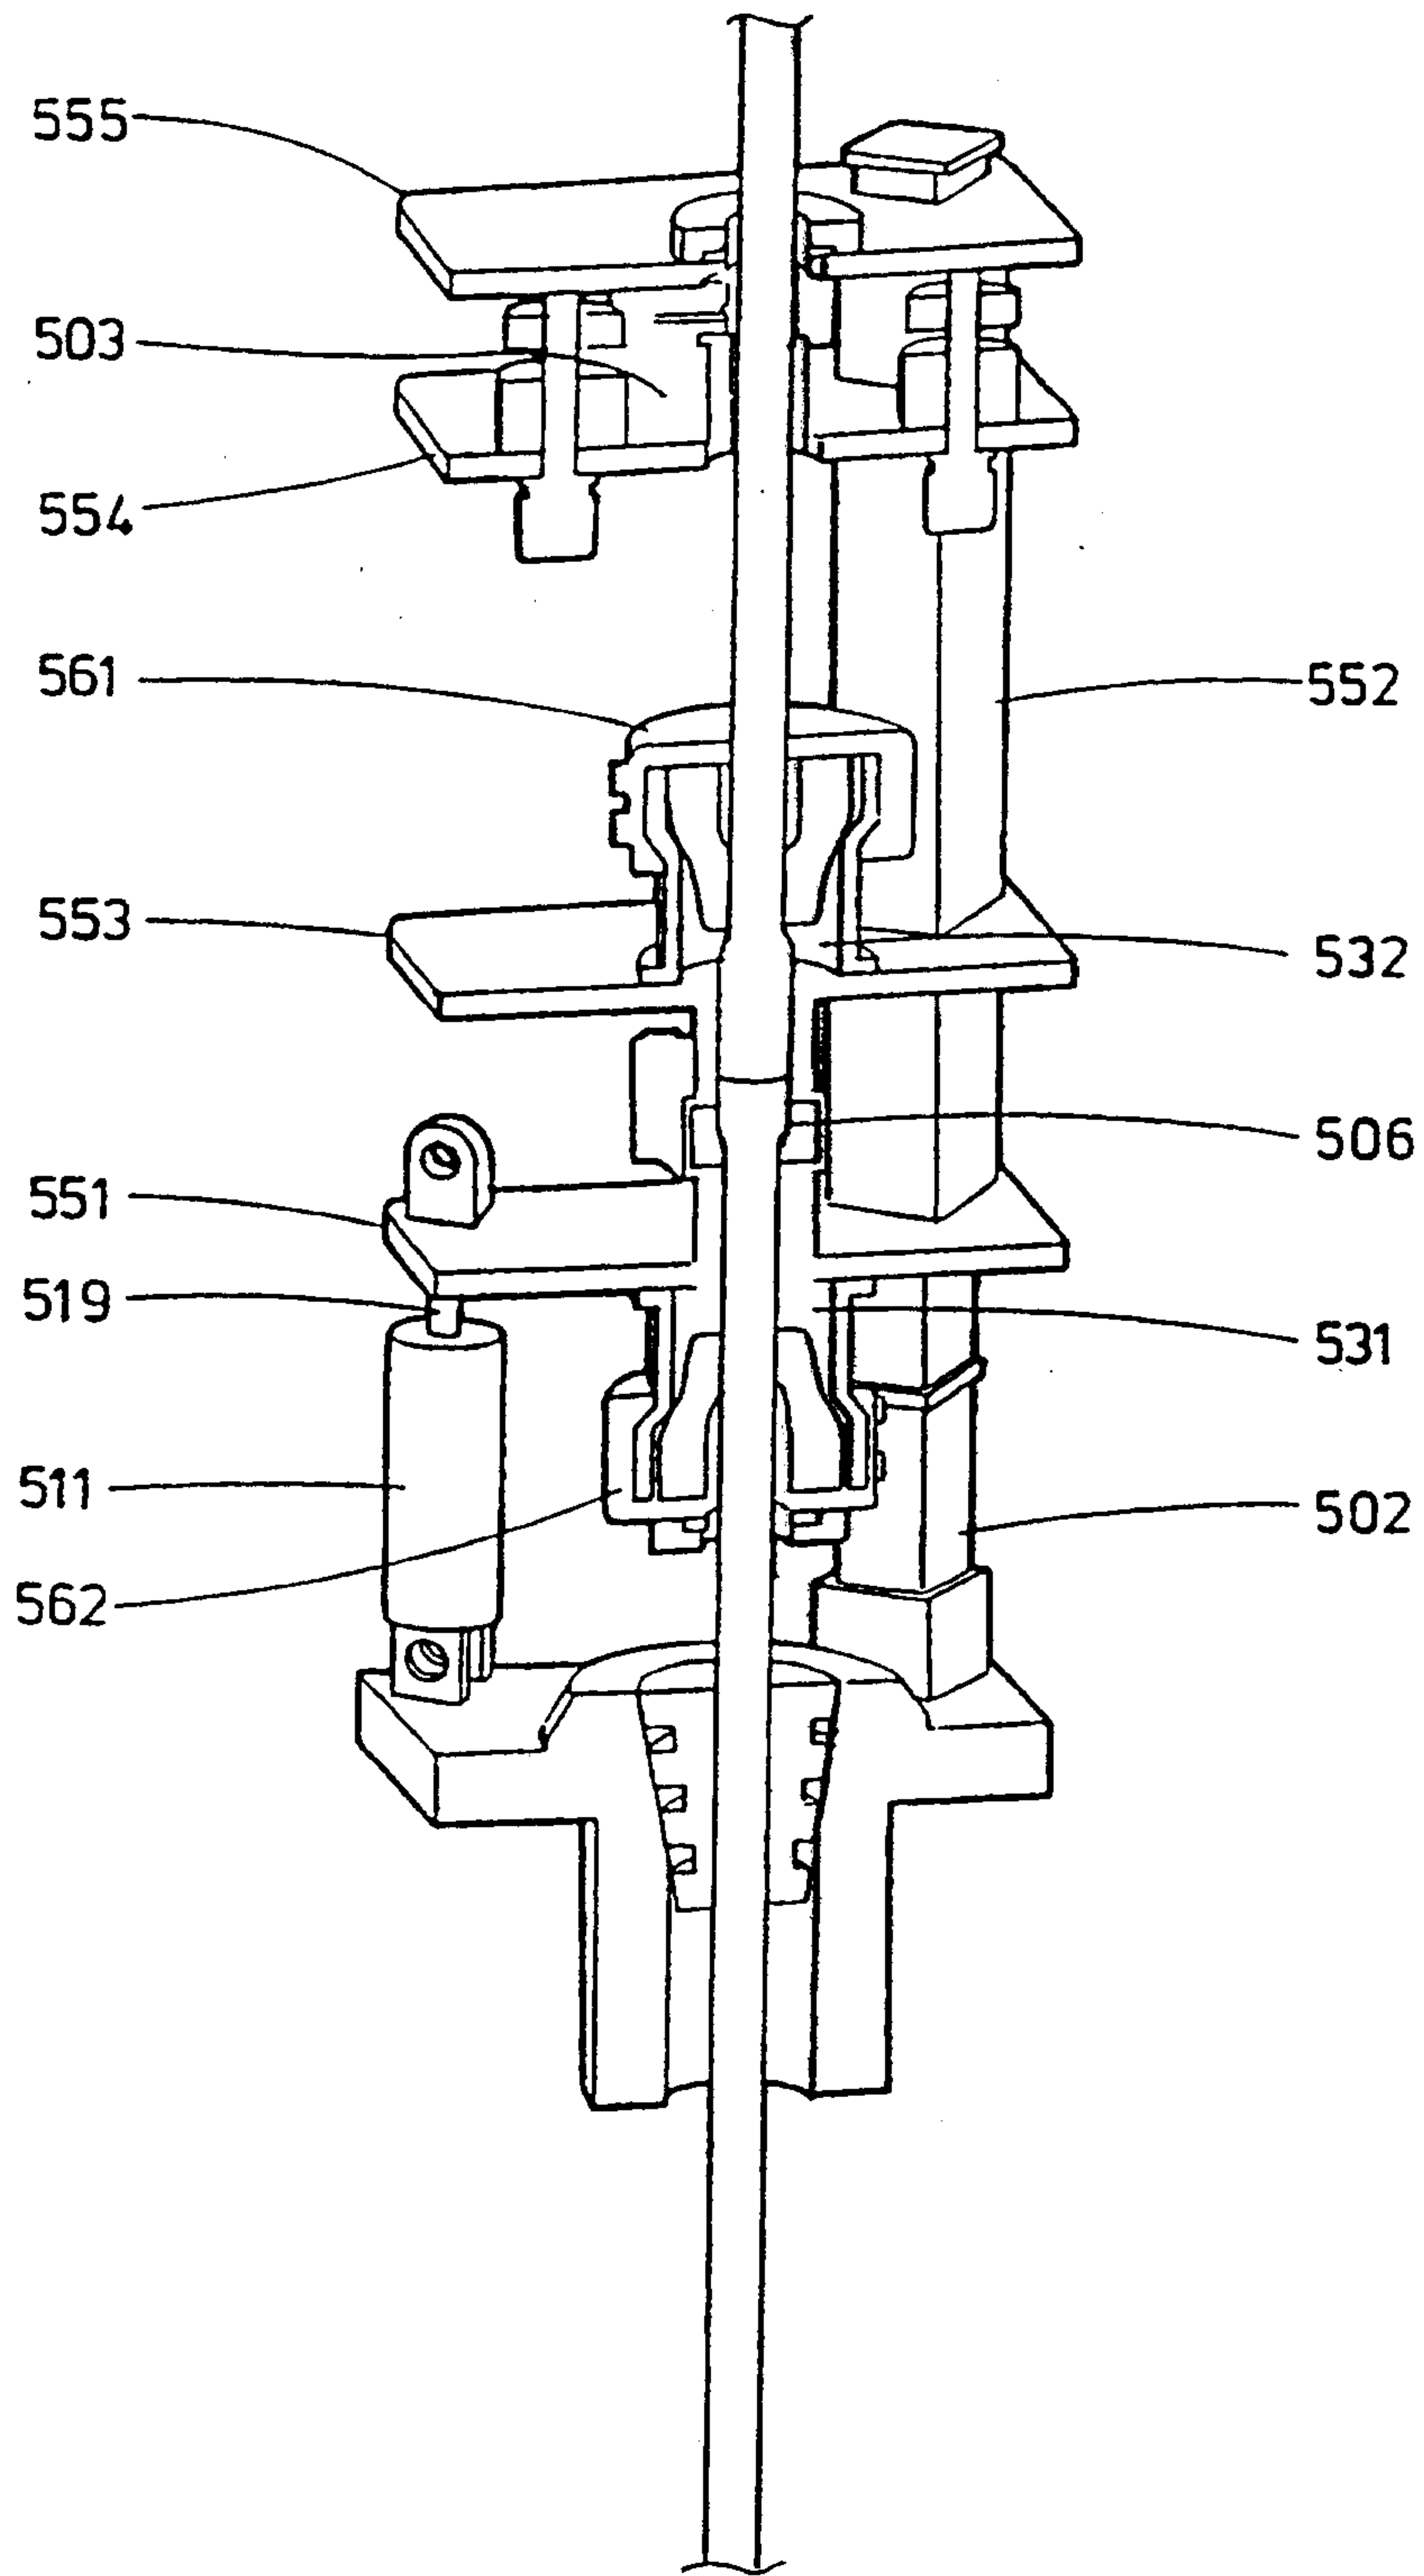


FIG 15F

24 / 26

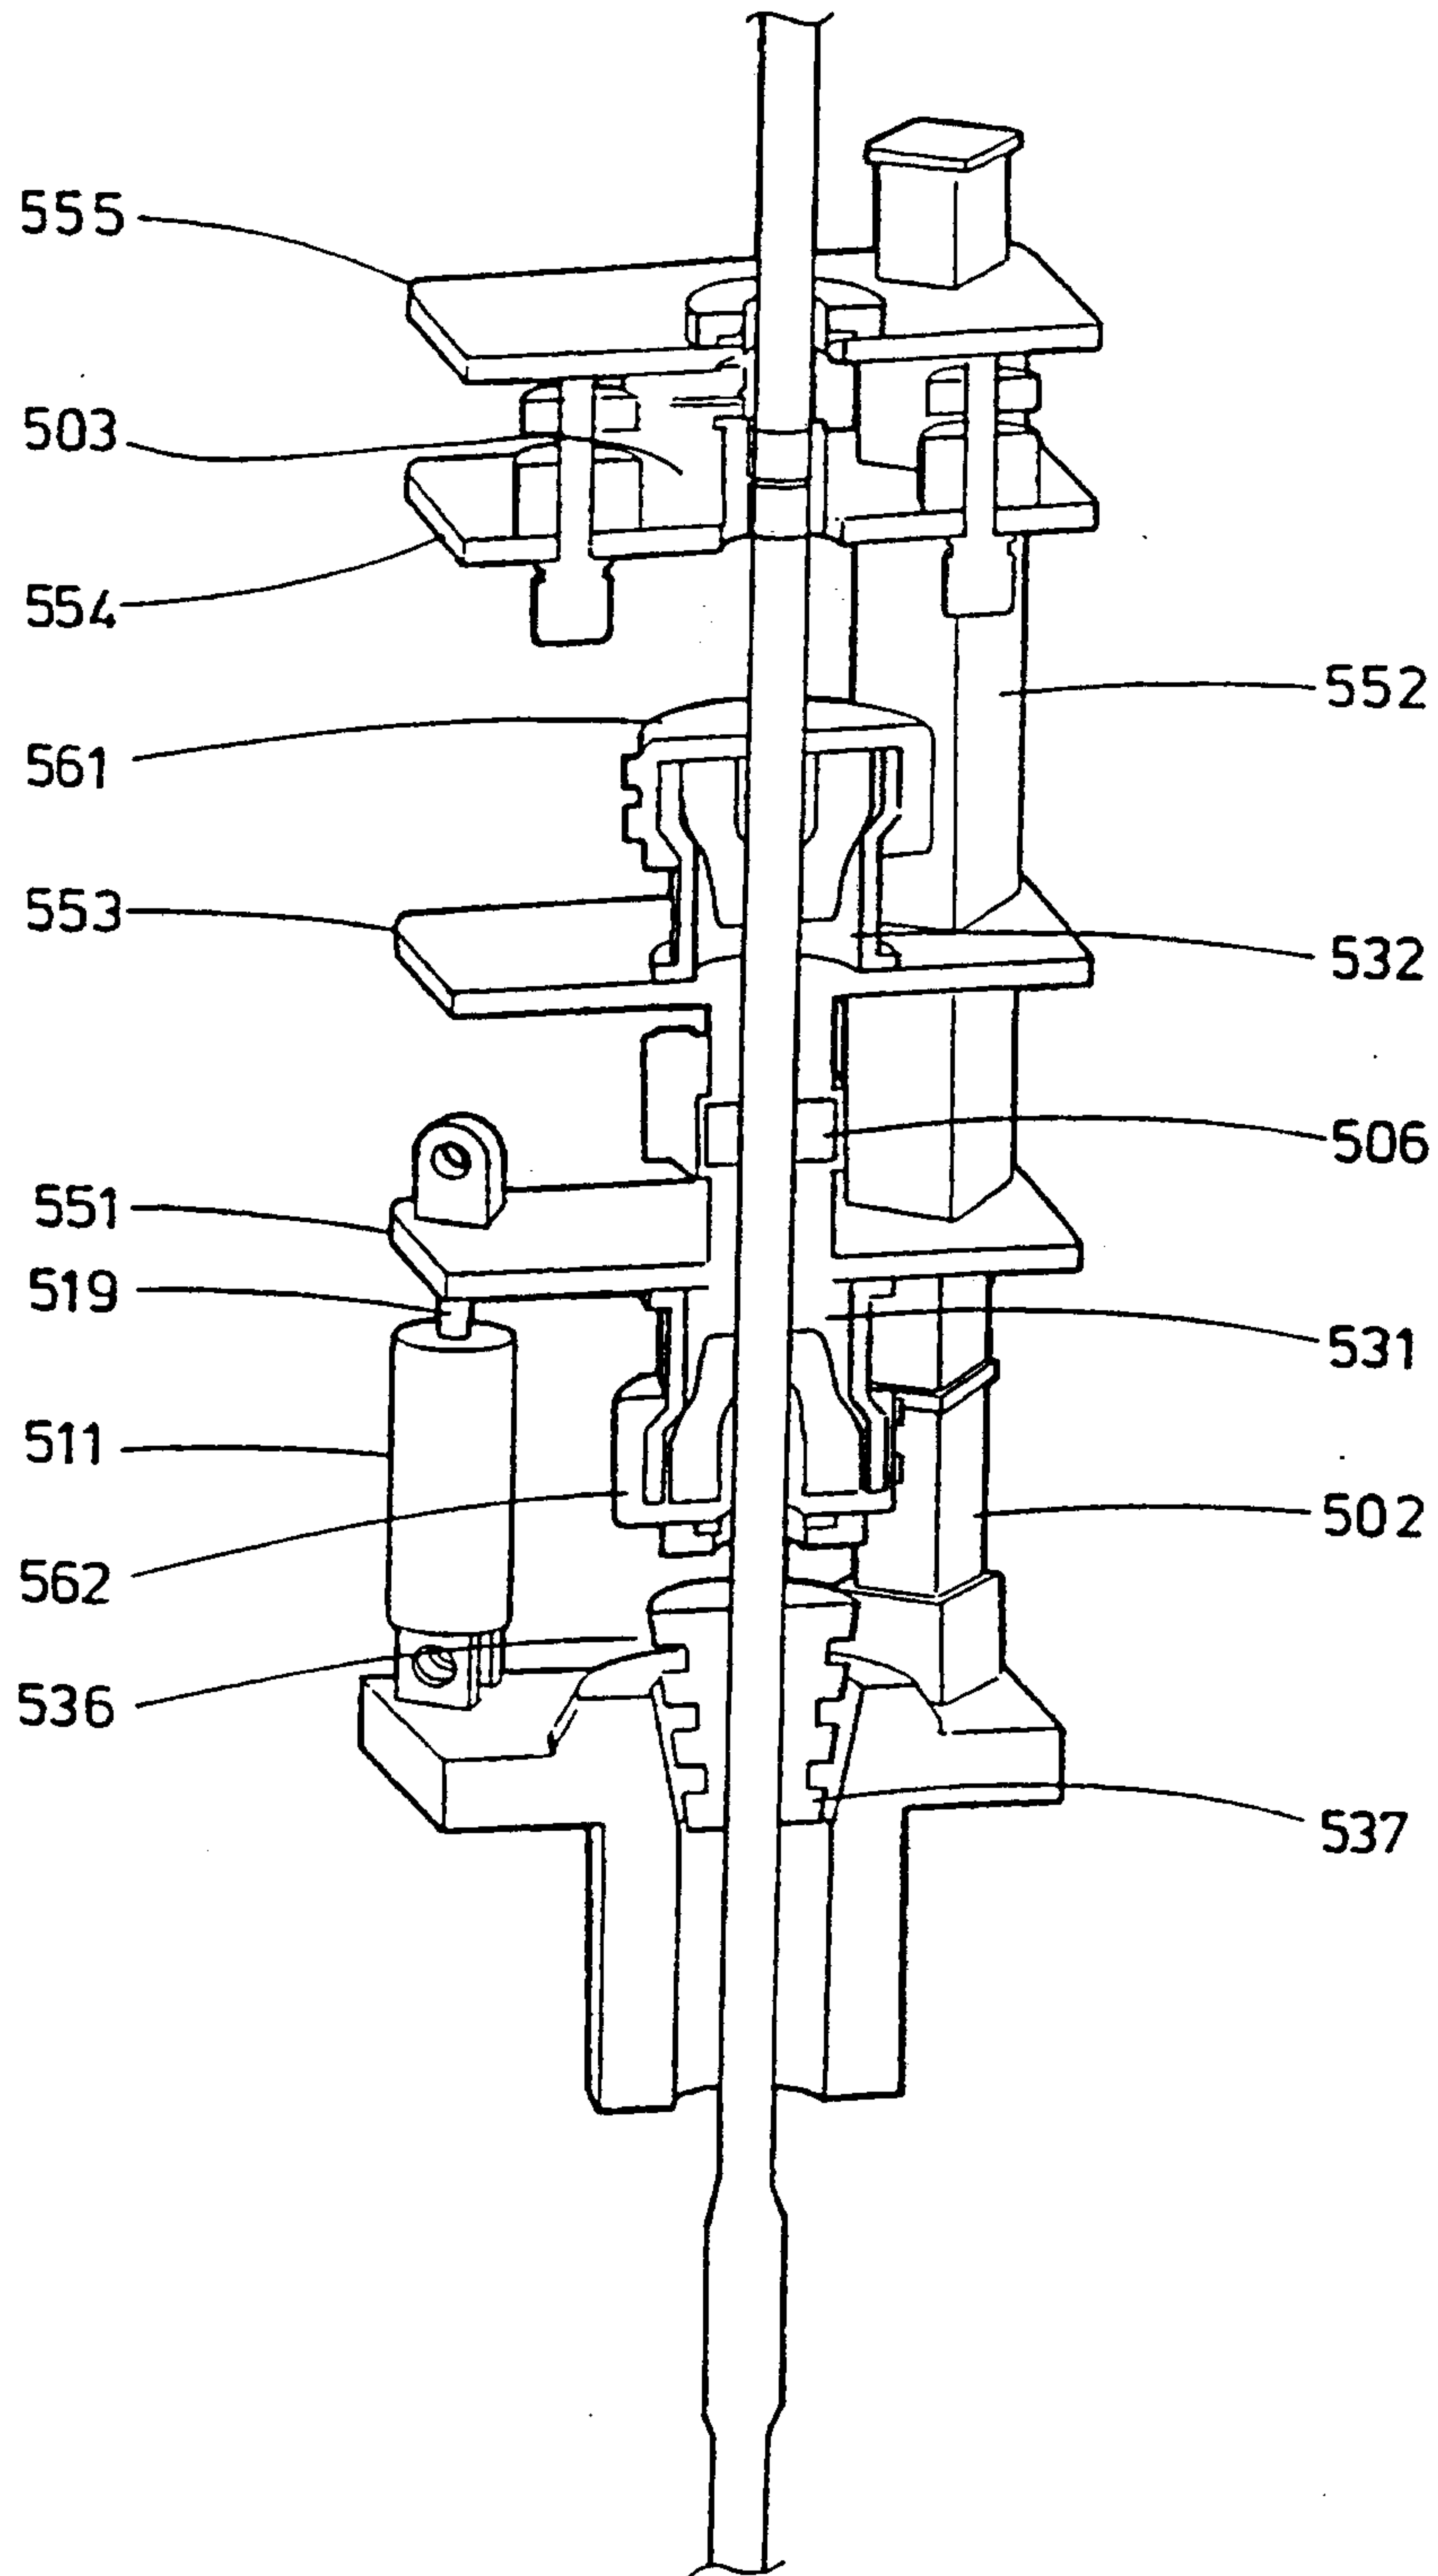


FIG 15G

25 / 26

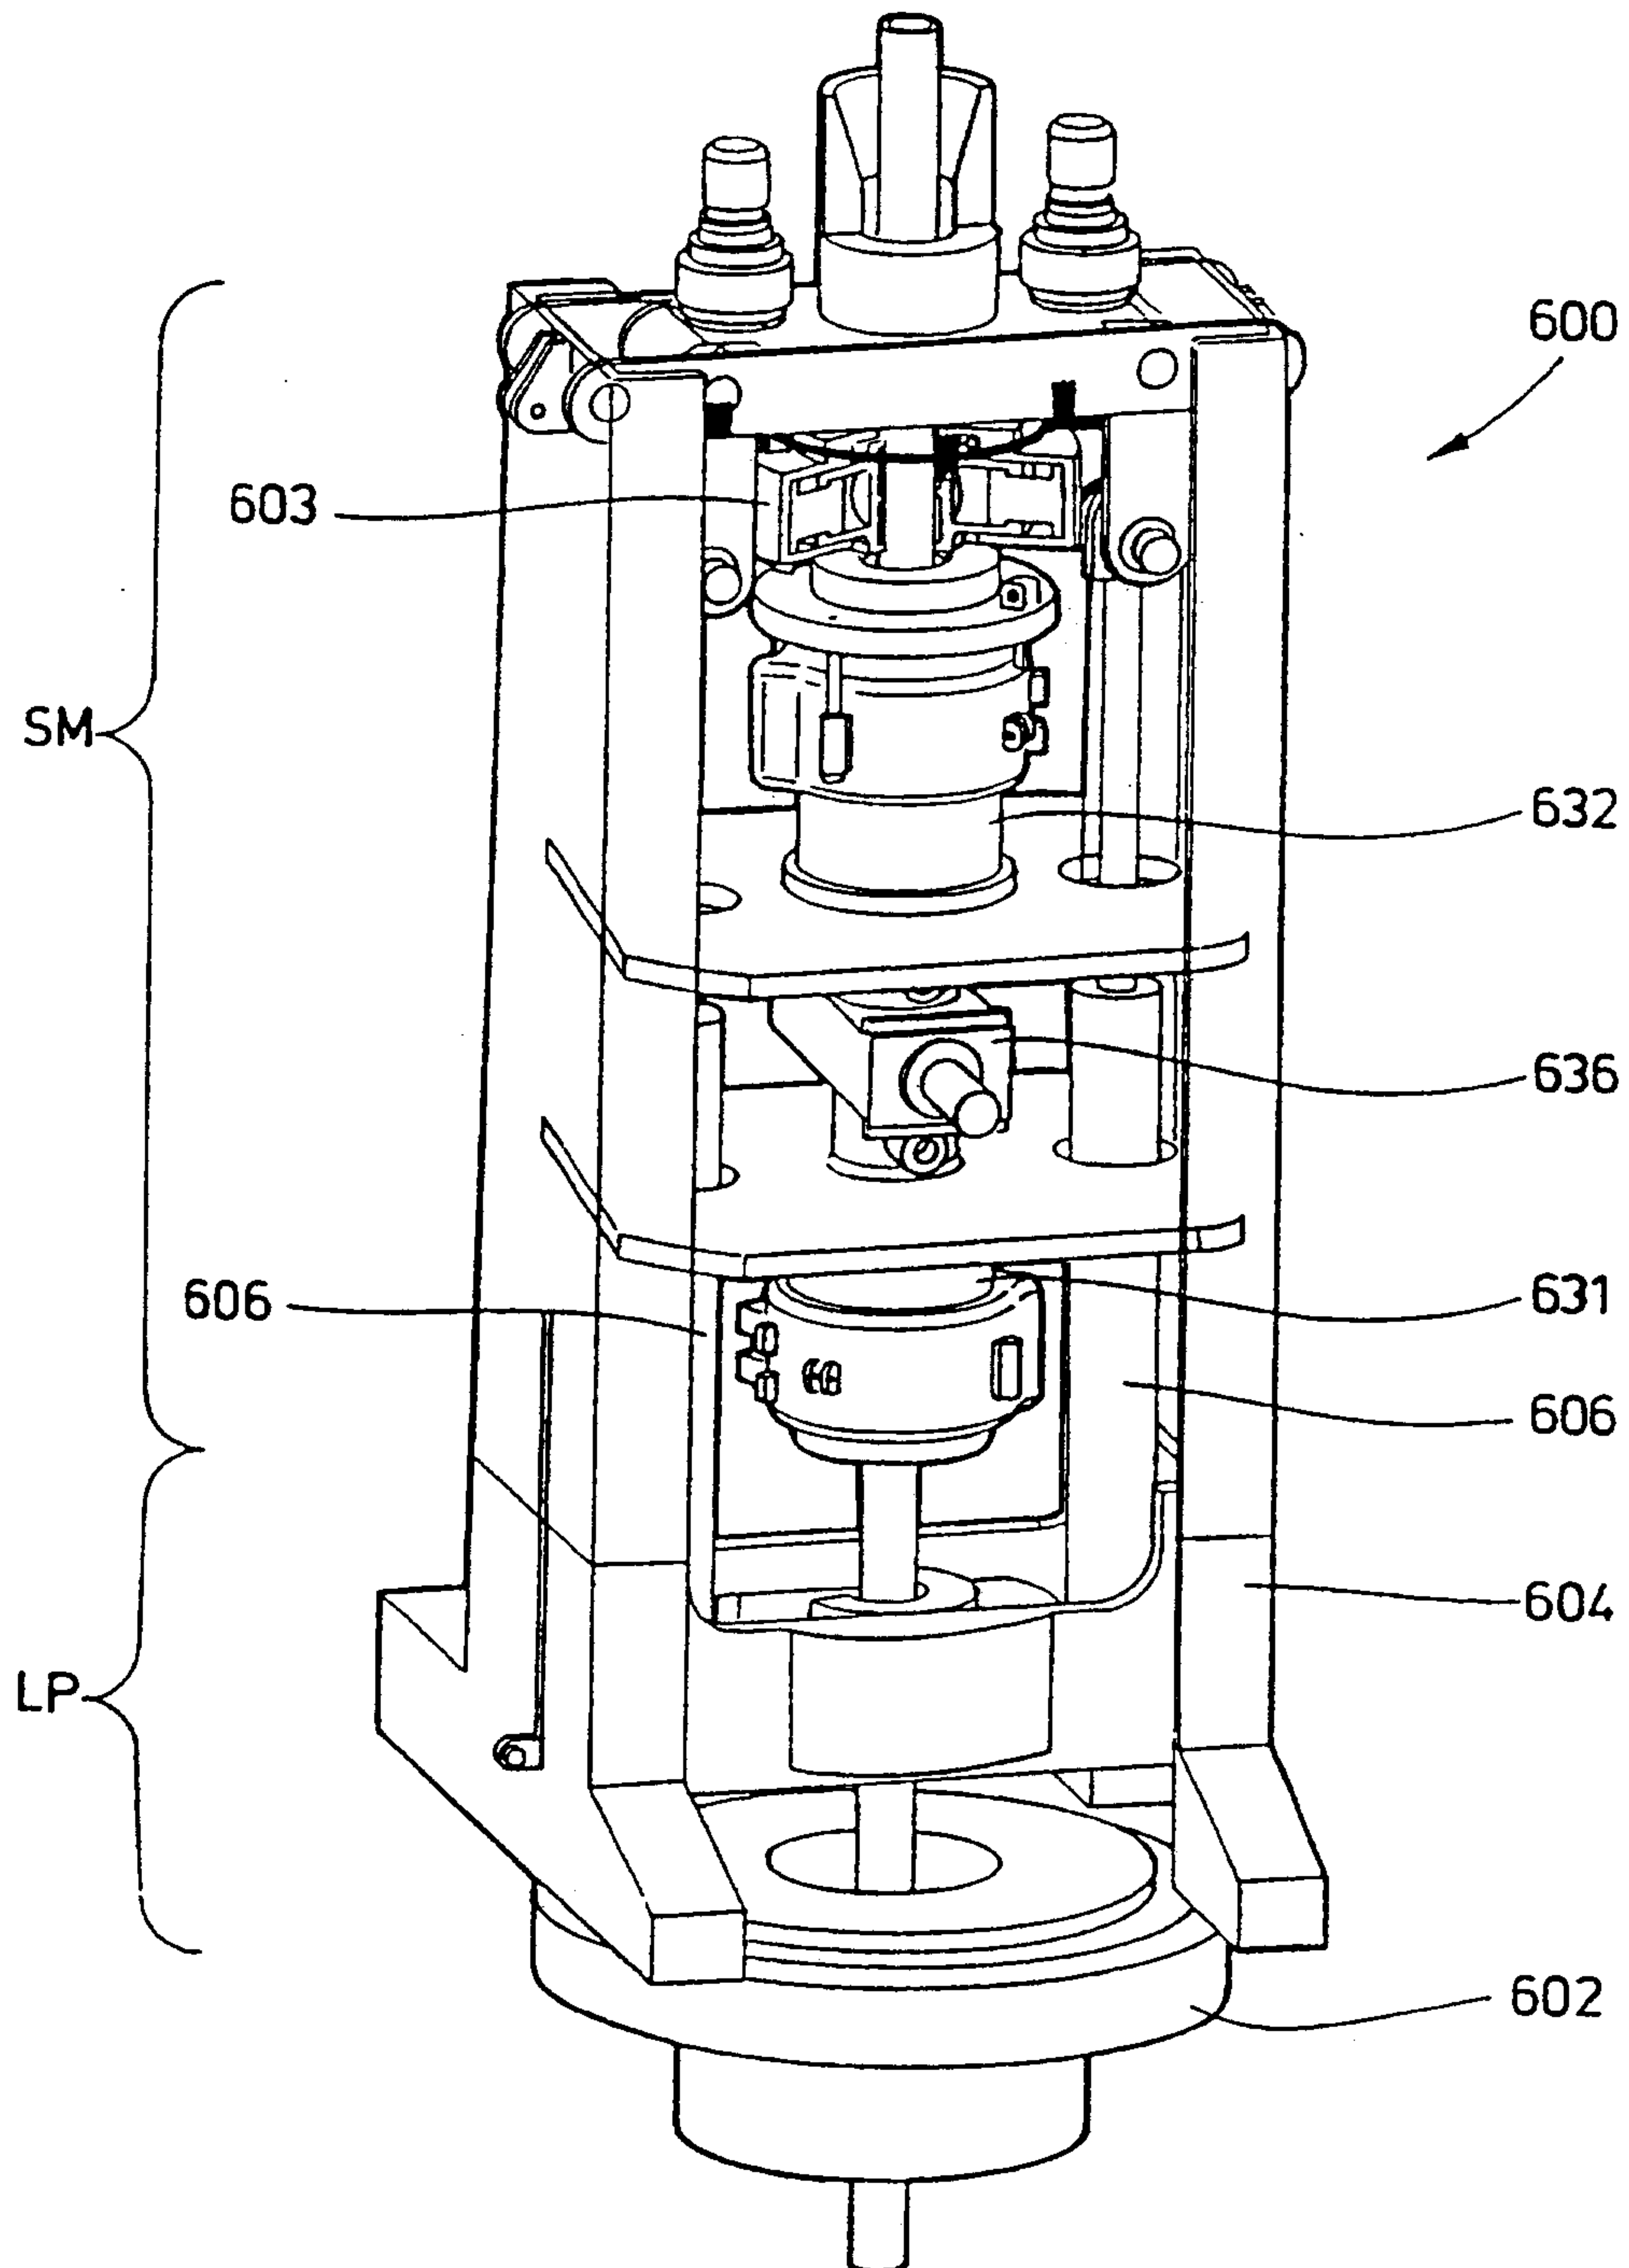


FIG 16A

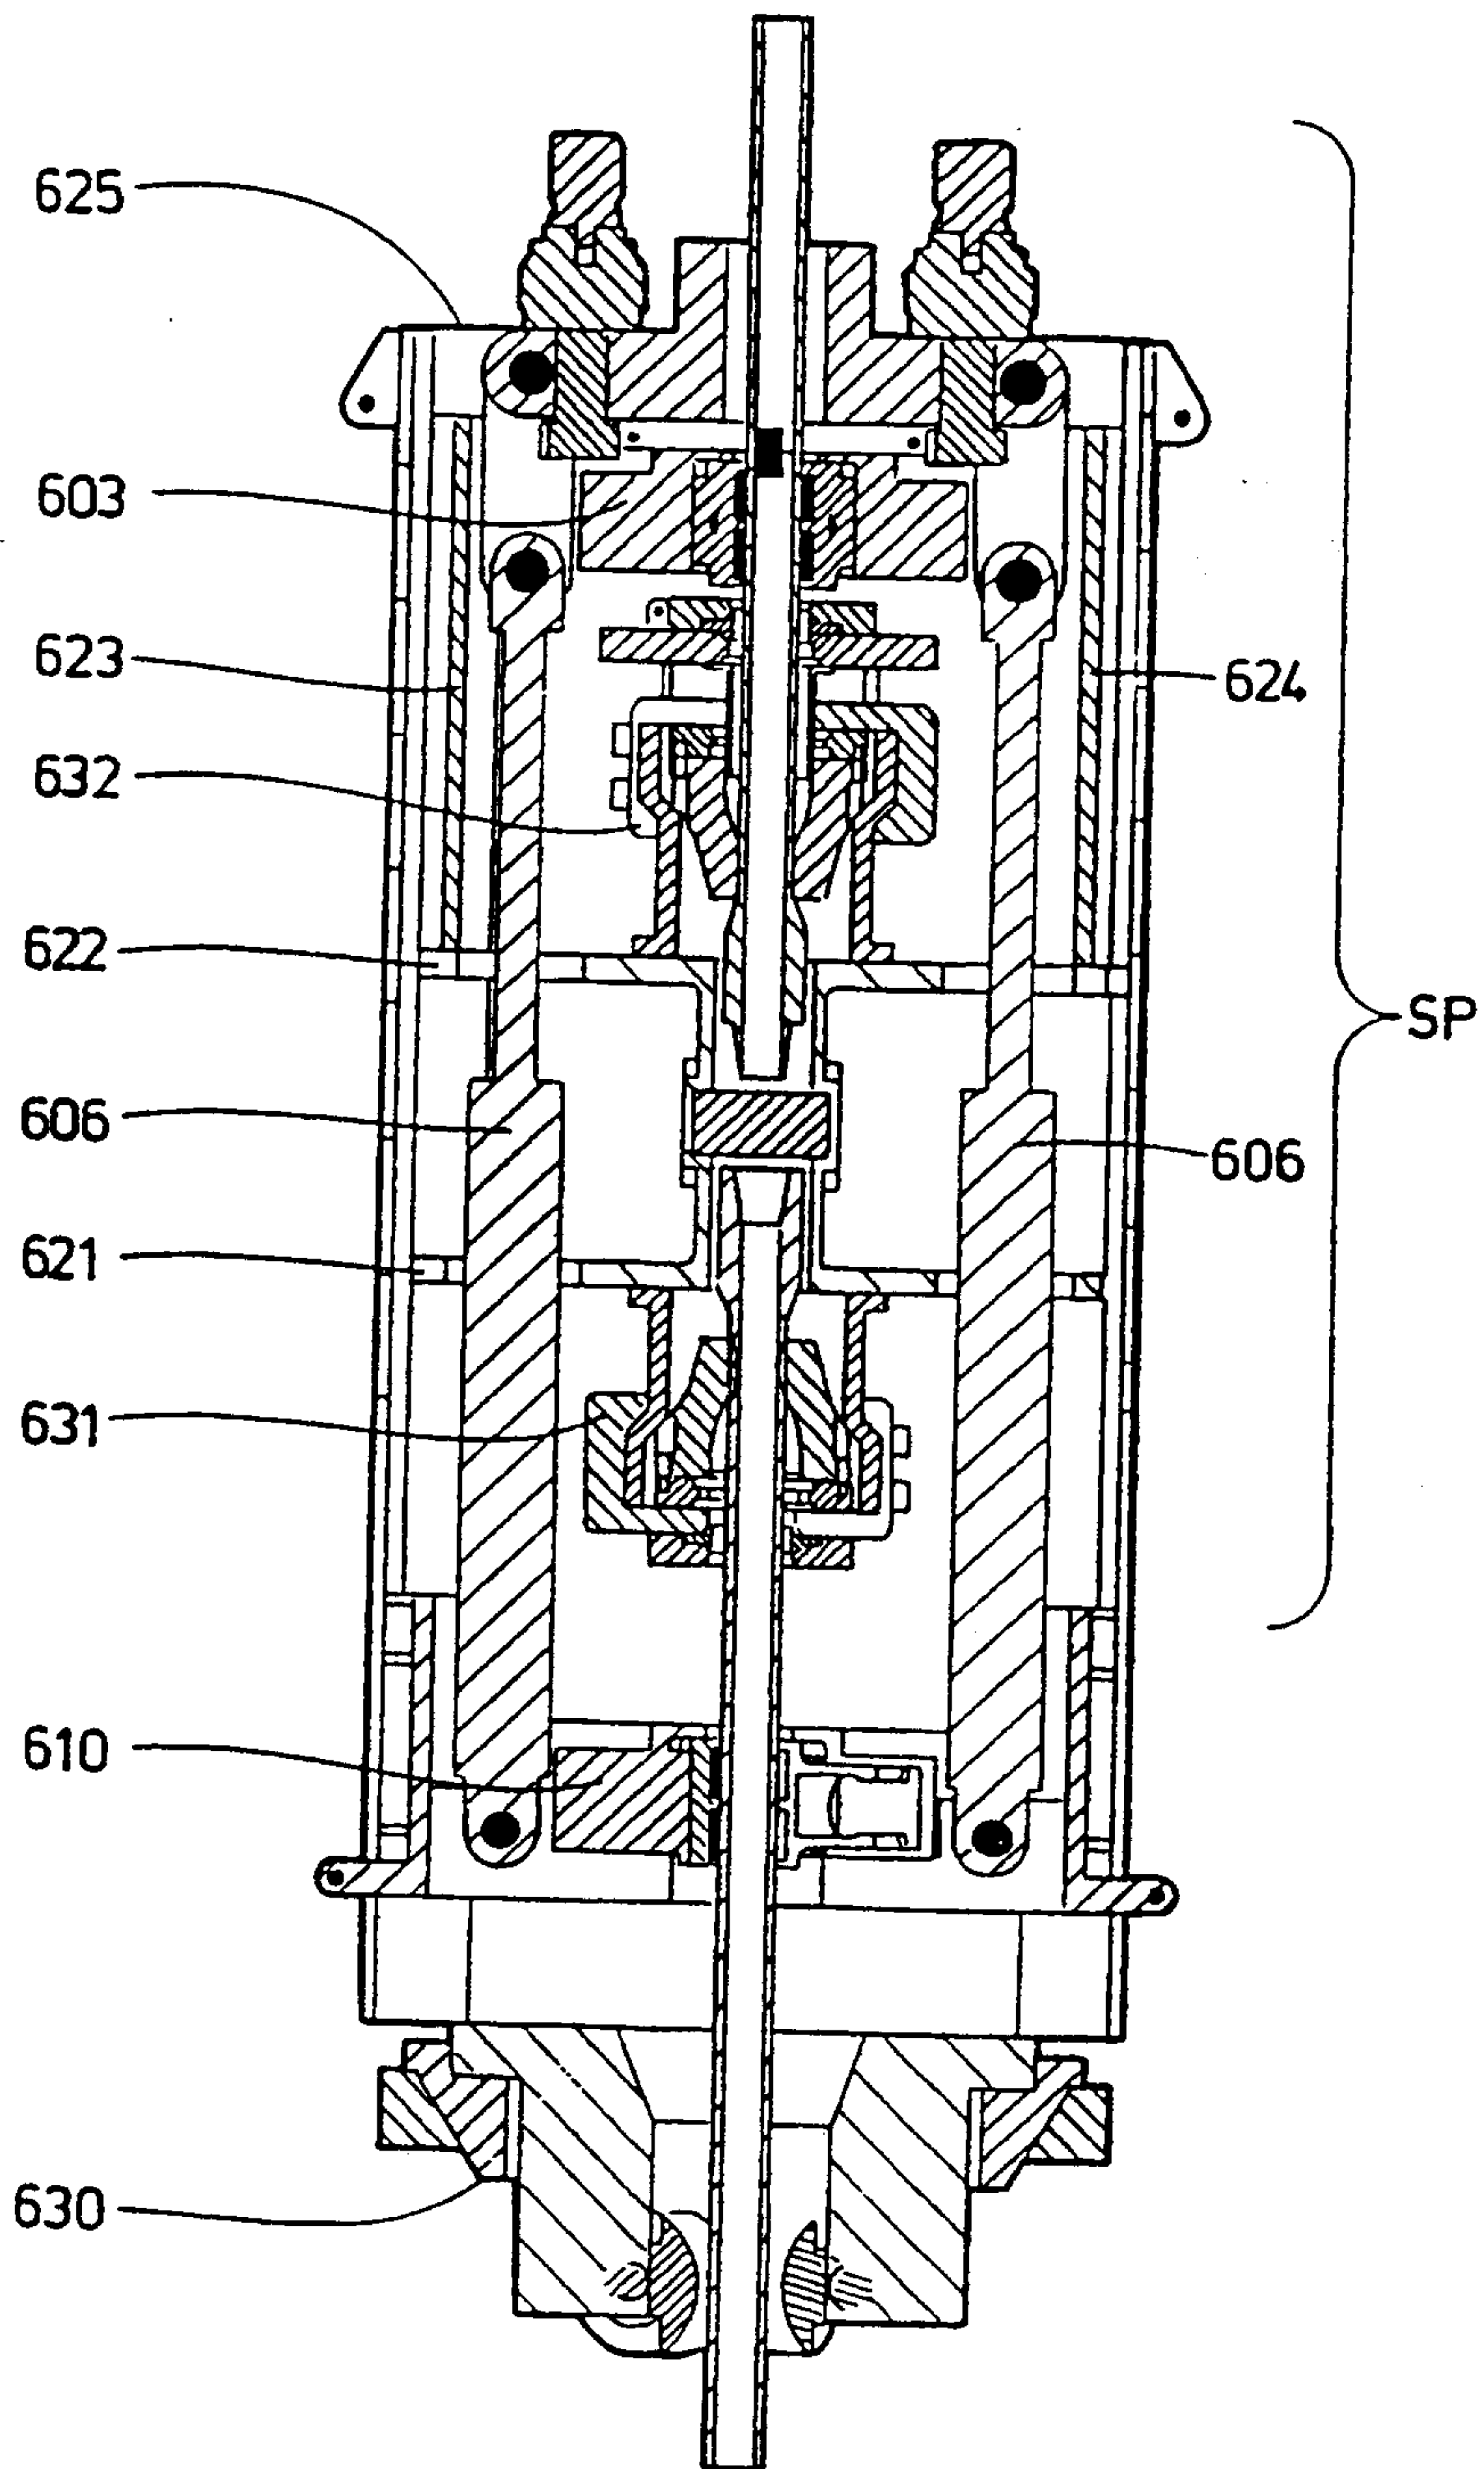


FIG 16 B



