



(86) Date de dépôt PCT/PCT Filing Date: 2011/08/12
 (87) Date publication PCT/PCT Publication Date: 2012/03/22
 (85) Entrée phase nationale/National Entry: 2013/02/27
 (86) N° demande PCT/PCT Application No.: US 2011/047503
 (87) N° publication PCT/PCT Publication No.: 2012/036811
 (30) Priorité/Priority: 2010/09/13 (US61/382,040)

(51) Cl.Int./Int.Cl. *A23P 1/00* (2006.01)
 (71) Demandeur/Applicant:
 HUSKY INJECTION MOLDING SYSTEMS LTD., CA
 (72) Inventeurs/Inventors:
 ST.GELAIS, THOMAS ANTHONY, US;
 BLAIS, PAUL R., US
 (74) Agent: HUSKY INTELLECTUAL PROPERTY
 SERVICES

(54) Titre : SYSTEME D'OUTIL DE MOULAGE AVEC ENSEMBLE ACTIONNEUR COMPRENANT UN ENSEMBLE PISTON ET UN ENSEMBLE MEMBRANE SOUPLE
 (54) Title: MOLD-TOOL SYSTEM HAVING ACTUATOR ASSEMBLY INCLUDING PISTON ASSEMBLY AND FLEXIBLE DIAPHRAGM ASSEMBLY

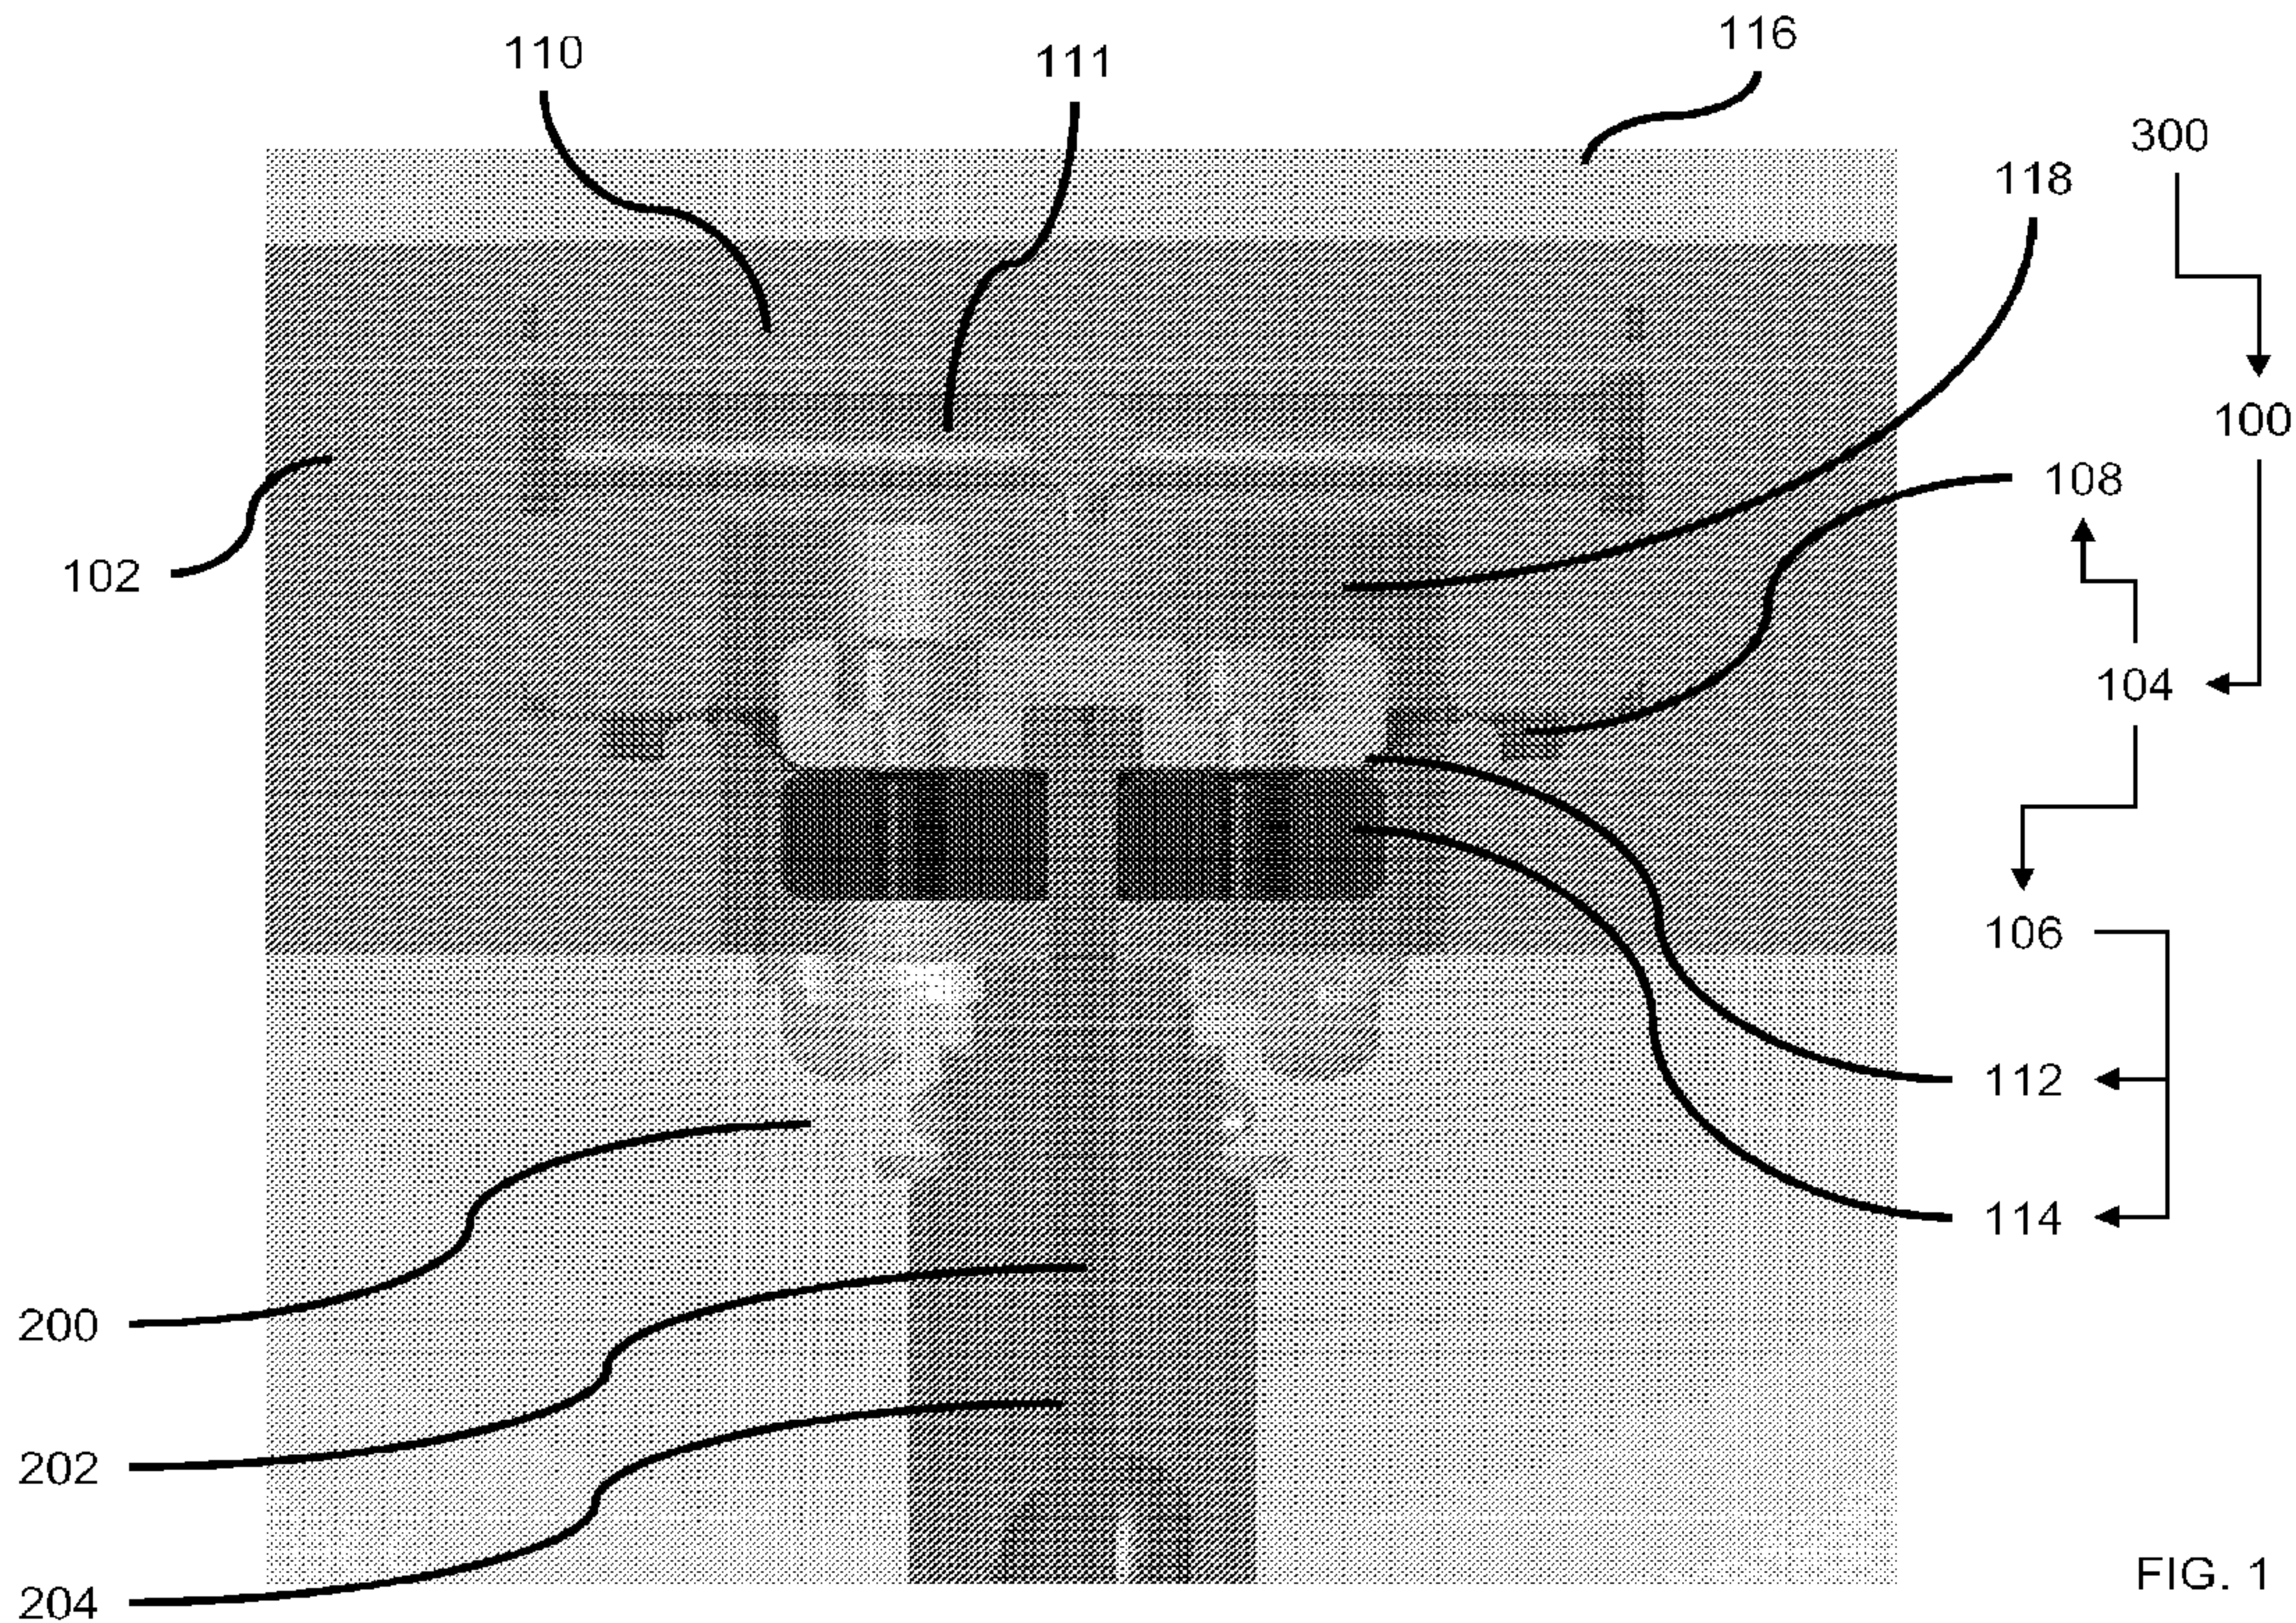


FIG. 1

(57) Abrégé/Abstract:

A mold-tool system (100), comprising: a stationary plate (102); and an actuator assembly (104) being supported by the stationary plate (102), the actuator assembly (104) having: a piston assembly (106) being movable in the stationary plate (102); and a flexible diaphragm assembly (108) being connected with the piston assembly (106) and with the stationary plate (102).



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
22 March 2012 (22.03.2012)(10) International Publication Number
WO 2012/036811 A1(51) International Patent Classification:
A23P 1/00 (2006.01)(21) International Application Number:
PCT/US2011/047503(22) International Filing Date:
12 August 2011 (12.08.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/382,040 13 September 2010 (13.09.2010) US(71) Applicant (for all designated States except US): **HUSKY INJECTION MOLDING SYSTEMS LTD** [CA/CA];
500 Queen Street South, Bolton, Ontario L7E 5S5 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ST.GELAIS, Thomas, Anthony** [US/US]; 531 Belair Drive, Colchester, Vermont 05446 (US). **BLAIS, Paul R.** [US/US]; 94 Butler Drive, South Burlington, Vermont 05403 (US).(74) Agent: **MUSGRAVE, Richard J.**; 288 North Road, Milton, Vermont 05468 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: MOLD-TOOL SYSTEM HAVING ACTUATOR ASSEMBLY INCLUDING PISTON ASSEMBLY AND FLEXIBLE DIAPHRAGM ASSEMBLY

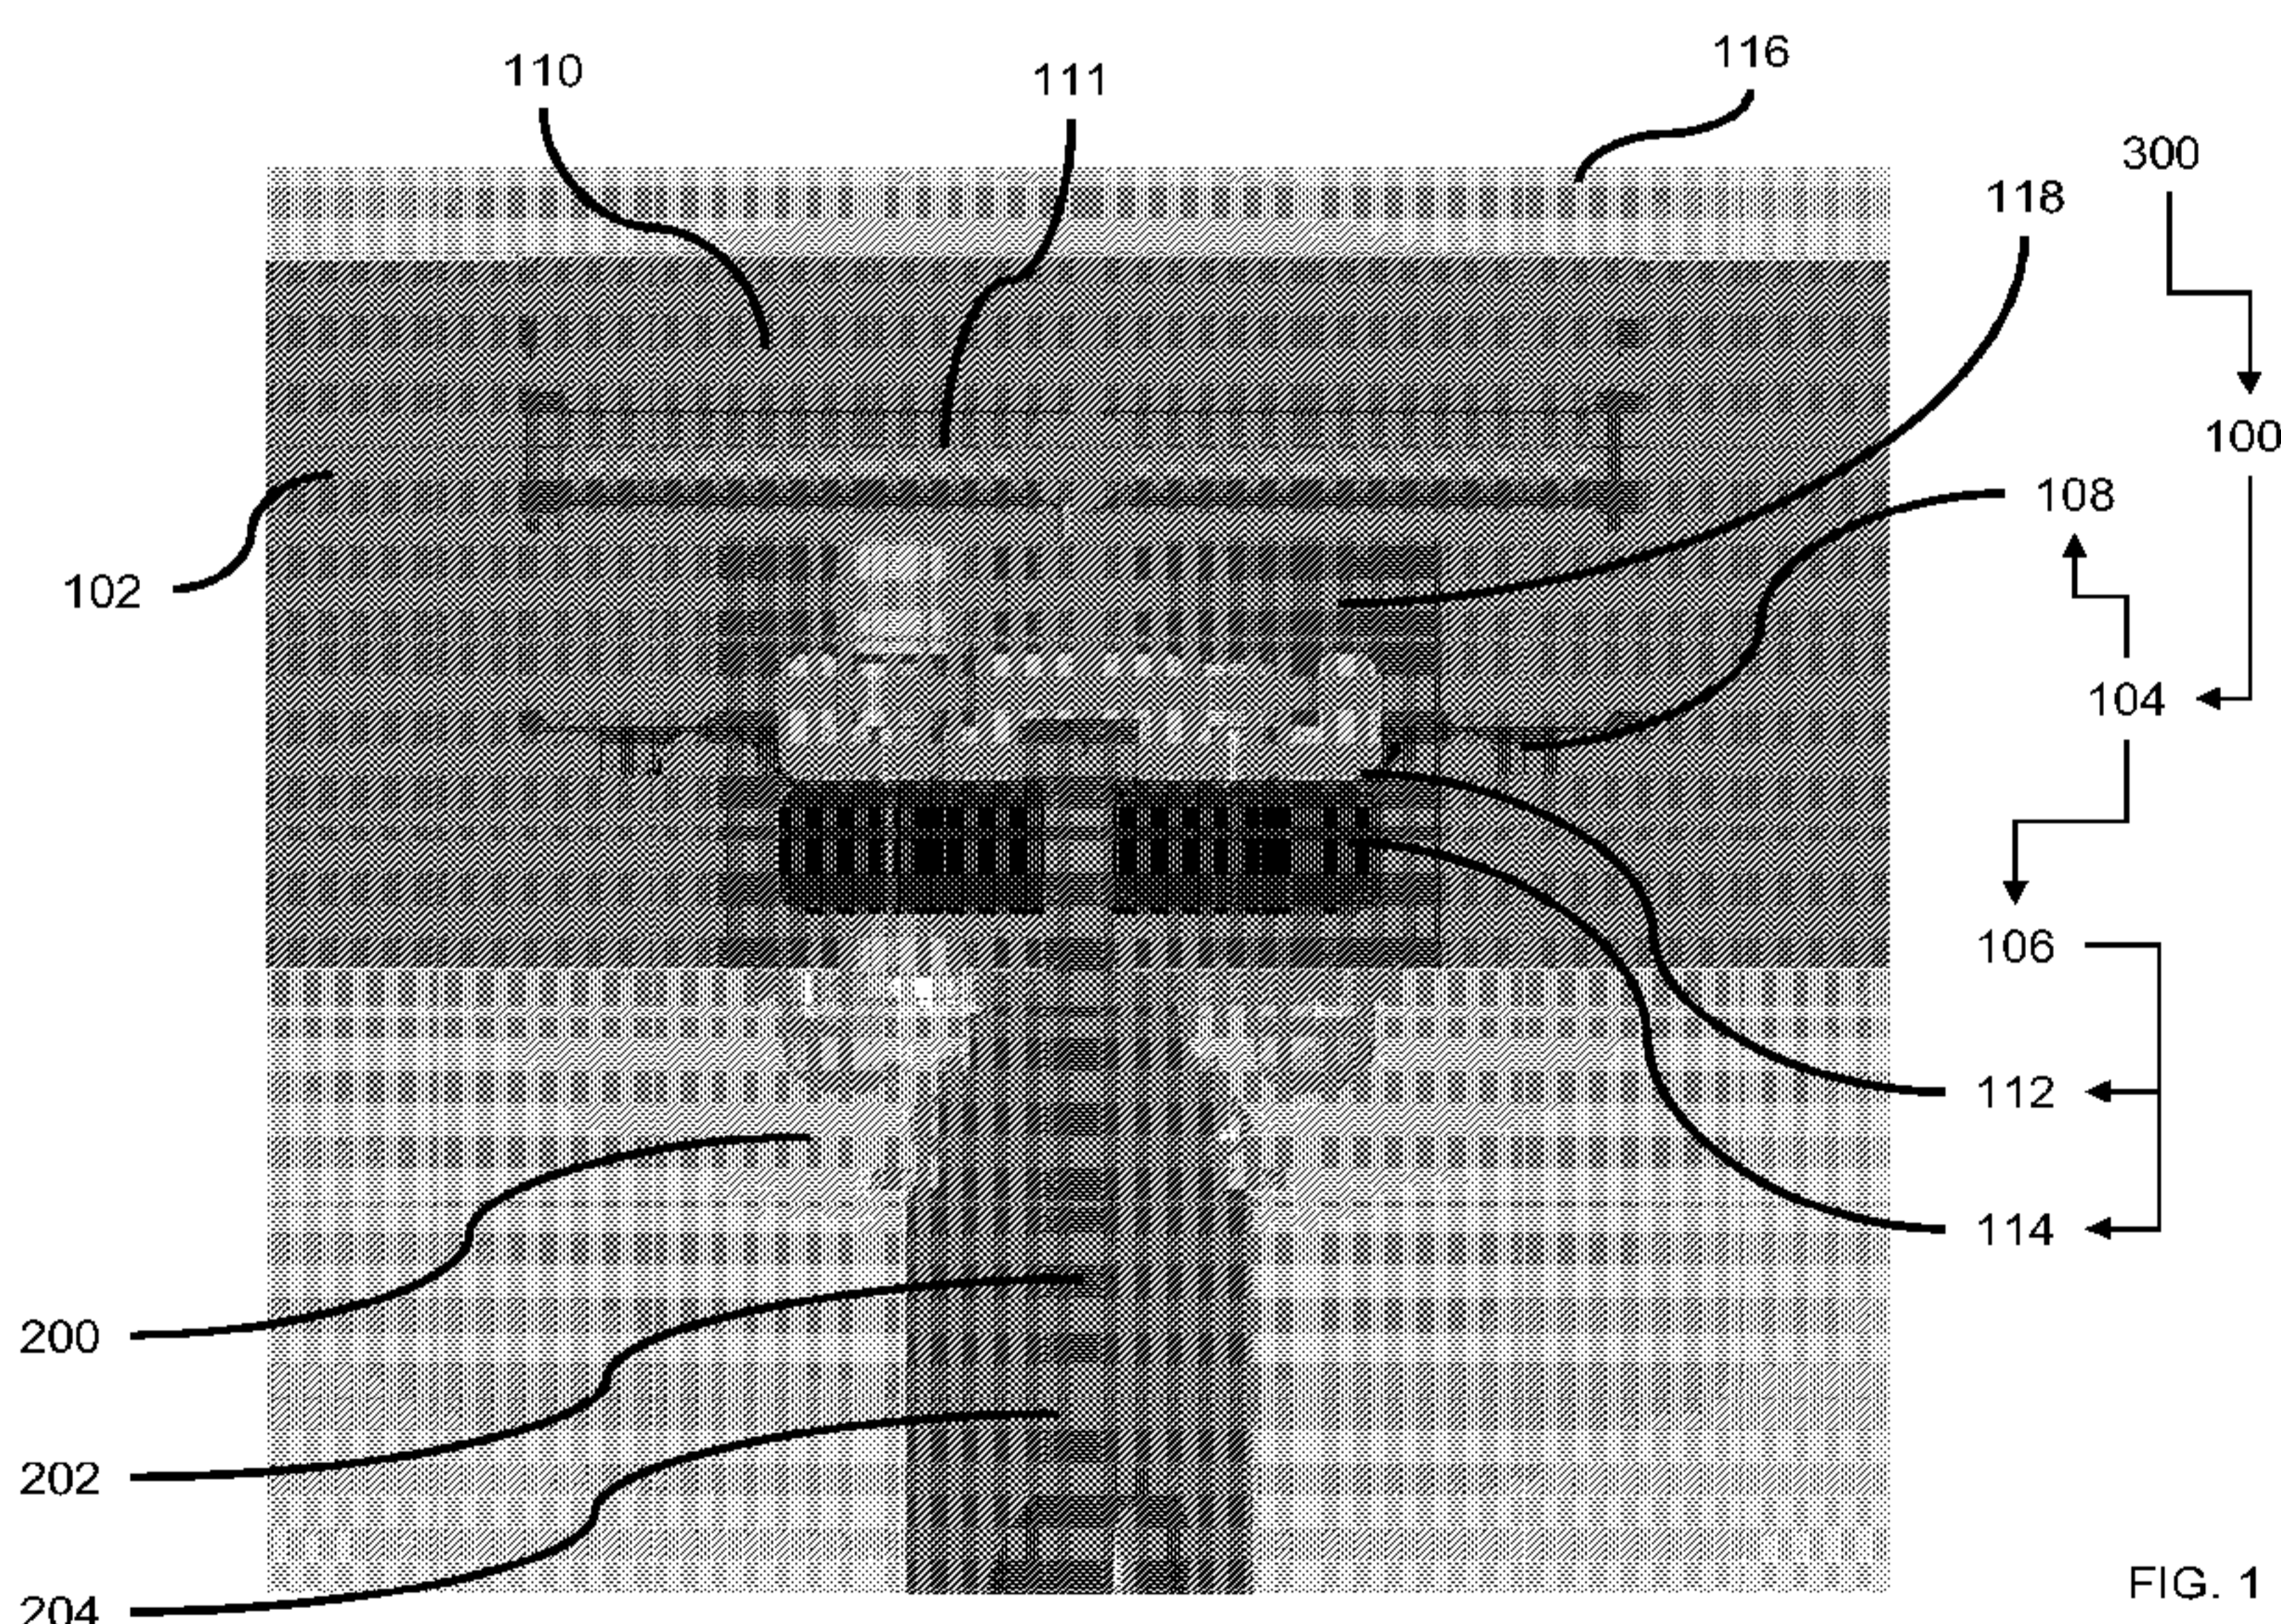


FIG. 1

(57) Abstract: A mold-tool system (100), comprising: a stationary plate (102); and an actuator assembly (104) being supported by the stationary plate (102), the actuator assembly (104) having: a piston assembly (106) being movable in the stationary plate (102); and a flexible diaphragm assembly (108) being connected with the piston assembly (106) and with the stationary plate (102).



WO 2012/036811 A1

**MOLD-TOOL SYSTEM HAVING ACTUATOR ASSEMBLY INCLUDING PISTON
ASSEMBLY AND FLEXIBLE DIAPHRAGM ASSEMBLY**

TECHNICAL FIELD

An aspect generally relates to (but is not limited to): (i) a mold-tool system having an actuator assembly including a piston assembly, and a flexible diaphragm assembly, and/or a molding system having the mold-tool system.

BACKGROUND

The first man-made plastic was invented in Britain in 1851 by Alexander PARKES. He publicly demonstrated it at the 1862 International Exhibition in London, calling the material Parkesine. Derived from cellulose, Parkesine could be heated, molded, and retain its shape when cooled. It was, however, expensive to produce, prone to cracking, and highly flammable. In 1868, American inventor John Wesley HYATT developed a plastic material he named Celluloid, improving on PARKES' concept so that it could be processed into finished form. HYATT patented the first injection molding machine in 1872. It worked like a large hypodermic needle, using a plunger to inject plastic through a heated cylinder into a mold. The industry expanded rapidly in the 1940s because World War II created a huge demand for inexpensive, mass-produced products. In 1946, American inventor James Watson HENDRY built the first screw injection machine. This machine also allowed material to be mixed before injection, so that colored or recycled plastic could be added to virgin material and mixed thoroughly before being injected. In the 1970s, HENDRY went on to develop the first gas-assisted injection molding process. Injection molding machines consist of a material hopper, an injection ram or screw-type plunger, and a heating unit. They are also known as presses, they hold the molds in which the components are shaped. Presses are rated by tonnage, which expresses the amount of clamping force that the machine can exert. This force keeps the mold closed during the injection process. Tonnage can vary from less than five tons to 6000 tons, with the higher figures used in comparatively few manufacturing operations. The amount of total clamp force is determined by the projected area of the part being molded. This projected area is multiplied by a clamp force of from two to eight tons for each square inch of the projected areas. As a rule of thumb, four or five tons per square inch can be used for most products. If the plastic material is very stiff, more injection pressure may be needed to fill the mold, thus more clamp tonnage to hold the mold closed. The required force can also be determined by the material used and the size of the part, larger parts require higher clamping force. With Injection Molding, granular

plastic is fed by gravity from a hopper into a heated barrel. As the granules are slowly moved forward by a screw-type plunger, the plastic is forced into a heated chamber, where it is melted. As the plunger advances, the melted plastic is forced through a nozzle that rests against the mold, allowing it to enter the mold cavity through a gate and runner system. The mold remains cold so the plastic solidifies almost as soon as the mold is filled. Mold assembly or die are terms used to describe the tooling used to produce plastic parts in molding. The mold assembly is used in mass production where thousands of parts are produced. Molds are typically constructed from hardened steel, etc. Hot-runner systems are used in molding systems, along with mold assemblies, for the manufacture of plastic articles. Usually, hot-runners systems and mold assemblies are treated as tools that may be sold and supplied separately from molding systems.

United States Patent Application Number 2006/0222730 discloses an injection molding machine that includes a nozzle member and a diaphragm member fixedly coupled within first mold section. The diaphragm member is generally an inverted T-shaped member threadedly engaged within nozzle member.

SUMMARY

The inventors have researched a problem associated with known molding systems that inadvertently manufacture bad-quality molded articles or parts. After much study, the inventors believe they have arrived at an understanding of the problem and its solution, which are stated below, and the inventors believe this understanding is not known to the public. Known systems create friction between a piston seal and an air cylinder. The increased friction reduces efficiency of a pneumatic actuator. Air pressure that could be used to apply force to the valve stem is used to overcome friction. Since there are manufacturing tolerances between installations, friction is not the same in all cylinders. Friction variability creates non-synchronous valve stem actuation. The double-delta creates 60% of the non-synchronous valve stem actuation. Piston seal to a cylinder interface wears over time. The wear results in two issues: (i) air leakage and (ii) scoring of the cylinder resulting in permanent damage. The high pre-load on the double delta results in permanent deformation of the cylinder and requires replacement. Known installations require special tools due to high installation forces.

According to one aspect, there is provided a mold-tool system (**100**), comprising: a stationary plate (**102**); and an actuator assembly (**104**) being supported by the stationary

plate (102), the actuator assembly (104) having: a piston assembly (106) being movable in the stationary plate (102); and a flexible diaphragm assembly (108) being connected with the piston assembly (106) and with the stationary plate (102).

According to another aspect, there is provided a molding system (300) having the mold-tool system (100).

Use of a diaphragm assembly (108) may have the following advantages: (i) lower friction, (ii) reduced wear, (iii) reduced air leakage, (iv) easier installation, (v) enable higher stem force for same diameter and air pressure, and/or (vi) more compliant than the known piston/cylinder assembly.

Other aspects and features of the non-limiting embodiments will now become apparent to those skilled in the art upon review of the following detailed description of the non-limiting embodiments with the accompanying drawings.

DETAILED DESCRIPTION OF THE DRAWINGS

The non-limiting embodiments will be more fully appreciated by reference to the following detailed description of the non-limiting embodiments when taken in conjunction with the accompanying drawings, in which:

FIGS. 1, 2A, 2B depict schematic representations of a mold-tool system (100).

The drawings are not necessarily to scale and may be illustrated by phantom lines, diagrammatic representations and fragmentary views. In certain instances, details not necessary for an understanding of the embodiments (and/or details that render other details difficult to perceive) may have been omitted.

DETAILED DESCRIPTION OF THE NON-LIMITING EMBODIMENT(S)

FIGS. 1, 2A, 2B depict the schematic representations of the mold-tool system (100) of a molding system (300). FIGS. 1 and 2B depict cross-sectional views and FIG. 2A depicts a perspective view of the mold-tool system (100). The mold-tool system (100) and the molding system (300) may be provided together or may be sold separately; that is, the molding system (300) may have the mold-tool system (100). These systems may include components that are known to persons skilled in the art, and these known components will

not be described here. Examples of the known components are: back-up pad (**200**), a stem (**202**), a nozzle housing (**204**), etc. These known components are described, at least in part, in the following reference books (for example): (i) "Injection Molding Handbook" authored by OSSWALD/TURNING/GRAMANN (ISBN: 3-446-21669-2), (ii) "Injection Molding Handbook" authored by ROSATO AND ROSATO (ISBN: 0-412-99381-3), (iii) "Injection Molding Systems" 3rd Edition authored by JOHANNABER (ISBN 3-446-17733-7) and/or (iv) "Runner and Gating Design Handbook" authored by BEAUMONT (ISBN 1-446-22672-9). It will be appreciated that for the purposes of this document, the phrase "includes (but is not limited to)" is equivalent to the word "comprising". The word "comprising" is a transitional phrase or word that links the preamble of a patent claim to the specific elements set forth in the claim which define what the invention itself actually is. The transitional phrase acts as a limitation on the claim, indicating whether a similar device, method, or composition infringes the patent if the accused device (etc) contains more or fewer elements than the claim in the patent. The word "comprising" is to be treated as an open transition, which is the broadest form of transition, as it does not limit the preamble to whatever elements are identified in the claim.

The mold-tool system (**100**) includes (but is not limited to): (i) a stationary plate (**102**), and (ii) an actuator assembly (**104**). The actuator assembly (**104**) is supported by the stationary plate (**102**). The actuator assembly (**104**) has (and is not limited to): (i) a piston assembly (**106**), and (ii) a flexible diaphragm assembly (**108**). The piston assembly (**106**) is movable in the stationary plate (**102**). The flexible diaphragm assembly (**108**) is connected with the piston assembly (**106**) and with the stationary plate (**102**).

The mold-tool system (**100**) may further include (and is not limited to): a fluid-delivery assembly (**110**) that is configured to deliver a fluid, under pressure, to the actuator assembly (**104**). The stationary plate (**102**) receives, at least in part, the fluid-delivery assembly (**110**). The fluid-delivery assembly (**110**) may be positioned adjacent the actuator assembly (**104**). The piston assembly (**106**) may optionally include (by way of example): (i) a first portion (**112**), and (ii) a second portion (**114**), and the flexible diaphragm assembly (**108**) is positioned between the first portion (**112**) and the second portion (**114**).

The stationary plate (**102**) may define a recess that is configured to receive, at least in part, the fluid-delivery assembly (**110**). The fluid-delivery assembly (**110**) may define a fluid-delivery channel (**111**) that is configured to deliver a fluid, under pressure, to the actuator

assembly (104). The combination of the fluid-delivery assembly (110) and the stationary plate (102) may define a fluid chamber (118). The fluid-delivery channel (111) is in communication with the fluid chamber (118). The piston assembly (106) may be received in the fluid chamber (118). The stationary plate (102) may define a groove (within the fluid chamber (118)) that fixedly receives, at least in part, an outer periphery of the flexible diaphragm assembly (108). The inner region of the flexible diaphragm assembly (108) may be fixedly held in place (that is, sandwiched) between the first portion (112) and the second portion (114) of the piston assembly (106). The stem (202) may be attached to the piston assembly (106).

For an actuation operation, the fluid (such as air, etc) is received, under pressure, in the fluid-delivery channel (111) and pushed into the fluid chamber (118) and the fluid then pushes the piston assembly (106) forward and the flexible diaphragm assembly (108) stretches so as to permit limited forward movement of the piston assembly (106) so that the stem (202) may be moved forward enough so that a molding material may be permitted to leave the nozzle housing (204) and enter a mold assembly (not depicted but known).

For a de-actuation operation, the fluid removed from the fluid-delivery channel (111) and from the fluid chamber (118), and the fluid then pulls the piston assembly (106) backward and the flexible diaphragm assembly (108) stretches in the opposite direction to that of the actuation operation so as to permit limited backward movement of the piston assembly (106) so that the stem (202) may be moved backward enough so that a molding material may be not be permitted to leave the nozzle housing (204) and enter the mold assembly.

It will be appreciated that the concept described above may be used for individual stem actuation, clustered stem actuation (such as four stems on one piston), and/or plate actuation.

It is understood that the scope of the present invention is limited to the scope provided by the independent claim(s), and it is also understood that the scope of the present invention is not limited to: (i) the dependent claims, (ii) the detailed description of the non-limiting embodiments, (iii) the summary, (iv) the abstract, and/or (v) description provided outside of this document (that is, outside of the instant application as filed, as prosecuted, and/or as granted). It is understood, for the purposes of this document, the phrase "includes (and is not limited to)" is equivalent to the word "comprising". It is noted that the foregoing has

outlined the non-limiting embodiments (examples). The description is made for particular non-limiting embodiments (examples). It is understood that the non-limiting embodiments are merely illustrative as examples.

CLAIMS**WHAT IS CLAIMED IS:**

- 5 1. A mold-tool system (100), comprising:
a stationary plate (102); and
an actuator assembly (104) being supported by the stationary plate (102), the
actuator assembly (104) having:
a piston assembly (106) being movable in the stationary plate (102); and
10 a flexible diaphragm assembly (108) being connected with the piston
assembly (106) and with the stationary plate (102).
2. The mold-tool system (100) of claim 1, further comprising:
a fluid-delivery assembly (110) being configured to deliver a fluid, under
15 pressure, to the actuator assembly (104), the stationary plate (102) receiving, at least
in part, the fluid-delivery assembly (110), and the fluid-delivery assembly (110) being
positioned adjacent the actuator assembly (104).
3. The mold-tool system (100) of claim 1, wherein:
20 the piston assembly (106) includes:
a first portion (112); and
a second portion (114), and the flexible diaphragm assembly (108) being
positioned between the first portion (112) and the second portion (114).
- 25 4. A molding system (300) having the mold-tool system (100) of claim 1.
5. The mold-tool system (100) of claim 1, wherein:
a stem (202) is attached to the piston assembly (106).
- 30 6. The mold-tool system (100) of claim 5, wherein:
for an actuation operation, a fluid is received, under pressure, in a fluid-
delivery channel (111) and pushed into a fluid chamber (118) and the fluid then
pushes the piston assembly (106) forward and the flexible diaphragm assembly
(108) stretches so as to permit limited forward movement of the piston assembly

(106) so that the stem (202) is moved forward enough so that a molding material may be permitted to leave a nozzle housing (204) and enter a mold assembly.

7. The mold-tool system (100) of claim 6, wherein:

5 for a de-actuation operation, the fluid is removed from the fluid-delivery channel (111) and from the fluid chamber (118), and the fluid then pulls the piston assembly (106) backward and the flexible diaphragm assembly (108) stretches in an opposite direction to that of the actuation operation so as to permit limited backward movement of the piston assembly (106) so that the stem (202) is moved backward
10 enough so that the molding material may be not be permitted to leave the nozzle housing (204) and enter the mold assembly.

8. The mold-tool system (100) of claim 5, wherein:

 the stationary plate (102) defines a recess configured to receive, at least in
15 part, a fluid-delivery assembly (110),
 the fluid-delivery assembly (110) defines a fluid-delivery channel (111)
 configured to deliver a fluid, under pressure, to the actuator assembly (104).

9. The mold-tool system (100) of claim 5, wherein:

20 a fluid-delivery assembly (110) and the stationary plate (102) define a fluid chamber (118),
 a fluid-delivery channel (111) is in communication with the fluid chamber (118),
 the piston assembly (106) is received in the fluid chamber (118),
 the stationary plate (102) defines a groove within the fluid chamber (118) that
25 fixedly receives, at least in part, an outer periphery of the flexible diaphragm assembly (108), and
 an inner region of the flexible diaphragm assembly (108) is fixedly held in place
 between a first portion (112) and a second portion (114) of the piston assembly (106).

PCT/US2011/047503 21.02.2012

Applicant's File No: H-7614-0-WO
International Application No: PCT/US2011/047503
International Filing Date: 12 August 2011
Page 2

AMENDMENTS TO THE CLAIMS

Listing of Claims:

1. (ORIGINAL) A mold-tool system (100), comprising:
 - a stationary plate (102); and
 - an actuator assembly (104) being supported by the stationary plate (102), the actuator assembly (104) having:
 - a piston assembly (106) being movable in the stationary plate (102); and
 - a flexible diaphragm assembly (108) being connected with the piston assembly (106) and with the stationary plate (102).
2. (ORIGINAL) The mold-tool system (100) of claim 1, further comprising:
 - a fluid-delivery assembly (110) being configured to deliver a fluid, under pressure, to the actuator assembly (104), the stationary plate (102) receiving, at least in part, the fluid-delivery assembly (110), and the fluid-delivery assembly (110) being positioned adjacent the actuator assembly (104).
3. (ORIGINAL) The mold-tool system (100) of claim 1, wherein:
 - the piston assembly (106) includes:
 - a first portion (112); and
 - a second portion (114), and the flexible diaphragm assembly (108) being positioned between the first portion (112) and the second portion (114).
4. (ORIGINAL) A molding system (300) having the mold-tool system (100) of claim 1.

PCT/US2011/047503 21.02.2012

Applicant's File No: H-7614-0-WO
International Application No: PCT/US2011/047503
International Filing Date: 12 August 2011
Page 3

5. (NEW) The mold-tool system (100) of claim 1, wherein:

a stem (202) is attached to the piston assembly (106).

6. (NEW) The mold-tool system (100) of claim 5, wherein:

for an actuation operation, a fluid is received, under pressure, in a fluid-delivery channel (111) and pushed into a fluid chamber (118) and the fluid then pushes the piston assembly (106) forward and the flexible diaphragm assembly (108) stretches so as to permit limited forward movement of the piston assembly (106) so that the stem (202) is moved forward enough so that a molding material may be permitted to leave a nozzle housing (204) and enter a mold assembly.

7. (NEW) The mold-tool system (100) of claim 6, wherein:

for a de-actuation operation, the fluid is removed from the fluid-delivery channel (111) and from the fluid chamber (118), and the fluid then pulls the piston assembly (106) backward and the flexible diaphragm assembly (108) stretches in an opposite direction to that of the actuation operation so as to permit limited backward movement of the piston assembly (106) so that the stem (202) is moved backward enough so that the molding material may be not be permitted to leave the nozzle housing (204) and enter the mold assembly.

8. (NEW) The mold-tool system (100) of claim 5, wherein:

the stationary plate (102) defines a recess configured to receive, at least in part, a fluid-delivery assembly (110),

the fluid-delivery assembly (110) defines a fluid-delivery channel (111) configured to deliver a fluid, under pressure, to the actuator assembly (104).

9. (NEW) The mold-tool system (100) of claim 5, wherein:

PCT/US2011/047503 21.02.2012

Applicant's File No: H-7614-0-WO
International Application No: PCT/US2011/047503
International Filing Date: 12 August 2011
Page 4

a fluid-delivery assembly (110) and the stationary plate (102) define a fluid chamber (118),

a fluid-delivery channel (111) is in communication with the fluid chamber (118),

the piston assembly (106) is received in the fluid chamber (118),

the stationary plate (102) defines a groove within the fluid chamber (118) that fixedly receives, at least in part, an outer periphery of the flexible diaphragm assembly (108), and

an inner region of the flexible diaphragm assembly (108) is fixedly held in place between a first portion (112) and a second portion (114) of the piston assembly (106).

PCT/US2011/047503 21.02.2012

Applicant's File No: H-7614-0-WO
International Application No: PCT/US2011/047503
International Filing Date: 12 August 2011
Page 5

REMARKS

Reconsideration for the subject application is respectfully requested.

STATUS OF THE CLAIMS

By way of this response to the Written Opinion:

Claims 1-4 are original; and

Claims 5-9 are new. Claim 5 depends from claim 1, and claims 6-9 depend from claim 5 (either directly or indirectly).

Support for claims 5-9 is fully provided by the Application as originally filed. No new matter has been added to the claims.

Applicant submits an amended application which includes the new claims 5-9.

Claims 5-9

Applicant believes claims 5-9 are novel over cited reference PECK.

Applicant believes that PECK fails to disclose the limitations of claim 5:

a stem (202) is attached to the piston assembly (106).

Applicant believes that the pending claims 5 to 9 should not be rejected on the basis of anticipation or lack of novelty because all the elements of the claimed invention are not described in the single reference. Further, the reference appears to fail to describe Applicant's claimed invention sufficiently to have placed a person of ordinary skill in the field of the invention in possession of it.

PCT/US2011/047503 21.02.2012

Applicant's File No: H-7614-0-WO
International Application No: PCT/US2011/047503
International Filing Date: 12 August 2011
Page 6

Anticipation requires that a reference must disclose each and every aspect of the claimed invention. Applicant respectfully submits that PECK does not disclose each and every element of the present invention as currently claimed in pending claims 5-9.

Applicant believes that a claim is anticipated only if each and every element as set forth in the claim is found, either expressly or inherently, described in a single prior art reference. The identical invention must be shown in as complete detail as contained in the claim. Further, the elements must be arranged as required by the claim. Nowhere in PECK does it disclose, inter alia, the limitations of claims 5 to 9. Accordingly, Applicant respectfully requests reconsideration for the pending claims.

Claims 1-4

At this time, Applicant is not prepared to respond to the Examiner's written opinion of claims 1-4.

PCT/US2011/047503 21.02.2012

Applicant's File No: H-7614-0-WO
International Application No: PCT/US2011/047503
International Filing Date: 12 August 2011
Page 7

CONCLUSION

In view of the above remarks, it is submitted that this application is now on condition for a favorable opinion: The Examiner is invited to telephone the undersigned, Applicant's Attorney of Record, to facilitate advancement of the present application. Applicant's undersigned Agent may be reached in Applicant's office by telephone at (802) 859-8157. All correspondence should continue to be directed to our below-listed address.

Respectfully submitted,

By

/Richard J. Musgrave/

Richard J. Musgrave, Esquire
Registration No. 44,960
Attorney for Applicant(s)
Husky Injection Molding Systems, Inc.
288 North Road
Milton, Vermont 05468
Telephone: (802) 859-8157
Facsimile: (802) 859-8499

RJM/jm

Attachments:

Amended Application including new claims 5-9

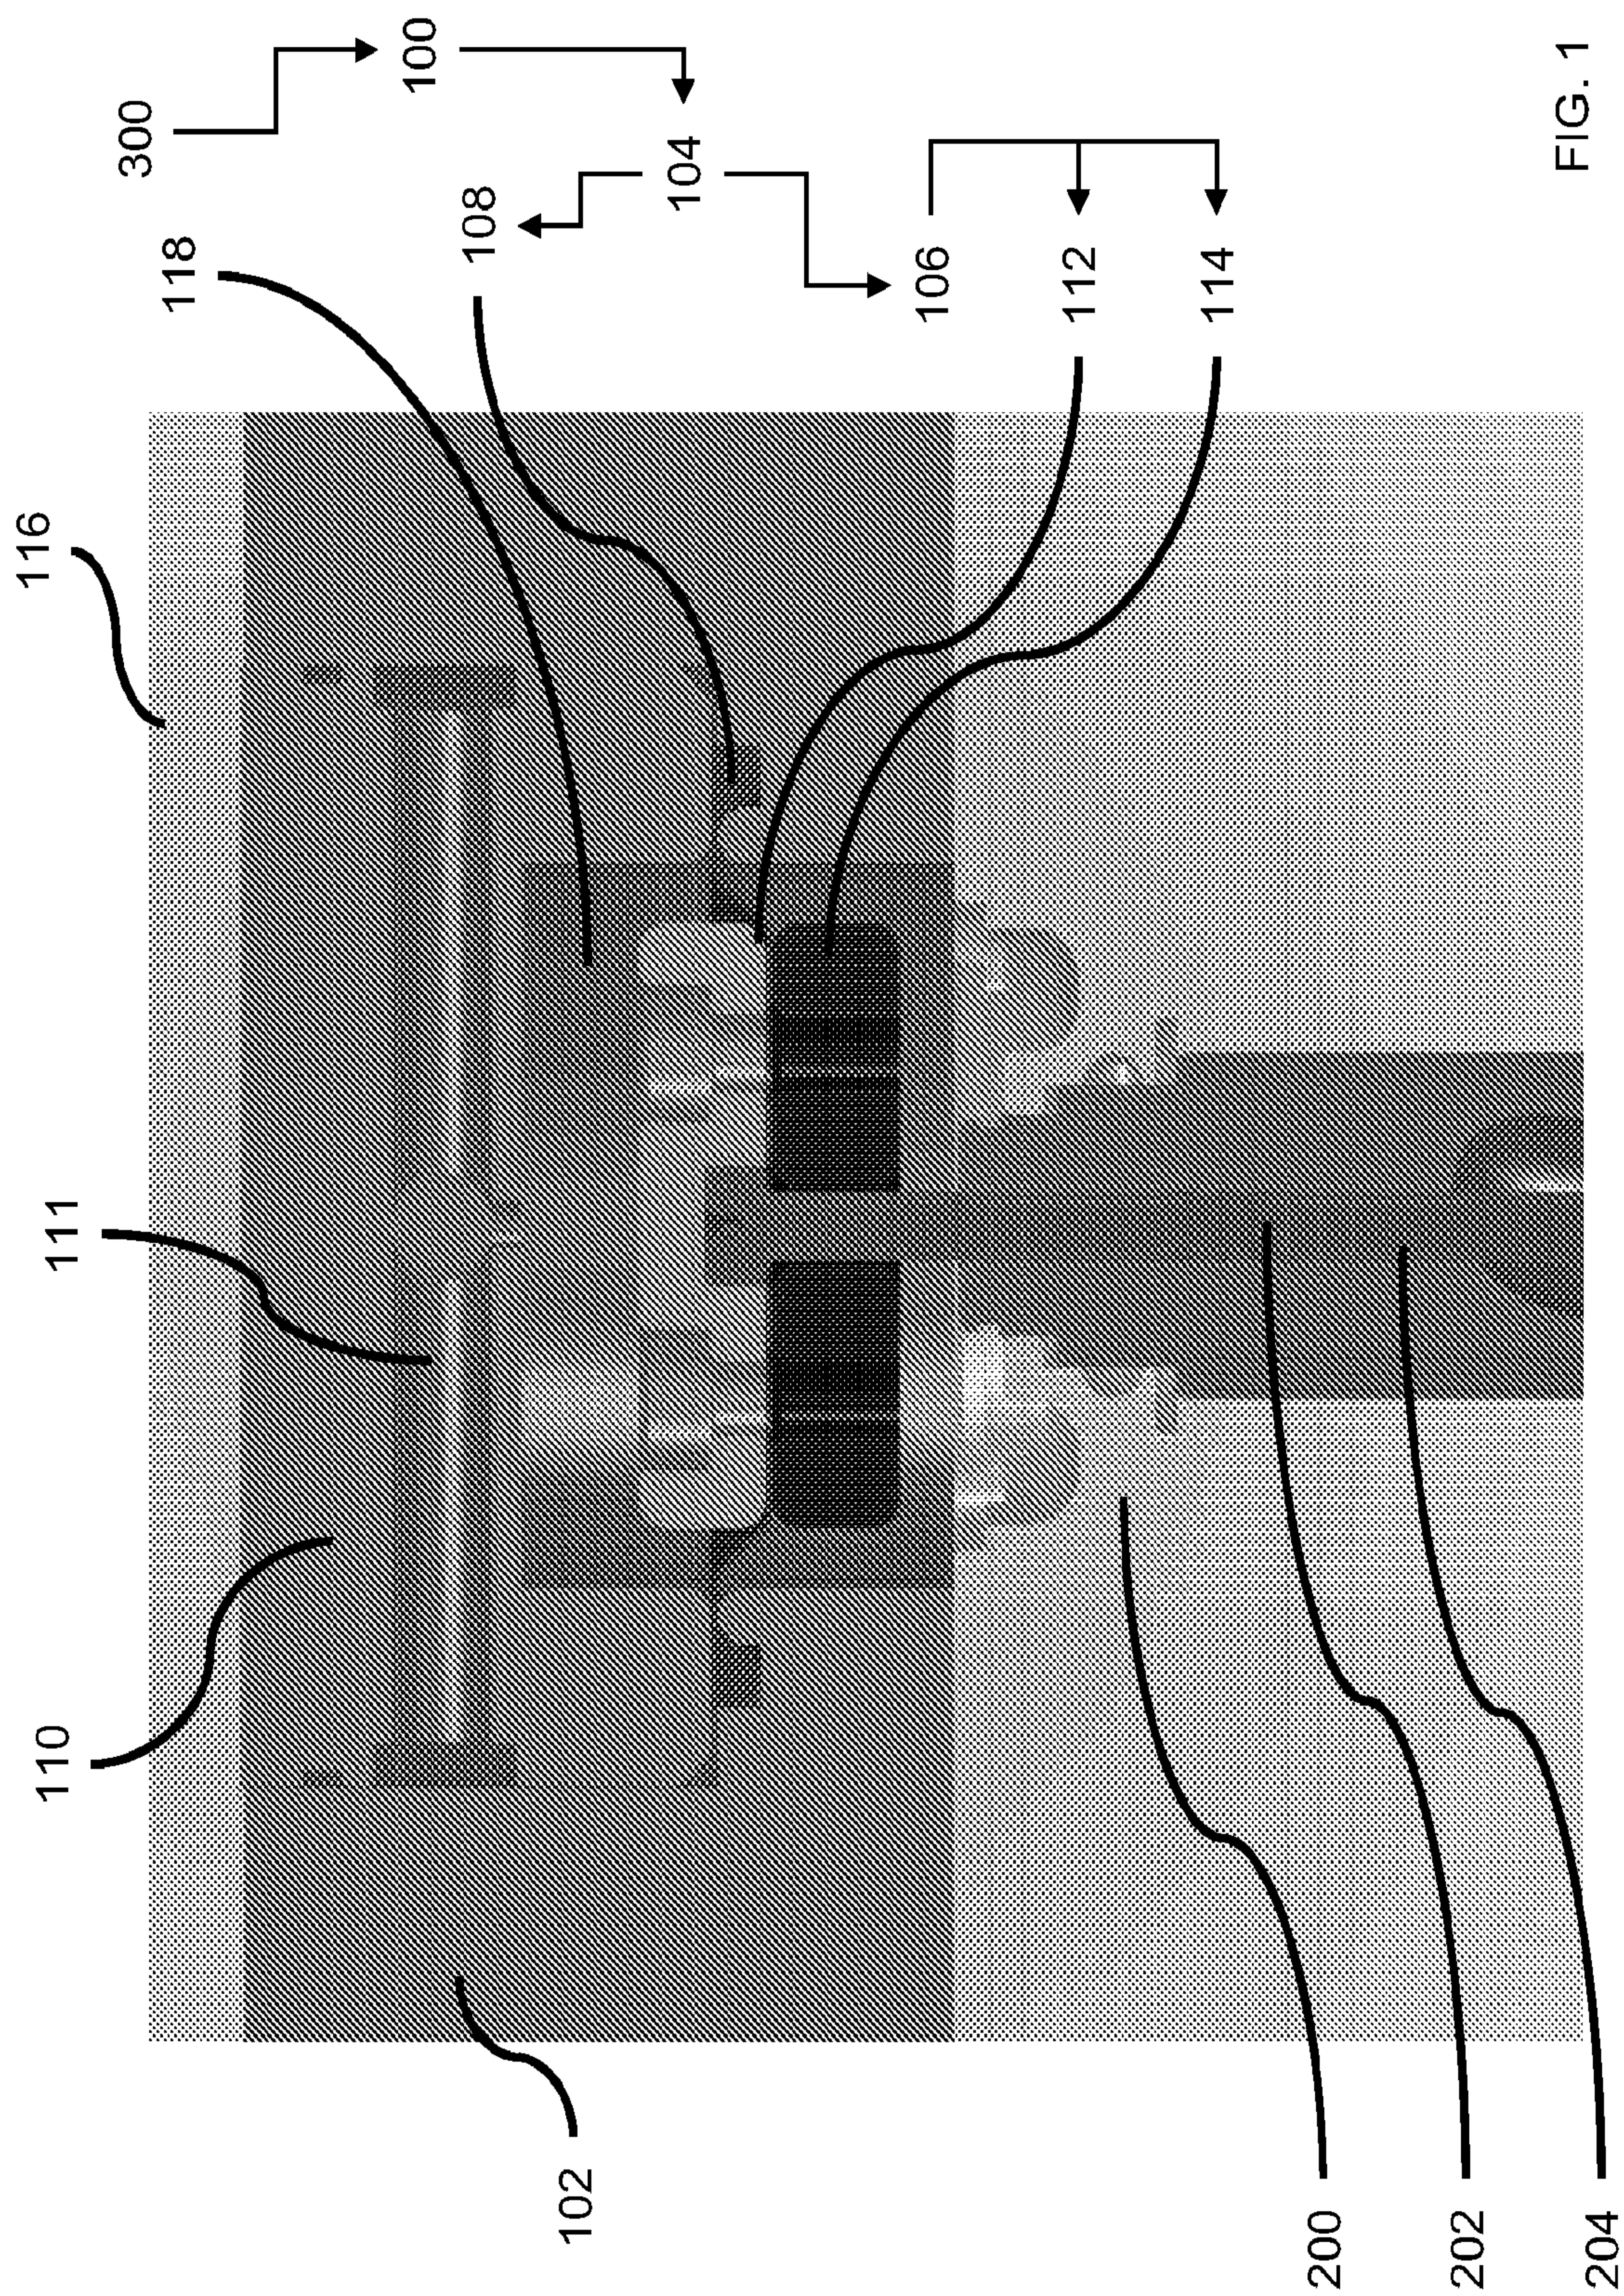


FIG. 1

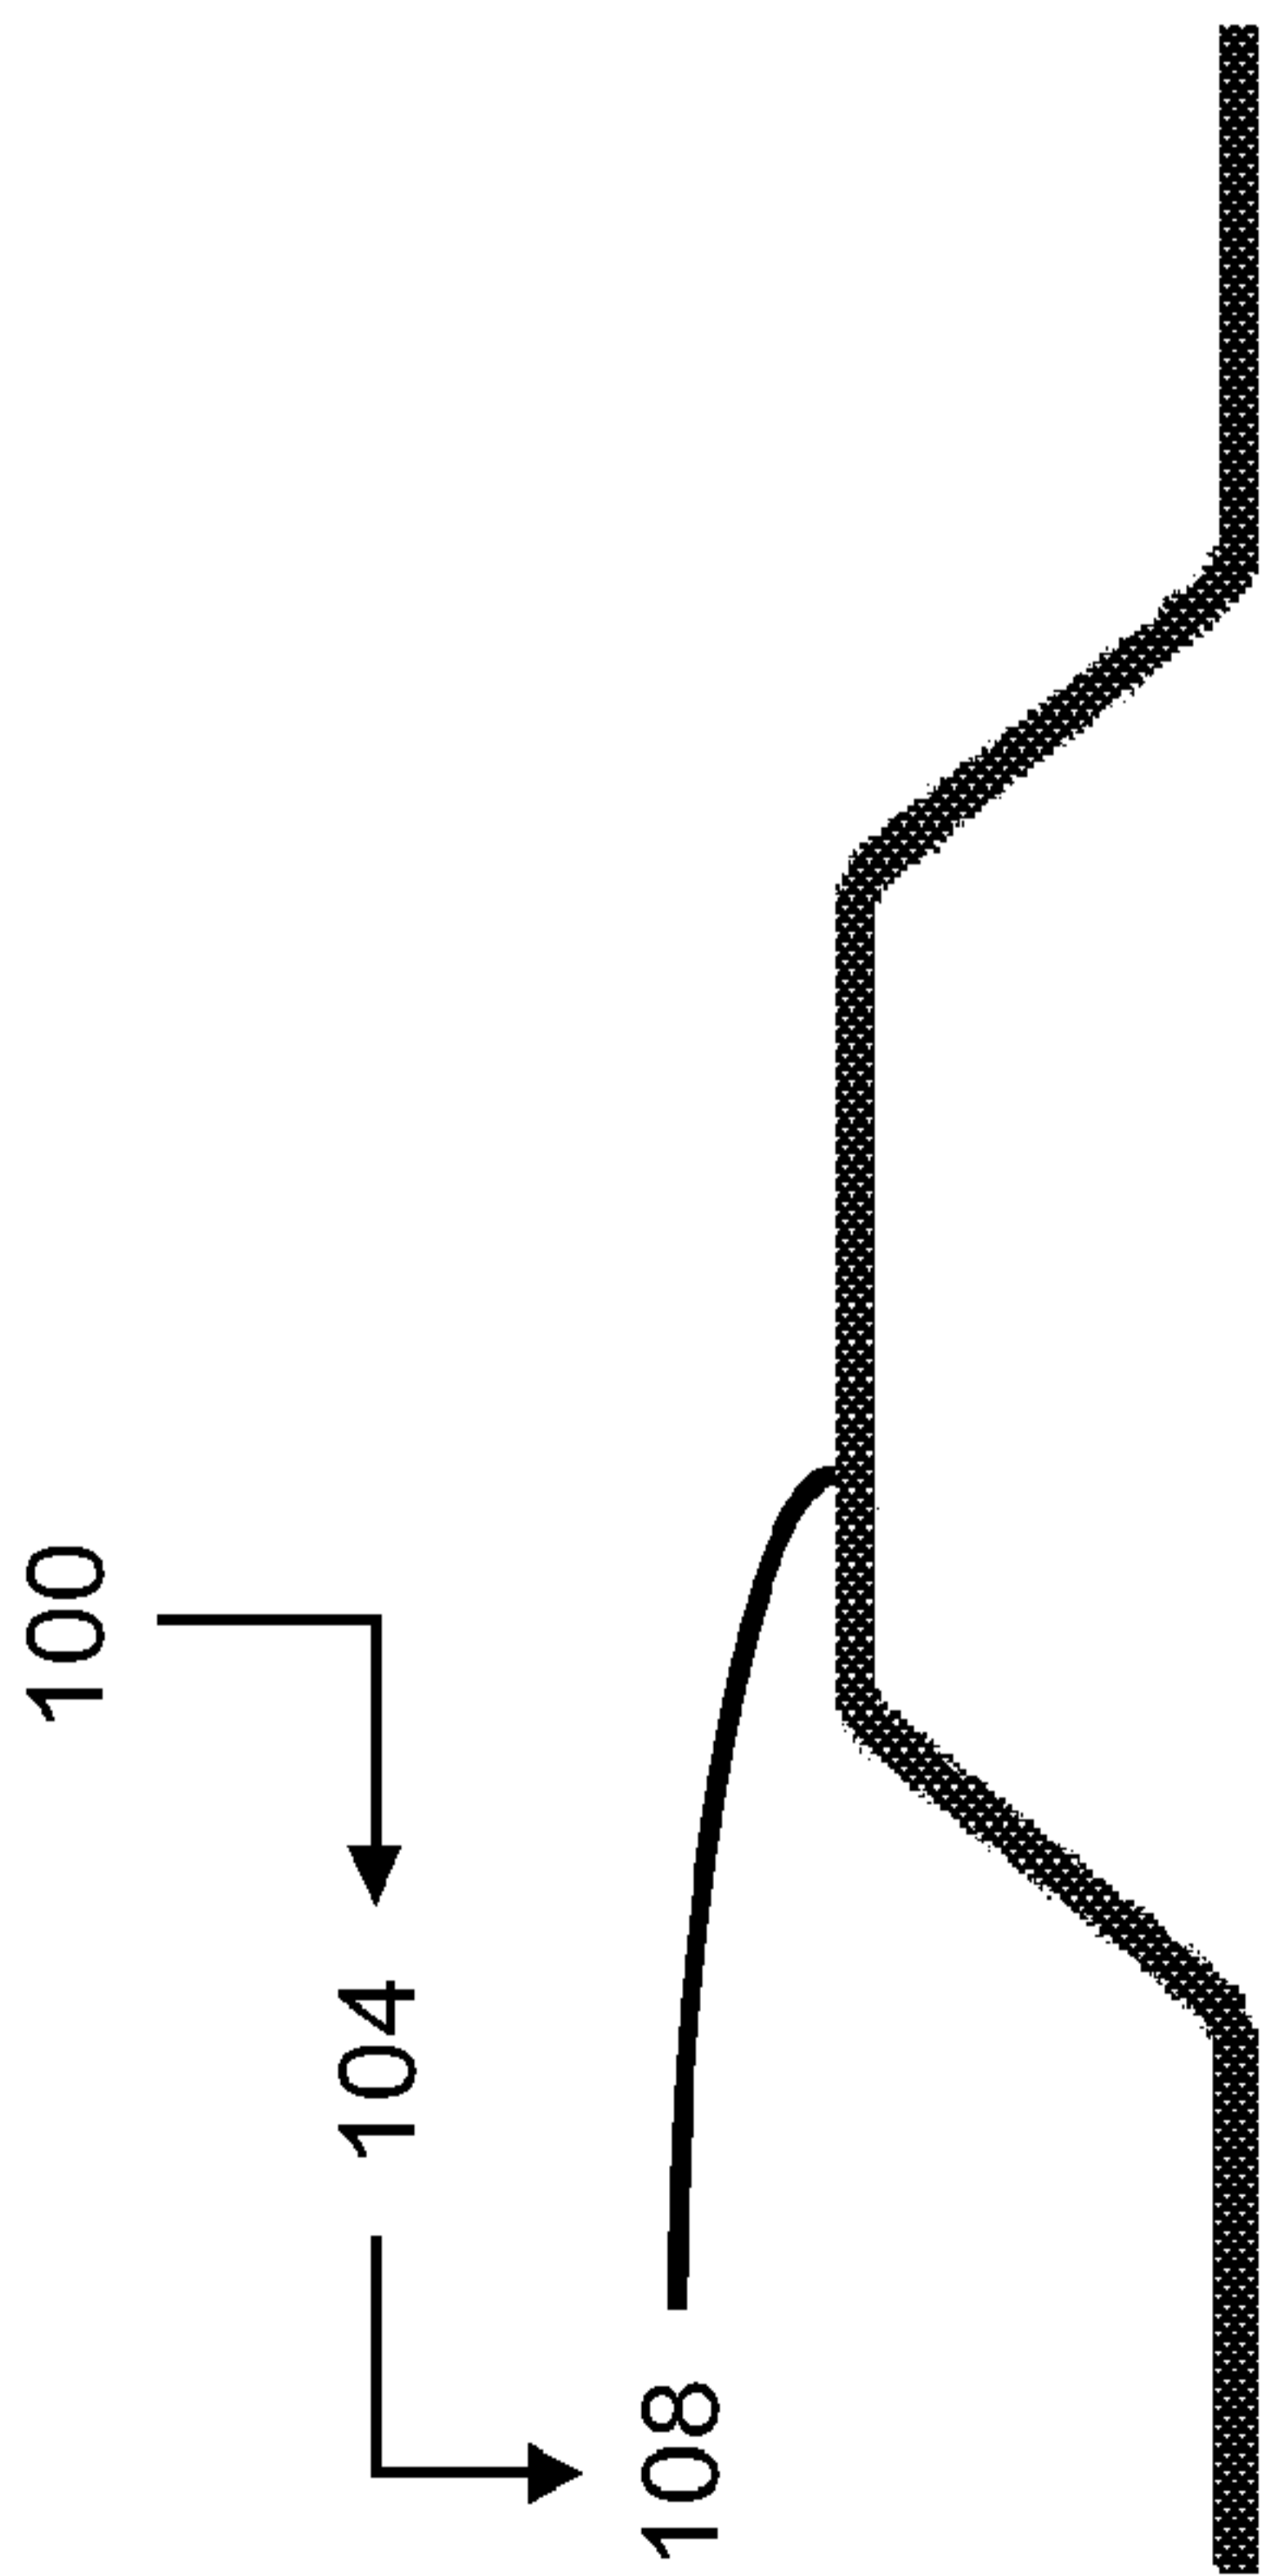


FIG. 2B

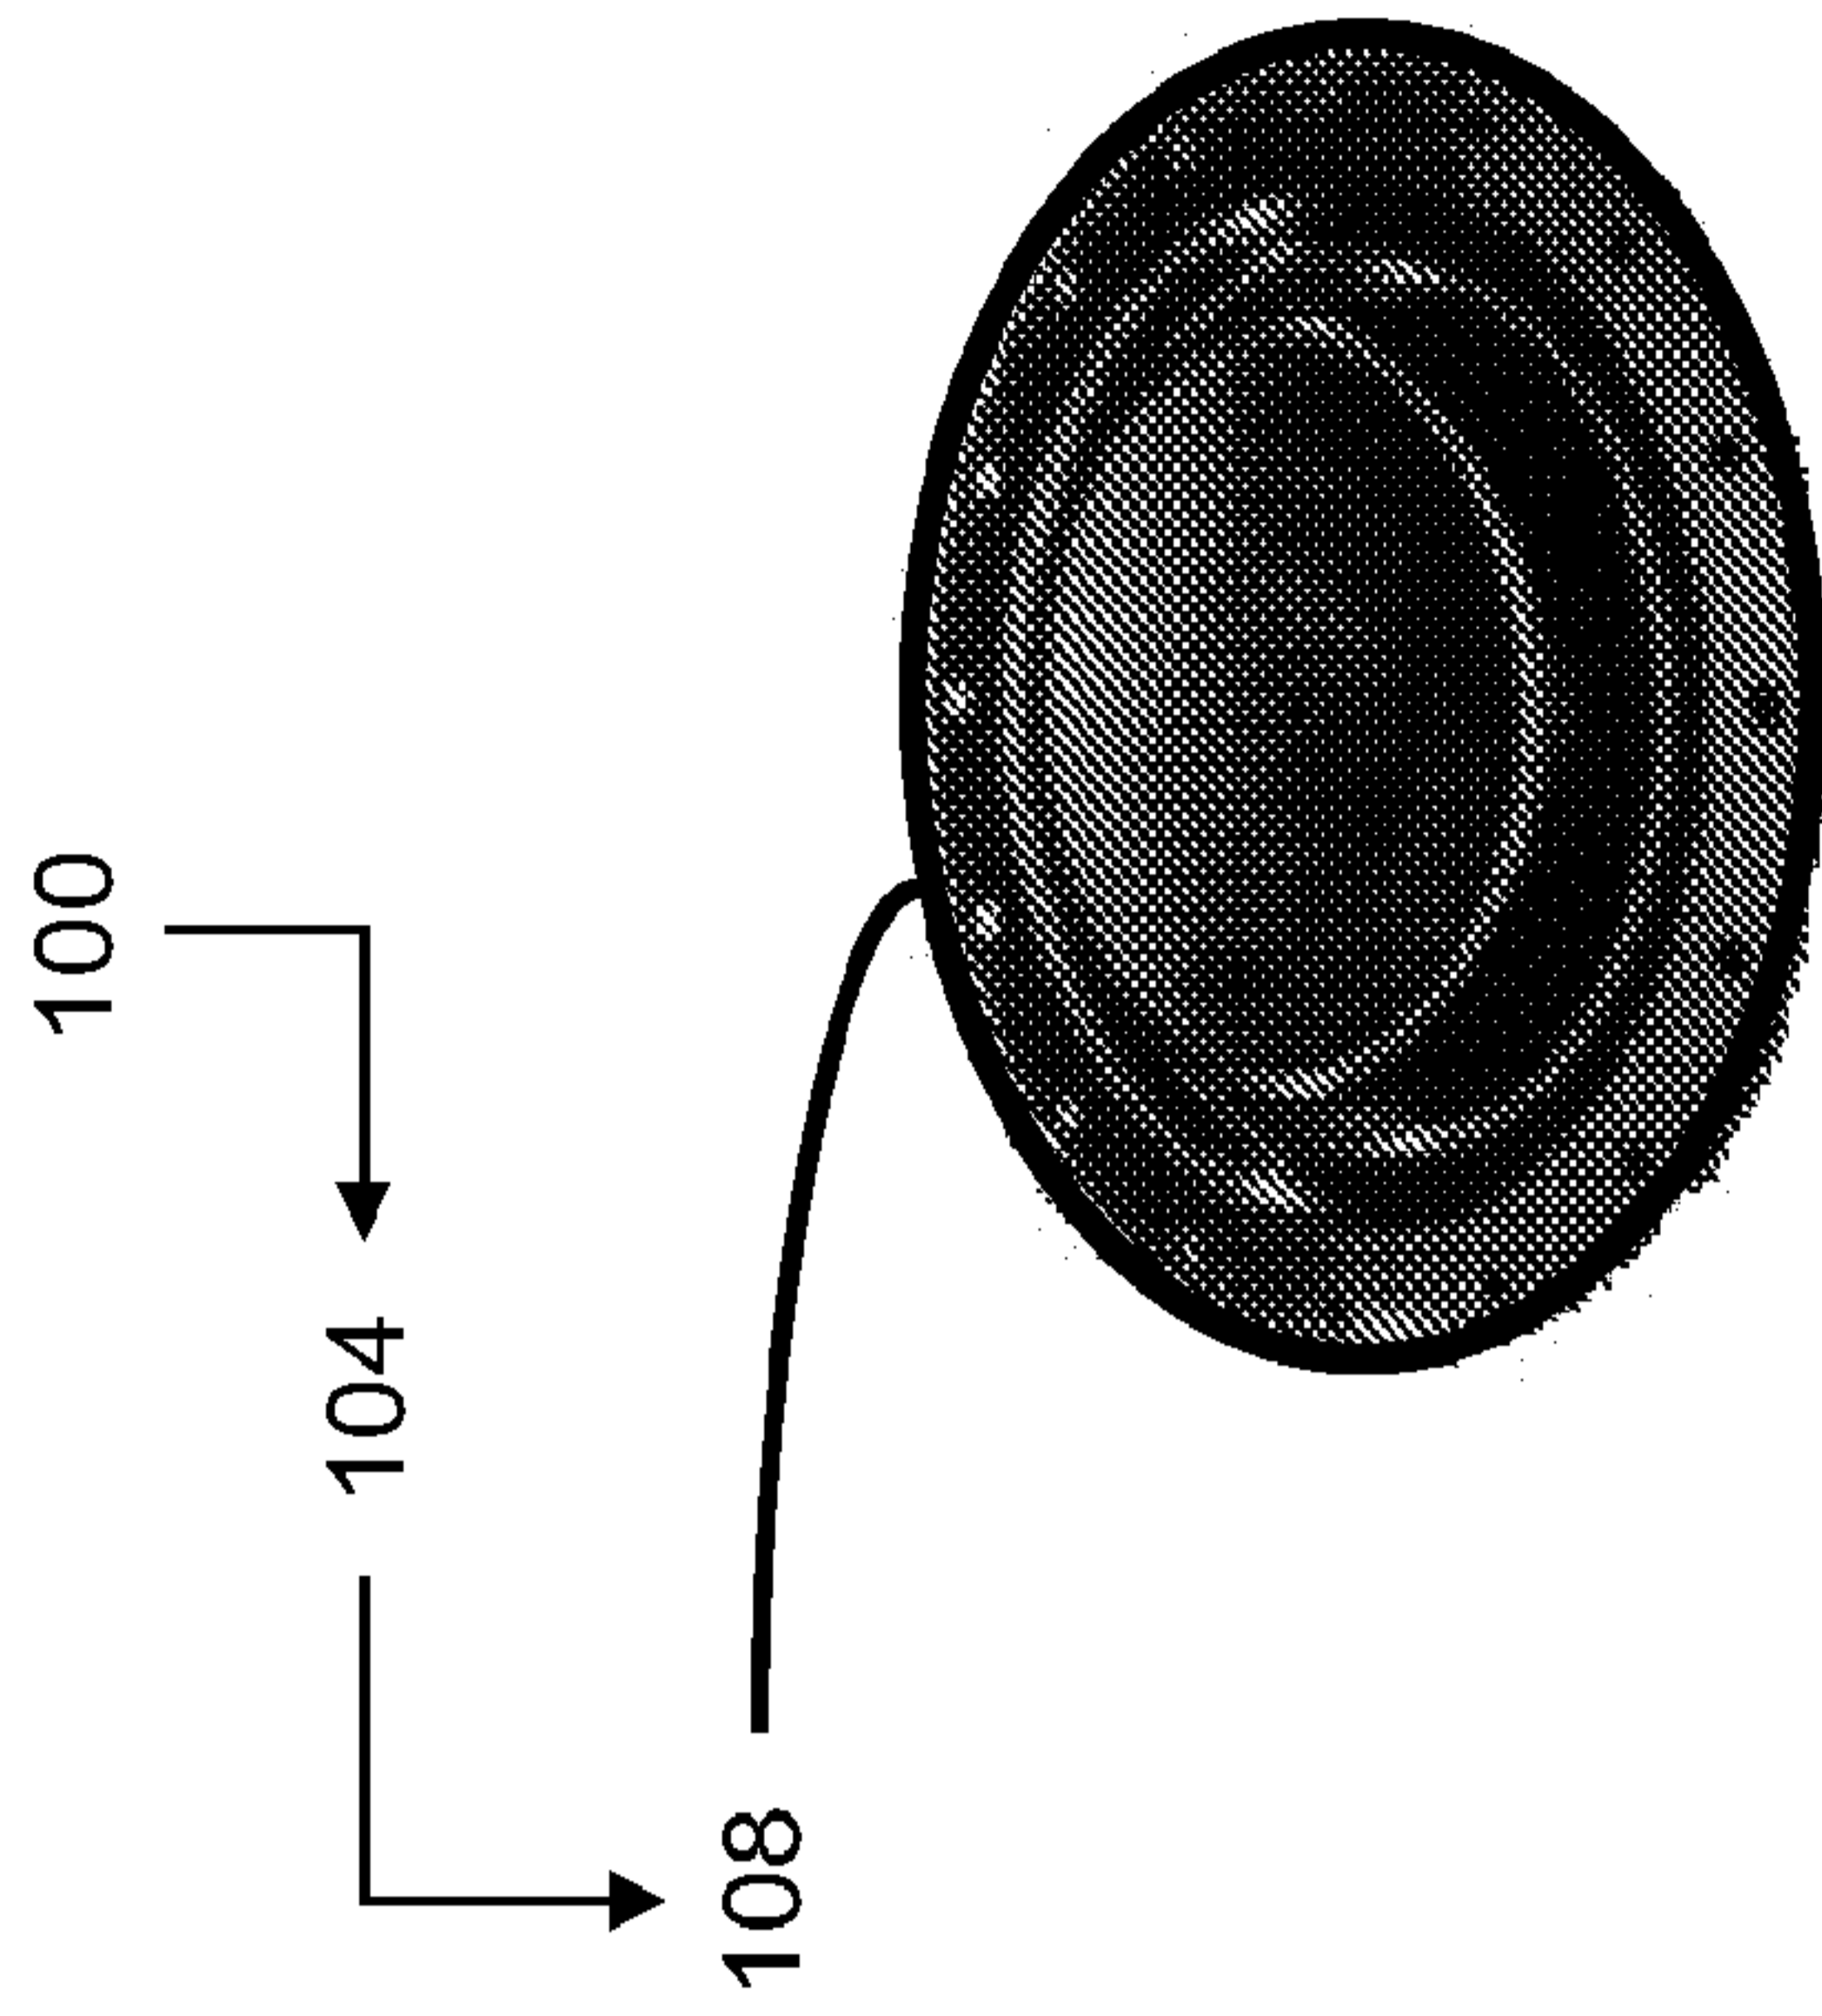


FIG. 2A

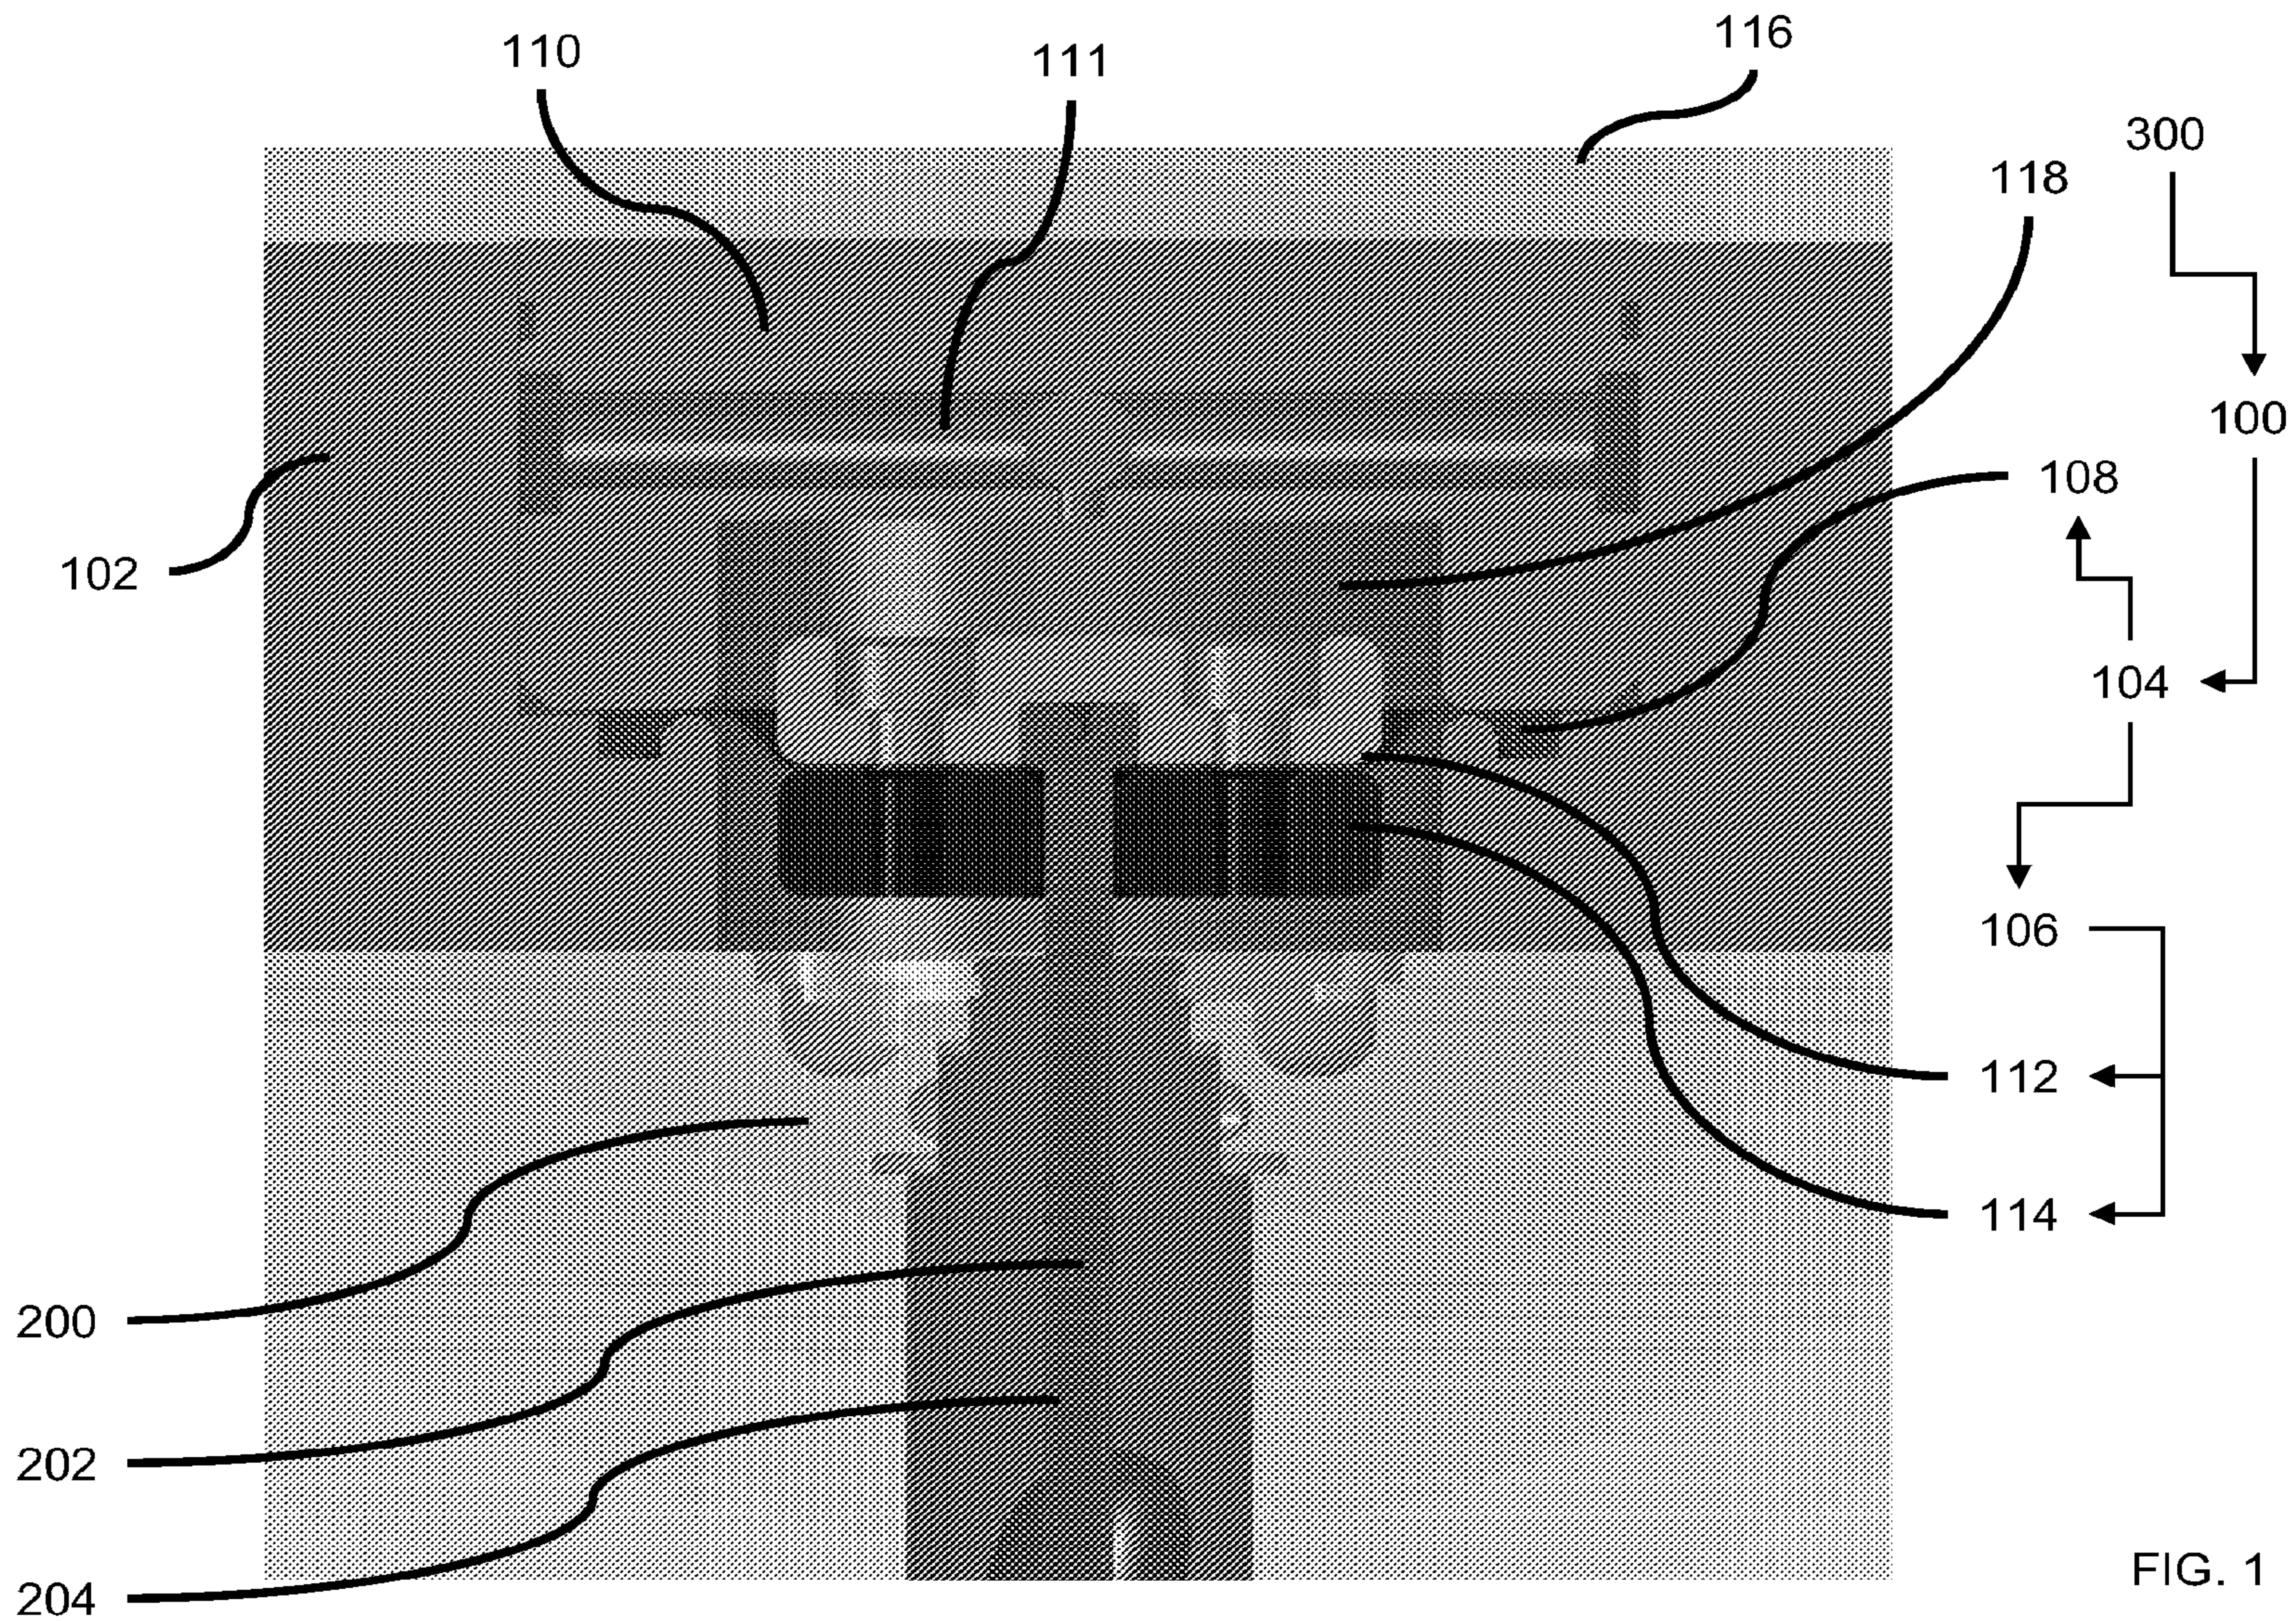


FIG. 1