



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) **Date de dépôt/Filing Date:** 2018/04/18

(41) **Mise à la disp. pub./Open to Public Insp.:** 2019/10/18

(51) **Cl.Int./Int.Cl.** **A47B 39/04** (2006.01),
A45C 3/02 (2006.01), **A45C 9/00** (2006.01),
A47B 3/10 (2006.01), **A47B 83/02** (2006.01),
A47C 9/10 (2006.01)


(71) **Demandeur/Applicant:**
GATRILL, ADRIAN, CA

(72) **Inventeur/Inventor:**
GATRILL, ADRIAN, CA

(74) **Agent:** OYEN WIGGS GREEN & MUTALA LLP

(54) **Titre : BANC ET BOITIER CONVERTIBLES**

(54) **Title: CONVERTIBLE CASE AND STOOL**

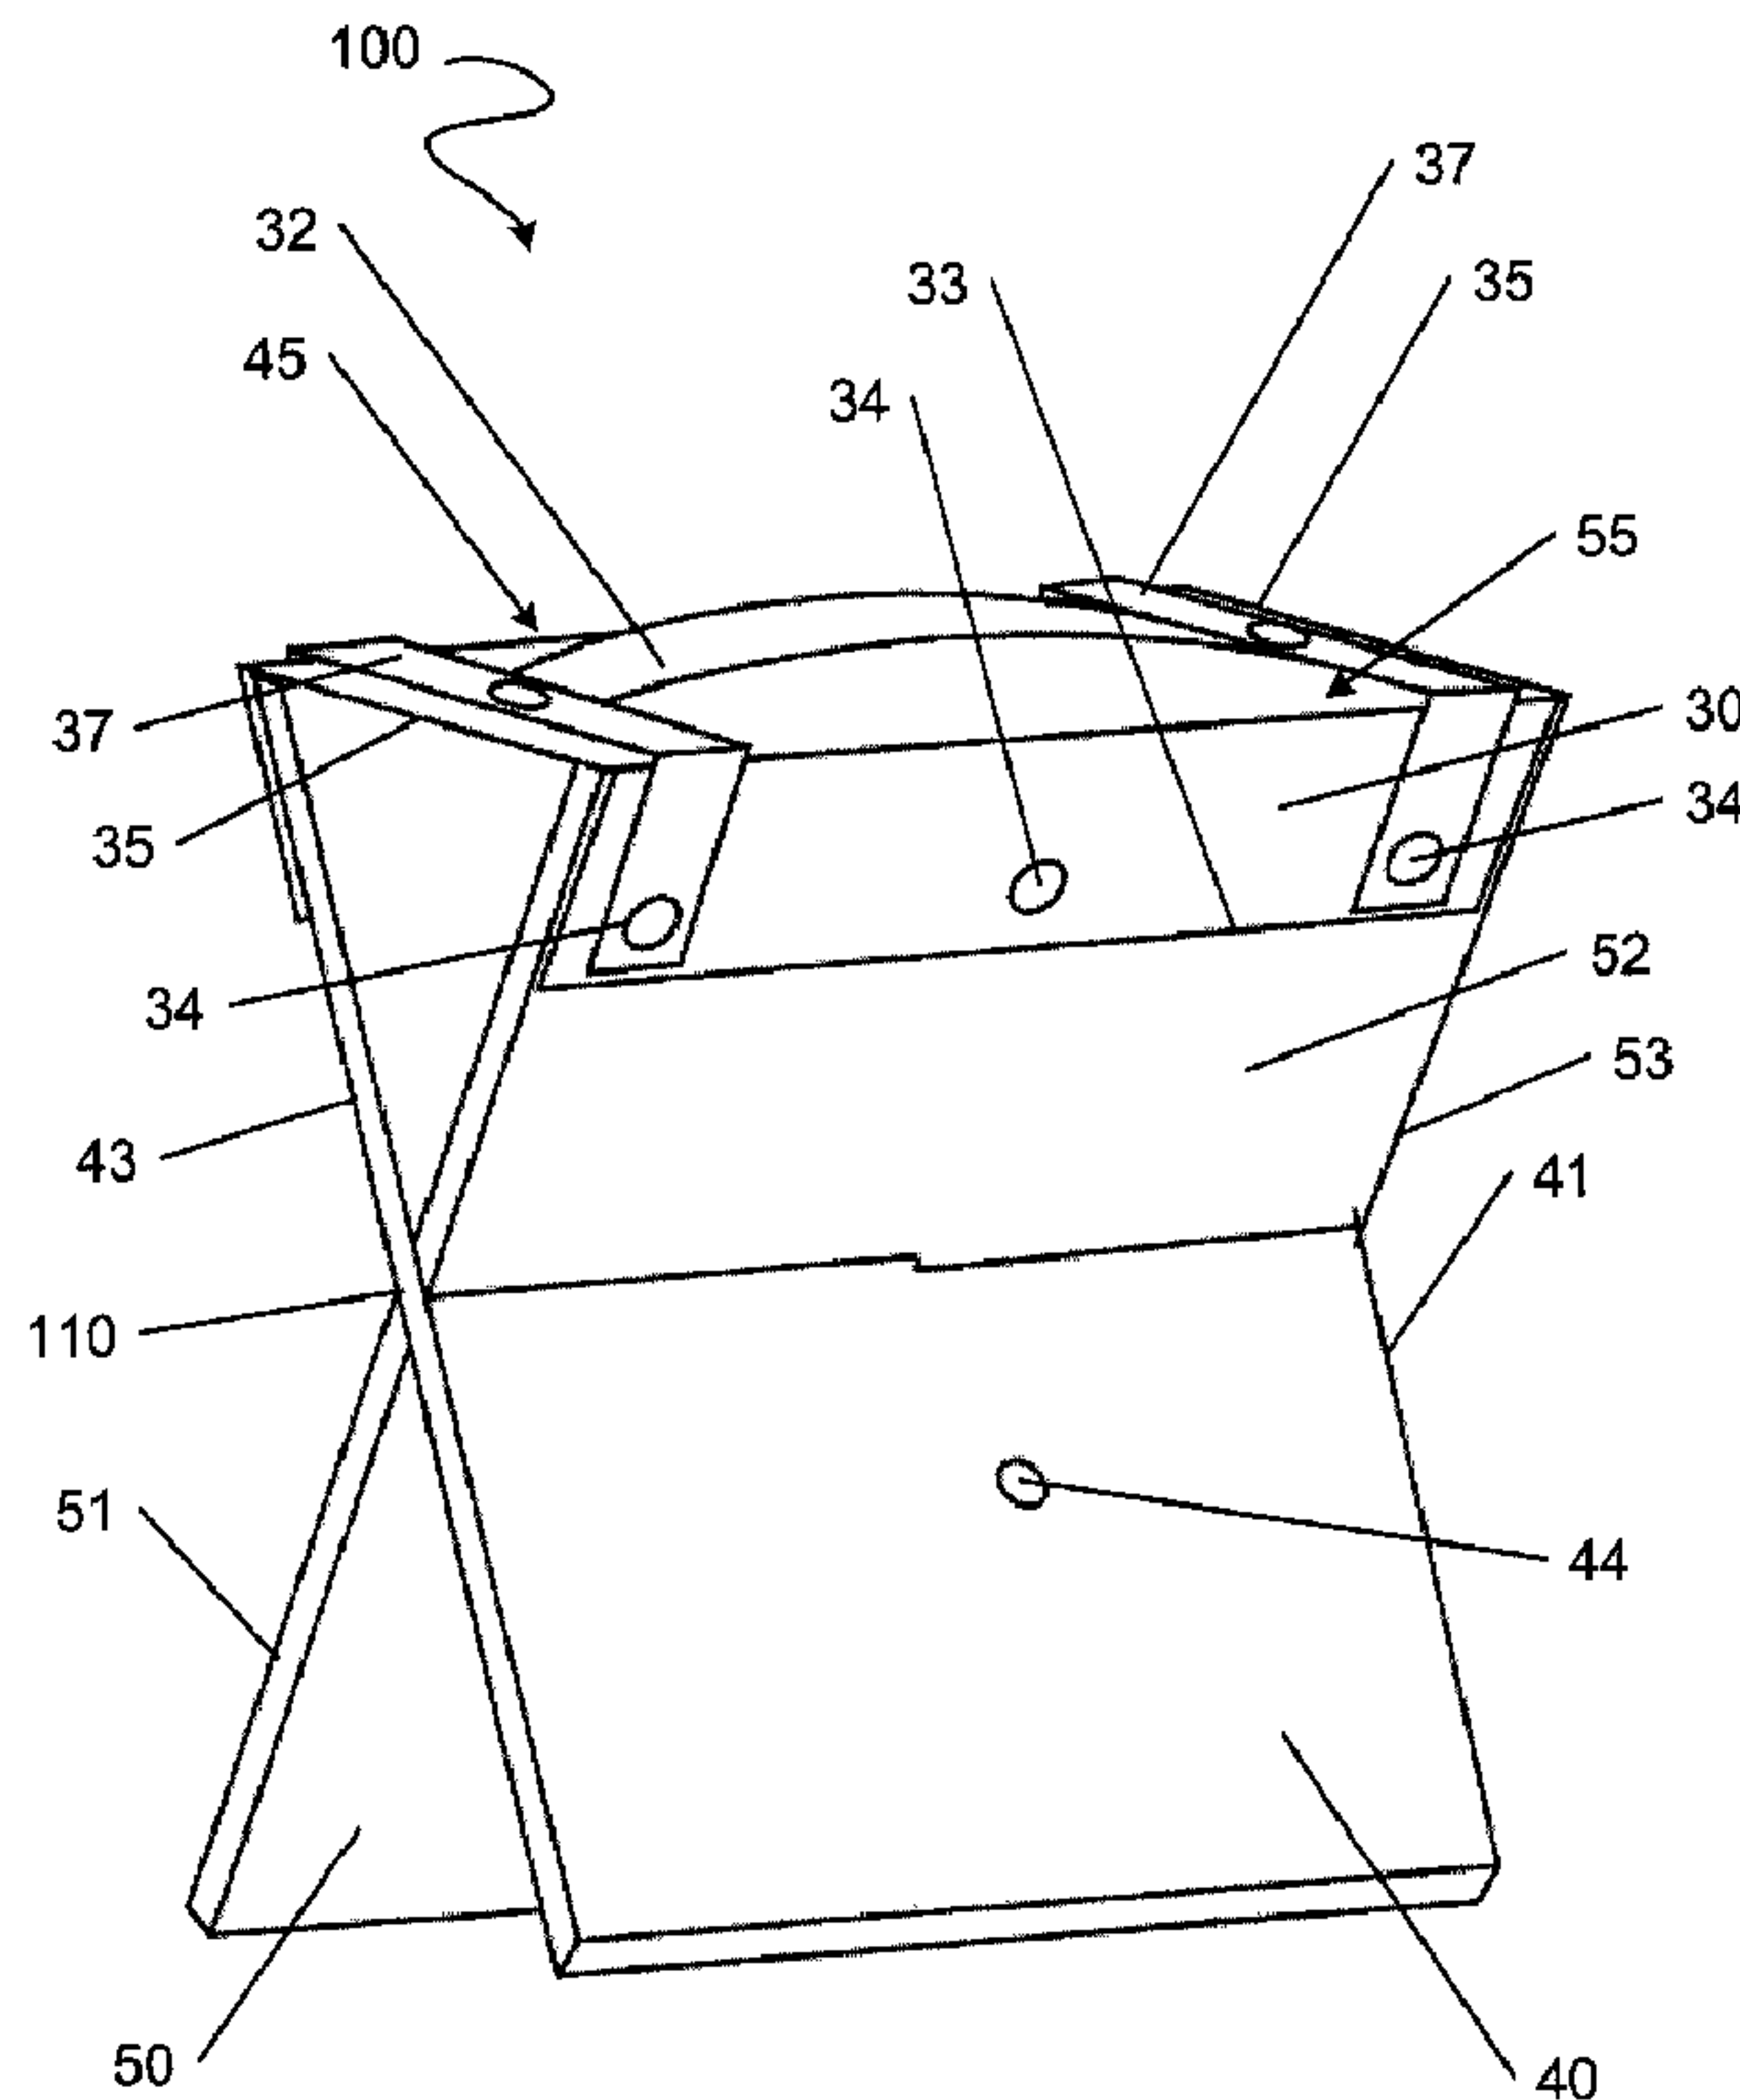

(57) **Abrégé/Abstract:**

A case that is convertible into a stool and a working surface is provided. The case includes a worktable, a front panel removably secured to a front side of the worktable, and a rear panel removably secured to a rear side of the worktable. The front and rear

(57) Abrégé(suite)/Abstract(continued):

panels each include a slot inwardly extending from a first edge thereof. The front and rear panels may be removed from the worktable and interconnected by sliding the slot of the front panel through the slot of the rear panel. The stool seat is removably attachable to the case and/or to the interconnected panels to form a stool.

ABSTRACT OF THE DISCLOSURE

- 5 A case that is convertible into a stool and a working surface is provided. The case includes a worktable, a front panel removably secured to a front side of the worktable, and a rear panel removably secured to a rear side of the worktable. The front and rear panels each include a slot inwardly extending from a first edge thereof. The front and rear panels may be removed from the worktable and interconnected by sliding the slot of the front panel through the slot of the rear
- 10 panel. The stool seat is removably attachable to the case and/or to the interconnected panels to form a stool.

CONVERTIBLE CASE AND STOOL

Technical Field

5 [0001] Some embodiments of the present invention relate to portable workstations. In particular, some embodiments of the present invention relate to portable cases that are convertible into a stool and a worktable.

Background

10 [0002] Pochade boxes are compact boxes that allow a user to keep all of their tools in one location and enable a user to perform work on the inside lid of the box. These boxes are traditionally used for travel and outdoor artistic endeavors such as plein air painting. These boxes and other known portable workstations suffer from disadvantages. For example, such workstations are cumbersome to carry and/or lack a seat to sit on when the user is working in the field.

15

[0003] There is a general desire for a portable workstation that is readily convertible from a compact case, which is used to conveniently carry tools and equipment, into an easily assembled workstation that includes a stool to seat the user and a worktable to enable the user to perform work with comfort and convenience.

20

[0004] The foregoing examples of the related art and limitations related thereto are intended to be illustrative and not exclusive. Other limitations of the related art will become apparent to those of skill in the art upon a reading of the specification and a study of the drawings.

25 Summary

[0005] The following embodiments and aspects thereof are described and illustrated in conjunction with systems, tools, and methods which are meant to be exemplary and illustrative, not limiting in scope. In various embodiments, one or more of the above-described problems have been reduced or eliminated, while other embodiments are directed to other improvements.

30

[0006] The present invention has a number of aspects. One aspect of the present invention provides a carrying case that is convertible into a stool and a working surface. The case includes a worktable, a front panel removably secured to a front side of the worktable, a rear panel removably secured to a rear surface of the worktable, and a stool seat. The front and rear panels are removable from the worktable and interconnectable to form a supporting substructure of the stool. The stool seat is removably attachable to the substructure.

[0007] In some embodiments, the front and rear panels each include a slot inwardly extending from a first edge thereof. The front and rear panels may be interconnected by sliding the slot of the front panel through the slot of the rear panel to form the substructure of the stool.

[0008] In some embodiments, the stool seat has a front end removably attachable to the front panel and/or a rear end removably attachable to the rear panel.

[0009] In some embodiments, the stool seat includes at least one front end fastener positioned adjacent to the front end of the stool seat and/or at least one rear end fastener positioned adjacent to the rear end of the stool seat.

[0010] In some embodiments, the front and rear panels each include at least one case fastener secured to a first surface thereof and positioned adjacent to an inward end of the slot. The at least one case fastener of the front panel may engage the at least one front end fastener of the stool seat and/or the at least one case fastener of the rear panel may engage the at least one rear end fastener of the stool seat when the front and rear panels are removably secured to the worktable.

[0011] In some embodiments, the front and rear panels each include at least one stool fastener secured to the first surface thereof and positioned adjacent to a second edge parallel to the slot. The at least one stool fastener of the front panel may engage the at least one front end fastener of the stool seat and/or the at least one stool fastener of the rear panel may engage the at least one rear end fastener of the stool seat when the front and rear panels are interconnected.

[0012] In some embodiments, the front and rear panels each include at least one stool fastener

secured to a second surface thereof and positioned adjacent to a second edge parallel to the slot. The at least one stool fastener of the front panel may engage the at least one front end fastener of the stool seat and/or the at least one stool fastener of the rear panel may engage the at least one rear end fastener of the stool seat when the front and rear panels are interconnected.

5

[0013] In some embodiments, the stool seat includes a handle.

[0014] In some embodiments, the stool seat comprises a flexible sheet material.

10 **[0015]** In some embodiments, the stool seat comprises a hinged and/or an articulated rigid material.

[0016] In some embodiments, the case further includes at least one retaining clip attached to a bottom surface of the worktable for removably securing the front and rear panels to the
15 worktable.

[0017] In some embodiments, the front panel and/or the rear panel includes a notch adjacent to a third edge thereof for engaging the at least one retaining clip.

20 **[0018]** In some embodiments, the front panel and/or the rear panel includes at least one worktable fastener for removably securing the respective panel to the worktable.

[0019] In some embodiments, the worktable includes at least one panel fastener for removably securing the front panel and/or the rear panel to the worktable.

25

[0020] In some embodiments, the worktable includes an inside panel, a top panel secured to a top edge of the inside panel, a bottom panel secured to a bottom edge of the inside panel opposed to the top edge, a first side panel secured to a first side edge of the inside panel, and a second side panel secured to a second side edge of the inside panel opposed to the first side edge.

30

[0021] In some embodiments, an inside surface of each of the top panel, the bottom panel, the

first side panel, and the second side panel and a front surface of the inside panel form a first cavity.

5 [0022] In some embodiments, the inside surface of each of the top panel, the bottom panel, the first side panel, and the second side panel and a rear surface of the inside panel form a second cavity.

[0023] In some embodiments, the worktable is integrally formed.

10 [0024] In some embodiments, a front edge of the top panel extends outwardly from a front edge of the side panels and/or a rear edge of the top panel extends outwardly from a rear edge of the side panels. In some embodiments, a front edge of the bottom panel extends outwardly from a front edge of the side panels and/or a rear edge of the bottom panel extends outwardly from a rear edge of the side panels.

15

[0025] In some embodiments, opposed edges of the front and rear panels each include at least one tongue and an inside surface of each the top and bottom panels of the worktable each comprise at least one groove adjacent to both of the front and rear edges thereof. The at least one tongue of the front panel matingly engages the at least one groove of the top and bottom panels of the worktable adjacent to the front edge. The at least one tongue of the rear panel matingly engages the at least one groove of the top and bottom panels of the worktable adjacent to the rear edge.

20

[0026] In some embodiments, opposed edges of the front and rear panels each include at least one groove and an inside surface of each the top and bottom panels of the worktable each comprise at least one tongue adjacent to both of the front and rear edges thereof. The at least one groove of the front panel matingly engages the at least one tongue of the top and bottom panels of the worktable adjacent to the front edge. The at least one groove of the rear panel matingly engages the at least one tongue of the top and bottom panels of the worktable adjacent to the rear edge.

30

[0027] Another aspect of the present invention provides a stool including a front panel having a slot inwardly extending from a first edge thereof, a rear panel having a slot inwardly extending from a first edge thereof, and a stool seat. The front and rear panels are interconnectable to form a supporting substructure of the stool by sliding the slot of the front panel through the slot of the rear panel. The stool seat is removably attachable to the substructure.

[0028] In some embodiments, the stool seat includes at least one front end fastener positioned adjacent to a front end thereof and/or at least one rear end fastener positioned adjacent to a rear end thereof.

[0029] In some embodiments, the front and rear panels each include at least one stool fastener secured to a first surface thereof and positioned adjacent to a first edge parallel to the slot. When the front and rear panels are interconnected to form the substructure, the at least one stool fastener of the front panel engages the at least one front end fastener of the stool seat and/or the at least one stool fastener of the rear panel engages the at least one rear end fastener of the stool seat.

[0030] In addition to the exemplary aspects and embodiments described above, further aspects and embodiments will become apparent by reference to the drawings and by study of the following detailed descriptions.

Brief Description of the Drawings

[0031] Exemplary embodiments are illustrated in referenced figures of the drawings. It is intended that the embodiments and figures disclosed herein are to be considered illustrative rather than restrictive.

[0032] Figure 1 is a perspective view of a convertible case according to an example embodiment of the present invention.

[0033] Figure 2 is a perspective view of the convertible case according to the example embodiment shown in Figure 1, wherein the case is partially disassembled.

[0034] Figure 3 is a perspective view of a stool according to an example embodiment of the present invention.

5 [0035] Figure 4 is a perspective view of a stool seat according to an example embodiment of the present invention.

[0036] Figure 5 is a perspective view of a worktable according to an example embodiment of the present invention.

10 [0037] Figure 6A is a side cross-section view of a partially disassembled convertible case according to an example embodiment of the present invention, wherein a front panel is removably attachable to a worktable via furniture snap fittings.

15 [0038] Figure 6B is a side cross-section view of a partially disassembled convertible case according to an example embodiment of the present invention, wherein a front panel is removably attachable to a worktable via a hook and loop fastener such as VelcroTM.

20 [0039] Figure 6C is a side cross-section view of a partially disassembled convertible case according to an example embodiment of the present invention, wherein a front panel is removably attachable to a worktable via a wood strip fixed to an inside surface of the front panel.

[0040] Figure 6D is a side cross-section view of a partially disassembled convertible case according to an example embodiment of the present invention, wherein a front panel is removably attachable to a worktable via top and bottom brackets.

25 [0041] Figure 6E is a side cross-section view of a partially disassembled convertible case according to an example embodiment of the present invention, wherein a front panel is removably snap fit to a worktable.

30 [0042] Figure 7A is a perspective view of a convertible case according to an example embodiment of the present invention.

[0043] Figure 7B is a perspective view of a convertible case according to an example embodiment of the present invention.

5 [0044] Figure 8A is a front elevation view of a convertible case according to an example embodiment of the present invention.

[0045] Figure 8B is a side elevation view of the convertible case according to the example embodiment shown in Figure 8A.

10 [0046] Figure 9 is a perspective view of a convertible case according to an example embodiment of the present invention.

Description

15 [0047] Throughout the following description specific details are set forth in order to provide a more thorough understanding to persons skilled in the art. However, well known elements may not have been shown or described in detail to avoid unnecessarily obscuring the disclosure. Accordingly, the description and drawings are to be regarded in an illustrative, rather than a restrictive, sense.

20 [0048] Unless context dictates otherwise, the term “carrying mode” (as used herein) means the state wherein a convertible case is fully assembled (for example, the state of the convertible case shown in Figure 1).

25 [0049] Unless context dictates otherwise, the term “working mode” (as used herein) means the state wherein a convertible case is fully disassembled into a stool and a working surface (for example, the stool shown in Figure 3 and the working surface shown in Figure 5).

[0050] A case **10** in accordance with one example embodiment of the present invention is shown in Figure 1. Case **10** is convertible into a stool and a working surface. Case **10** includes a
30 worktable **20**, a stool seat **30**, front panel **40** removably secured to a front side **12** of worktable **20**, and a rear panel **50** removably secured to a rear side **14** of worktable **20**. A front end **31** of

stool seat **30** is removably attachable to front panel **40** and a rear end **33** (Figure 2) of stool seat **30** is removably attachable to rear panel **50**. In carrying mode, the front end **31** of stool seat **30** is removably attached to front panel **40**. Stool seat **30** extends across a top surface **21** of worktable **20** and the rear end **33** of stool seat **30** is removably attached to rear panel **50**. Stool seat **30** may include a handle **32** for carrying case **10** with comfort and convenience. In some embodiments, stool seat **30** is carried inside case **10** when case **10** is in carrying mode. Top surface **21** of worktable **20** of such embodiments may include a handle (Figures 8 and 9). In carrying mode, case **10** may resemble a briefcase.

10 [0051] Front and rear panels **40**, **50** may be removed from worktable **20** to form a stool **100** (Figure 3) that is structurally independent of worktable **20**. In some embodiments, to remove front and rear panels **40**, **50** from worktable **20**, stool seat **30** is first removed from case **10**. Panels **40**, **50** may then be removed from worktable **20**. Figure 2 shows a partially disassembled case **10** wherein stool seat **30** and front panel **40** have been removed from case **10**. As seen in
15 Figure 2, front panel **40** includes a slot **48** inwardly extending from a top edge **41** thereof. Rear panel **50** similarly includes a slot (not shown) inwardly extending from a top edge **51** thereof. In some embodiments, slot **48** (and/or the slot of rear panel **50**) may alternatively extend inwardly from a bottom or side edge of the panel. Front and rear panels **40**, **50** are interconnectable to form a supporting substructure **110** of stool **100** by inserting slot **48** of front panel **40** through the
20 slot (not shown) of rear panel **50** such that panels **40**, **50** intersect. Stool seat **30** is removably attached to substructure **110** to form the sitting surface of stool **100**. Persons skilled in the art will recognize that front and rear panels **40**, **50** may be removed from worktable **20** and used with or without stool seat **30** to form other types of furniture for sitting conventionally known.

25 [0052] Stool seat **30** is removably attached to front and rear panels **40**, **50** using a variety of fastening means conventionally known. For example, front panel **40** includes at least one fastener **44** secured to an outside surface **42** thereof and positioned adjacent to an inward end **49** of slot **48**. Front panel **40** further includes at least one fastener **46** secured to outside surface **42** and positioned adjacent to a side edge **45** thereof. In the example embodiment shown in Figure 2,
30 two fasteners **44** and three fasteners **46** are shown secured to outside surface **42** of front panel **40**. Each fastener **44** is positioned an equal distance from top edge **41**. Each fastener **46** is positioned

an equal distance from side edge 45. Persons skilled in the art will recognize that any reasonable number of fasteners 44, 46 may be used to attach stool seat 30 to front panel 40. At least one fastener 44 and/or at least one fastener 46 may be attached to front panel 40 and/or formed integrally therewith. For example, at least one fastener 44 and/or at least one fastener 46 may
5 comprise one or more of snaps (i.e. press studs), Velcro™, buckles, hooks, toggles, keder rails, magnets, or other fastening devices conventionally known. In some embodiments, at least one fastener 44 is attached to or integrally formed with outside surface 42 of front panel 40 and at least one fastener 46 is attached to or integrally formed with an inside surface (not shown) of front panel 40. In this way, at least one fastener 46 is not visible when case 10 is in carrying
10 mode.

[0053] Many features and components of rear panel 50 are similar to features and components of front panel 40. Rear panel 50 includes at least one fastener (not shown) secured to an outside surface 52 thereof and positioned adjacent to an inward end of the slot (not shown) of rear panel
15 50. Each fastener may be positioned an equal distance from top edge 51. Rear panel 50 further includes at least one fastener (not shown) secured to the outside surface 52 thereof and positioned adjacent to a side edge 55. Each fastener may be positioned an equal distance from side edge 55. Persons skilled in the art will recognize that any reasonable number of fasteners may be used to attach stool seat 30 to rear panel 50. Each fastener may be attached to rear panel
20 40 and/or formed integrally therewith. For example, each fastener may comprise snaps (i.e. press studs), Velcro™, buckles, hooks, toggles, keder rails, magnets, or other fastening devices conventionally known. In some embodiments, the at least one fastener adjacent to the inward end of the slot (not shown) of rear panel 50 is attached to or integrally formed with outside surface 52 of rear panel 50 and the at least one fastener adjacent to side edge 55 is attached to or integrally
25 formed with an inside surface (not shown) of rear panel 50. In this way, the at least one fastener adjacent to side edge 55 is not visible when case 10 is in carrying mode.

[0054] Stool seat 30 comprises at least one fastener 34 adjacent to front end 31 and at least one fastener 38 adjacent to rear end 33. At least one fastener 34 and/or at least one fastener 38 may
30 be attached to stool seat 30 and/or integrally formed therewith. At least one fastener 34 and/or at least one fastener 38 may comprise one or more of snaps (i.e. press studs), Velcro™, buckles,

hooks, toggles, keder rails, magnets, or other fastening devices conventionally known.

5 [0055] In carrying mode, at least one fastener 34 adjacent to front end 31 of stool seat 30 engages at least one fastener 44 of front panel 40. At least one fastener 38 adjacent to rear end 33 of stool seat 30 engages the at least one rear fastener (not shown) of rear panel 50 adjacent to the inward end of the slot (not shown). In some embodiments, slot 48 of front panel 40 and/or the slot (not shown) of rear panel 50 is hidden by stool seat 30 when case 10 is in carrying mode.

10 [0056] Stool seat 30 is removably attachable to substructure 110 to form stool 100 by attaching front end 31 of stool seat 30 to front panel 40 via fasteners 34, 46, extending stool seat 30 over side edges 45, 55 of front and rear panels 40, 50, and attaching rear end 33 of stool seat 30 to rear panel 50 via at least one fastener 38 and the at least one rear panel fastener (not shown) of rear panel 50 adjacent to side edge 55.

15 [0057] Stool seat 30 comprises a flexible sheet material including one or more of fabric, leather, plastic, chain mail, and other flexible sheet materials conventionally known. In some embodiments, stool seat 30 may be articulated and/or include hinges to facilitate securing the front and rear panels 40, 50 to worktable 20, to facilitate removing the stool seat from case 10, and/or to facilitate forming a stool with front and rear panels 40, 50. For example, stool seat 30
20 may comprise hinged polypropylene or other hinged plastics.

[0058] In the example embodiment shown in Figure 3, stool seat 30 includes a pair of straps 37. Each strap 37 extends from front end 31 of stool seat 30 to rear end 33 along an opposed side end 35. Opposed ends 36 of handle 32 are each attached to a strap 37 midway between front and rear
25 ends 31, 33. A stool seat 30' in accordance with another example embodiment of the present invention is shown in Figure 4. Many features and components of stool seat 30' are similar to features and components of stool seat 30, with the same reference numerals being used to indicate features and components that are similar between the embodiments. Stool seat 30' lacks straps 37.

30

[0059] In some embodiments, a rigid C-shaped member (not shown) is snap fit over top surface

21 of worktable **20** to secure front and rear panels **40, 50** to worktable **20**. The C-shaped member may be made of one or more of metal, wood, plastic, and other rigid materials conventionally known. In such embodiments, stool seat **30** is carried inside case **10** when the case is in carrying mode.

5

[0060] Worktable **20** in accordance with one example embodiment of the present invention is shown in Figure 5. Worktable **20** includes an inside panel **26**, a top panel **22** secured to a top edge **120** of inside panel **26**, bottom panel **23** secured to a bottom edge **121** of inside panel **26** (Figure 2), and two opposed side panels **24, 25**, each side panel secured to an opposed side edge **122** of inside panel **26**. Inside surfaces **129** of panels **22, 23, 24, 25** and front surface **130** of inside panel **26** form a cavity **28** in a front side **12** of worktable **20** (Figures 2 and 5). Objects to be carried may be stored inside cavity **28** when case **10** is in carrying mode. Worktable **20** may additionally or alternatively define a cavity (not shown) in a rear side **14** of worktable **20**. The depth of cavity **28** and/or the depth of the cavity in rear side **14** of worktable **20** may be modified based upon the needs of the user by modifying the position of inside panel **26** with respect to panels **22, 23, 24, 25**. In some embodiments, worktable **20** is integrally formed.

[0061] In some embodiments, top panel **22** and/or bottom panel **23** may be sized to help secure front and rear panels **40, 50** to worktable **20** when case **10** is in carrying mode. For example, a front edge **124** of top panel **22** may extend outwardly from a front edge **126** of side panels **24, 25** and/or a rear edge **125** (Figure 2) of top panel **22** may extend outwardly from a rear edge (not shown) of side panels **24, 25**. Top panel **22** may thereby prevent front and rear panels **40, 50** from sliding upwardly or otherwise out of position when case **10** is in carrying mode. A front edge (not shown) of bottom panel **23** may extend outwardly from a front edge **126** of side panels **24, 25** and/or a rear edge (not shown) of bottom panel **23** may extend outwardly from a rear edge of side panels **24, 25**. Bottom panel **23** may thereby prevent front and rear panels **40, 50** from sliding downwardly or otherwise out of position when case **10** is in carrying mode.

[0062] Case **10** may further include a retaining clip **60** for removably securing front and rear panels **40, 50** to worktable **20** when case **10** is in carrying mode. In some embodiments, retaining clip **60** is fixed to bottom panel **23** of worktable **20**. In some other embodiments, retaining clip

60 is removably snap fit to case **10** or otherwise removably attached to case **10** using conventional means to secure front and rear panels **40**, **50** to worktable **20** when case **10** is in carrying mode. Front panel **40** may include a notch **47** adjacent to a bottom edge **43** of front panel **40** for engaging retaining clip **60**. Rear panel **50** may similarly include a notch (not shown) at a bottom edge **53** of rear panel **50** for engaging retaining clip **60**.

[0063] Retaining clip **60** is C-shaped and includes a rigid body **62**, an upwardly extending front edge **64**, and an upwardly extending rear edge **65** (Figure 6C). When retaining clip **60** is secured to bottom panel **23** of worktable **20**, body **62** extends outwardly from front edge **126** of bottom panel **23** such that retaining clip **60** creates a channel **66** between front edge **64** and front edge **126** of bottom panel **23**. Notch **47** of front panel **40** may be inserted into channel **66**. Similarly, body **62** extends outwardly from rear edge **123** of bottom panel **23** such that retaining clip **60** creates a channel **67** between rear edge **65** of retaining clip **60** and rear edge **123** of bottom panel **23**. The notch (not shown) of rear panel **50** may be inserted into channel **67**.

[0064] Worktable **20**, front panel **40**, rear panel **50**, and/or retaining clip **60** may each comprise one or more of wood, metal, fibre, thermoplastic, and thermosetting plastic. In some embodiments, worktable **20**, front panel **40**, rear panel **50**, and/or retaining clip **60** may each be made of a molded thermoplastic or thermosetting plastic. For example, worktable **20**, front panel **40**, rear panel **50**, and/or retaining clip **60** may each be made of a one-piece injection molded thermoplastic. In some embodiments, worktable **20**, front panel **40**, rear panel **50**, and/or retaining clip **60** may be 3D printed. In some embodiments, worktable **20**, front panel **40**, rear panel **50**, and/or retaining clip **60** may comprise die cast aluminum or other metal casting.

[0065] Case **10** optionally includes a removable shelf **200** and/or a bar **210** as shown in Figure 5. Shelf **200** and/or bar **210** may be stored inside case **10** in carrying mode. When case **10** has been fully disassembled, shelf **200** may be inserted into a slot **202** formed in side panel **25** of worktable **20** to provide a user with an additional working surface. In some embodiments, shelf **200** includes a removable artist's palette **204** that may rest on shelf **200** or may be supported in the user's hand using thumb aperture **205**. Shelf **200** comprises one or more of wood, metal, high density polyethylene, Plexiglas, and other plastics. Palette **204** comprises one or more of wood,

metal, porcelain, Plexiglas, high density polyethylene, other plastics, and other hard, inert, nonporous materials conventionally known. Bar **210** may be secured to inside panel **26** of worktable **20** via a fastener **212** (for example, a wing nut). Bar **210** may be used to prop up paper or canvas board (shown in dotted lines in Figure 5). In some embodiments, inside panel **26** includes a slot **214** inwardly extending from top edge **120**. The position of bar **210** may be determined by fastening bar **210** to inside panel **26** at any position along slot **214**. Bar **210** comprises one or more of wood, metal, high density polyethylene, and other plastics. Persons skilled in the art will recognize that shelf **200**, palette **204**, and bar **210** are geared towards artists; however, case **10** may be used by different types of users and/or for different purposes and may include other optional components that are geared towards the user and/or purpose. For example, case **10** may be designed for the needs of school children in developing countries who lack conventional school furniture. Such cases may include a worktable having a front and/or rear surface of the inside panel made of or painted with a blackboard material for writing with chalk. Case **10** may alternatively be designed to store a laptop for use by field engineers and/or other users operating in the outdoors or in remote areas. Case **10** may optionally include a shoulder strap (not shown) for carrying case **10** with comfort and convenience.

[0066] One or more of top panel **22**, bottom panel **23**, stool seat **30**, and retaining clip **60** prevent front and rear panels **40**, **50** from moving out of position when case **10** is in carrying mode. This may be achieved using a variety of means. For example, Figures 6A-6E and 7A-7B show alternate embodiments for removably securing panels **40**, **50** to worktable **20**. Persons skilled in the art will recognize that front panel **40** and/or rear panel **50** may be removably secured to worktable **20** using an assortment of means, including one or more of the example means shown in Figures 1, 6A-6E, and 7A-7B.

[0067] Figure 6A shows a front panel **40A** having a plurality of furniture snap fittings **160** attached to an inside surface **140A** of front panel **40A**. Furniture snap fittings **160** may be attached adjacent to a top edge **41A** of front panel **40A** and/or a bottom edge **43A** of front panel **40A**. Front panel **40A** is removably snap fit to a worktable **20A** by pressing inside surface **140A** of front panel **40A** against a front edge **124A** of a top panel **22A** and against a bottom edge **126A** of a bottom panel **23A** of worktable **20A**. Persons skilled in the art will recognize that furniture

5 snap fittings **160** may additionally or alternatively be attached to inside surface **140A** of front panel **40A** adjacent to one or more side edges (not shown) of front panel **40A**. Persons skilled in the art will further recognize that furniture snap fittings **160** may additionally or alternatively be attached to top and/or bottom panels **22A**, **23A** and/or side panels (not shown) of worktable **20A** to removably secure front panel **40A** to worktable **20A**. Persons skilled in the art will recognize that similar means may be used to secure the rear panel to worktable **20A**. Persons skilled in the art will further recognize that furniture snap fittings **160** may be replaced with alternate securing means, such as magnets or a hook and loop fastener such as Velcro™ (Figure 6B).

10 [0068] Figure 6B shows a front panel **40B** having at least one hook and loop fastener such as Velcro™ **162** attached to an inside surface **140B** of front panel **40B**. At least one Velcro™ **162** may be attached adjacent to a top edge **41B** of front panel **40B** and/or to a bottom edge **43B** of front panel **40B**. At least one hook and loop fastener such as Velcro™ **164** is attached to an inside surface **129B** of a top panel **22B** adjacent to a front edge **124B** and/or to an inside surface
15 **129B'** of a bottom panel **23B** adjacent to a front edge **126B** of worktable **20B**. In some embodiments, at least one Velcro™ **164** is attached to front edge **124B** of top panel **22B** and/or to front edge **126B** of bottom panel **23B**. At least one Velcro™ **164** engages at least one Velcro™ **162**. In some embodiments, at least one Velcro™ **162** comprises a strip of Velcro™ that extends along top edge **41B** of front panel **40B** and/or along bottom edge **43B** of front panel
20 **40B** and/or at least one Velcro™ **164** comprises a strip of Velcro™ that extends adjacent to front edge **124B** of top panel **22B** and/or adjacent to front edge **126B** of bottom panel **23B**. Persons skilled in the art will recognize that at least one Velcro™ **162** may additionally or alternatively be attached to inside surface **140B** of front panel **40B** adjacent to one or more side edges (not shown) and/or at least one Velcro™ **164** may additionally or alternatively be attached to a front
25 surface of the side panels (not shown) of worktable **20B**. Front panel **40B** is removably secured to worktable **20B** by pressing inside surface **140B** of front panel **40B** against front edge **124B** of top panel **22B** and front edge **126B** of bottom panel **23B**. Persons skilled in the art will recognize that similar means may be used to secure the rear panel to worktable **20B**.

30 [0069] Figure 6C shows a front panel **40C** having a strip of wood **170** attached to an inside surface **140C** of front panel **40C**. Wood strip **170** may be attached adjacent to a top edge **41C** of

front panel **40C** (for example, ¼" from top edge **41C**). Front panel **40C** further includes a notch **47C** at a bottom edge **43C** for engaging retaining clip **60**. Retaining clip **60** is attached to a bottom panel **23C** of workstation **20C** as described elsewhere herein. Front panel **40C** is removably secured to worktable **20C** by inserting notch **47C** of front panel **40C** into a channel **66C** formed between front edge **64** of retaining clip **60** and a front edge **126C** of bottom panel **23C** of worktable **20C**. Wood strip **170** frictionally engages an inside surface **129C** of a top panel **22C** of worktable **20C**. Persons skilled in the art will recognize that one or more wood strips **170** may be used. In some embodiments, a single wood strip **170** extends along adjacent to top edge **41C** of front panel **40C**. Persons skilled in the art will recognize that similar means may be used to secure the rear panel to worktable **20C**.

[0070] Figure 6D shows a worktable **20D** having a top bracket **180** secured to a top surface **21D** of a top panel **22D** of worktable **20D** and a bottom bracket **182** secured to a bottom surface **185D** of bottom panel **23D** of worktable **20D**. Top and bottom brackets **180**, **182** may be L-shaped and form channels **184**, **186** between a front edge **181** of front bracket **180** and a front edge **124D** of top panel **22D** and between a front edge **183** of bottom bracket **182** and a front edge **126D** of bottom panel **23D**. One or more top bracket **180** and/or one or more bottom bracket **182** may be used. In some embodiments, top bracket **180** extends along front edge **124D** of top panel **22D** and/or bottom bracket **182** extends along front edge **126D** of bottom panel **23D**. Front panel **40D** is removably secured to worktable **20D** by simultaneously inserting a top edge **41D** of front panel **40D** through channel **184** and inserting a bottom edge **43D** of front panel **40D** through channel **186**. Persons skilled in the art will recognize that similar means may be used to secure the rear panel to worktable **20D**.

[0071] Figure 6E shows a worktable **20E** having at least one groove **190** in an inside surface **129E** of a top panel **22E** adjacent to a front edge **124E** thereof and at least one groove **190E** in an inside surface **129E'** of a bottom panel **23E** adjacent to a front edge **126E** thereof. Front panel **40E** includes at least one tongue **192** on a top edge **41E** and at least one tongue **192E** on a bottom edge **43E** thereof. In some embodiments, groove **190** may extend along inside surface **129E** of top panel **22E** along front edge **124E** and/or groove **190E** may extend along inside surface **129E'** of bottom panel **23E** along front edge **126E**. Tongue **192** may extend along top

edge **41E** of front panel **40E** and/or tongue **192E** may extend along bottom edge **43E** of front panel **40E**. Front panel **40E** may be removably snap fit to worktable **20E** by engaging at least one tongue **192** of front panel **40E** with at least one groove **190** of worktable **20E** and engaging at least one tongue **192E** of front panel **40E** with at least one groove **190E** of worktable **20E**.

5 Persons skilled in the art will recognize that at least one tongue **192** and/or **192E** of front panel **40E** may be substituted with at least one groove and/or at least one groove **190** and/or **190E** of worktable **20E** may be substituted with at least one tongue. Persons skilled in the art will recognize that similar means may be used to secure the rear panel to worktable **20E**.

10 **[0072]** In the example embodiments shown in Figures 6A-6B and 6D-6E, retaining clip **60** is not required to removably secure the front and rear panels to the worktable.

[0073] Figure 7A shows a convertible case **300** in accordance with one example embodiment of the present invention. Many features and components of case **300** are similar to features and components of case **10**, with the same reference numerals being used to indicate features and components that are similar between the embodiments. To retain front and rear panels **40**, **50** in position when case **300** is in carrying mode, case **300** includes top retaining clips **310**, **312** and bottom retaining clips **320**, **322**. Top retaining clips **310**, **312** are L-shaped and fit about the corners formed by top panel **22** and side panels **24**, **25**. In some embodiments, front edge **124** (Figure 2) of top panel **22** and front edge **126** of side panels **24**, **25** are coplanar and/or rear edge **125** of top panel **22** and the rear edge (not shown) of side panels **24**, **25** are coplanar. In such embodiments, top retaining clips **310**, **312** extend outwardly from the front edge and/or the rear edge of top panel **22** and side panels **24**, **25** such that top retaining clips **310**, **312** prevent front panel **40** and/or rear panel **50** from moving out of position (i.e. upwards or sideways) when case **300** is in carrying mode. In some other embodiments, front edge **124** of top panel **22** may extend outwardly from front edge **126** of side panels **24**, **25** and/or rear edge **125** of top panel **22** may extend outwardly from the rear edge (not shown) of side panels **24**, **25** to prevent front panel **40** and/or rear panel **50** from moving upwards when case **300** is in carrying mode. In such embodiments, top retaining clips **310**, **312** may not extend beyond front edge **124** and/or rear edge **125** of top panel **22**.

[0074] Bottom retaining clips **320**, **322** are shaped to fit about the corners formed by bottom panel **23** and side panels **24**, **25**. Bottom retaining clip **320** comprises an L-shaped member **324**, a front panel retaining member **326** at a front end of L-shaped member **324**, and a rear panel retaining member (not shown) at a rear end of L-shaped member **324**. Many features and components of bottom retaining clip **322** are similar to features and components of bottom retaining clip **320**. In some embodiments, the front edge of bottom panel **23** and the front edge of side panels **24**, **25** are coplanar and/or the rear edge of bottom panel **23** and the rear edge of side panels **24**, **25** are coplanar. In such embodiments, bottom retaining clips **320**, **322** extend outwardly from the front edge and/or the rear edge of bottom panel **23** and side panels **24**, **25** such that bottom retaining clips **320**, **322** prevent front panel **40** and/or rear panel **50** from moving out of position (i.e. downwards or sideways) when case **300** is in carrying mode. In some other embodiments, the front edge of bottom panel **23** may extend outwardly from the front edge of side panels **24**, **25** and/or the rear edges of bottom panel **23** may extend outwardly from the rear edges of side panels **24**, **25** to prevent front panel **40** and/or rear panel **50** from moving downwards when case **300** is in carrying mode. In such embodiments, bottom retaining clips **320**, **322** may not extend beyond the front edge and/or the rear edge of bottom panel **23**.

[0075] Figure 7B shows a convertible case **400** in accordance with one example embodiment of the present invention. Many features and components of case **400** are similar to features and components of case **300**, with the same reference numerals being used to indicate features and components that are similar between the embodiments. To prevent front panel **40** and/or rear panel **50** from moving upwards when case **400** is in carrying mode, the front edge **124** of top panel **22** extends outwardly from the front edges **126** of side panels **24**, **25** and the rear edge **125** of top panel **22** extends outwardly from the rear edges (not shown) of side panels **24**, **25**.

[0076] Figures 8A-8B show a convertible case **500** in accordance with one example embodiment of the present invention. Many features and components of case **500** are similar to features and components of case **10**, with the same reference numerals being used to indicate features and components that are similar between the embodiments. Worktable **20**, stool seat **30**, front panel **40**, and rear panel **50** are each made of a molded thermoplastic or thermosetting plastic. For example, worktable **20**, stool seat **30**, front panel **40**, and rear panel **50** may each be made of a

one-piece injection molded thermoplastic. Worktable **20** is integrally formed and includes an integral handle **510**. Front panel **40** and rear panel **50** are snap fit to worktable **20** using a tongue and groove fastening means, such as the fastening means shown in Figure 6E. As best seen in Figure 8A, top panel **22** and/or bottom panel **23** of worktable **20** include rounded corners **520** to prevent front panel **40** and rear panel **50** from moving out of position when case **500** is in carrying mode. Persons skilled in the art will recognize that front panel **40** and/or rear panel **50** may be secured to worktable **20** using other fastening means conventionally known and/or described elsewhere herein.

10 [0077] Figure 9 shows a convertible case **600** in accordance with one example embodiment of the present invention. Many features and components of case **600** are similar to features and components of case **10**, with the same reference numerals being used to indicate features and components that are similar between the embodiments. Worktable **20**, stool seat **30**, front panel **40**, and rear panel **50** are each made of a molded thermoplastic or thermosetting plastic. For example, worktable **20**, stool seat **30**, front panel **40**, and rear panel **50** may each be made of a one-piece injection molded thermoplastic. Worktable **20** is integrally formed and includes an integral handle **610**. The fasteners of stool seat **30**, front panel **40**, and rear panel **50**, described elsewhere herein, are integrally formed therewith. For example, fasteners **46** are integrally formed with front panel **40**. Fasteners **34** are integrally formed with stool seat **30**. Front panel **40** and rear panel **50** are snap fit to worktable **20** using a tongue and groove fastening means, such as the fastening means shown in Figure 6E. To prevent front panel **40** and rear panel **50** from moving out of position when case **600** is in carrying mode top panel **22** and/or bottom panel **23** of worktable **20** include rounded corners **520**. Persons skilled in the art will recognize that front panel **40** and/or rear panel **50** may be secured to worktable **20** using other fastening means conventionally known and/or described elsewhere herein.

Interpretation of Terms

[0078] Unless the context clearly requires otherwise, throughout the description and the claims:

- “comprise”, “comprising”, and the like are to be construed in an inclusive sense, as opposed to an exclusive or exhaustive sense; that is to say, in the sense of “including, but not limited to”;

- “connected”, “coupled”, or any variant thereof, means any connection or coupling, either direct or indirect, between two or more elements; the coupling or connection between the elements can be physical, logical, or a combination thereof;
- “herein”, “above”, “below”, and words of similar import, when used to describe this specification, shall refer to this specification as a whole, and not to any particular portions of this specification;
- “or”, in reference to a list of two or more items, covers all of the following interpretations of the word: any of the items in the list, all of the items in the list, and any combination of the items in the list;
- the singular forms “a”, “an”, and “the” also include the meaning of any appropriate plural forms.

[0079] Words that indicate directions such as “vertical”, “transverse”, “horizontal”, “upward”, “downward”, “forward”, “backward”, “inward”, “outward”, “left”, “right”, “front”, “back”, “top”, “bottom”, “below”, “above”, “under”, and the like, used in this description and any accompanying claims (where present), depend on the specific orientation of the apparatus described and illustrated. The subject matter described herein may assume various alternative orientations. Accordingly, these directional terms are not strictly defined and should not be interpreted narrowly.

20

[0080] Where a component (e.g. a substrate, assembly, device, manifold, etc.) is referred to above, unless otherwise indicated, reference to that component (including a reference to a “means”) should be interpreted as including as equivalents of that component any component which performs the function of the described component (i.e., that is functionally equivalent), including components which are not structurally equivalent to the disclosed structure which performs the function in the illustrated exemplary embodiments described herein.

[0081] Specific examples of systems, methods, and apparatus have been described herein for purposes of illustration. These are only examples. The technology provided herein can be applied to systems other than the example systems described above. Many alterations, modifications, additions, omissions, and permutations are possible within the practice of this invention. This invention includes variations on described embodiments that would be apparent to the skilled

30

addressee, including variations obtained by: replacing features, elements and/or acts with
equivalent features, elements and/or acts; mixing and matching of features, elements and/or acts
from different embodiments; combining features, elements and/or acts from embodiments as
described herein with features, elements and/or acts of other technology; and/or omitting
5 combining features, elements and/or acts from described embodiments.

WHAT IS CLAIMED IS:

1. A case convertible into a stool and a working surface, the case comprising:
 - a worktable;
 - 5 a front panel removably secured to a front side of the worktable;
 - a rear panel removably secured to a rear side of the worktable; and
 - a stool seat,wherein the front and rear panels are interconnectable to form a supporting substructure of the stool and the stool seat is removably attachable to the substructure.
10
2. A case according to claim 1, wherein the front and rear panels each comprise a slot inwardly extending from a first edge thereof, wherein the front and rear panels are interconnected by sliding the slot of the front panel through the slot of the rear panel.
- 15 3. A case according to claim 1 or 2, wherein the stool seat comprises a front end removably attachable to the front panel and a rear end removably attachable to the rear panel.
4. A case according to claim 3, wherein the stool seat comprises at least one front end fastener positioned adjacent to the front end and at least one rear end fastener positioned
20 adjacent to the rear end.
5. A case according to claim 4, wherein the front and rear panels each comprise at least one case fastener secured to a first surface thereof and positioned adjacent to an inward end of the slot, the at least one case fastener of the front panel for engaging the at least one front
25 end fastener of the stool seat and the at least one case fastener of the rear panel for engaging the at least one rear end fastener of the stool seat when the front and rear panels are removably secured to the worktable.
6. A case according to claim 5, wherein the stool seat extends across a top surface of the
30 worktable when the front and rear panels are removably secured to the worktable.

7. A case according to claim 4, wherein the front and rear panels each comprise at least one stool fastener secured to the first surface thereof and positioned adjacent to a second edge parallel to the slot, the at least one stool fastener of the front panel for engaging the at least one front end fastener of the stool seat and the at least one stool fastener of the rear panel for engaging the at least one rear end fastener of the stool seat when the front and rear panels are interconnected to form the substructure of the stool.
8. A case according to claim 4, wherein the front and rear panels each comprise at least one stool fastener secured to a second surface thereof and positioned adjacent to a second edge parallel to the slot, the at least one stool fastener of the front panel for engaging the at least one front end fastener of the stool seat and the at least one stool fastener of the rear panel for engaging the at least one rear end fastener of the stool seat when the front and rear panels are interconnected to form the substructure of the stool.
9. A case according to claim 6, wherein the stool seat includes a handle.
10. A case according to any one of claims 1 to 9, wherein the stool seat comprises a flexible sheet material.
11. A case according to any one of claims 1 to 9, wherein the stool seat comprises a hinged or an articulated rigid material.
12. A case according to any one of claims 1 to 11, further comprising at least one retaining clip attached to a bottom surface of the worktable for removably securing the front and rear panels to the worktable.
13. A case according to claim 12, wherein the front and rear panels each comprise a notch adjacent to a third edge thereof for engaging the at least one retaining clip.
14. A case according to any one of claims 1 to 13, wherein the front and rear panels each comprise at least one worktable fastener for removably securing the front and rear panels

to the worktable.

15. A case according to any one of claims 1 to 14, wherein the worktable comprises at least one panel fastener for removably securing the front and rear panels to the worktable.

5

16. A case according to claim 1, wherein the worktable comprises:

an inside panel;

a top panel secured to a top edge of the inside panel;

a bottom panel secured to a bottom edge of the inside panel opposed to the top edge;

10

a first side panel secured to a first side edge of the inside panel; and

a second side panel secured to a second side edge of the inside panel opposed to the first side edge.

17. A case according to claim 16, wherein an inside surface of each of the top panel, the

15

bottom panel, the first side panel, and the second side panel and a first surface of the inside panel form a first cavity.

18. A case according to claim 16 or 17, wherein the inside surface of each of the top panel, the bottom panel, the first side panel, and the second side panel and a second surface of the

20

inside panel form a second cavity.

19. A case according to any one of claims 16 to 18, wherein the worktable is integrally formed.

20. A case according to any one of claims 16 to 19, wherein a front edge of the top panel

25

extends outwardly from a front edge of the side panels and a rear edge of the top panel extends outwardly from a rear edge of the side panels.

21. A case according to claim 20, wherein opposed edges of the front and rear panels each

30

comprise at least one tongue and an inside surface of each the top and bottom panels of the worktable each comprise at least one groove adjacent to both of the front and rear edges thereof, wherein the at least one tongue of the front panel matingly engages the at least one

groove of the top and bottom panels of the worktable adjacent to the front edge and the at least one tongue of the rear panel matingly engages the at least one groove of the top and bottom panels of the worktable adjacent to the rear edge.

5 22. A case according to claim 20, wherein opposed edges of the front and rear panels each comprise at least one groove and an inside surface of each the top and bottom panels of the worktable each comprise at least one tongue adjacent to both of the front and rear edges thereof, wherein the at least one groove of the front panel matingly engages the at least one tongue of the top and bottom panels of the worktable adjacent to the front edge and the at
10 least one groove of the rear panel matingly engages the at least one tongue of the top and bottom panels of the worktable adjacent to the rear edge.

23. A stool comprising:

15 a front panel comprising a front slot inwardly extending from a first front panel edge thereof;

a rear panel comprising a rear slot inwardly extending from a first rear panel edge thereof; and

a stool seat,

20 wherein the front and rear panels are interconnectable to form a supporting substructure of the stool by sliding the slot of the front panel through the slot of the rear panel, and wherein the stool seat is attached to the substructure.

24. A stool according to claim 23, wherein the stool seat comprises at least one front end fastener positioned adjacent to a front end thereof and at least one rear end fastener
25 positioned adjacent to a rear end thereof.

25. A stool according to claim 24, wherein the front panel comprises at least one front fastener secured to a first surface thereof and positioned adjacent to a first front panel edge parallel to the front slot and the rear panel comprises at least one rear fastener secured to a second
30 surface thereof and positioned adjacent to a first rear panel edge parallel to the rear slot, the at least one front fastener of the front panel for engaging the at least one front end fastener

of the stool seat and the at least one rear fastener of the rear panel for engaging the at least one rear end fastener of the stool seat when the front and rear panels are interconnected to form the substructure of the stool.

5

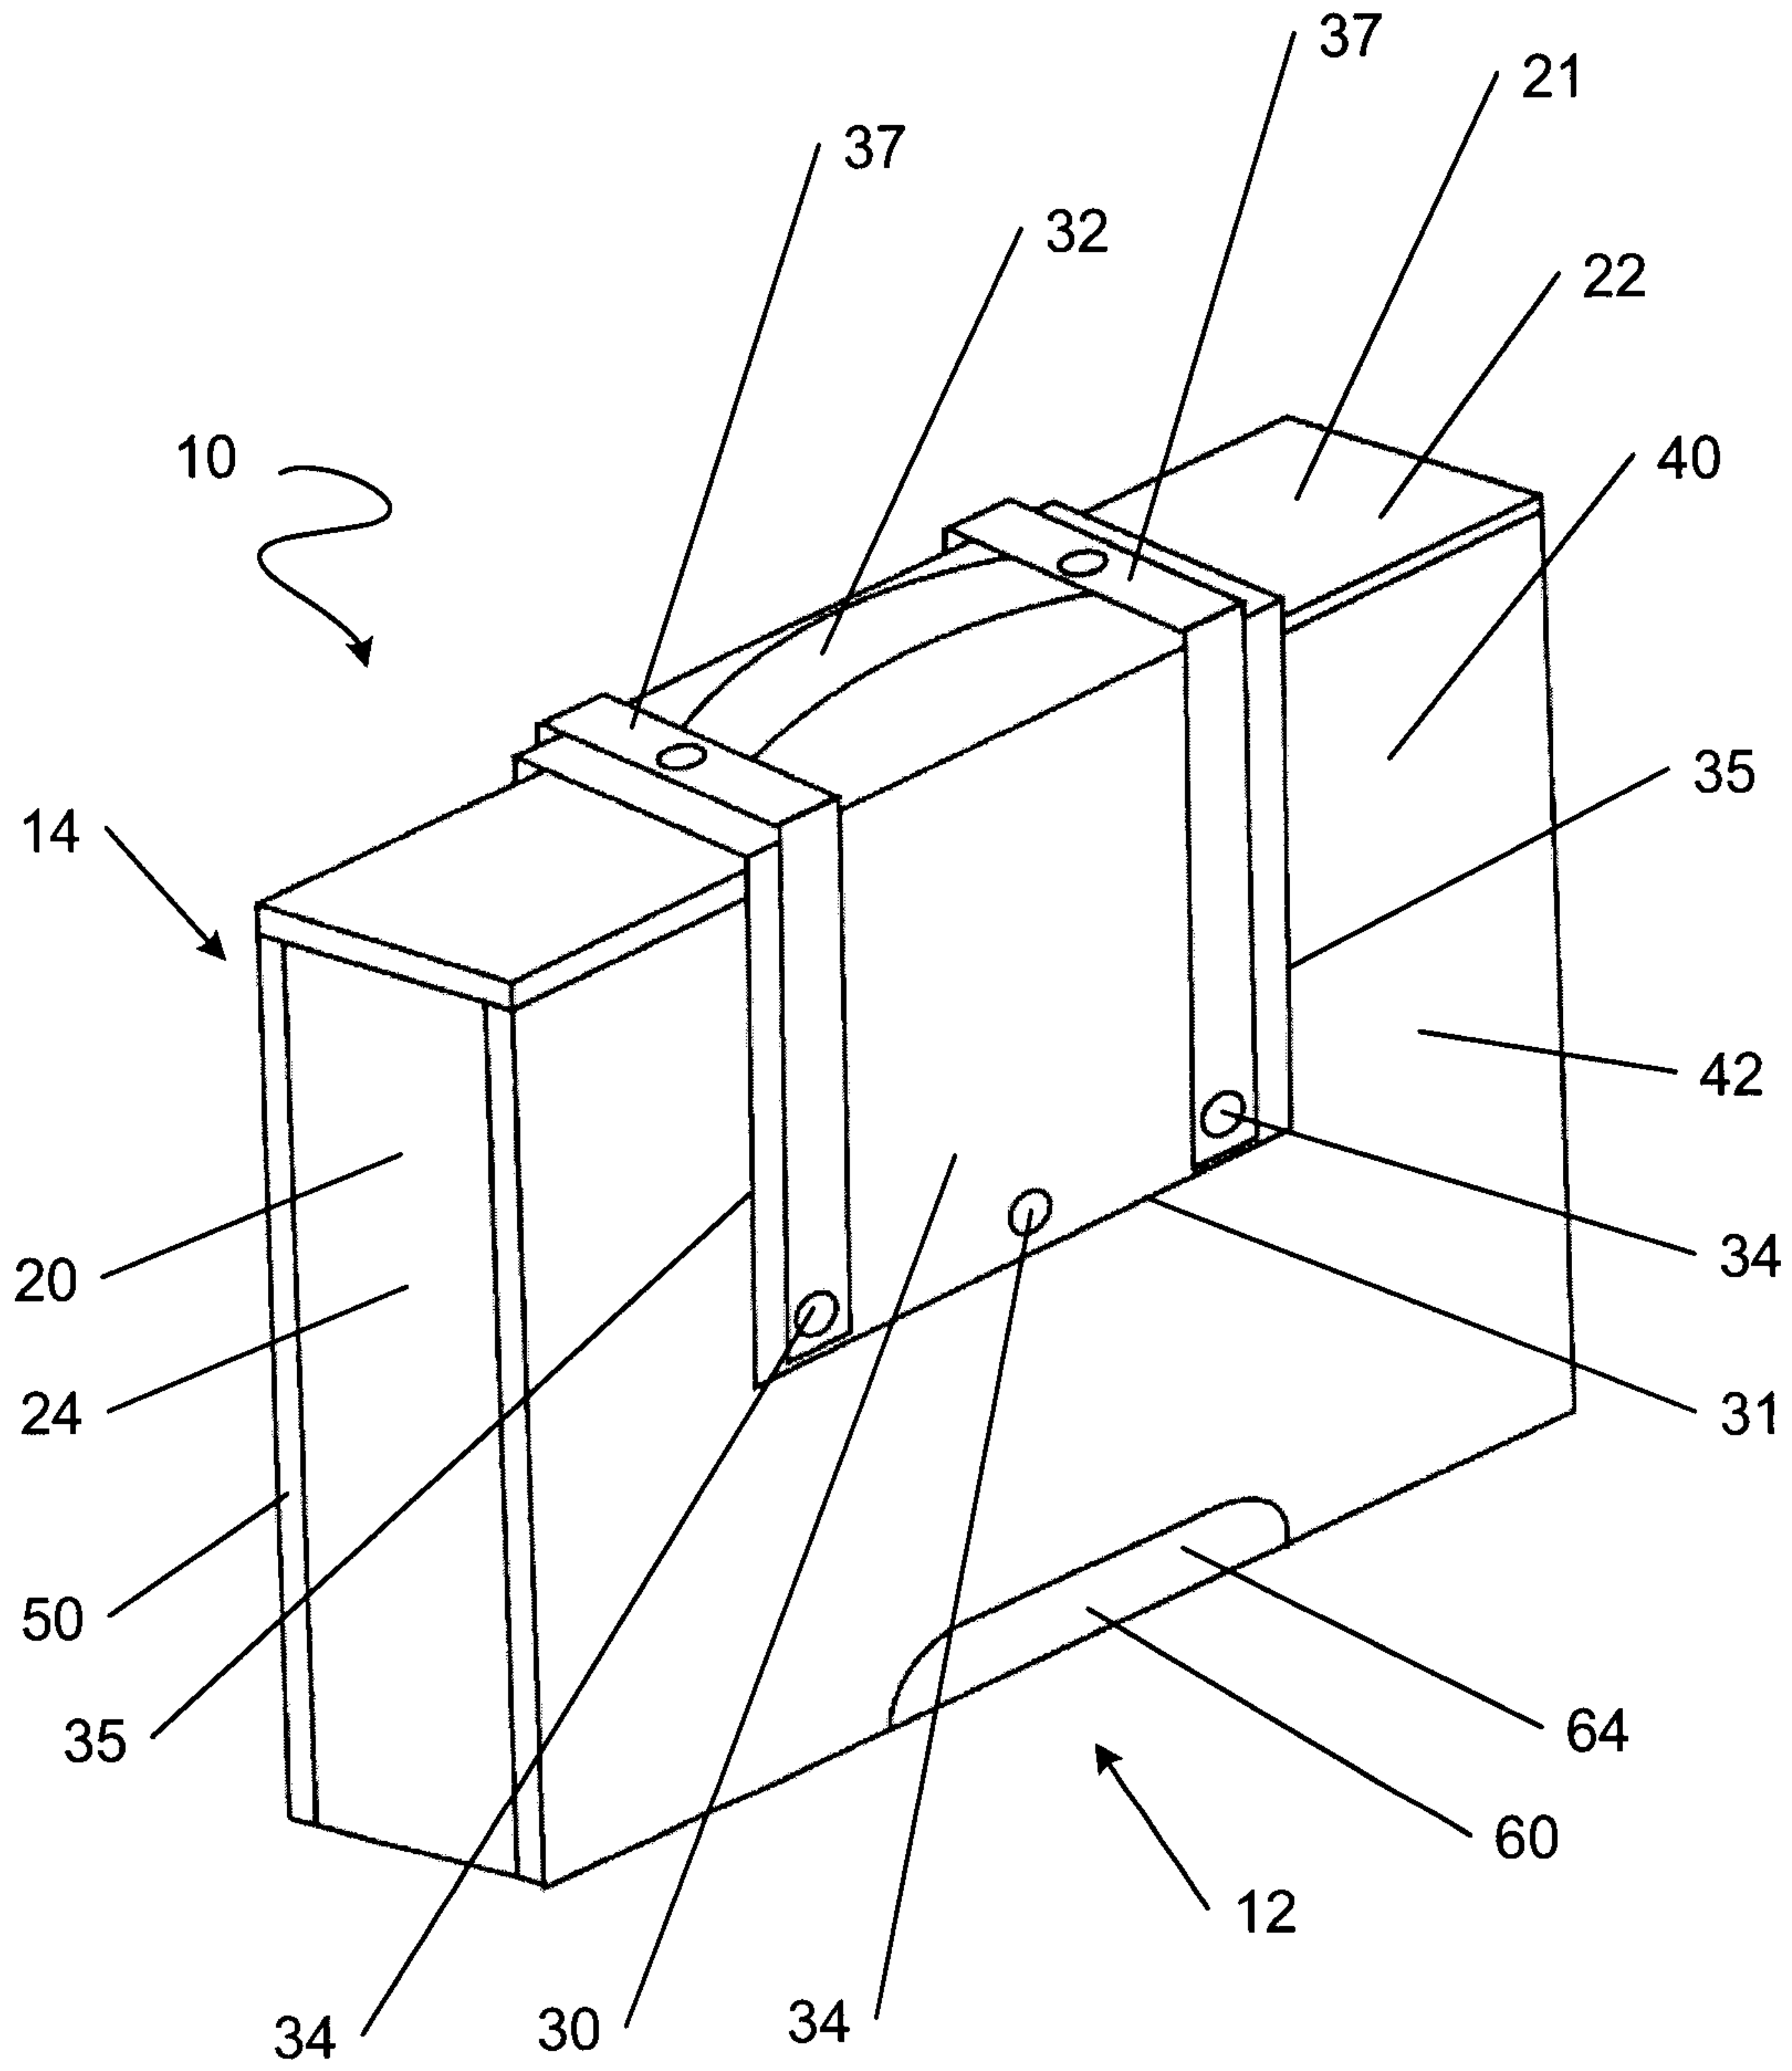


FIG. 1

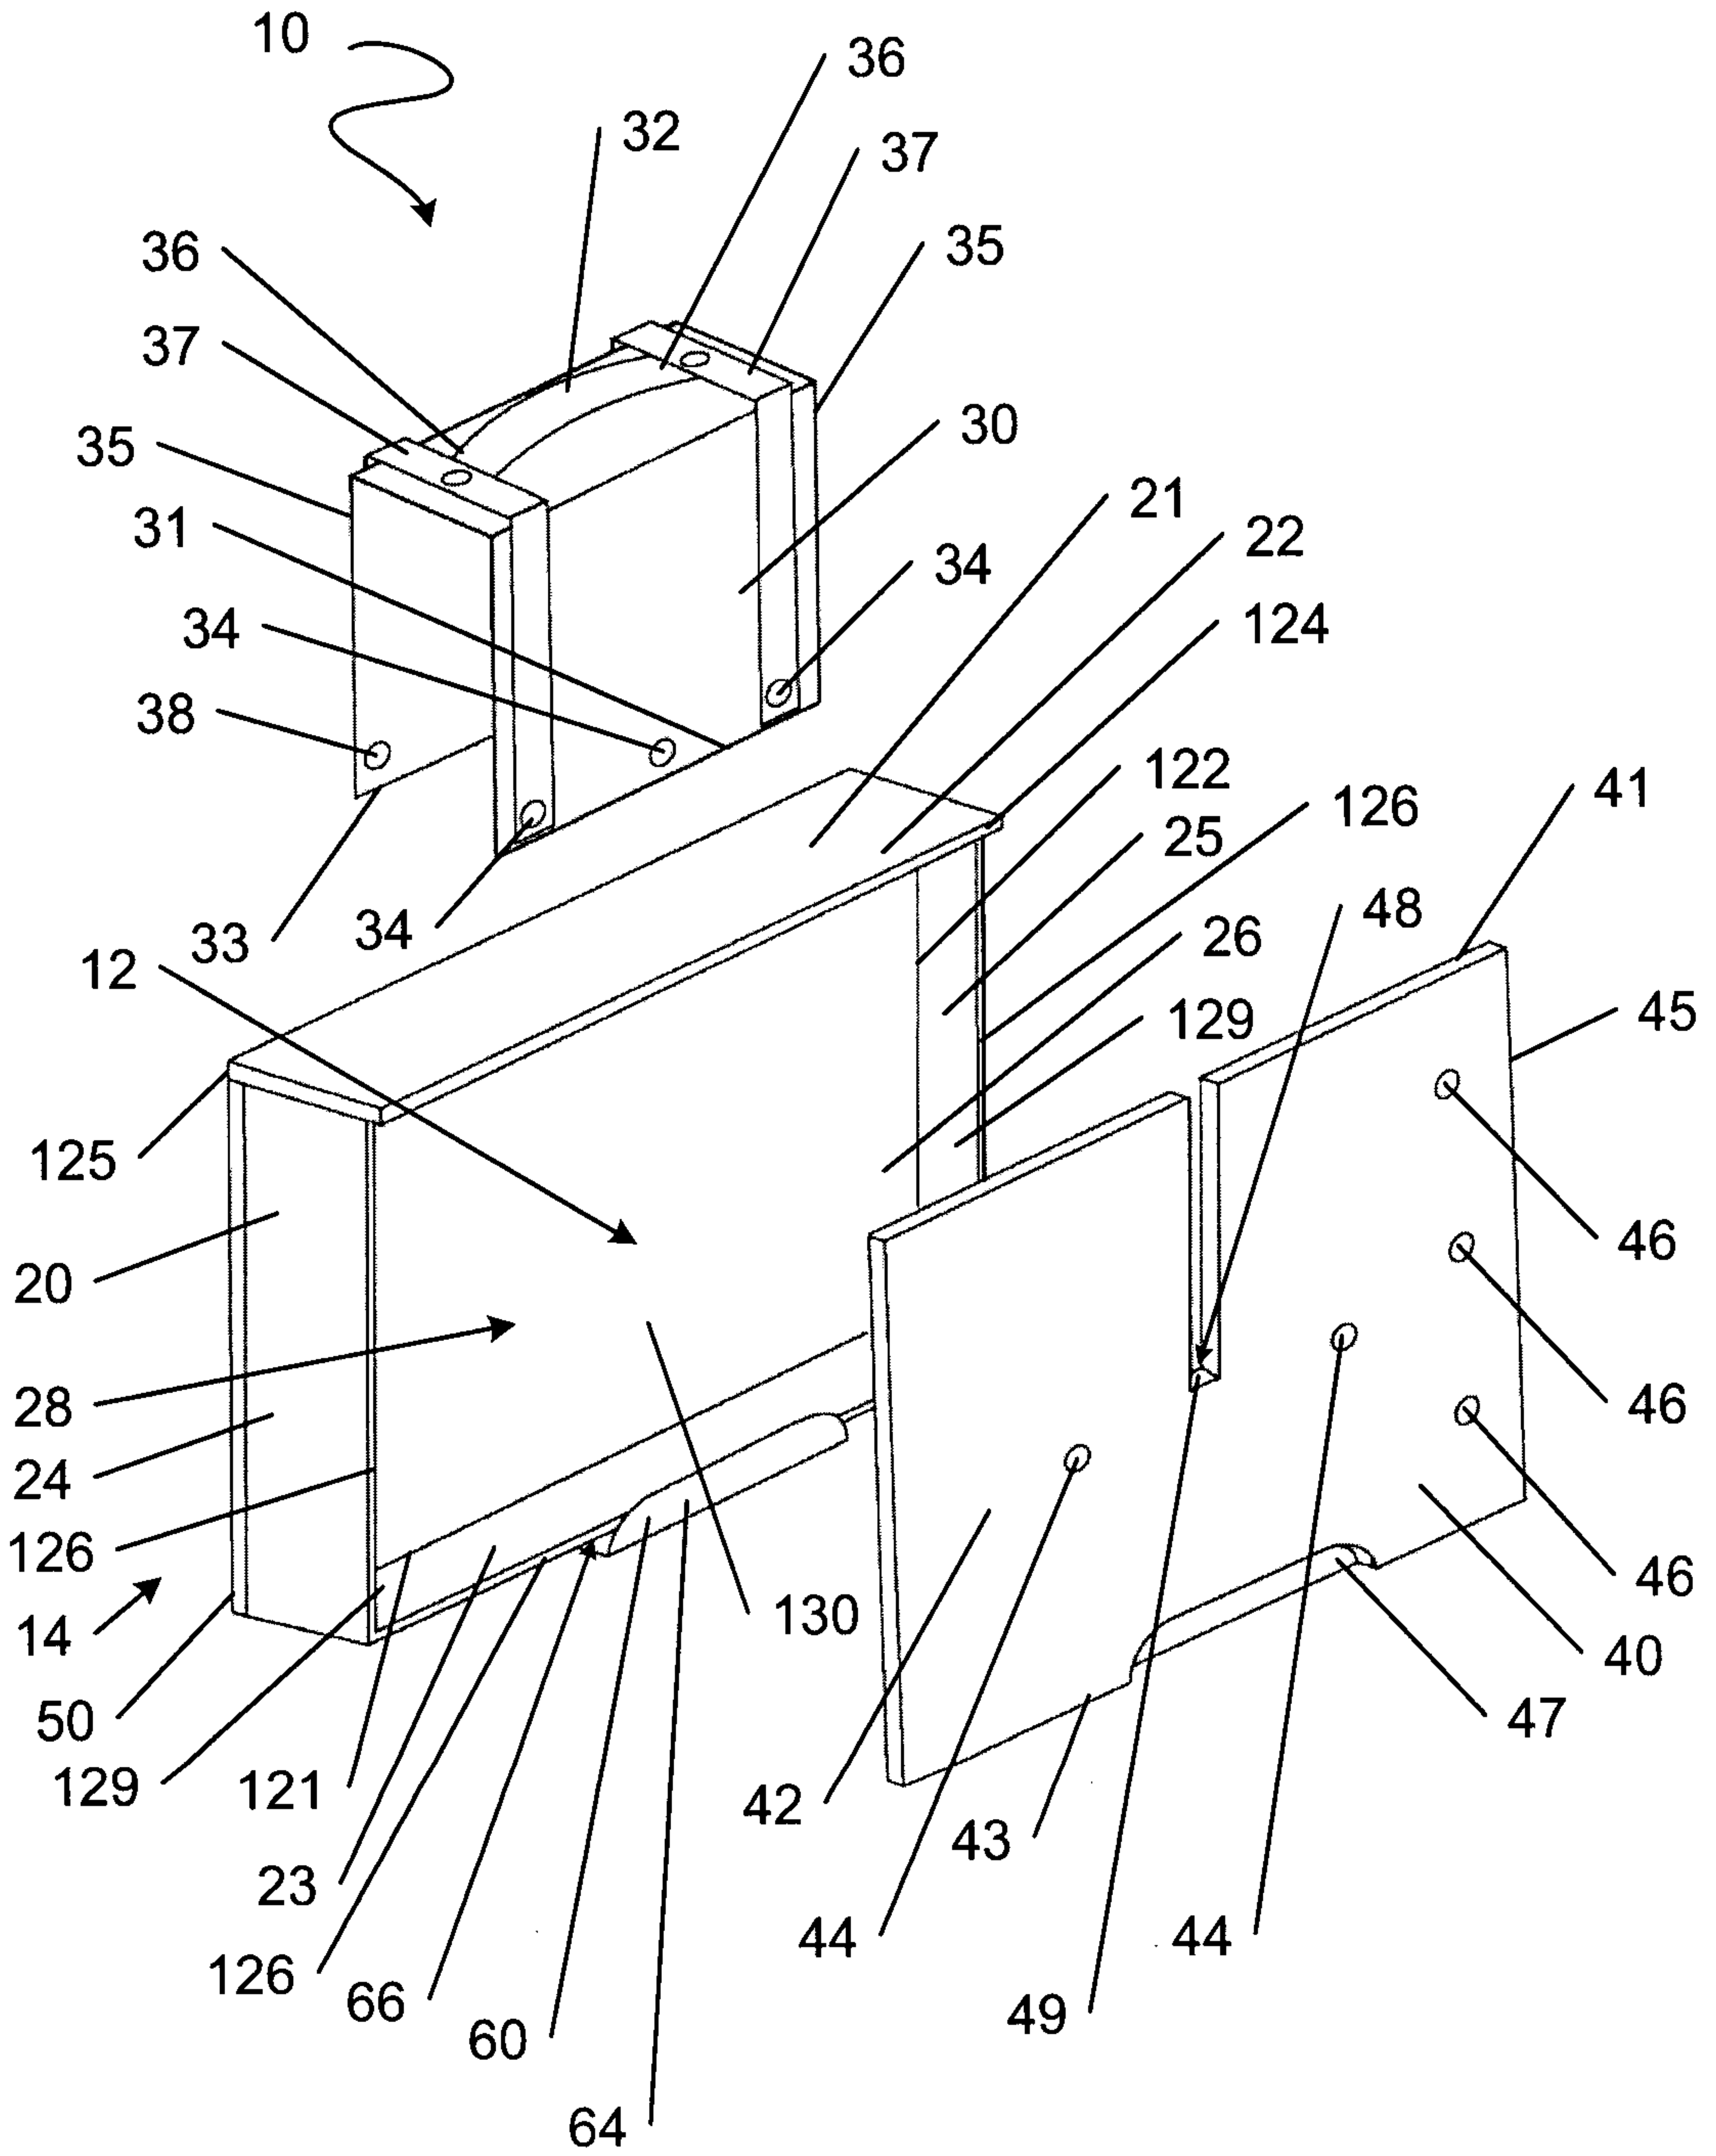


FIG. 2

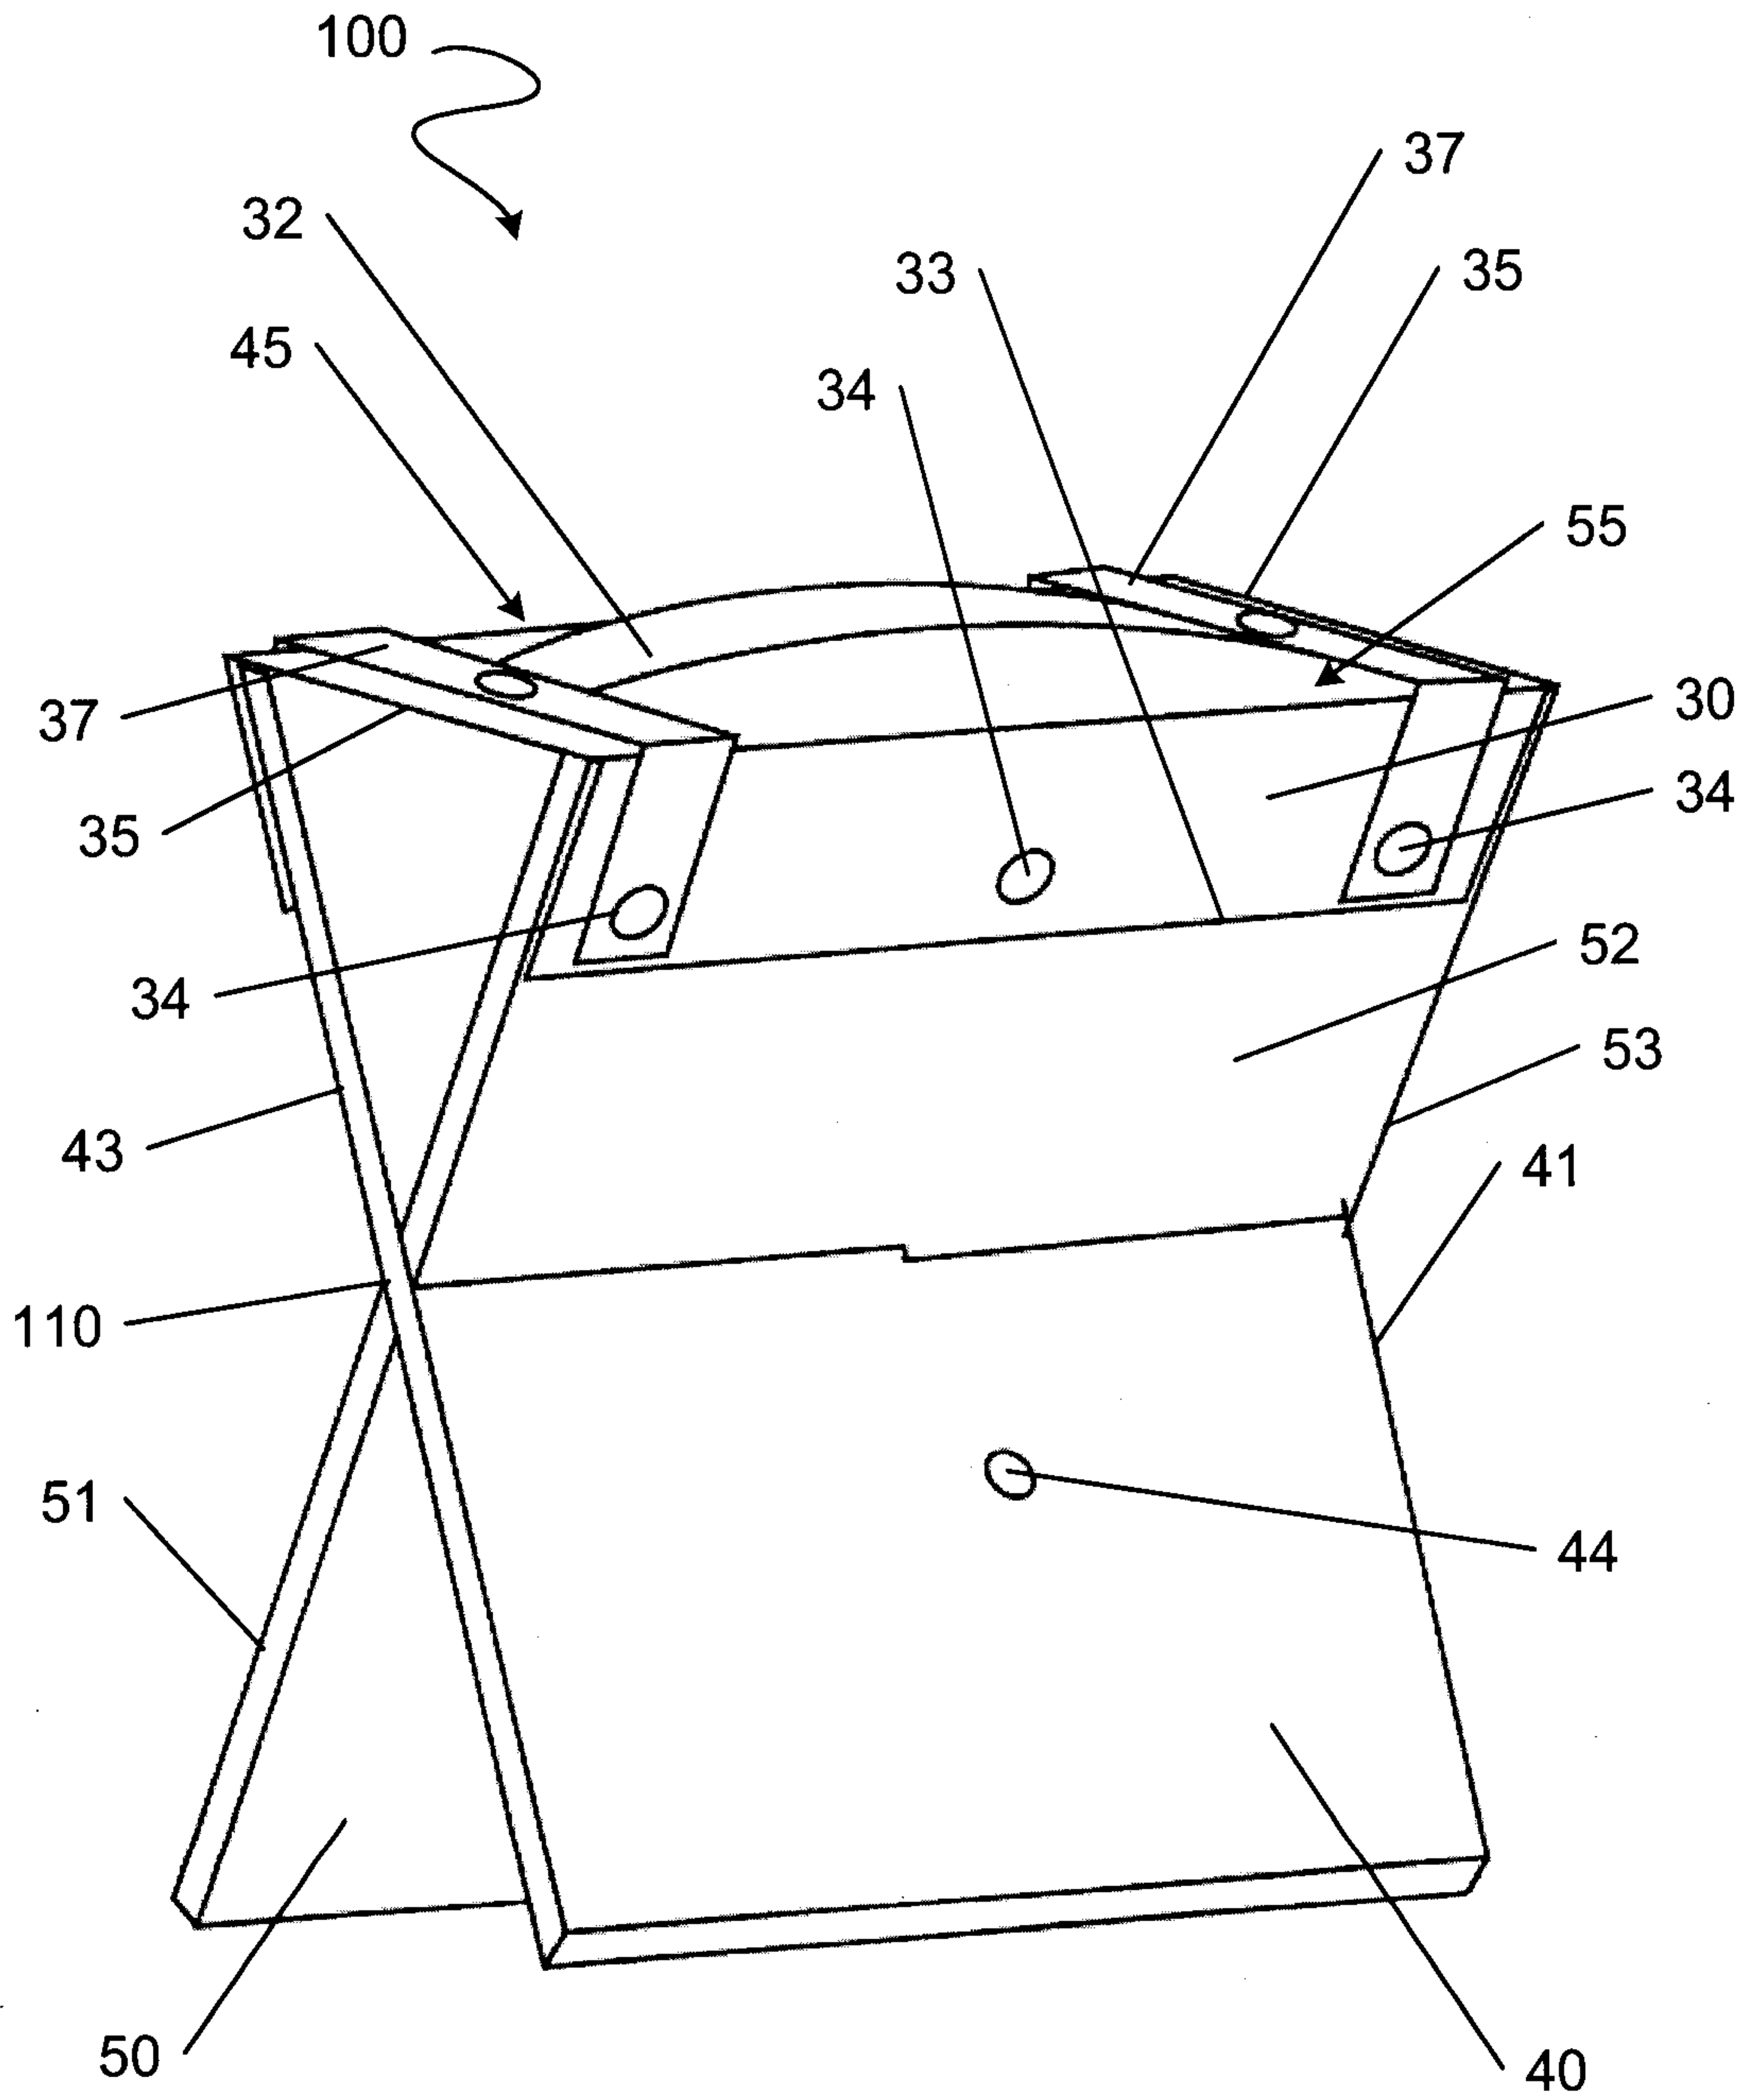


FIG. 3

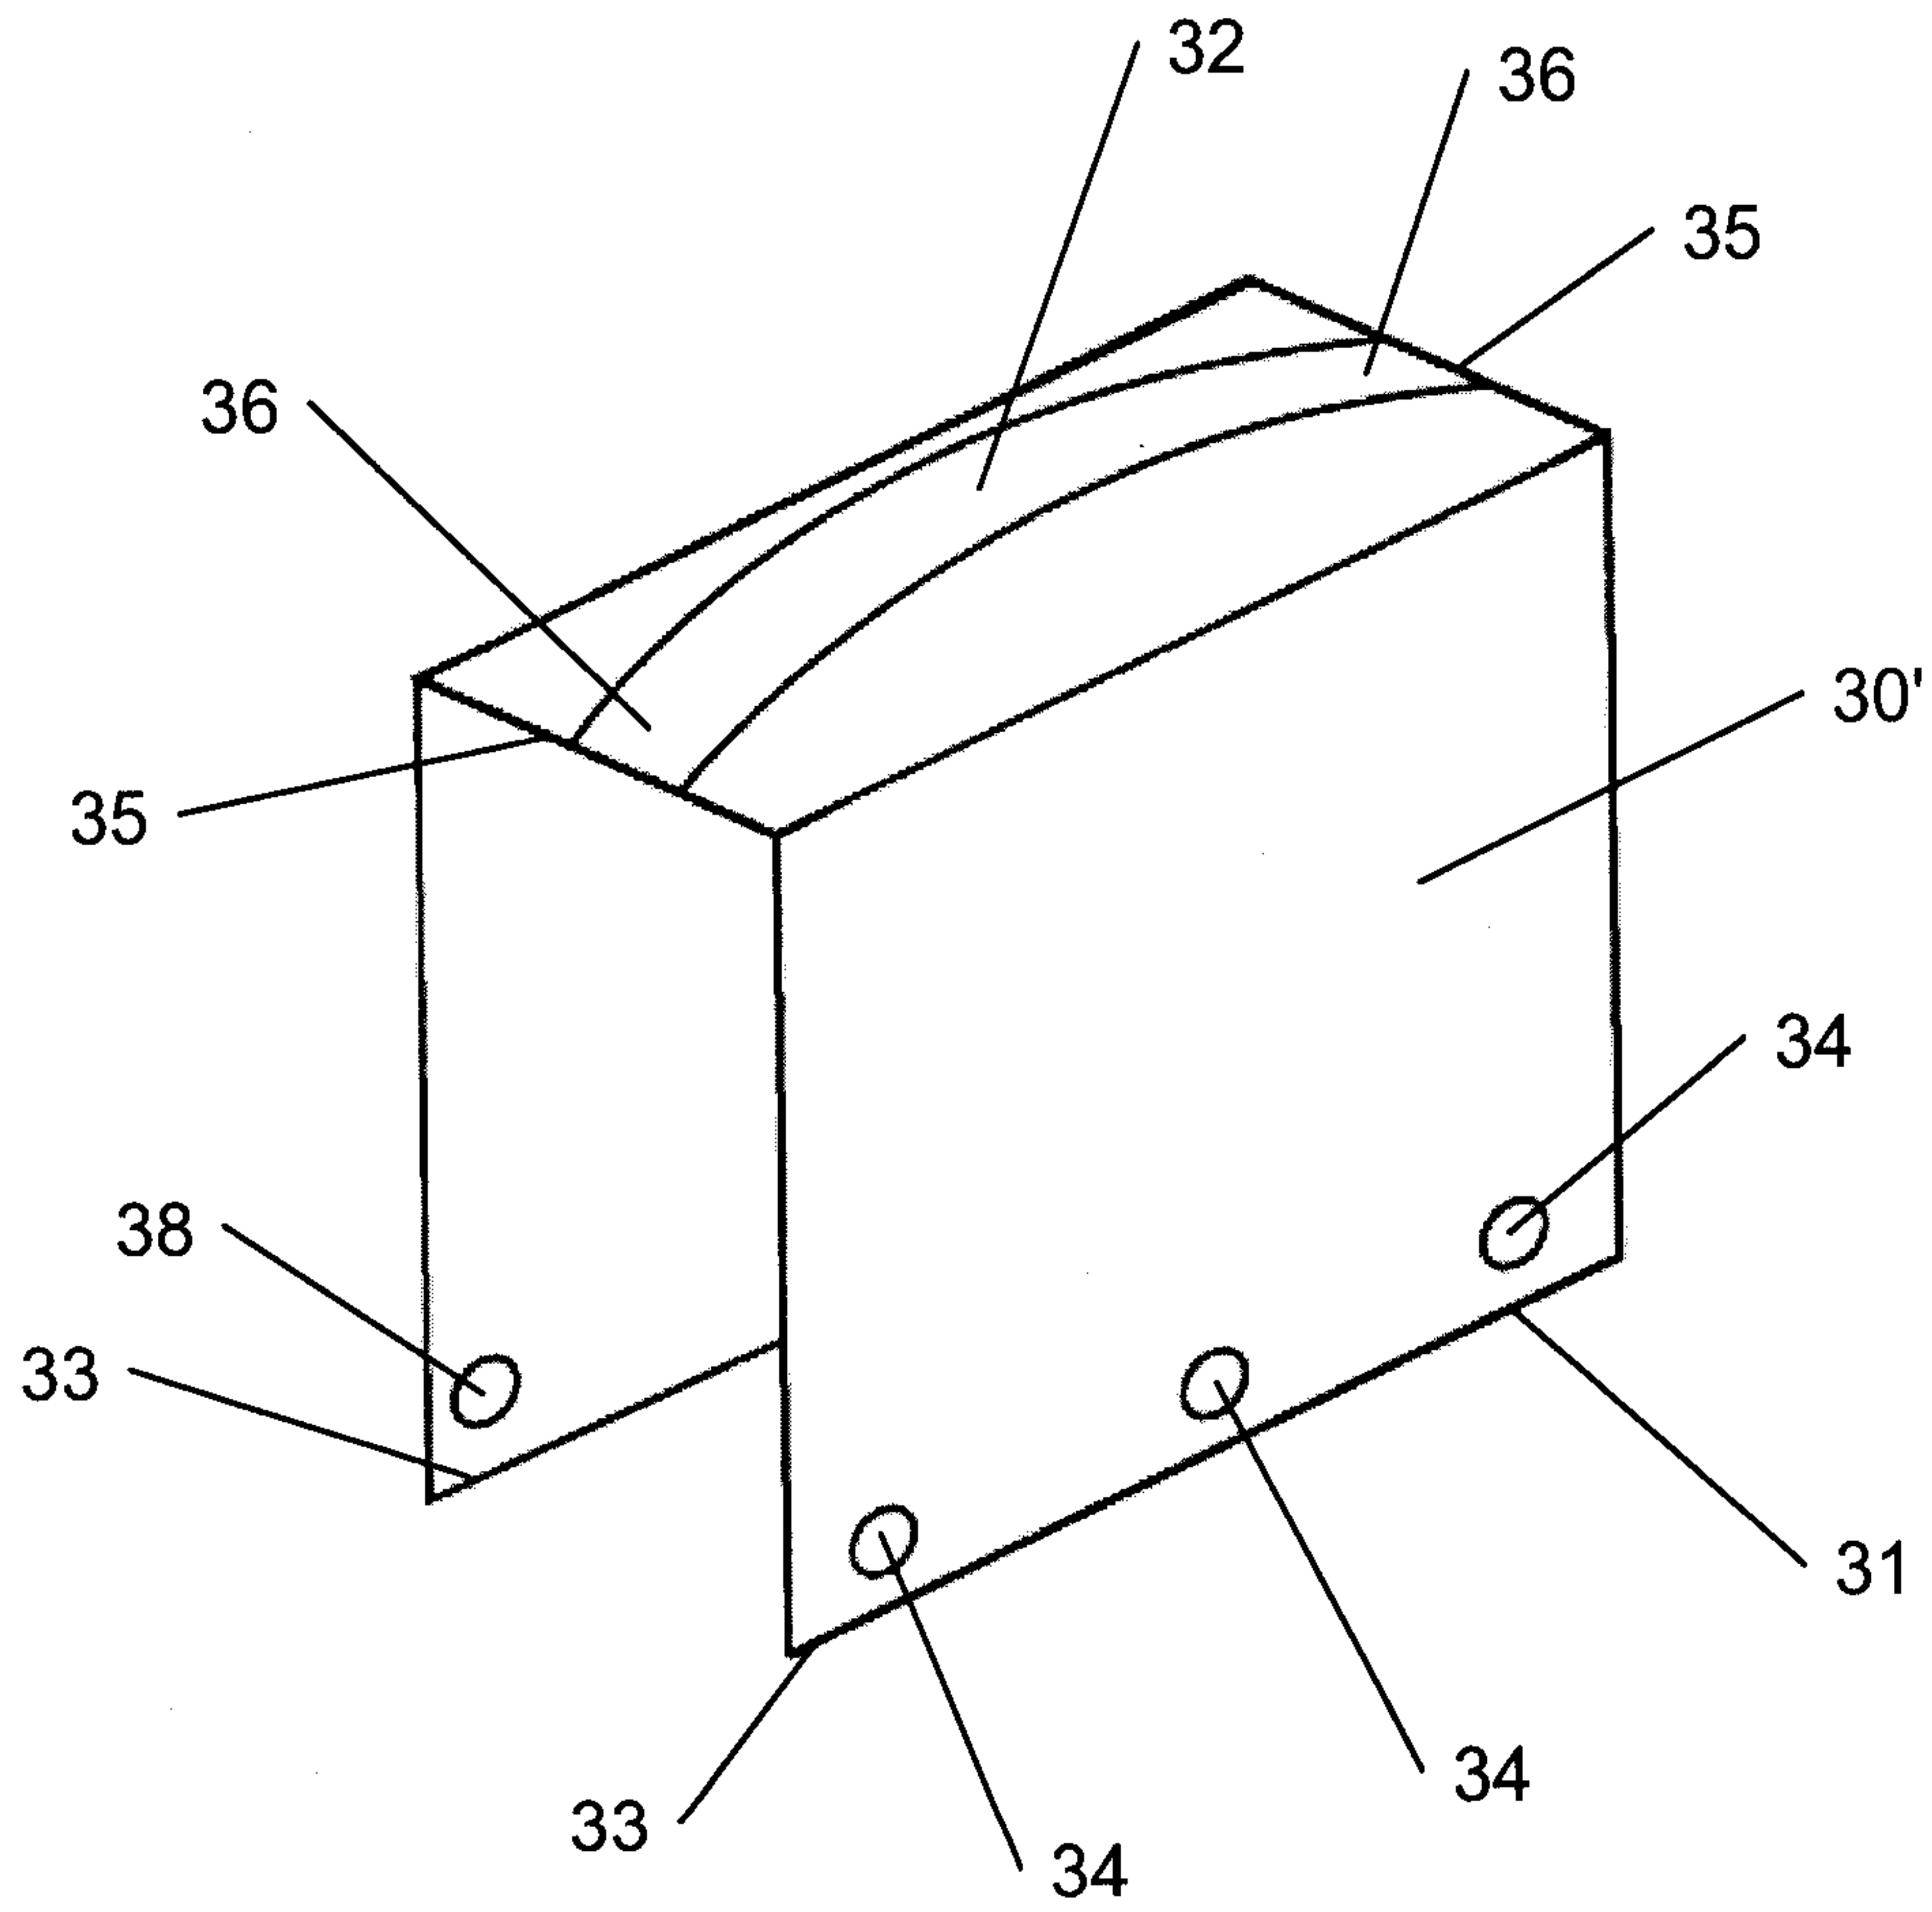


FIG. 4

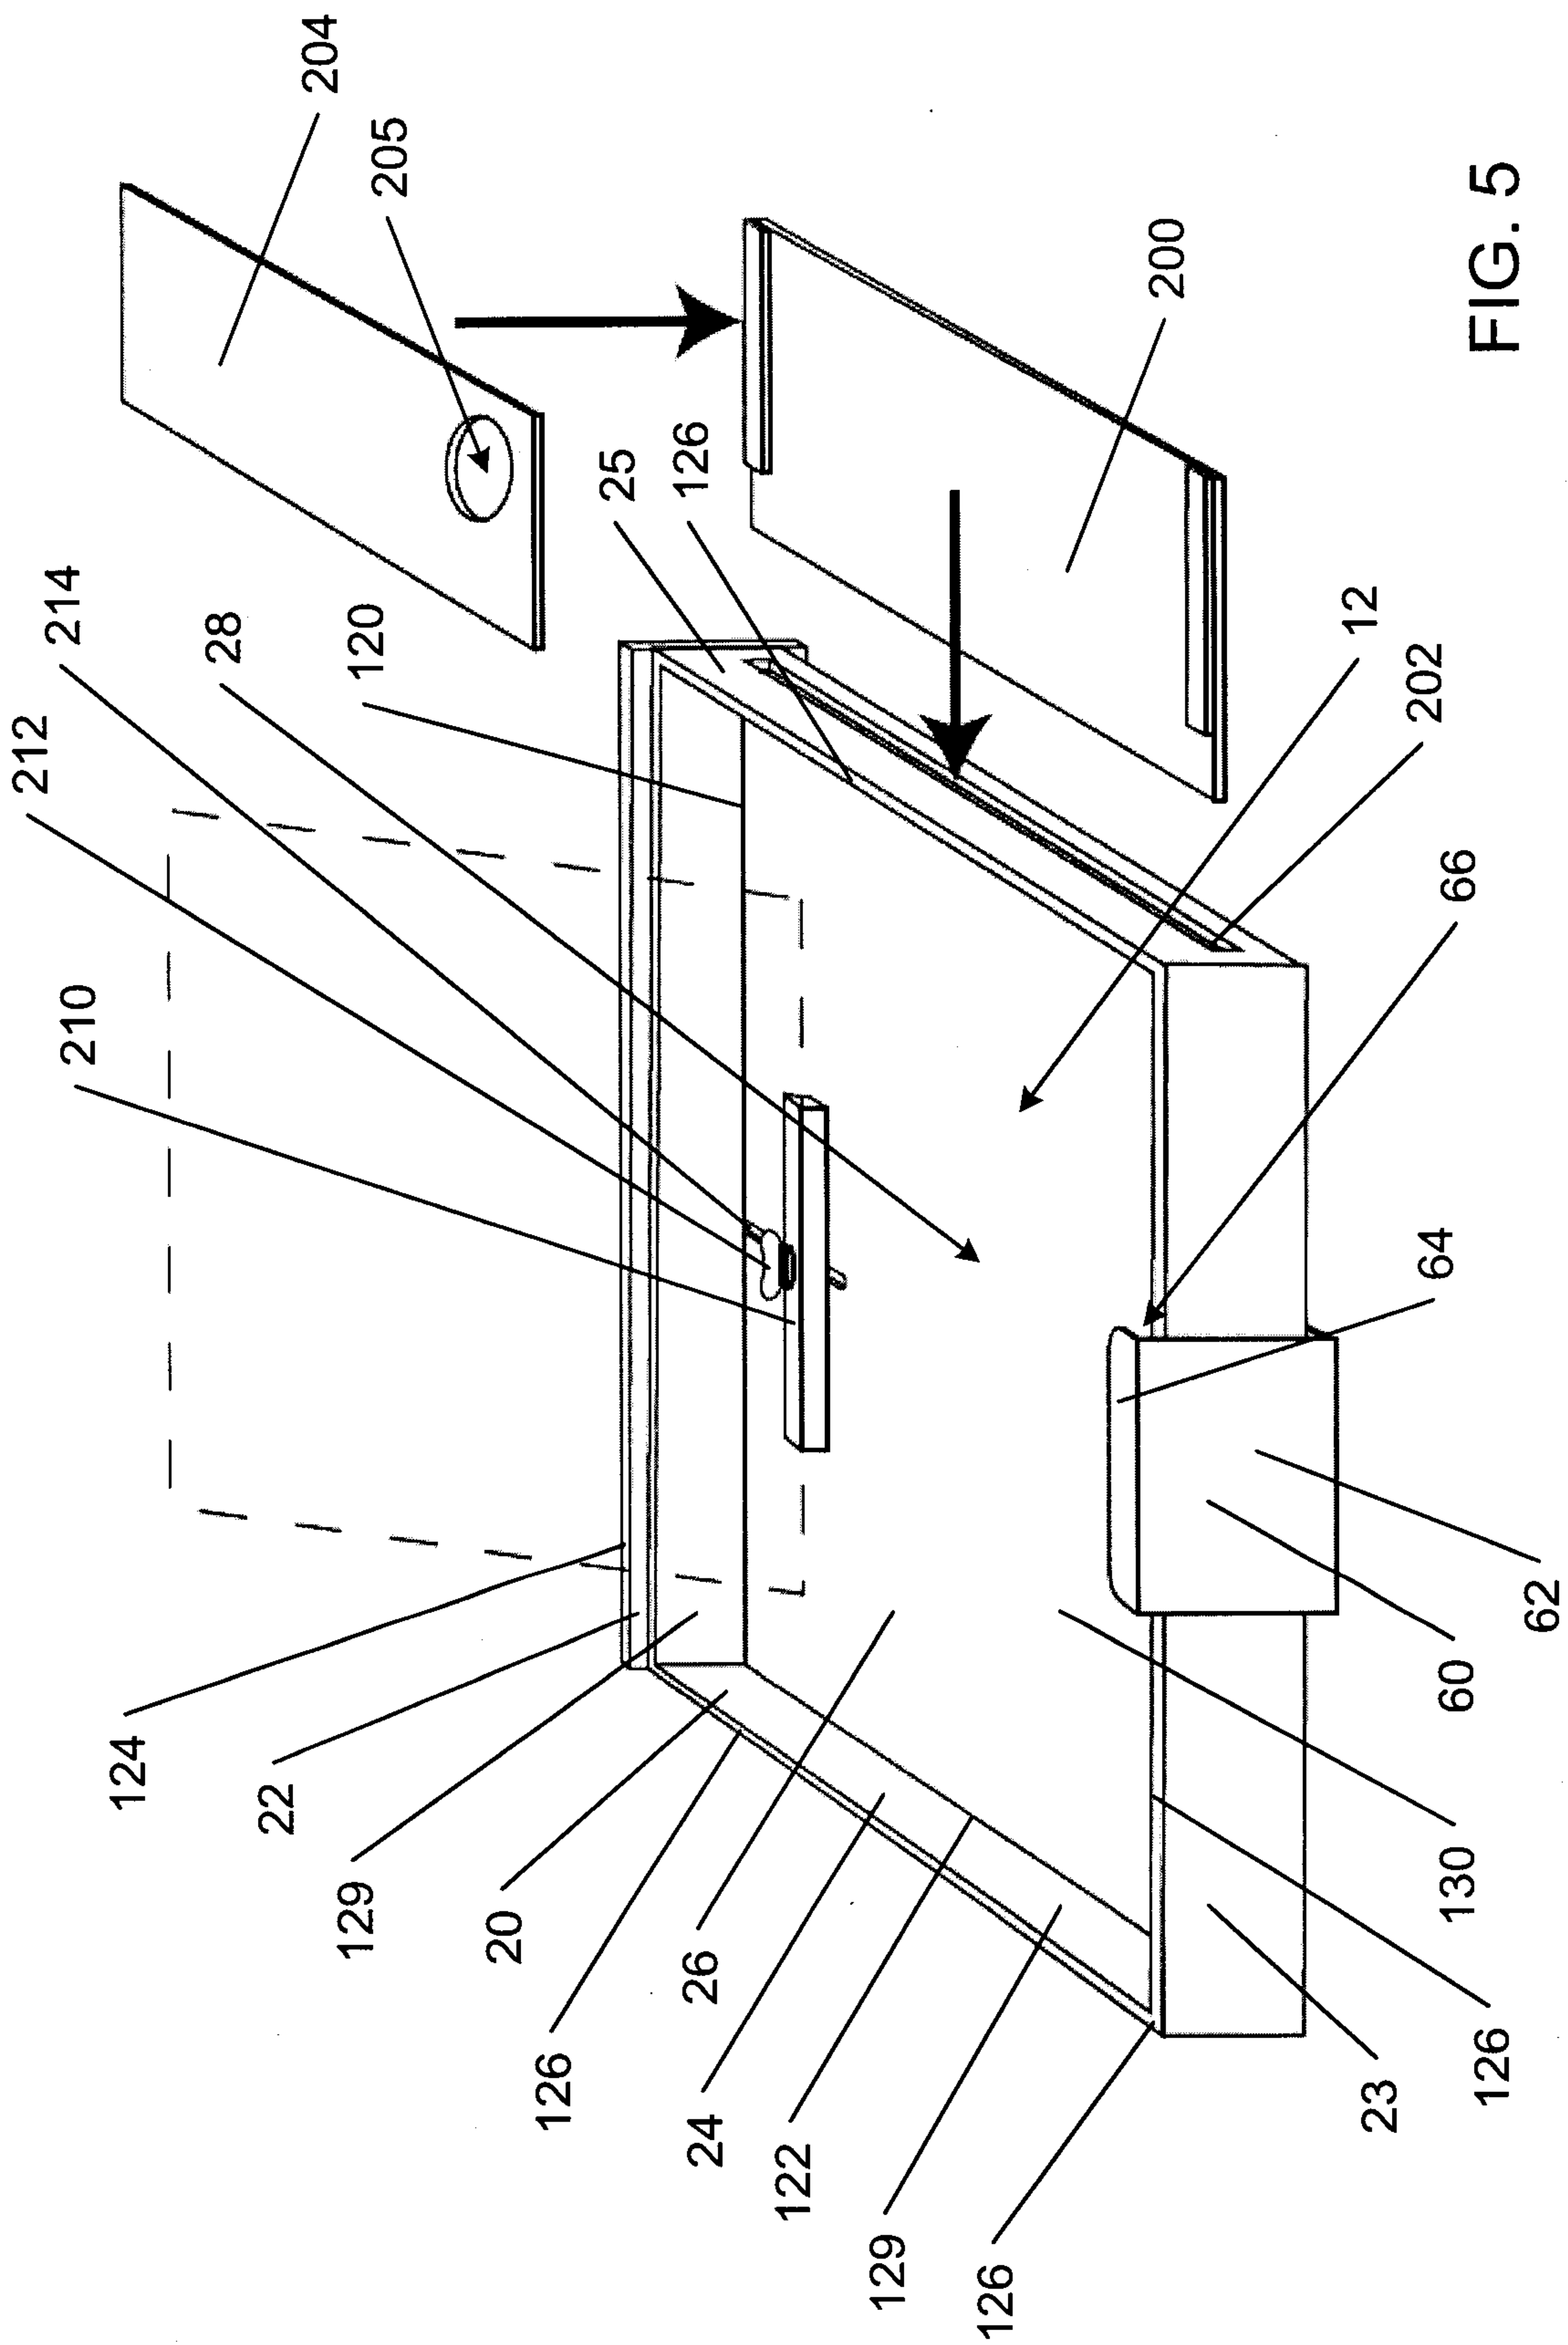


FIG. 5

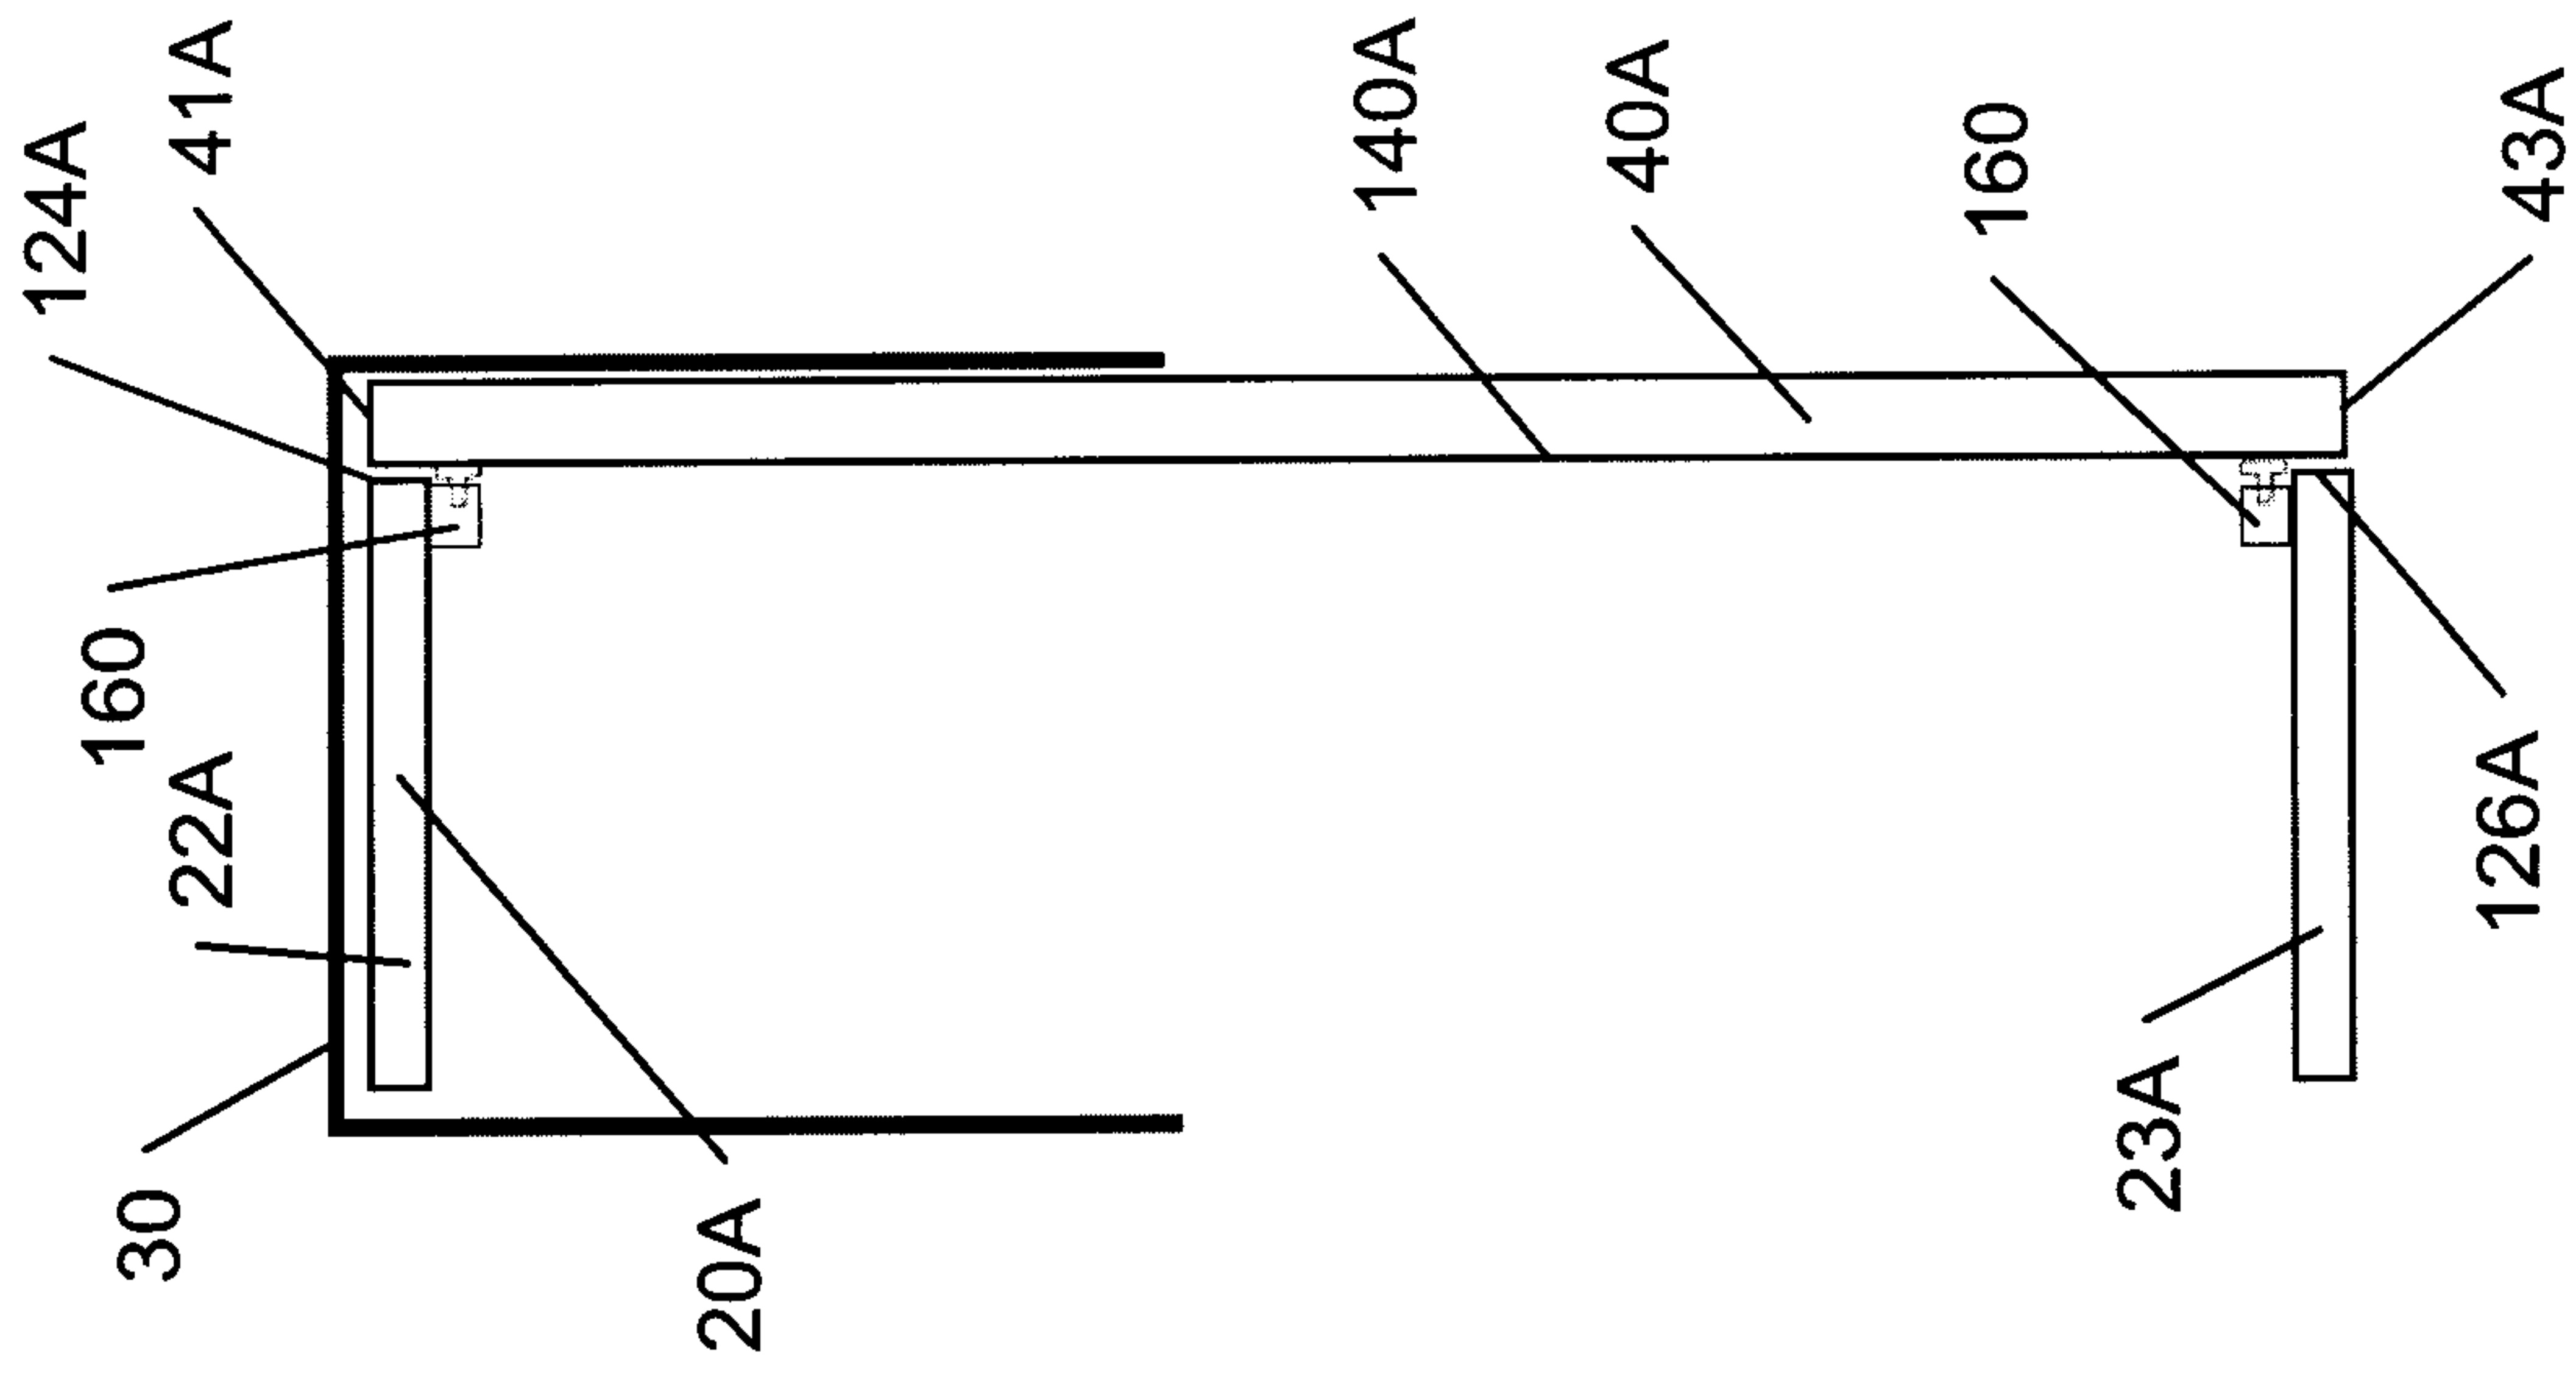


FIG. 6A

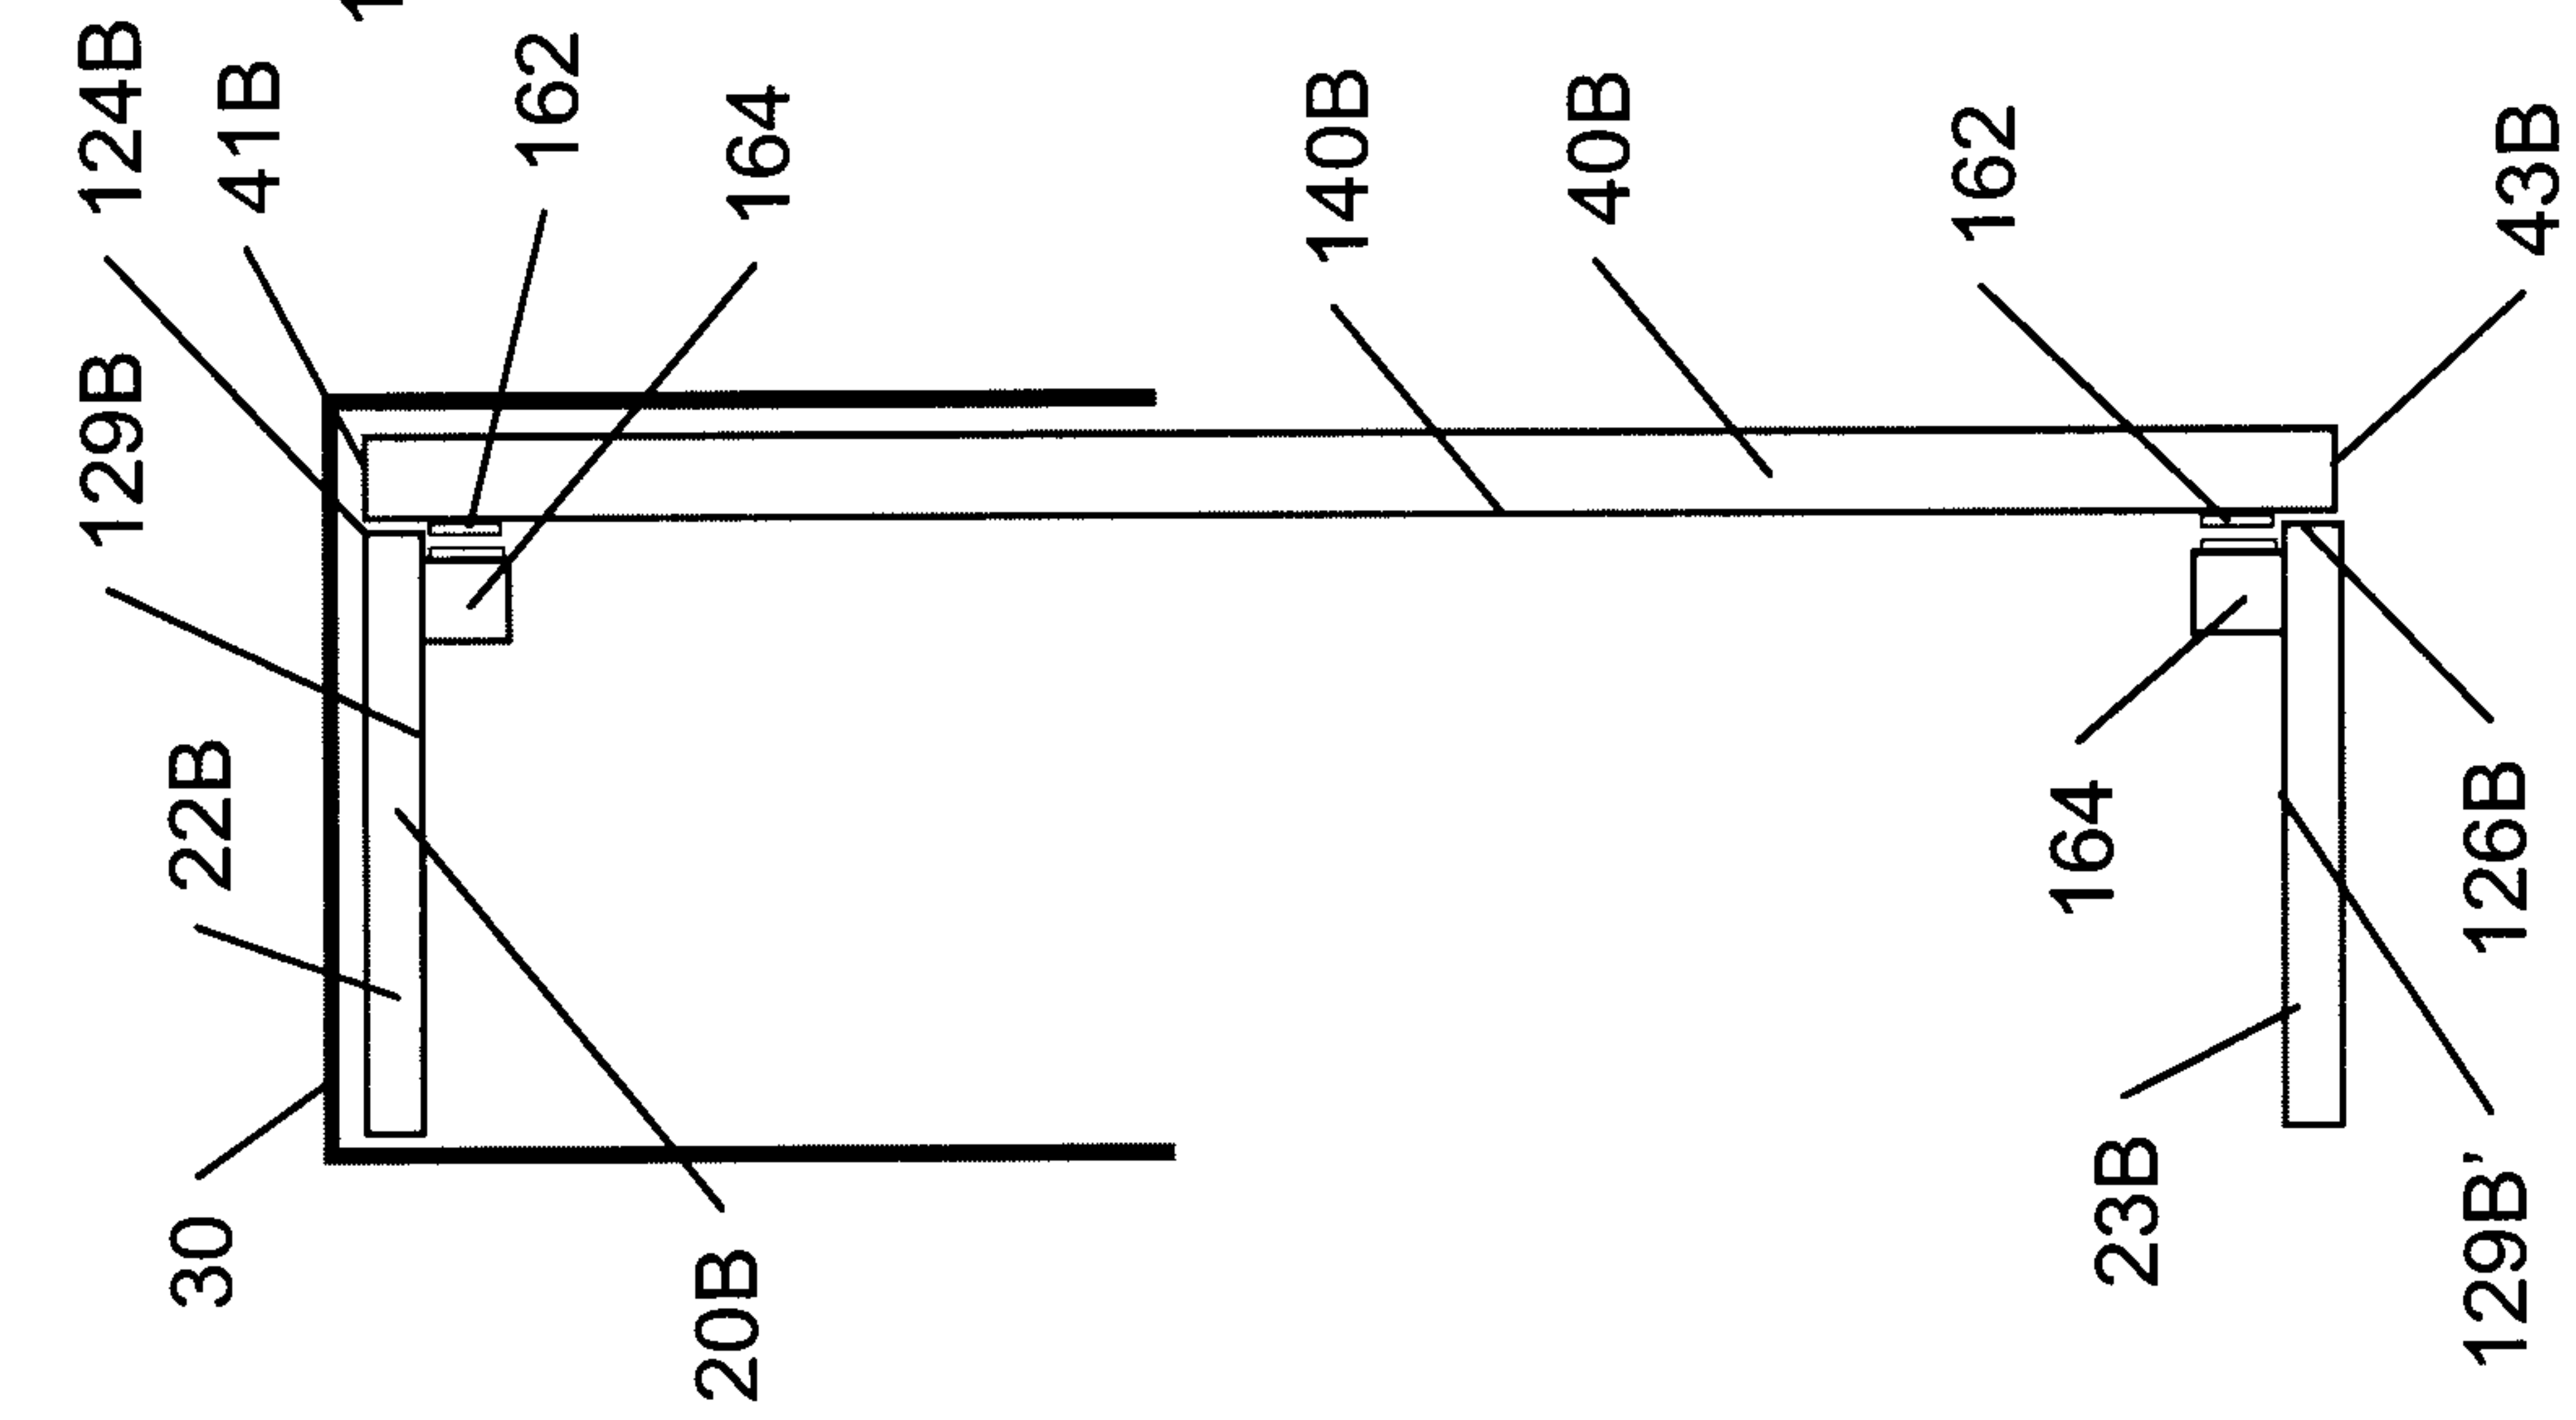


FIG. 6B

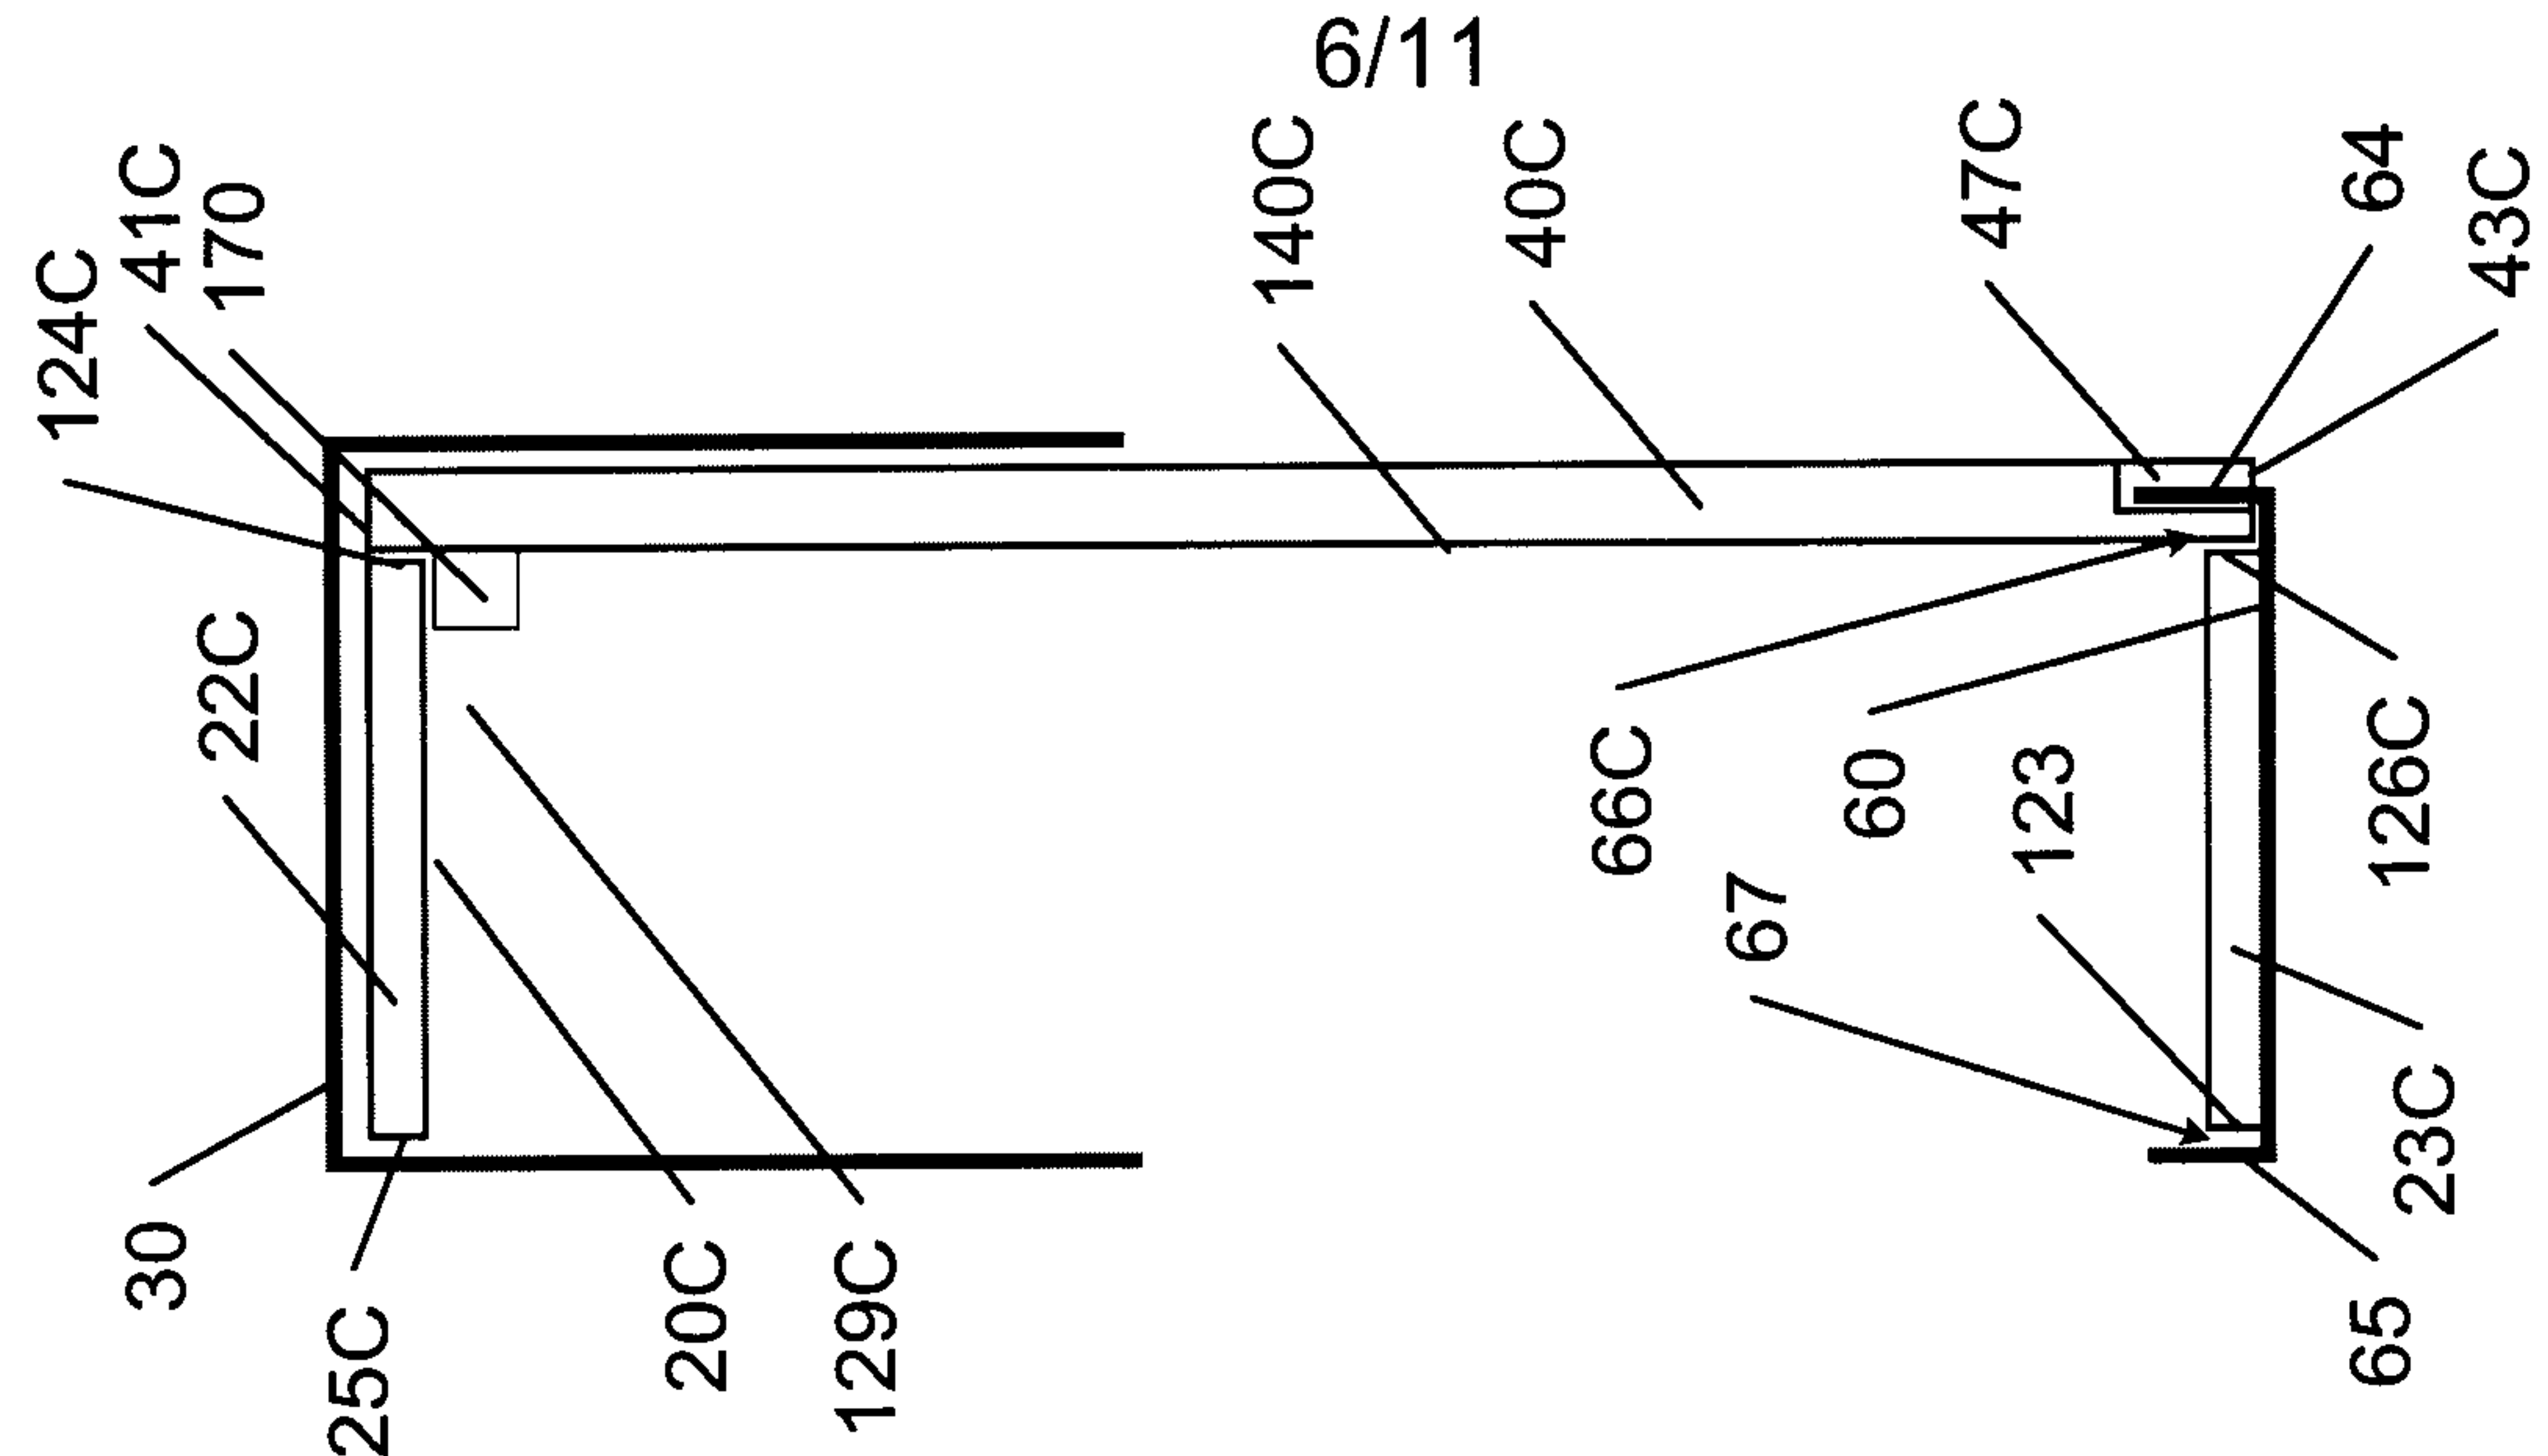


FIG. 6C

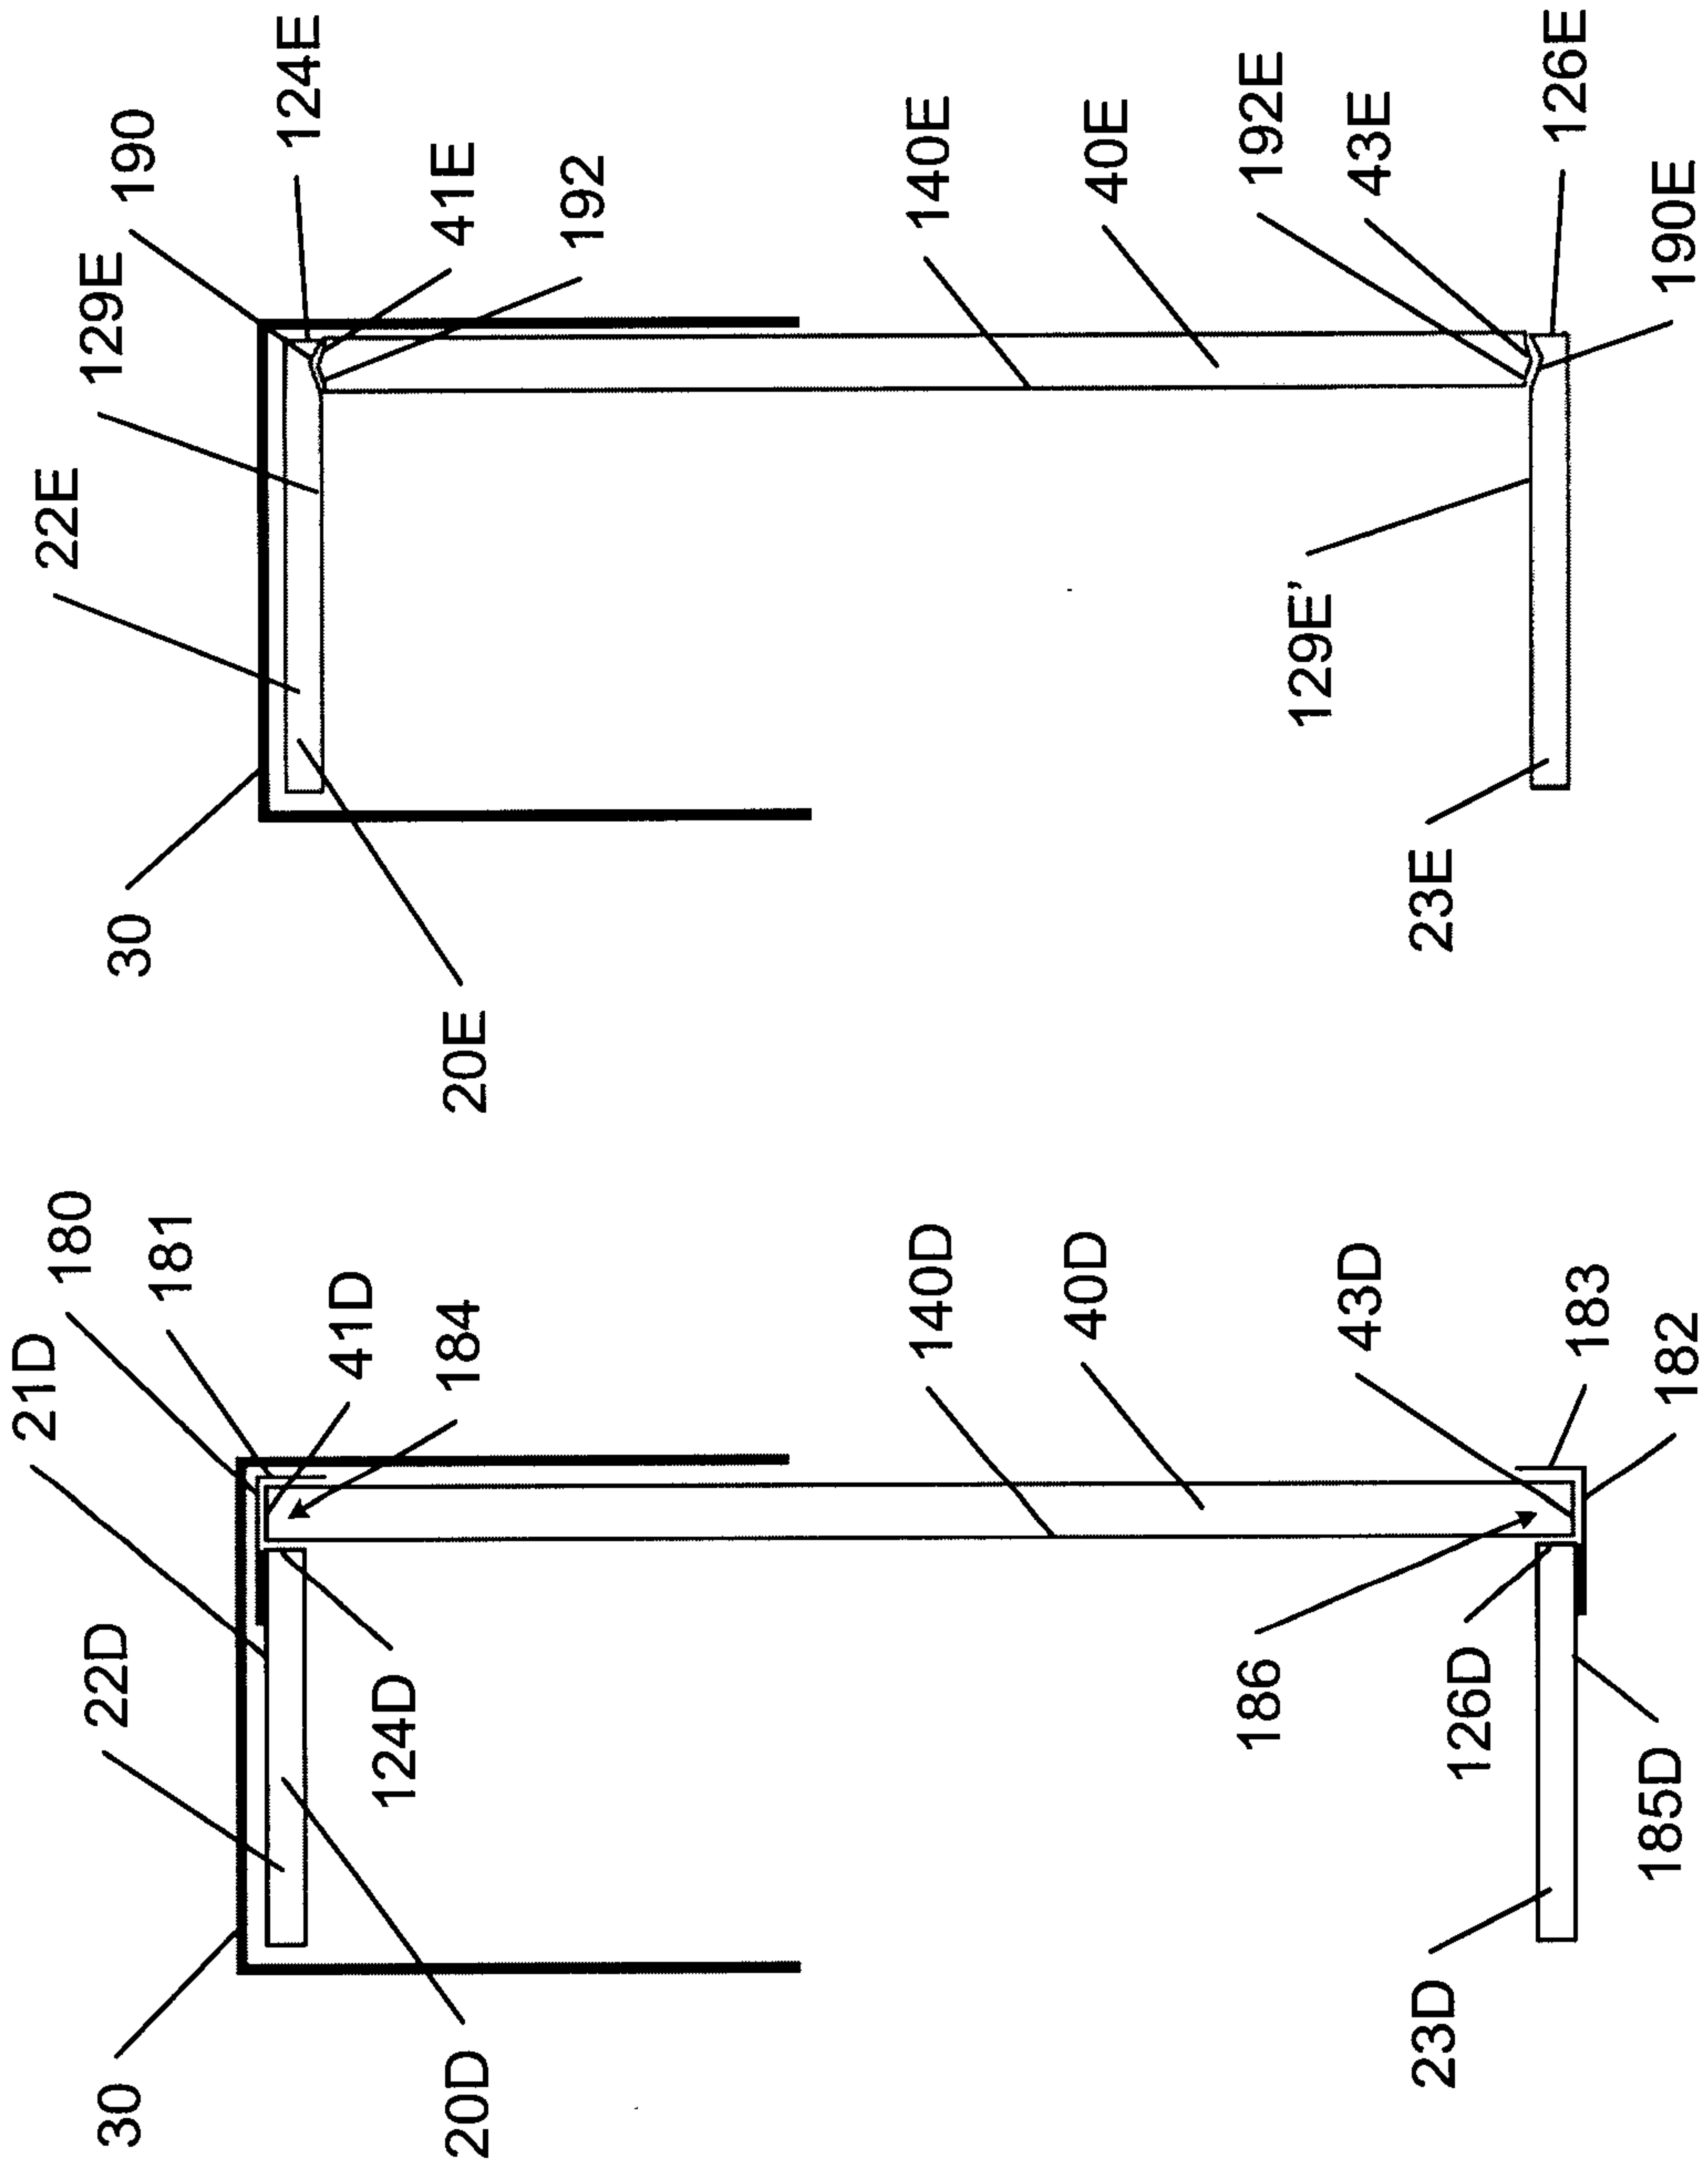


FIG. 6E

FIG. 6D

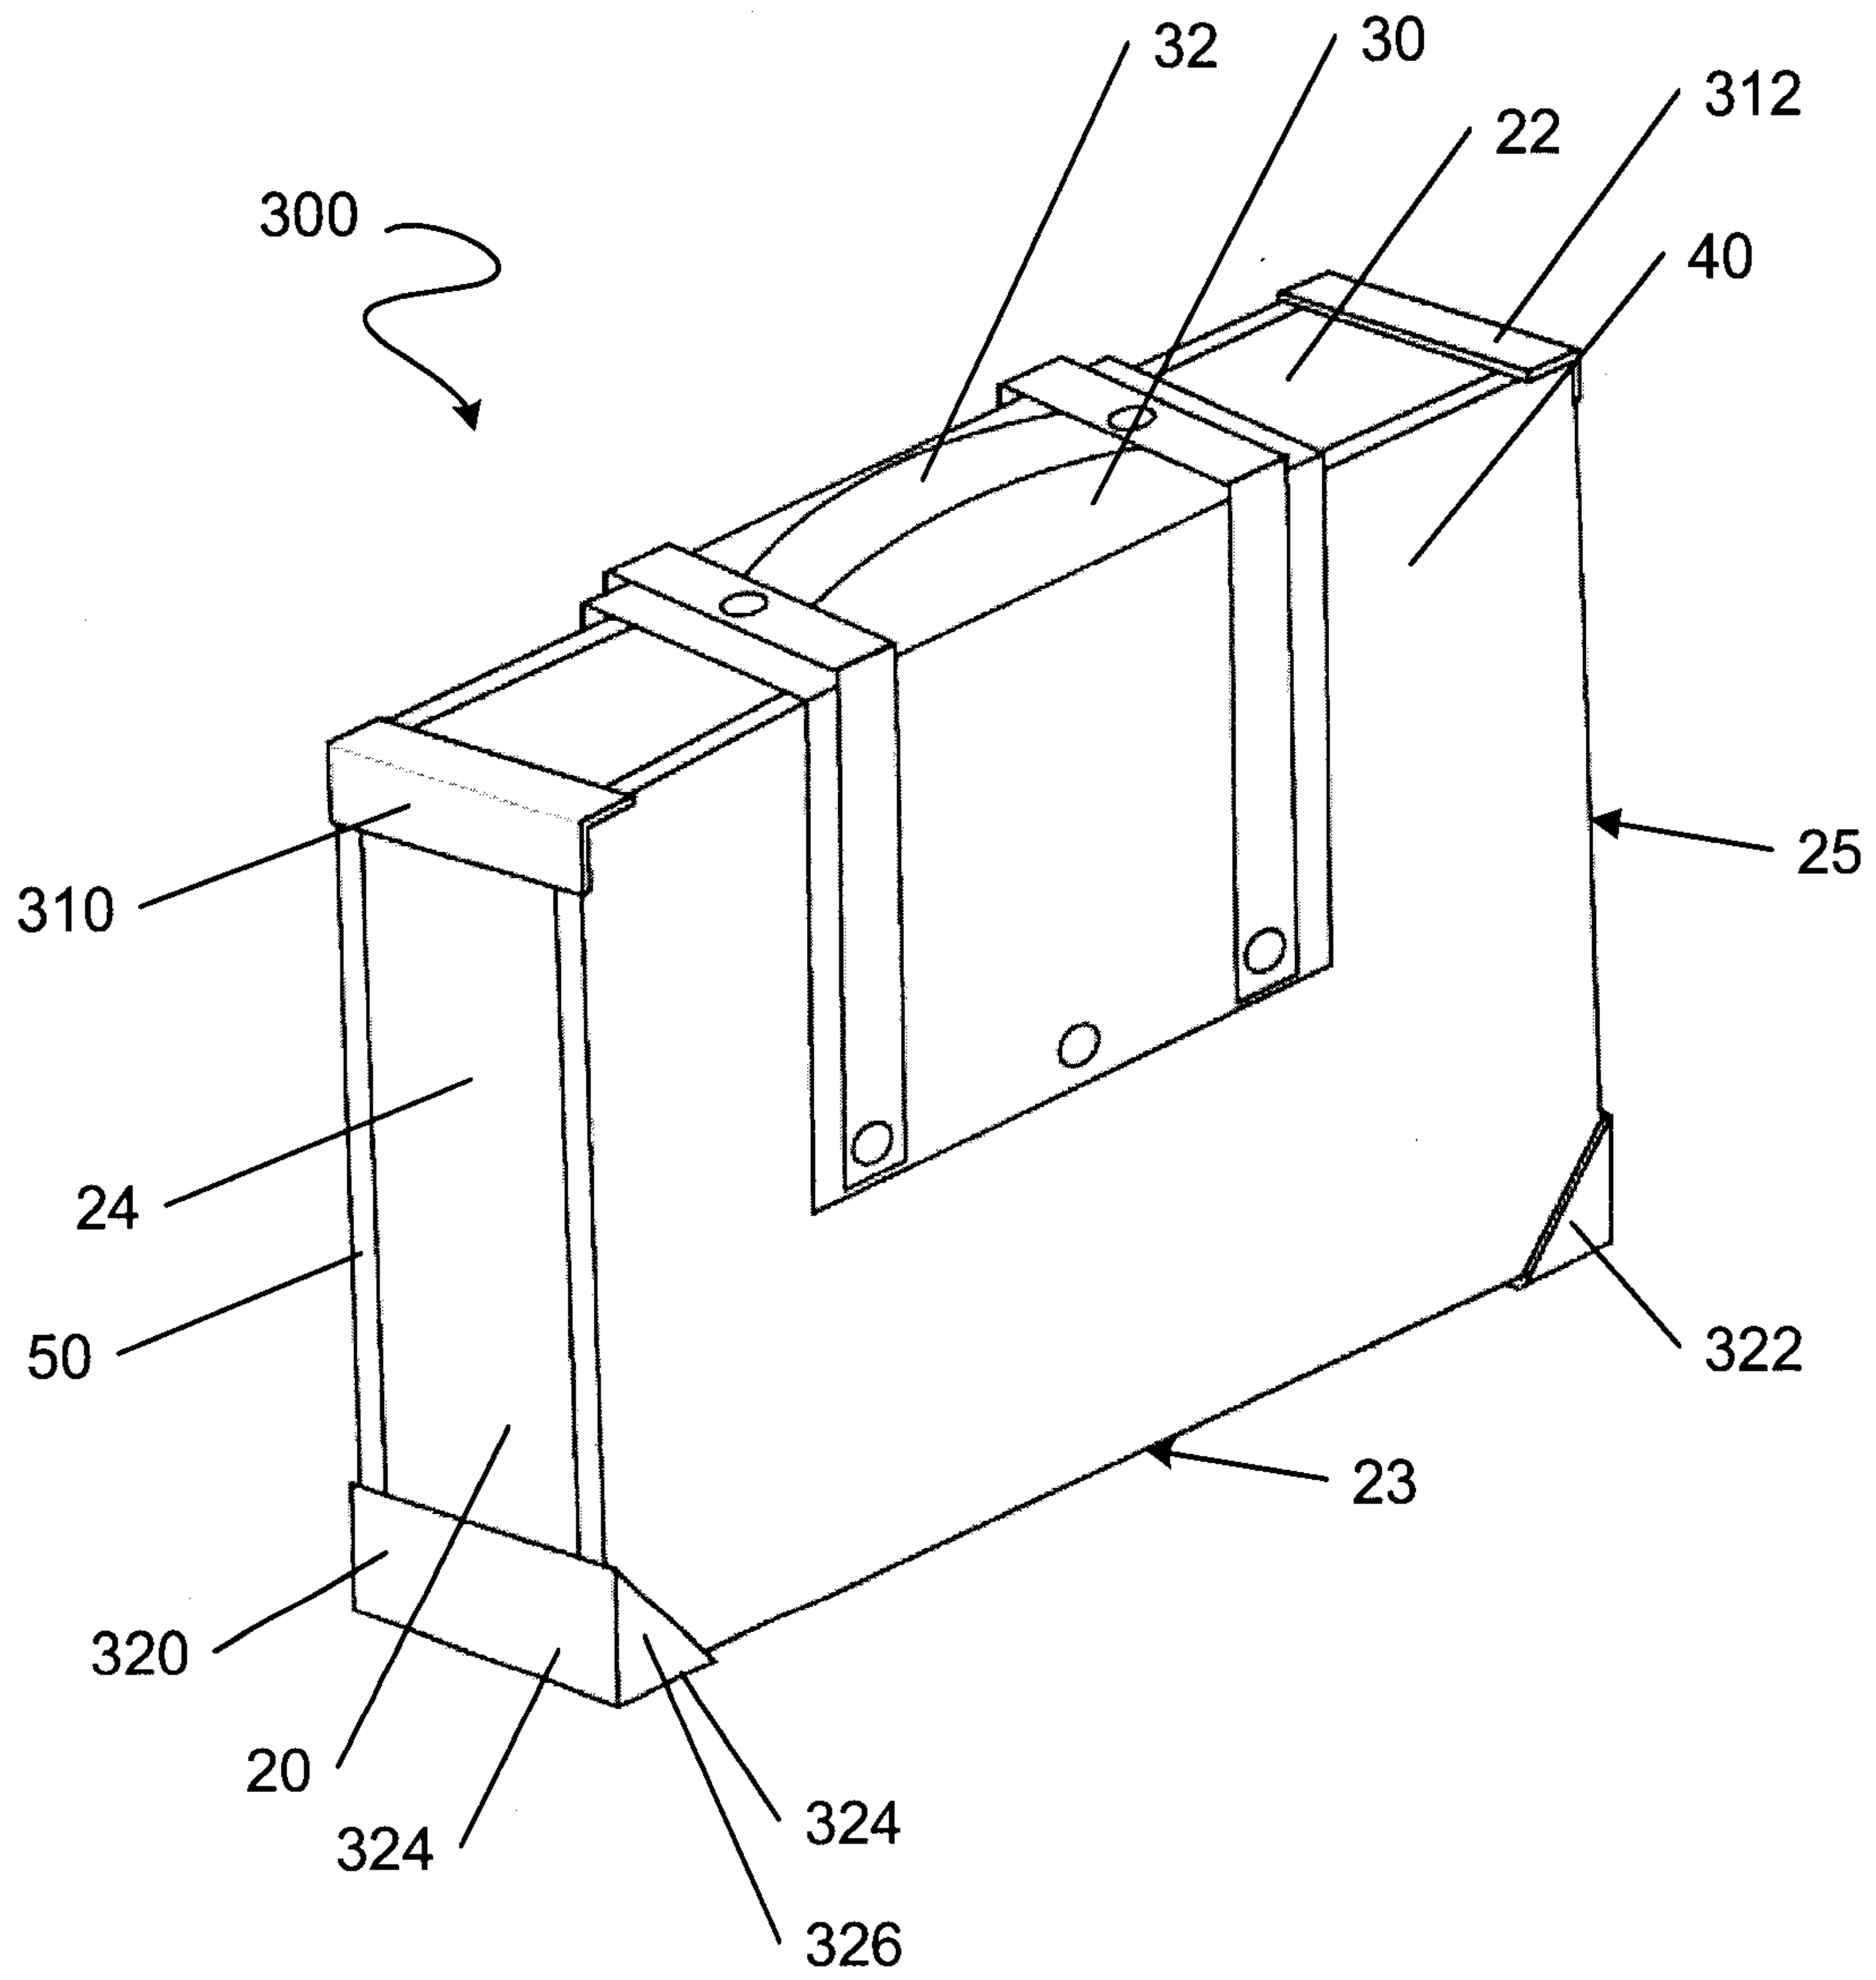


FIG. 7A

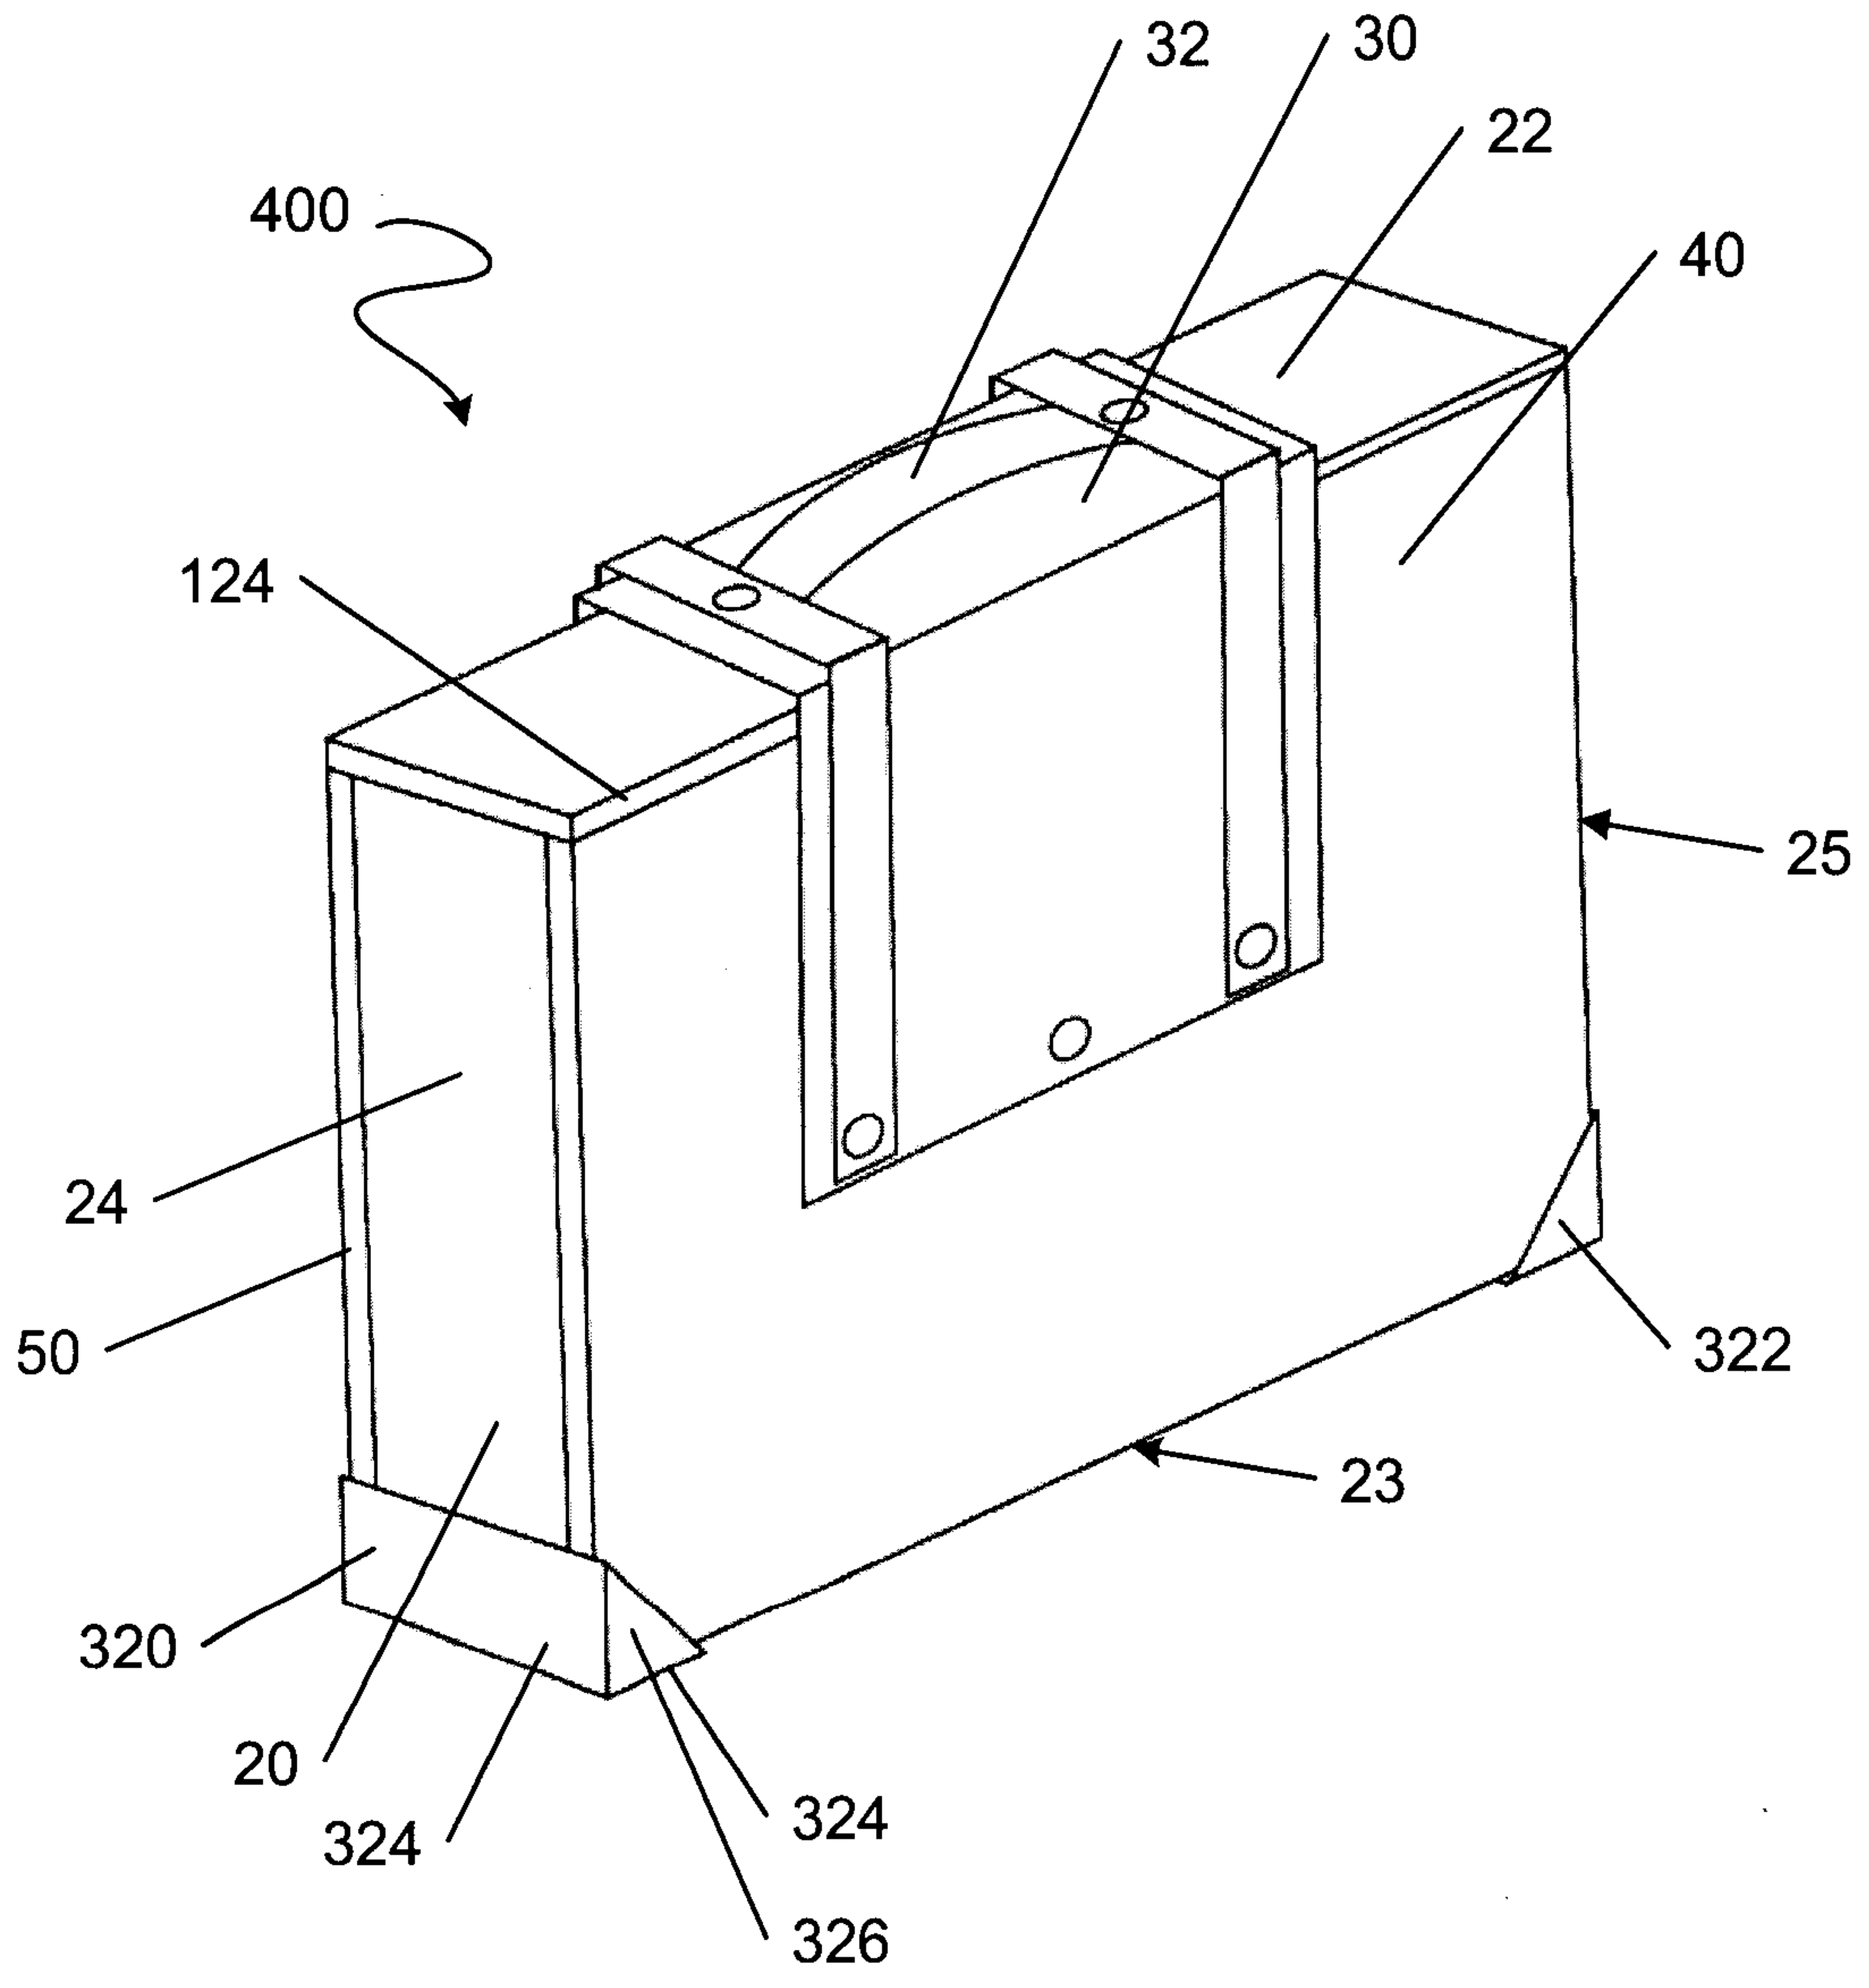
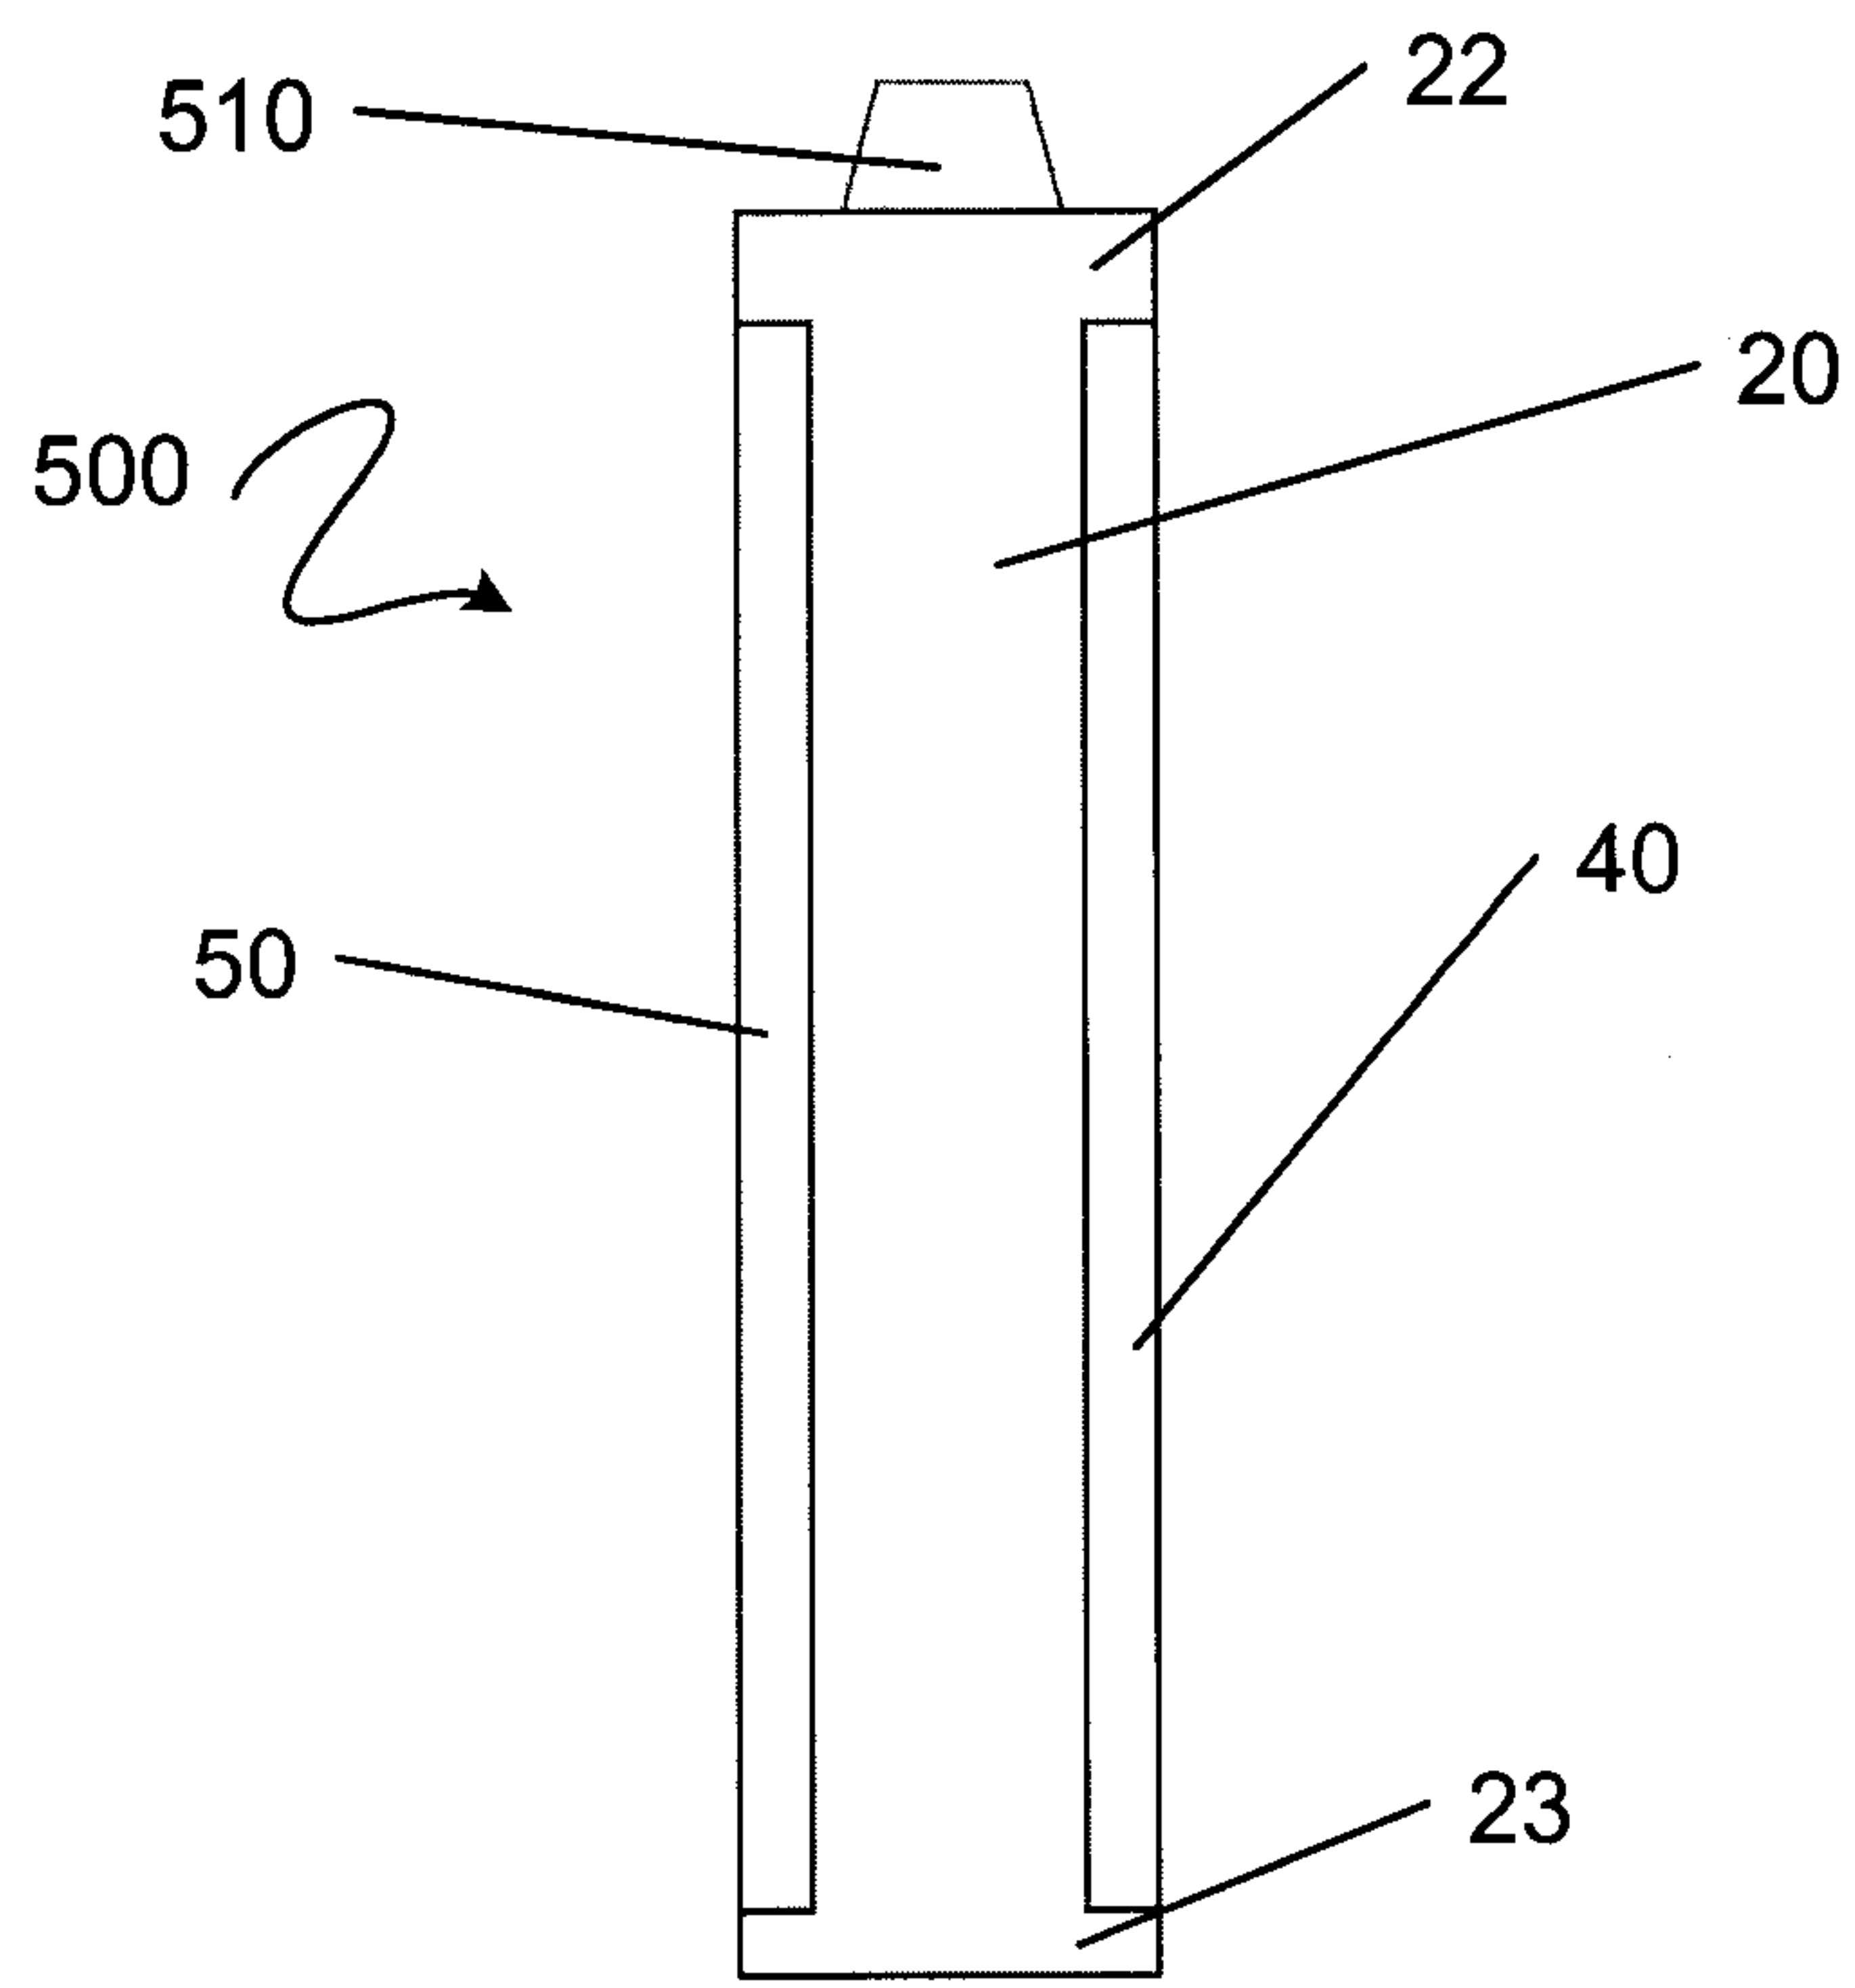
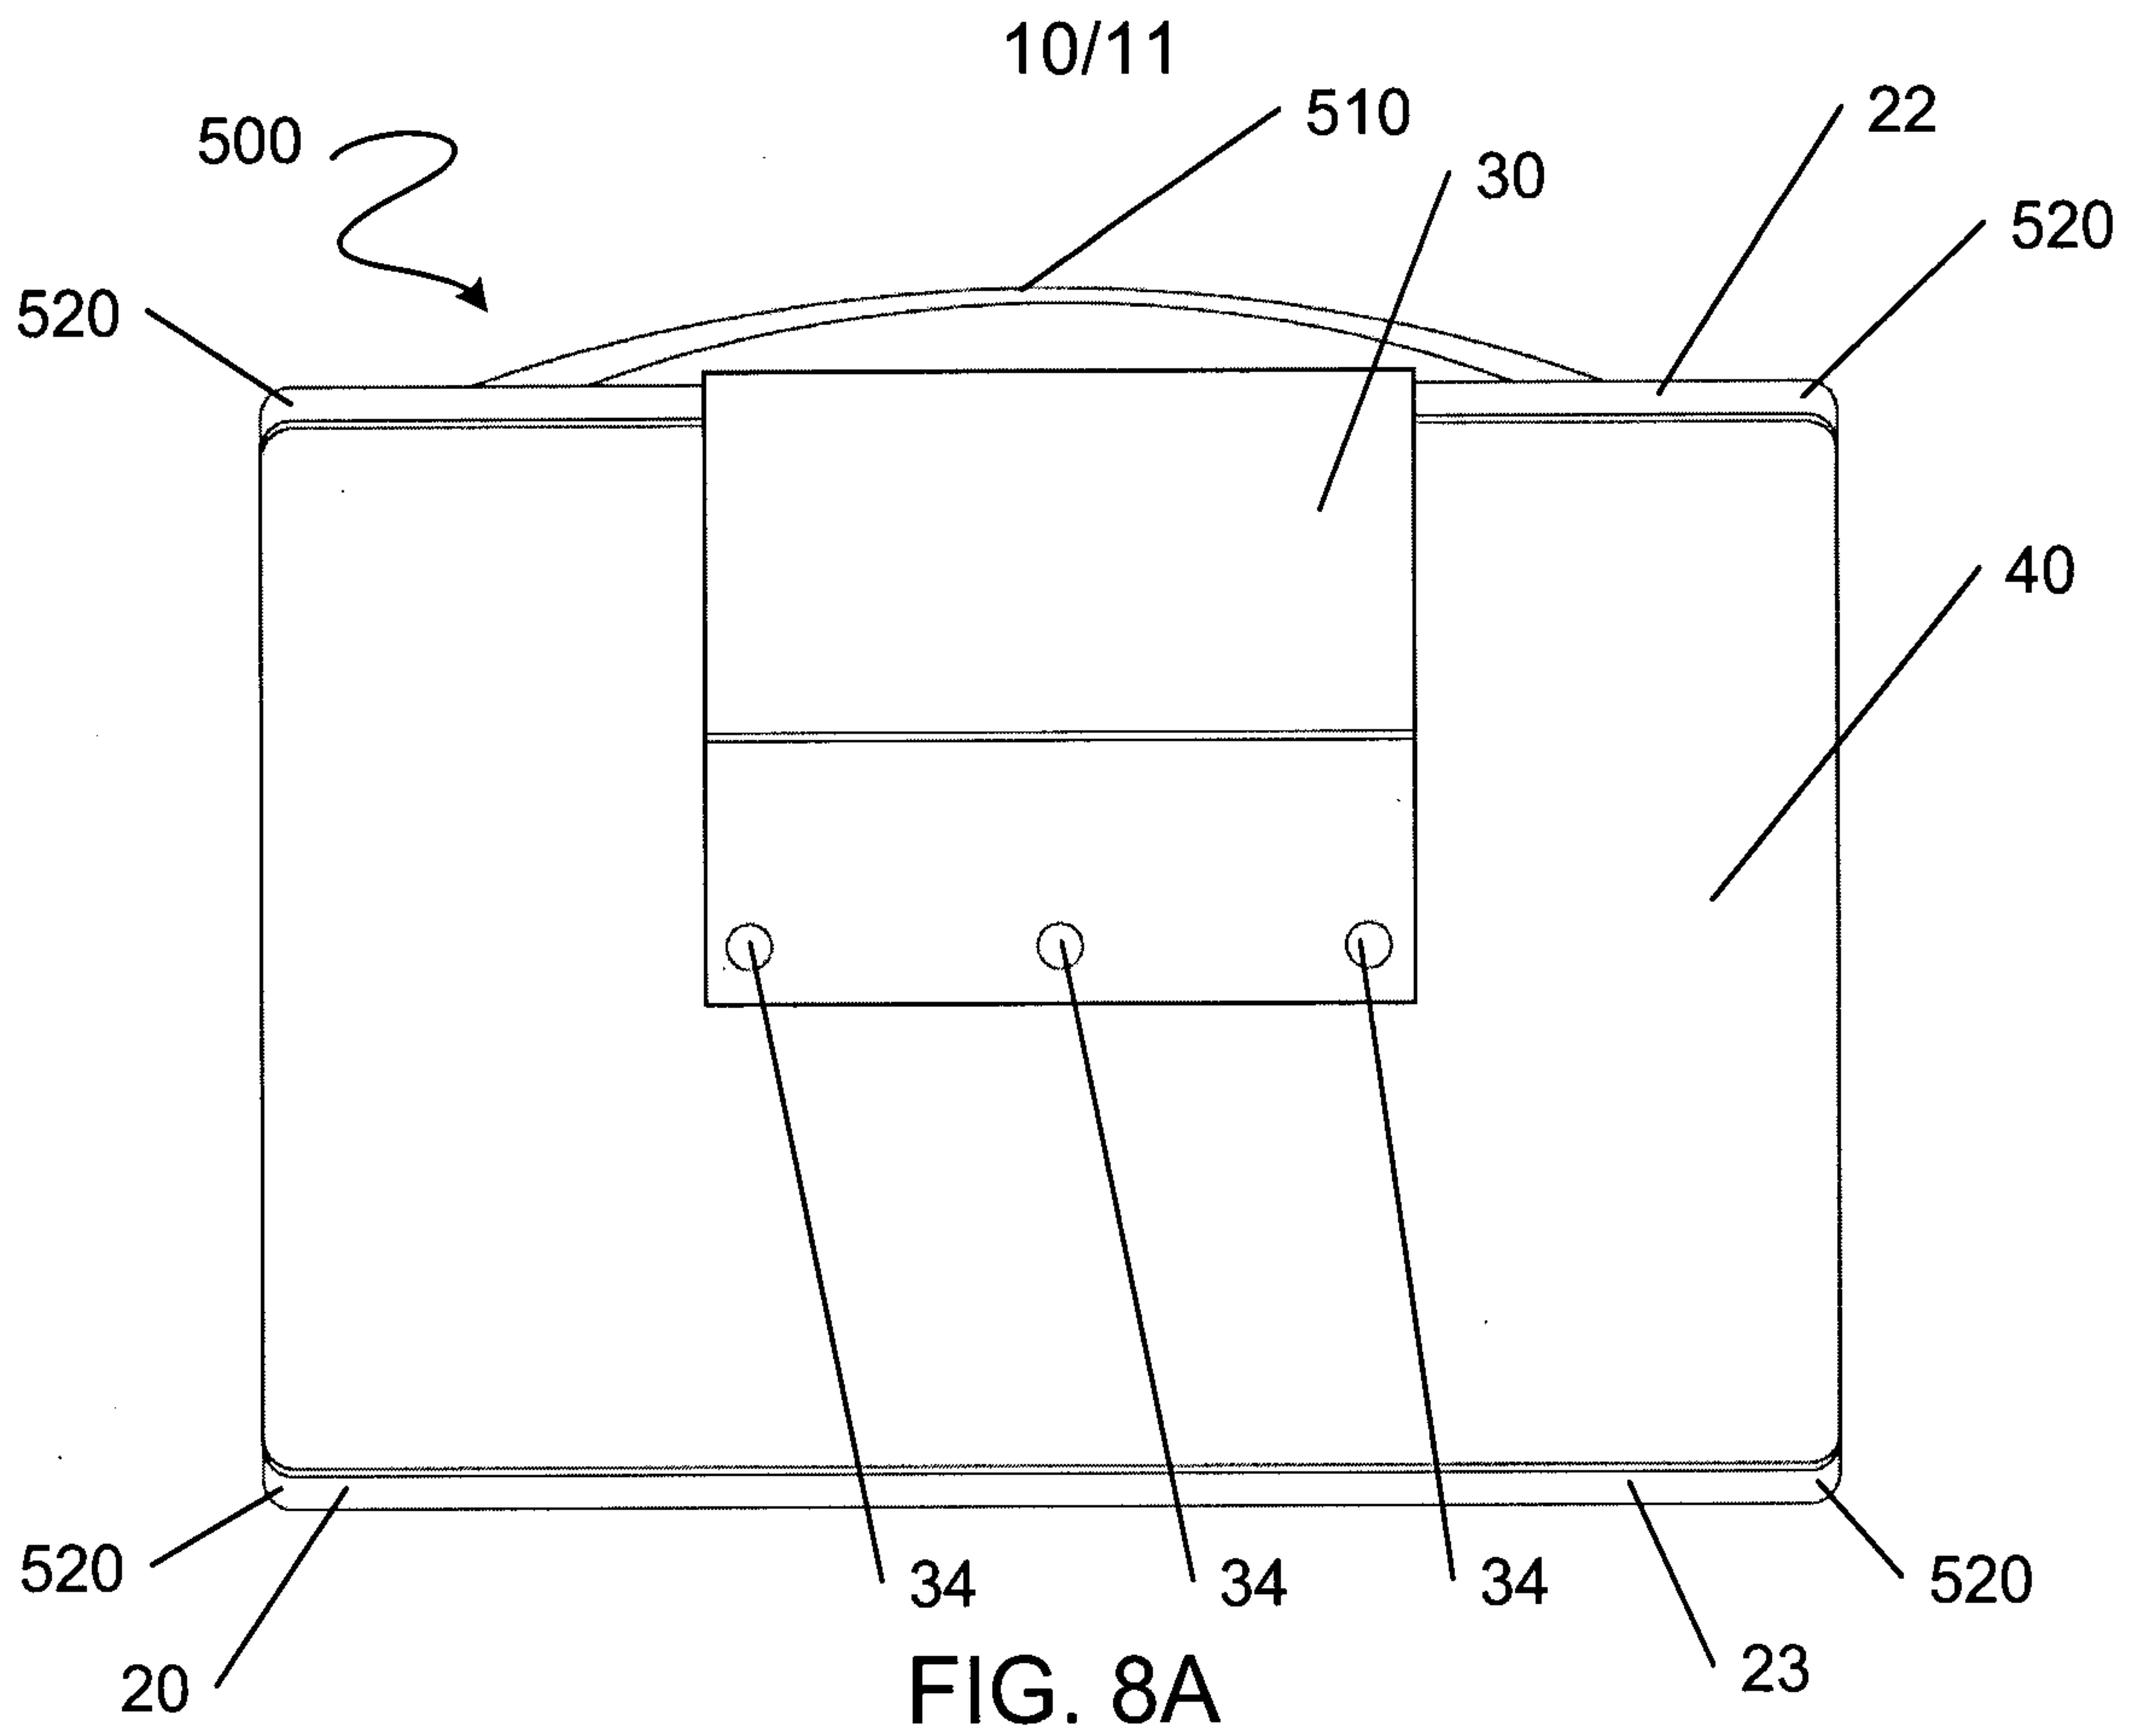


FIG. 7B



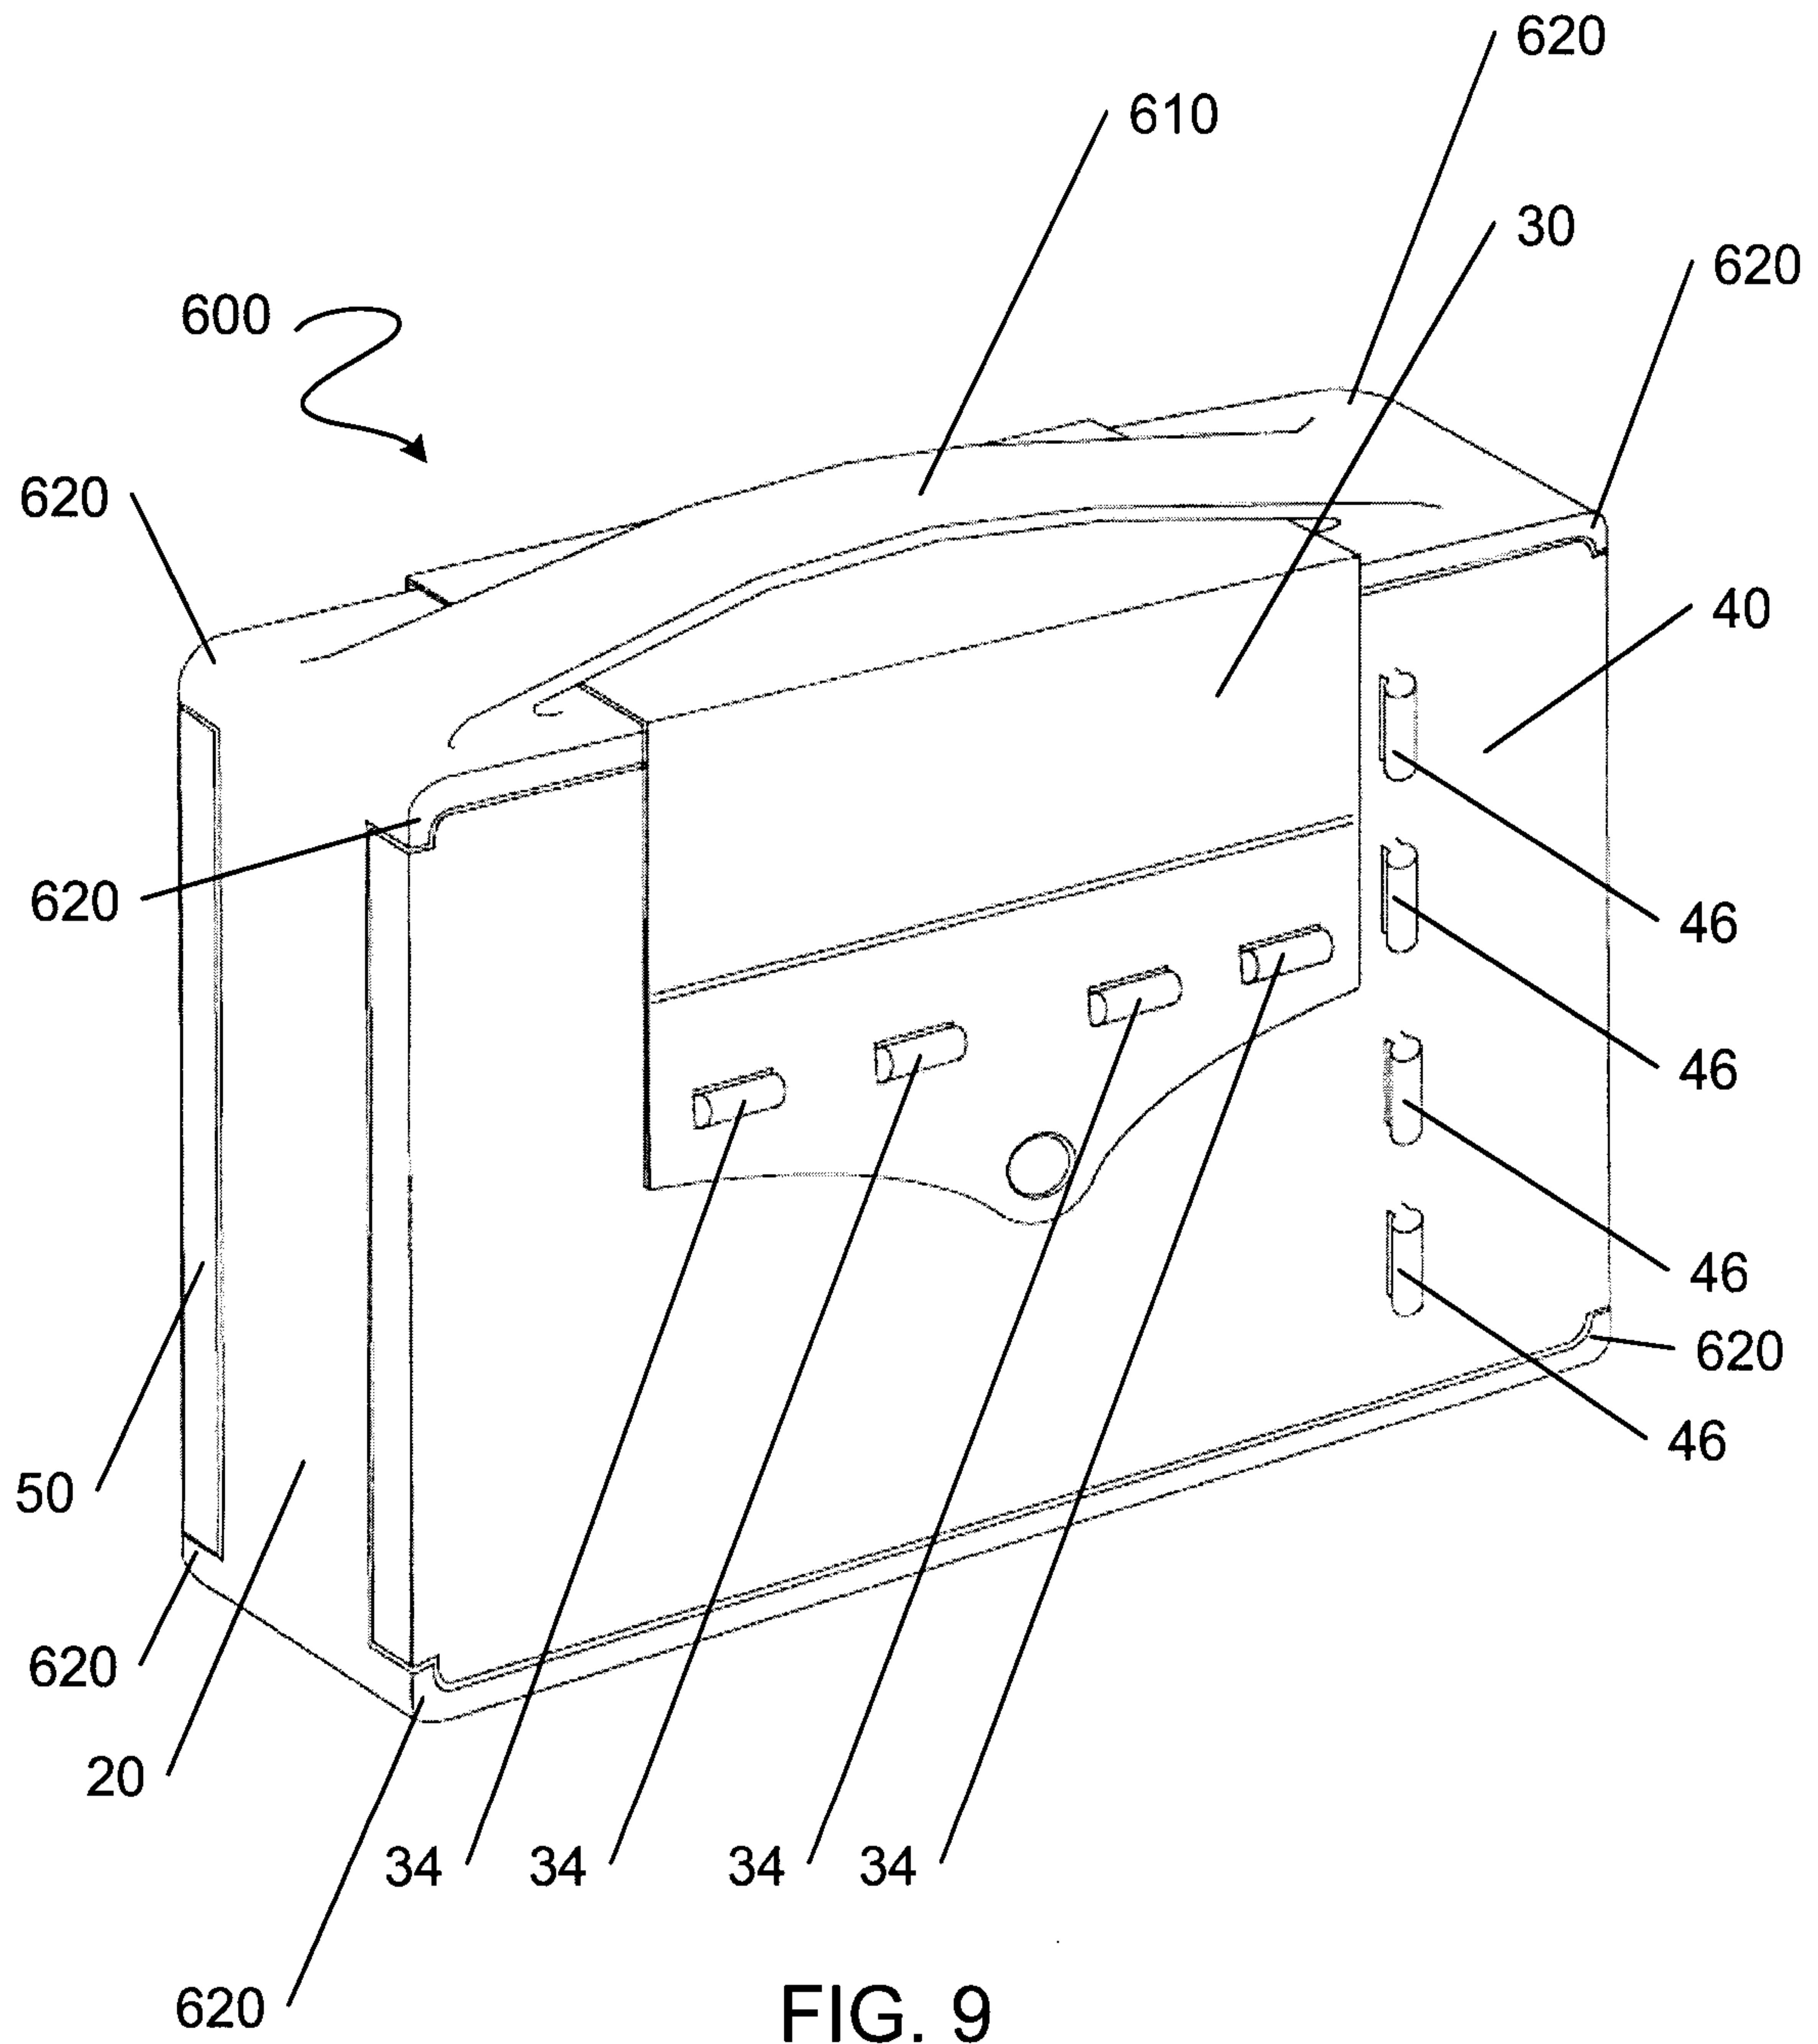


FIG. 9

