



(72) APPEL, PETER WILLEM, NL

(72) VAN DER KRAAN, MARCEL, NL

(71) UNILEVER PLC, GB

(51) Int.Cl.<sup>7</sup> C11D 17/06, C11D 11/02, C11D 11/00

(30) 1997/05/30 (9711350.0) GB

(54) **COMPOSITIONS DETERGENTES GRANULAIRES ET LEUR  
PRODUCTION**

(54) **GRANULAR DETERGENT COMPOSITIONS AND THEIR  
PRODUCTION**

(57) Composition détergente ayant une masse volumique en vrac d'au moins  $550 \text{ kg/m}^3$ , qui comprend un mélange: (a) d'un granulat, de préférence un granulat mélangé mécaniquement, ayant une masse volumique en vrac de  $450 \text{ kg/m}^3$  à  $1\ 300 \text{ kg/m}^3$ , comprenant un tensioactif et une matière inorganique, et (b) un auxiliaire séché par atomisation comprenant une matière inorganique, de préférence de la burkéite ou du sesquicarbonate de sodium, le composant (a) étant présent à raison de 35 à 85 % en poids du produit granulaire intégral. L'auxiliaire permet l'ajustement de la masse volumique en vrac de la composition finale à n'importe quelle valeur, sans que cela nuise aux autres propriétés, ce qui donne de la souplesse de formulation dans une certaine plage de masses volumiques en vrac.

(57) A detergent composition having a bulk density of at least  $550 \text{ kg/m}^3$  comprises a mixture of: (a) a granulate, preferably a mechanically mixed granulate, of bulk density  $450 \text{ kg/m}^3$  to  $1300 \text{ kg/m}^3$ , comprising surfactant and inorganic material, and (b) a spray-dried adjunct comprising inorganic material, preferably sodium sesquicarbonate or Burkeite, component (a) being present in an amount of from 35 % to 85 % by weight of the total granular product. The adjunct allows the bulk density of the final composition to be adjusted to any chosen value without detriment to other properties, thus providing flexibility to formulate at a range of bulk densities.




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : C11D 17/06, 11/00, 11/02</p>	<p>A1</p>	<p>(11) International Publication Number: <b>WO 98/54288</b> (43) International Publication Date: 3 December 1998 (03.12.98)</p>
<p>(21) International Application Number: PCT/EP98/02985 (22) International Filing Date: 11 May 1998 (11.05.98) (30) Priority Data: 9711350.0 30 May 1997 (30.05.97) GB (71) Applicant (for AU BB CA CY GB GH GM IE IL KE LC LK LS MN MW NZ SD SG SL SZ TT UG ZW only): UNILEVER PLC [GB/GB]; Unilever House, Blackfriars, London EC4P 4BQ (GB). (71) Applicant (for all designated States except AU BB CA CY GB GH GM IE IL KE LC LK LS MN MW NZ SD SG SL SZ TT UG ZW): UNILEVER N.V. [NL/NL]; Weena 455, NL-3013 AL Rotterdam (NL). (72) Inventors: APPEL, Peter, Willem; Unilever Research Vlaardingen, Olivier van Noortlaan 120, NL-3133 AT Vlaardingen (NL). VAN DER KRAAN, Marcel; Unilever Research Vlaardingen, Olivier van Noortlaan 120, NL-3133 AT Vlaardingen (NL). (74) Agent: FRANSELLA, Mary, Evelyn; Unilever PLC, Patent Dept., Colworth House, Sharnbrook, Bedford MK44 1LQ (GB).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: GRANULAR DETERGENT COMPOSITIONS AND THEIR PRODUCTION</p>		
<p>(57) Abstract</p> <p>A detergent composition having a bulk density of at least 550 kg/m<sup>3</sup> comprises a mixture of: (a) a granulate, preferably a mechanically mixed granulate, of bulk density 450 kg/m<sup>3</sup> to 1300 kg/m<sup>3</sup>, comprising surfactant and inorganic material, and (b) a spray-dried adjunct comprising inorganic material, preferably sodium sesquicarbonate or Burkeite, component (a) being present in an amount of from 35 % to 85 % by weight of the total granular product. The adjunct allows the bulk density of the final composition to be adjusted to any chosen value without detriment to other properties, thus providing flexibility to formulate at a range of bulk densities.</p>		

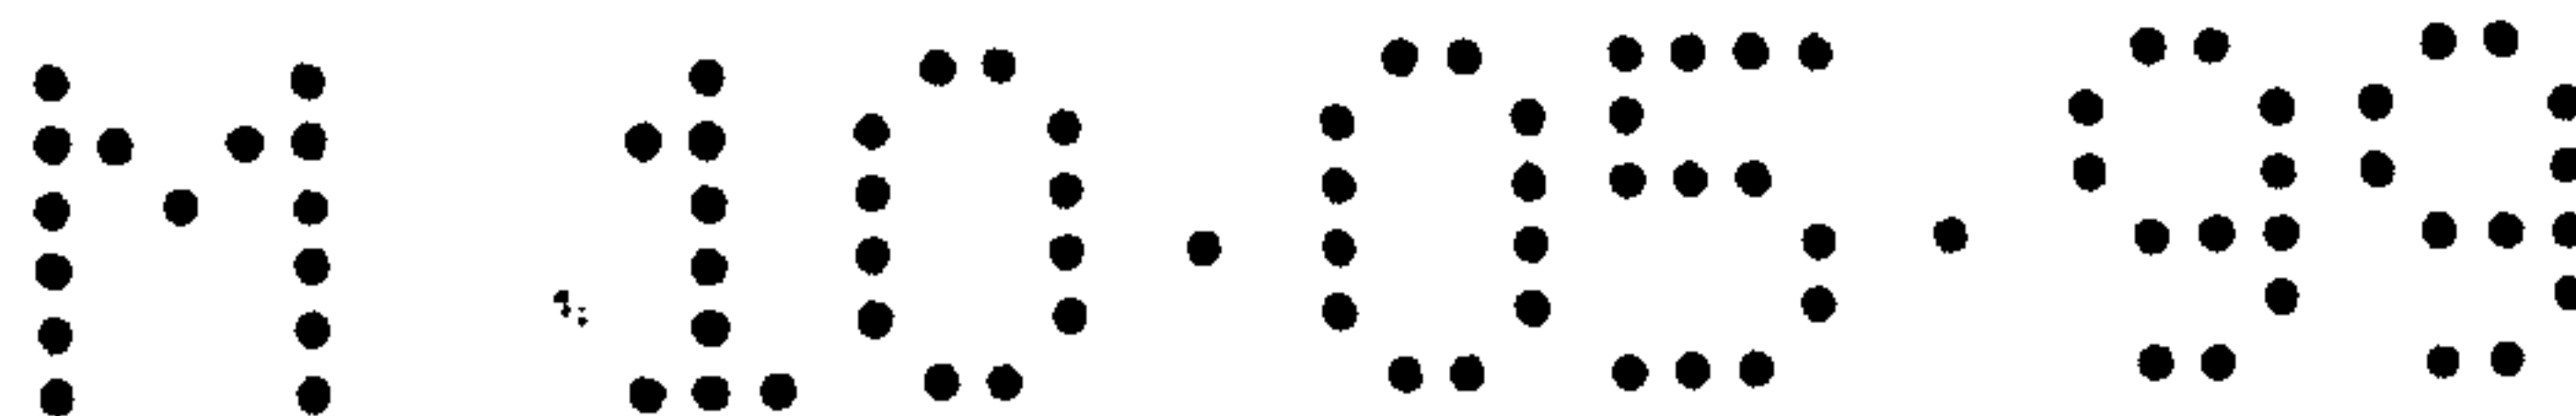

- 1 -

GRANULAR DETERGENT COMPOSITIONS AND THEIR PRODUCTIONTechnical field

5

The present invention relates to detergent particles and a process for their production.

10 In particular the present invention relates to a granular detergent composition comprising a mixture of a mechanically mixed granulate and a spray-dried adjunct.

Background

15

Generally speaking, there are two main types of processes by which detergent powders can be prepared. The first type of process involves spray-drying an aqueous detergent slurry in a spray-drying tower. This process may include the  
20 additional step of spraying a surfactant onto a spray-dried base powder. In the second type of process the various solid components are mechanically mixed and optionally agglomerated with liquids, eg nonionic surfactants. The latter kind of process is suited to the production of  
25 powders having a relatively high bulk density. However for spray-dried powders postdosed ingredients may be added so that the final bulk density of the product is raised.

30 Spray-drying is only suited to production of low-to-medium bulk density products because the chemical composition of the slurry used in the spray drying process markedly affects the bulk density of the granular product. This bulk density

- 2 -

can only be significantly increased by increasing the content of relatively dense sodium sulphate and/or sodium carbonate. However, sodium sulphate does not contribute to detergency, so that the overall performance of the powder in  
5 the wash is thereby reduced.

In some cases, the production of products by mechanical mixing has been described, using a solid starting material which itself has been produced by spray-drying. Obviously,  
10 the resultant product will then also contain sodium sulphate.

For a given target bulk density, often the ranges of amounts of surfactants, builders and other ingredients in the  
15 detergent granules are limited by the conditions of the particular process in question. This is especially (but not exclusively), the case for producing detergent products having bulk densities spanning the interface between medium and high bulk densities. Further restrictions on  
20 formulation flexibility then arise if one tries to minimise the content of non-functional ingredients such as sodium sulphate in the detergent compositions. Obviously such problems are undesirable in the formulation of detergent products.

25 It is already known to post-dose relatively low amounts of adjuncts of minor ingredients in the form of mechanically mixed granules or spray-dried granules, to a spray-dried detergent powder in order to produce a finished granular  
30 detergent composition. For example enzymes, antifoams, or other minor ingredients may be added to spray-dried detergent powders in the form of prills, marumes or granules.

Conventionally, the bulk of the prill, marume or granule is typically formed from ingredients which have no function in the detergent product but which simply act as a filler, for example, sodium sulphate.

5

In some cases the addition of post-dosed additives in detergent products can lead to a deterioration in the properties of the powders. In particular the dispensing properties and physical properties such as the dynamic flow rate (DFR) may suffer.

10

It can thus be appreciated that control of the bulk density of a product, whilst retaining formulation flexibility and product characteristics (such as the product's flow or dispensing properties) is a problem; replacing high bulk density components with lower bulk density ones may lead to a worsening of such properties or lower bulk density products may not exhibit the same physical properties as their higher bulk density counterparts.

15  
20

The flow properties of particulate compositions can be measured, for example, by the dynamic flow rate (DFR).

The present invention seeks to address the aforementioned problems by utilising a mixture of granules which have been produced by mechanical mixing and particles which have been produced by spray-drying. The present invention seeks to provide detergent products having a high degree of formulation flexibility but which retain the desired bulk density range and physical properties eg dispensing properties and dynamic flow rate of the products.

25  
30

- 4 -

Furthermore the products are especially energy efficient to produce when the granulate is produced by a mechanically mixed method.

5

Prior art

EP 242 138A (Unilever) discloses particulate detergent compositions containing spray-dried carbonate-containing detergent base powders with a bulk density of 500-550 g/l; the base powders are prepared by a spray-drying process in which an acid (eg succinic acid, fatty acid, polyacrylic acid) is reacted with sodium carbonate in the slurry to produce sodium sesquicarbonate.

15

EP 221 776A, EP 289 311A and EP 289 312A (Unilever) disclose granular spray-dried detergent compositions comprising a crystal-growth-modified carbonate-based structurant salt, such as sodium sesquicarbonate or Burkeite. The use of these salts as carriers for fabric softening compounds is disclosed in EP 289 313A (Unilever).

25

EP 266 863A (Unilever) discloses sodium-carbonate-based particulate antifoam ingredients, suitable for incorporation into powder detergent products. The carrier for the antifoam ingredient may be a crystal-growth-modified salt such as Burkeite.

US 5 569 645 (Procter & Gamble/Dinniwell) discloses a particulate detergent composition composed of spray-dried detergent base granules (40-80% by weight) and agglomerated detergent base granules of high bulk density (20-60% by weight), and 1-20% by weight of admixed ingredients. The spray-dried granules preferably predominate. Both spray-dried and agglomerated base granules contain high levels of anionic surfactant, plus aluminosilicate builder and sodium carbonate.

10

JP 03 084 100A (Lion Corporation) discloses a detergent powder of high bulk density in which an agglomerated high-bulk-density granule, prepared by densifying (kneading then disintegrating) a mixture of spray-dried base powder with other ingredients, is then diluted with a minor amount (1-15%) of undensified spray-dried base powder. The spray-dried base powder contains anionic surfactant (20-50%) and zeolite builder (10-70% by weight).

20

#### Definition of the invention

The present invention accordingly provides a granular detergent composition having a bulk density of at least 550 kg/m<sup>3</sup> comprising:

(a) from 35% to 85% by weight, based on the total composition, of a mechanically mixed granulate having a bulk density of from 600 kg/m<sup>3</sup> to 900 kg/m<sup>3</sup>, the granulate comprising from 15 to 50% by weight of synthetic surfactant material, and from 30 to 80% by weight of inorganic material, based on the weight of the granulate; and

- 5a -

(b) from 0.5 to 30% by weight, based on the total granular composition, of a spray-dried adjunct having a bulk density within the range of from 150 to 600 kg/m<sup>3</sup>, the spray-dried  
5 adjunct comprising from 45 to 95% by weight of inorganic material comprising a sodium carbonate salt selected from sodium carbonate monohydrate, sodium sesquicarbonate and Burkeite, and optionally comprising from 0 to 20% by weight  
10 of synthetic surfactant material, from 0 to 25% by weight of a polymer, from 0 to 25% by weight of a citrate and from 0 to 10% by weight of fatty acid and/or soap, based on the weight of the adjunct.

15 Detailed description of the invention

The granulate (a) (base powder)

20 The granulate (a) comprises from 15 to 50% by weight, preferably from 20 to 40% by weight, of synthetic surfactant material based on the total weight of the granulate. Suitable synthetic surfactant materials are described below.

25 The granulate further comprises from 30 to 80% by weight, preferably from 35 to 75% by weight, of inorganic material

**AMENDED SHEET**



based on the total weight of the granulate. It is especially preferred that the inorganic material comprises a builder which may be either a phosphorus-based builder or a non-phosphorus-based builder.

5

The granulate may optionally further comprise small amounts of components conventionally included in detergent base powders, for example, builder or structurant polymers, other supplementary builders, fluoescers, or antiredeposition  
10 polymers. Typically the amount of these conventional components does not exceed 20% by weight of the total weight of the granulate.

Usually the granulate comprises from 0.5 to 10% by weight of  
15 water, more usually from 1 to 8% by weight, based on the total weight of the granulate.

The bulk density of the granulate is within the range of from 600 kg/m<sup>3</sup> to 900 kg/m<sup>3</sup>.

20

The granulate is preferably present in an amount of from 45 to 80% by weight, based on the total weight of the granular detergent composition.

25 The granulate preferably has an average particle diameter of from 250 mm to 1000 mm, more preferably from 400 mm to 800 mm. The spray-dried adjunct preferably has an average particle diameter of from 100 mm to 900 mm, more preferably from 300 mm to 700 mm. Unless stated specifically to the  
30 contrary, all average particle diameters are d<sub>50</sub> average particle diameters.

The granulate is prepared by a mechanical mixing process, such as granulation or agglomeration, rather than by spray-drying.

- 5 The porosity of the granulate is preferably from 0 to 20, more preferably from 0 to 10. The porosity of the spray-dried adjunct is preferably from 30 to 80, more preferably from 35 to 70.
- 10 The measurement of particle porosity is based on the well known Kozeny-Carman relation (equation I) for air flow through a packed bed of powder:

$$15 \quad \frac{\phi_v h}{\Delta P} = k \frac{\pi D_{bed}^2}{4\eta} D_p^2 \frac{\epsilon_{bed}^3}{(1 - \epsilon_{bed})^2} \quad (I)$$

- in which:
- 20  $\phi_v$  = air flow
- $\Delta P$  = pressure drop over the bed
- $D_{bed}$  = bed diameter
- $h$  = bed height
- $D_p$  = particle diameter
- $\epsilon_{bed}$  = bed porosity
- 25  $\eta$  = gas viscosity
- $k$  = empirical constant, equal to 180 for granular solids

- 8 -

The bulk density of a powder can be described by the following equation (equation II):

5

$$\text{Bulk density} = \rho_{sol} \cdot (1 - \epsilon_{bed}) \cdot (1 - \epsilon_{particle}) \quad (\text{II})$$

in which:  $\rho_{sol}$  = solids density of the materials in  
10 the particle  
 $\epsilon_{particle}$  = particle porosity

Based on these equations, the particle porosity can be  
15 derived from the following experiments:

A glass tube with a diameter of 16.3 mm, containing a glass  
filter (pore diameter 40-90  $\mu\text{m}$ ) as support for the powder,  
is filled with a known amount of powder (particle size  
20 between 355 and 710  $\mu\text{m}$ ). The height of the powder bed is  
recorded. An airflow of 375  $\text{cm}^3/\text{min}$  is flowed through the  
bed of powder. The pressure drop over the bed is measured.  
The pressure drop over the empty tube should also be  
measured at the specified air flow.

25

This measurement is repeated with the same quantity of  
powder, but now a more dense bed packing is achieved by  
gentle tapping of the tube containing the powder. Again the  
pressure drop is measured at the specified air flow.

30

In order to be able to derive the particle porosity from  
these measurements, also the solids density of the particles  
is needed (equation II). This is measured using helium

pycnometry, eg by using a penta pycnometer supplied by Quantachrome.

Based on the above described measurements and equations, the  
5 particle porosity can easily be derived.

Preparation of the granulate (a)

10 The granulate may be produced by any suitable mechanical mixing process known in the art, either continuous or batch-wise.

The granulate may, for example, be produced by a process in  
15 which the starting materials are mixed in a high speed mixer and then maintained or brought into a deformable state in a moderate speed mixer/densifier, before cooling and/or drying. This process is described in EP 367 339A (Unilever). Preferably, this process is performed  
20 continuously with a mean residence time in the high speed mixer of from about 5 to 30 seconds and a residence time in the moderate speed mixer densifier of from 1 to 10, preferably from 2 to 5 minutes. Actually,

- 10 -

in some cases, the second stage in the moderate speed mixer/densifier is optional.

In the first mixing step, the solid components of the feedstock are very thoroughly mixed with the liquid blend by means of a high-speed mixer. Such a mixer provides a high energy stirring input and achieves thorough mixing in a very short time.

As high-speed mixer the Lödige (Trade Mark) CB 30 Recycler may be used. This apparatus essentially consists of a large, static hollow cylinder having a diameter of about 30 cm which is horizontally placed. In the middle, it has a rotating shaft with several different types of blades mounted thereon. It can be rotated at speeds between 100 and 2500 rpm, dependent on the degree of densification and the particle size desired. The blades on the shaft provide a thorough mixing action of the solids and the liquids which may be admixed at this stage. The mean residence time is somewhat dependent on the rotational speed of the shaft, the position of the blades and the weir at the exit opening.

Other types of high-speed mixers/densifiers having a comparable effect on detergent powders can also be contemplated. For instance, a Shugi (Trade Mark) Granulator or a Drais (Trade Mark) K-TTP 80 may be used.

In the first mixing step, the components of the feedstock are thoroughly mixed in a high-speed mixer/densifier for a relatively short time of about 5-30 seconds, preferably under conditions whereby the starting material is brought into, or maintained in, a deformable state, to be defined hereafter.

- 11 -

In the case of production of highest bulk density granules, after the first mixing step, if the resultant detergent material still possesses a considerable porosity, then  
5 instead of choosing a longer residence time in the high-speed mixer/densifier to obtain a further bulk density increase, it may then be subjected to the optional second mixing step in which the detergent material is treated in a moderate-speed granulator/densifier. During this second  
10 processing step, the conditions are such that the powder is brought into, or maintained in, a deformable state. As a consequence, the particle porosity will be further reduced. The main differences with the first step reside in the lower mixing speed and the longer residence time of 1-10 minutes,  
15 and the necessity for the powder to be deformable.

The optional second mixing step can be successfully carried out in a Lödige (Trade Mark) KM 300 mixer, also referred to as Lödige Ploughshare. This apparatus essentially consists  
20 of a hollow static cylinder having a rotating shaft in the middle. On this shaft various plough-shaped blades are mounted. It can be rotated at a speed of 40-160 rpm. Optionally, one or more high-speed cutters can be used to prevent excessive agglomeration. Another suitable machine  
25 for this step is, for example the Drais (Trade Mark) K-T 160.

For use, handling and storage, the densified detergent powder must be in a free flowing state. Therefore, in a  
30 final step the powder can be dried and/or cooled if necessary. This step can be carried out in a known manner, for instance in a fluid bed apparatus (drying, cooling) or in an airlift (cooling). It is advantageous if the powder

- 12 -

needs a cooling step only, because the required equipment is relatively simple and more economical.

For production of high bulk density products, any optional  
5 second mixing step and preferably also for the first mixing  
step, the detergent powder should be brought into a  
deformable state in order to get optimal densification. The  
high-speed mixer and/or the moderate speed  
granulator/densifier are then able to effectively deform the  
10 particulate material in such a way that the particle  
porosity is considerably reduced or kept at a low level, and  
consequently the bulk density is increased.

To improve granulation and flow properties, this process may  
15 employ dosing of a layering agent in the moderate speed  
mixer/densifier, as described in EP 390 251A (Unilever).

Where the granulate contains an anionic surfactant,  
advantageously, this is formed by dry neutralisation of a  
20 liquid acid precursor of the anionic surfactant with a  
water-soluble alkaline inorganic material in the high speed  
mixer, as described in EP 420 317A (Unilever).

Alternatively, anionic surfactant may be produced in the  
25 mechanically mixed granules by a wet neutralisation process  
which comprises contacting a pumpable precursor acid of the  
anionic surfactant with a pumpable neutralising agent in a  
drying zone to produce the anionic surfactant, (the total  
water content preferably being in excess of 10% and more  
30 preferably in excess of 20% by weight), agitating the  
precursor and neutralising agent with agitation means  
(preferably having a tip speed in excess of  $15\text{ms}^{-1}$  and more  
preferably in excess of  $20\text{ms}^{-1}$ ), heating the surfactant

- 13 -

- (preferably to a temperature in excess of 130°C and more preferably in excess of 140°C) in the drying zone to reduce the water content (preferably to not more than 20% by weight and more preferably not more than 15% by weight) and
- 5 subsequently cooling the surfactant to form the granulate. In a continuous process of the latter kind, the flow rate is suitably of the order of 10 to 25 kg/m<sup>2</sup>/hr and preferably 17 to 22 kg/m<sup>2</sup>/hr, eg 20 kg/m<sup>2</sup>/hr.
- 10 Suitably the average residence time in the drying zone is less than 5 minutes. A residence time of less than 4 minutes is especially preferred with as low a residence time as possible being most preferred.
- 15 Agitation of the precursor and neutralising agent (hereinafter referred to as the feedstocks) in the heating zone generally provides efficient heat transfer and facilitate removal of water. Agitation reduces the contact time between the feedstocks and the wall of the drying zone
- 20 which, together with efficient heat transfer, reduces the likelihood of 'hot spots' forming which may lead to thermal decomposition. Moreover, improved drying is secured thus allowing a shorter residence time/increased throughput in the drying zone.
- 25 To avoid thermal decomposition, the temperature of the drying zone preferably does not exceed 170°C.
- The above process permits the formation of particles having
- 30 a bulk density for example in excess of 550 kg/m<sup>3</sup>. The material is cooled in a cooling zone which is suitably operated at a temperature not in excess of 50°C and preferably not in excess of 40°C, eg 30°C. Desirably there



- 14 -

is agitation within the cooling zone to provide efficient cooling of the material therein. By actively cooling the particles, the possibility of thermal decomposition occurring due to the particles being heated to a high  
5 temperature is reduced.

In addition to the precursor acid and neutralising agent feedstocks, pre-neutralised surfactants eg primary alcohol sulphate (PAS), linear alkylbenzene sulphonate (LAS) and  
10 alkyl ether sulphate (LES) may be fed into the drying zone as a separate feedstock and/or as an admixture with the neutralising agent and/or the precursor acid.

The above process may be carried out in any suitable  
15 apparatus however it is preferred that a flash reactor is employed. Suitable flash reactors include, for example, the Flash Drier system available from VRV SpA Impianti Industriali. The drying zone may have a heat transfer area of at least 10 m<sup>2</sup>. The cooling zone desirably has a heat  
20 transfer area of at least 5 m<sup>2</sup>.

Optionally two or more drying zones may be employed before the cooling zone as desired. A single apparatus may be employed to provide the drying zone and cooling zone as  
25 desired or alternatively separate apparatus for example a drier and a cooling fluid bed may be employed.

Suitably the drying zone is substantially circular in cross section and is thus defined by a cylindrical wall.  
30 Preferably the said wall is heated by means of a heating jacket through which water, steam or oil may be fed. The inside of the said wall is preferably maintained at a temperature of at least 130°C and especially at least 140°C.

Preferably the drying zone has an evaporation rate of 3 to 25, and especially 5 to 20 kg of water per m<sup>2</sup> of heat surface per hour.

5 The cooling zone is preferably defined by a cylindrical wall. Where the process is continuous, the apparatus is suitably arranged such that the drying zone and cooling zone are substantially horizontally aligned to facilitate efficient drying, cooling and transport of the material  
10 through the drying and cooling zones in a generally horizontal direction.

Suitably the drying zone and preferably the cooling zone have agitation means therein which agitates and transports  
15 the surfactant paste and forming granules through the said zones. The agitation means preferably comprises a series of radially extending paddles and/or blades mounted on an axially mounted rotatable shaft. Desirably the paddles and/or blades are inclined in order to effect  
20 transportation.

The spray-dried adjunct (b)

25 The spray dried adjunct may comprises from 0 to 20% by weight of synthetic surfactant material based on the total weight of the adjunct. Suitable synthetic surfactant materials are described below.

30 The adjunct comprises from 45 to 95% by weight, preferably from 50 to 90%, of inorganic material based on the total weight of the adjunct.

The inorganic material comprises a carbonate salt which is sodium carbonate monohydrate, or especially, sodium sesquicarbonate or Burkeite (sodium carbonate/sodium sulphate double salt). Especially preferred are crystal-growth-modified carbonate salts as described in EP 221 776A (Unilever), in particular, crystal-growth-modified sodium sesquicarbonate, sodium carbonate monohydrate, or Burkeite.

Sesquicarbonate is preferably formed in situ from the aqueous reaction of carbonate with acid. Organic acids such as citric acid and maleic/acrylic polymer in acid form (Sokalan (Trade Mark) CP45 from BASF), detergent sulphonic acids eg linear alkylbenzene sulphonic acid (LAS acid) or other conventional organic acids may be used to produce the sesquicarbonate. Alternatively, suitable inorganic acids may be used. The Burkeite is preferably formed in situ from the aqueous reaction of carbonate with sulphate.

The adjunct preferably further comprises a fatty acid, preferably a C<sub>10</sub>-C<sub>22</sub> fatty acid. The fatty acid may be converted to the corresponding soap during the preparation of the adjunct. Typically the level of fatty acid/soap in the adjunct is up to 10% by weight, preferably from 0.5% to 6%, based on the total weight of the adjunct.

The spray-dried adjunct may further comprise up to 25% by weight, preferably 5 to 20% by weight, based on the total weight of the adjunct, of a polymer. Any polymers conventionally present in detergent products may be included. Preferred polymers include amongst others, polyvinyl pyrrolidone (PVP) and vinyl pyrrolidone copolymers, cellulosic polymers such as sodium

- 17 -

carboxymethyl cellulose, and acrylic polymers such as Sokalan (Trade Mark) CP5 (a sodium salt of maleic/acrylic acid copolymer, available from BASF). The CP5 polymer may be produced from the corresponding acid (CP45) during the conversion of an inorganic material precursor (eg carbonate) to an inorganic material (eg sesquicarbonate).

A citrate may also be present in the spray-dried adjunct, in particular where sesquicarbonate has been produced in situ by the action of an acid upon carbonate. The spray-dried adjunct may comprise up to 25% by weight of citrate, preferably up to 20% based on the total weight of the adjunct. Preferably the citrate is sodium citrate.

The spray-dried adjunct may also contain a silicate, preferably sodium silicate, in an amount of up to 25% by weight based on the total weight of the adjunct.

Usually the adjunct comprises from 0.5 to 30% by weight of free water, preferably from 1 to 25% by weight and most preferably from 5 to 20% by weight based on the total weight of the adjunct.

The bulk density of the adjunct is preferably within the range of from 150 to 600 kg/m<sup>3</sup>, more preferably from 200 to 600 kg/m<sup>3</sup>.

The spray-dried adjunct may optionally further comprise small amounts of other components suitable for inclusion in a granular material via a spray-drying process. The spray-dried adjunct may be treated so that other minor ingredients, or low levels of actives, may be sprayed onto the adjunct.

- 18 -

The spray-dried adjunct may be produced by any suitable spray-drying process known in the art.

- 5 The spray-dried adjunct may be prepared by mixing an inorganic material precursor (eg sodium carbonate for sodium sesquicarbonate) with one or more acids (eg citric acid and/or maleic/acrylic acid). During this process one or more of the acids may be converted to the corresponding
- 10 polymeric salt eg the sodium maleic/acrylic acid salt. In this way the inorganic material can be produced in-situ. Other components to be present in the adjunct (or precursors thereof) may also be included at this stage.
- 15 The mixture should be maintained at a temperature at which it is stable, eg below 80°C, prior to the addition of a suitable amount of water to form a slurry of the required viscosity.
- 20 The slurry should be maintained at a temperature such that the slurry components do not degrade. For sesquicarbonate containing slurries the temperature should typically be maintained at below 80°C.
- 25 The slurry may be spray-dried according to any suitable process. Typically the tower inlet temperature should not exceed 450°C and the tower outlet temperature should remain within the range of from 95 to 135°C. Suitable nozzle pressures during spray-drying are in the range of 20 to 60
- 30 bar, for example 40 bar.

For the spray-drying of sesquicarbonate containing adjuncts it has been found that recirculation, supersaturation or agitation (or a combination thereof) of the slurry during spray-drying helps to achieve fast crystallisation and  
5 produce an adjunct of a suitable bulk density.

Typically the sesquicarbonate containing slurries comprise 40-60% by weight of total water in order to provide suitable properties for spray-drying.  
10

The granular detergent composition

The granular detergent composition comprises from 35 to 85%  
15 by weight of the granulate (a) (the base powder), preferably from 45 to 80% (based upon the total weight of the granular detergent composition).

The granular detergent composition comprises from 0.5 to 30%  
20 of the spray-dried adjunct (based on the total weight of the granular detergent composition), preferably from 1 to 30%, most preferably from 2 to 25% by weight.

Typically the synthetic surfactant concentration in the  
25 granular detergent composition is from 5% to 50%, preferably from 10% to 45%, most preferably from 15% to 40%.

Typically the builder concentration in the granular  
30 detergent composition is from 5 to 80%, preferably from 9% to 50%, more preferably from 15% to 40%, most preferably from 20% to 35%, by weight of the total product.

- 20 -

Typically the water concentration in the granular detergent composition is from 0% to 20%, preferably from 1% to 15%, most preferably from 2% to 10%.

5 The granulate and the spray-dried adjunct may be mixed together by any suitable means so as to produce the granular detergent composition. Typically the spray-dried adjunct is added to the granulate in a medium shear rate mixer, and the two components are mixed until a well mixed product is  
10 obtained.

The granulate and spray-dried adjunct are mixed together in suitable proportions so that the required bulk density of the granular detergent product is obtained. The bulk  
15 density of the granular detergent composition is at least 550 kg/m<sup>3</sup>. It is especially preferred that the bulk density of the granular detergent composition is within the range of from 600 kg/m<sup>3</sup> to 1200 kg/m<sup>3</sup>, most preferably from 650 kg/m<sup>3</sup> to 1000 kg/m<sup>3</sup>, for example from 700 kg/m<sup>3</sup> to 950 kg/m<sup>3</sup>.

20 In addition, the granular detergent composition may comprise postdosed ingredients, in addition to the granulate (base powder) and the spray dried adjunct which are the essential elements of the invention. Postdosed ingredients may  
25 suitably be present in a total amount of up to 25% (based on the total weight of the composition).

Ingredients which are normally but not exclusively postdosed, may include bleach ingredients, bleach precursor,  
30 bleach catalyst, bleach stabiliser, photobleaches, alkali metal carbonate, water-soluble crystalline or amorphous alkaline metal silicate, layered silicates, anti-redeposition agents, soil release polymers, dye

- 21 -

transfer inhibitors, fluorescers, inorganic salts, foam control agents, foam boosters, proteolytic, lipolytic, amylitic and cellulytic enzymes, dyes, speckles, perfume, fabric conditioning compounds and mixtures thereof.

5

#### Detergent ingredients

The granulate contains at least synthetic surfactant material and inorganic material, and, the spray dried adjunct contains at least inorganic material. The following is a description of ingredients which, as appropriate, may be included in the granulate or adjunct, or may be separately dosed (postdosed) in the final product.

15

By the term 'synthetic surfactant' what is meant is any non-soap surfactant. Many suitable synthetic surfactant materials are available and fully described in the literature, for example, in "Surface-Active Agents and Detergents", Volumes I and II, by Schwartz, Perry and Berch. The preferred detergent-active compounds that can be used are synthetic non-soap anionic and nonionic compounds. However, in certain circumstances cationic/amphoteric and/or zwitterionic surfactants may also be present for example in the compositions with built-in fabric softening compounds.

20  
25

The granulate and the spray-dried adjunct may comprise either the same or different, but compatible, surfactants.

Suitable anionic surfactants are well-known to those skilled in the art. Examples include alkyl benzene sulphonates, primary and secondary alkyl sulphates, particularly C<sub>12</sub>-C<sub>15</sub> primary alkyl sulphates (PAS); alkyl ether sulphates; olefin

30



- 22 -

sulphonates; alkyl xylene sulphonates; dialkyl sulphosuccinates; and fatty acid ester sulphonates. Sodium salts are generally preferred.

Suitable nonionic surfactants include the primary and secondary alcohol ethoxylates, especially the C<sub>8</sub>-C<sub>20</sub> aliphatic alcohols ethoxylated with an average of from 1 to 20 moles ethylene oxide per mole of alcohol, and more especially the C<sub>10</sub>-C<sub>15</sub> primary and secondary aliphatic alcohols ethoxylated with an average of from 1 to 10 moles of ethylene oxide per mole of alcohol. Non-ethoxylated nonionic surfactants include alkylpolyglycosides, glycerol monoethers, and polyhydroxyamides (glucamide).

Either anionic or nonionic surfactants may be used according to the present invention. It is also possible to have a mixture of anionic and nonionic surfactants in the granular detergent composition.

The granular detergent composition may comprise soap, preferably a C<sub>10</sub>-C<sub>22</sub> soap.

Compositions according to the present invention may also contain, in addition to the detergent-active compounds, detergency builders and optionally bleaching components and other active ingredients to enhance performance and properties. The variations of phosphorus containing and non-phosphorus containing builder products have already been mentioned above. For both types of built products suitable builders are given below.

30

It is especially preferred that the inorganic material in the granulate and/or the spray-dried adjunct comprises a

- 23 -

non-phosphorus containing builder or phosphorus containing builder.

Non-phosphorous containing inorganic builders that may be present include sodium carbonate, if desired, in combination with a crystallisation seed of calcium carbonate as disclosed in GB-A-1 437 950. A carbonate will clearly need to be in excess of any amount used to neutralise the anionic surfactant acid precursor. Sodium carbonates are preferred. Sodium bicarbonate may also suitably be present as a builder.

Other suitable inorganic non-phosphorous containing builders include crystalline and amorphous aluminosilicates, for example zeolites as disclosed in GB 1 473 201 (Henkel); amorphous aluminosilicates as disclosed in GB 1 473 202 (Henkel); and mixed crystalline/amorphous aluminosilicates as disclosed in GB 1 470 250 (Henkel); and layered silicates as disclosed in EP 164 514B. Inorganic phosphate builders, for example, sodium orthophosphate, pyrophosphate and tripolyphosphate, may also be present.

Aluminosilicates, include the zeolite used in most commercial particulate detergent compositions, namely zeolite A. Advantageously, however, maximum aluminium zeolite P (zeolite MAP) described and claimed in EP 384 070B (Unilever) may be used. Zeolite MAP is an alkali metal aluminosilicate of the P type having a silicon to aluminium ratio not exceeding 1.33, preferably not exceeding 1.15, and more preferably not exceeding 1.07.

It is preferred that the non-phosphorus containing builder used is a carbonate, aluminosilicate and/or citrate.

- 24 -

Organic non-phosphorous containing builders that may be present include polycarboxylate polymers such as polyacrylates and acrylic/maleic copolymers; monomeric polycarboxylates such as citrates, glucomates, oxydisuccinates, glycerol mono-, di- and trisuccinates, carboxymethyloxysuccinates, carboxymethyloxymalonates, dipicolinates, hydroxyethyliminodiacetates, alkyl- and alkenylmalonates and succinates; and sulphonated fatty acid salts. These materials are preferably present in alkali metal salt, especially sodium salt, form. This list is not intended to be exhaustive.

Suitably the builder system comprises a zeolite (for example zeolite A) and optionally an alkali metal citrate and/or a crystalline layered silicate (for example SKS-6 ex Hoechst).

Examples of phosphorous-containing inorganic detergency builders include the water-soluble salts, especially the alkali metal salts of pyrophosphates, orthophosphates, polyphosphates and phosphonates.

The phosphorus containing inorganic builder is preferably pyrophosphate or polyphosphate. Specific examples of inorganic phosphate builders include sodium and potassium tripolyphosphates, orthophosphates and hexametaphosphates.

The granulate typically comprises low levels of sodium sulphate, preferably from 0 to 5% by weight based on the total weight of the granulate, most preferably from 0 to 1% sodium sulphate.

- 25 -

Optional ingredients may also be included in the detergent products of the present invention, either within the granulate, the spray-dried adjunct or as a post-dosed ingredient. Typically the total amount of optional  
5 ingredients is less than 25% by weight, preferably less than 20% by weight, most preferably less than 10% by weight based on the weight of the composition.

Granular detergent compositions according to the invention  
10 may also contain a bleach system, desirably a peroxy bleach compound, for example, an inorganic persalt or organic peroxyacid, capable of yielding hydrogen peroxide in aqueous solution. The peroxy bleach compound may be used in  
15 conjunction with a bleach activator (bleach precursor) to improve bleaching action at low wash temperatures. An especially preferred bleach system comprises a peroxy bleach compound (preferably sodium percarbonate or perborate) optionally together with a bleach activator.

20 Powder flow of the granular product may be improved by the incorporation of a small amount of an additional powder structurant, for example, a fatty acid (or fatty acid soap), a sugar, an acrylate or acrylate/maleate polymer, or sodium silicate which is suitably present in an amount of from 1-5  
25 wt%. This is in addition to any of these compounds which may be present in the granulate or spray-dried adjunct.

The materials that may be present in granular products of the present invention include sodium silicate; corrosion  
30 inhibitors including silicates; anti-redeposition agents such as cellulosic polymers; fluorescers; inorganic salts such as sodium sulphate, foam control agents or foam boosters as appropriate; enzymes (proteases, lipases,

- 26 -

amylases, cellulases); dyes; coloured speckles; and fabric conditioning compounds. This list is not intended to be exhaustive. These components may be present within the granulate, spray-dried adjunct and/or post dosed to the  
5 granular product.

- 27 -

EXAMPLES

The present invention will now be described in more detail  
5 with reference to the following non-limiting Examples, in  
which parts and percentages are by weight unless otherwise  
stated.

10 Measurement of dynamic flow rate (DFR)

The apparatus used consists of a cylindrical glass tube  
having an internal diameter of 35 mm and a length of 600 mm.  
The tube is securely clamped in a position such that its  
15 longitudinal axis is vertical. Its lower end is terminated  
by means of a smooth cone of polyvinyl chloride having an  
internal angle of 150 and a lower outlet orifice of diameter  
22.5 mm. A first beam sensor is positioned 150 mm above the  
outlet, and a second beam sensor is positioned 250 mm above  
20 the first sensor.

To determine the dynamic flow-rate of a powder sample, the  
outlet orifice is temporarily closed, for example, by  
covering with a piece of card, and powder is poured through  
25 a funnel into the top of the cylinder until the powder level  
is about 10 cm higher than the upper sensor; a spacer  
between the funnel and the tube ensures that filling is  
uniform. The outlet is then opened and the time  $t$  (seconds)  
taken for the powder level to fall from the upper sensor to  
30 the lower sensor is measured electronically. The  
measurement is normally repeated two or three times and an  
average value taken. If  $V$  is the volume (ml) of the tube

- 28 -

between the upper and lower sensors, the dynamic flow rate DFR (ml/s) is given by the following equation:

$$\text{DFR} = V/t$$

5

The averaging and calculation are carried out electronically and a direct read-out of the DFR value obtained.

All quantities of components are in parts by weight unless stated otherwise.

10

#### Measurement of dispenser residues

For the purposes of the present invention, dispensing into the washing machine is assessed by means of a standard procedure using a test rig based on the main wash compartment of the dispenser drawer of the Philips (Trade Mark) AWB 126/7 washing machine. This drawer design provides an especially stringent test of dispensing characteristics especially when used under conditions of low temperature, low water pressure and low rate of water flow.

The drawer is of generally cuboidal shape and consists of a main compartment, plus a small front compartment and a separate compartment for fabric conditioner which play no part in the test. In the test, a 100 g dose of powder is placed in a heap at the front end of the main compartment of the drawer, and subjected to a controlled water fill of 5 litres at 10°C and an inlet pressure of 50 kPa, flowing in over a period of 1 minute. The water enters through 2 mm diameter holes in a plate above the drawer: some water enters the front compartment and therefore does not reach

- 29 -

the powder. Powder and water in principle leave the drawer at the rear end which is open.

After 1 minute the flow of water is ceased, and the powder  
5 remaining is then collected and dried at 90°C to constant weight. The dry weight of powder recovered from the dispenser drawer, in grams, represents the weight percentage of powder not dispensed into the machine (the residue). Every result is the average of two duplicate measurements.  
10

EXAMPLE 1

15

Production of a sesquicarbonate-containing spray-dried adjunct

A mixture was prepared by pre-mixing 18.1% maleic/acrylic  
20 acid (CP45 available as a 45% solution from BASF), and 9.6% citric acid, and subsequently adding 1.3% fatty acid (Pristerine 4916 available as a 50% solution from Unichema). The pre-mix was maintained at approximately 70°C. To the premix 35.1% sodium carbonate, and subsequently, 35.1% water  
25 were added to produce a slurry having a total moisture content of approximately 52.5%. The slurry was maintained below 80°C prior to spray-drying.

The slurry was spray-dried using the following final  
30 processing conditions:



WO 98/54288

PCT/EP98/02985

- 30 -

Outlet Temperature	101°C final
Spray Pressure	40 bar
Throughput	11.8 tph slurry

Composition of the spray-dried adjunct

Sodium sesquicarbonate 2H <sub>2</sub> O	66.0%
Sodium citrate 2H <sub>2</sub> O	13.1%
Copolymer CP5	15.0%
Soap	2.5%
Free moisture (approx)	3.5%

- 5 Bulk density of the spray-dried adjunct = 347 kg/m<sup>3</sup>.

EXAMPLE 2

- 10 A second spray-dried adjunct was prepared by the same method, to the following formulation:

Sesquicarbonate.2aq	58.5%
Sodium citrate.2aq	10.4%
Copolymer CP5	14.5%
Soap	1.5%
Free moisture	15.1%

EXAMPLES 3 TO 6Mixing of a spray-dried sesquicarbonate based adjunct with a mechanically mixed granulate

5

A mechanically mixed granulate of the composition given in Table 1 below was mixed with various post-dosed ingredients to produce the formulation given in Table 2. To this formulation varying amounts of the sesquicarbonate adjunct of Example 2 were added in order to reach a total of 3, 6, 9 and 12% of the adjunct in the final product.

The bulk density of the formulation of Table 2 was 882 kg/m<sup>3</sup>. The bulk density of the spray-dried adjunct was 397 kg/m<sup>3</sup>. The bulk densities of the final products are shown in Table 3.

Table 1: mechanically mixed granulate

Sodium alkyl benzene sulphonate	14.6%
Non-ionic surfactant 7E0 branched	7.7%
Nonionic surfactant 3E0, branched	4.1%
Fatty acid	1.9%
Zeolite A24	46.7%
Copolymer CP5	1.6%
Sodium carbonate	12.4%
SCMC	0.9%
Moisture, salts etc.	10.1%

20

- 32 -

Table 2: granulate plus postdosed ingredients

Mechanically mixed granulate	85.1%
Antifoam granule	2.6%
PVP	0.3%
Sodium citrate.2aq	5.1%
Sodium carbonate	1.6%
Sodium bicarbonate	2.7%
EDTMP	1.3%
Enzymes and perfumes	1.3%

5 Table 3: bulk densities of final products

Example	% adjunct added	BD Product kg/m <sup>3</sup>
Control	0	882
3	3	841
4	6	823
5	9	780
6	12	762

- 33 -

EXAMPLES 7 to 9, COMPARATIVE EXAMPLE ADetergent compositions containing sesquicarbonate adjuncts

To a base powder (a mechanically mixed granulate) further  
 5 ingredients were post-dosed, and a sesquicarbonate adjunct  
 added to produce compositions (Examples 7 to 9) having the  
 overall compositions below. To a spray dried base powder  
 further ingredients were postdosed, and a sesquicarbonate  
 adjunct added to produce a composition (Comparative Example  
 10 A) having the overall compositions below (in weight %).

From base powder	A	7	8	9
Sodium alkyl benzene sulphonate	6.50	7.77	7.77	8.17
Nonionic surfactant 7E0	3.25	4.08	4.08	4.29
Nonionic surfactant 3E0	4.31	2.19	2.19	2.30
Fatty acid	2.16	1.00	1.0	1.05
Zeolite A24 anhydrous	25.43	25.65	25.65	27.0
SCMC	0.41	0.34	0.34	0.35
Copolymer CP5	3.99	-	0	-
Sodium carbonate	10.04	2.06	2.06	2.16
Sodium citrate	-	2.65	2.65	2.79
Sodium sulphate	6.59	-	-	-
Other salts etc.	1.33	0.15	0.15	0.16
Water	9.13	4.4	4.14	4.35

- 34 -

<u>Post-dosed</u>	A	7	8	9
Sodium perborate 4H <sub>2</sub> O	15.0	15.21	15.0	15.79
EDTMP	0.21	0.13	0.13	0.14
Other salts	0.80	0.28	0.27	0.28
TAED	2.29	3.04	3.0	3.16
Antifoam	1.44	1.22	1.2	1.26
Fluorescer	-	0.81	0.8	0.84
Enzyme	0.29	0.30	0.29	0.30
Perfume	0.21	0.21	0.21	0.22
Sodium sulphate	6.56	-	9.1	9.58
Sodium carbonate	-	-	-	5.26
Sesquicarbonate adjunct	-	29.10	20.00	10.53

5 The sesquicarbonate adjunct of Example 2 was used in examples 7 to 9. The bulk density of the base powder was 882 kg/m<sup>3</sup>.

Bulk densities and dynamic flow rates were as follows:

Example	Bulk density (kg/m <sup>3</sup> )	Dynamic flow rate (ml/s)	Dispensing at 10°C
A	612	76	0
7	622	149	2.5
8	722	142	3.5
9	817	137	3.5

- 35 -

Example 7 comprised a mechanically mixed base powder, 29.1% spray dried adjunct and also post dosed materials; it had approximately the same bulk density as the spray dried powder of Comparative Example A. However Example 7 exhibited a  
5 higher DFR and better dispensing properties than Comparative Example A. Therefore the bulk density has been modified for Example 7 (so as to be comparable to that of the lower bulk density of Comparative Example A) whilst the physical properties of Example 7 are superior to those of Comparative  
10 Example A.

Examples 8 and 9 have higher bulk densities than Example 7 due to lower levels of the spray dried adjunct being present. However the advantages with respect to the physical  
15 properties are still achieved when compared to Comparative Example A. Therefore the flexibility in bulk density modification, and the associated advantages in physical properties over for a wide range of bulk densities, is demonstrated.

20

EXAMPLE 10Production of a Burkeite containing spray dried adjunct

5

A slurry composition was prepared comprising:

	% by weight
Water	37.6
Sodium polyacrylate* <sup>1</sup>	0.4
Sodium sulphate	22
Sodium carbonate	8.2
45% sodium silicate soln.	20.9
Sodium carboxy methyl cellulose	0.3
Fatty acid* <sup>2</sup>	0.5
CP5 (40% soln)	7.5
Nonionic surfactant 7E0	2.6

10

\*<sup>1</sup> available as Sokolan PA25 (45% solution) from BASF

\*<sup>2</sup> available as Pristerene 4917 from Unichema

- 37 -

The slurry was spray-dried to produce a Burkeite-based adjunct of the following formulation:

5

	% by weight
Burkeite ( $2\text{Na}_2\text{SO}_4\text{-Na}_2\text{CO}_3$ )	61.5
Sodium silicate	19.1
Nonionic surfactant 7E0	5.4
Soap	6.1
Sodium carboxy methyl cellulose	0.6
Sodium polyacrylate * <sup>1</sup>	0.4
Water	6.9

The bulk density of the Burkeite spray-dried adjunct was 399 kg/m<sup>3</sup>.

10



EXAMPLES 11 to 13, COMPARATIVE EXAMPLE BDetergent compositions containing Burkeite adjunct

5 The Burkeite-containing adjunct of Example 10 (see previously) was added in varying amounts to a detergent powder formulation produced from a mixture of the mechanically mixed granulate (base powder) and the postdosed ingredients used in Examples 7 to 9.

10

Bulk densities (in kg/m<sup>3</sup>) were as follows:

Base powder	793
15 Postdosed ingredients (other than sodium carbonate and sodium sulphate)	850
Sodium carbonate	1013
Sodium sulphate	1529
20 Final formulation (without Burkeite adjunct)	892

25 The base powder had the formulation shown in Table 4 below. The mix of postdosed ingredients, other than the Burkeite adjunct, sodium carbonate and sodium sulphate, is shown in Table 5 below.

30

Table 4:Ingredients from base powder (mechanically mixed granulate)

5

Sodium alkyl benzene sulphonate	7.76
Nonionic surfactant 7E0	4.08
Nonionic surfactant 3E0	2.19
Fatty acid	1.00
Zeolite A24 anhydrous	25.63
SCMC	0.34
Copolymer CP5	-
Sodium carbonate	2.06
Sodium citrate	2.65
Sodium sulphate	-
Other salts etc.	0.15
Water	4.4
Total	50.00

The base powder had a bulk density of 793 kg/m<sup>3</sup>.

- 40 -

Table 5:

Postdosed ingredients, other than the Burkeite adjunct sodium carbonate and sodium sulphate

5

Sodium perborate 4H <sub>2</sub> O	15.21
EDTMP	0.13
Other salts	0.28
TAED	3.04
Antifoam	1.22
Fluorescer	0.81
Enzyme	0.30
Perfume	0.21
Total	21.2

This mixture of postdosed ingredients had a bulk density of 850 kg/m<sup>3</sup>.

10

The full compositions had the formulations shown in Table 6 below, which also shows bulk densities, dynamic flow rates, and dispenser residues. The effect of replacing the high bulk density sulphate and carbonate with the low bulk density Burkeite-containing spray-dried adjunct on the Dynamic Flow Rate (DFR ml/s) and the dispensing properties was not significant. Therefore the flexibility of the bulk density manipulation without affecting the physical properties is demonstrated.

20

Table 6: full formulations and properties

	B	11	12	13
Base powder as in Table 4	50	50	50	50
Postdosed ingredients as in Table 5	21.2	21.2	21.2	21.2
Sodium carbonate	13.8	8.8	-	-
Sodium sulphate	15	10	10	
Burkeite adjunct	-	10	18.8	28.8
Bulk density	892	782	713	632
DFR	148	141	132	131
Dispenser residues	2	1	1	0

CLAIMS

1 A granular detergent composition having a bulk density  
5 of at least 550 kg/m<sup>3</sup> comprising:

(a) from 35% to 85% by weight, based on the total  
composition, of a mechanically mixed granulate having a bulk  
density of from 600 kg/m<sup>3</sup> to 900 kg/m<sup>3</sup>, the granulate  
10 comprising from 15 to 50% by weight of synthetic surfactant  
material, and from 30 to 80% by weight of inorganic material,  
based on the weight of the granulate;

characterised in that it further comprises:

15

(b) from 0.5 to 30% by weight, based on the total granular  
composition, of a spray-dried adjunct having a bulk density  
within the range of from 150 to 600 kg/m<sup>3</sup>, the spray-dried  
adjunct comprising from 45 to 95% by weight of inorganic  
20 material comprising a sodium carbonate salt selected from  
sodium carbonate monohydrate, sodium sesquicarbonate and  
Burkeite, and optionally comprising from 0 to 20% by weight  
of synthetic surfactant material, from 0 to 25% by weight of  
a polymer, from 0 to 25% by weight of a citrate and from 0 to  
25 10% by weight of fatty acid and/or soap, based on the weight  
of the adjunct.

2 A detergent composition as claimed in claim 1,  
30 characterised in that the granulate (a) comprises from 20 to  
40% by weight of synthetic surfactant material.

3 A detergent composition as claimed in claim 1 or claim  
2, characterised in that the granulate (a) comprises from 35  
to 75% by weight of inorganic material.

5

4 A detergent composition as claimed in any preceding  
claim, characterised in that the spray-dried adjunct (b)  
comprises from 50 to 90% by weight of inorganic material.

10

5 A detergent composition as claimed in any preceding  
claim, characterised in that the inorganic material in the  
spray-dried adjunct (b) comprises crystal-growth-modified  
sodium carbonate monohydrate, sodium sesquicarbonate or

15 Burkeite.

6 A detergent composition as claimed in any preceding  
claim, characterised in that the spray-dried adjunct (b)  
20 comprises from 5 to 20% by weight of a polymer.

7 A detergent composition as claimed in any preceding  
claim, characterised in that the granulate (a) is present in  
25 an amount of from 45 to 80% by weight of the total granular  
composition.

8 A detergent composition as claimed in any preceding  
30 claim, characterised in that the spray-dried adjunct (b) is  
present in an amount of from 1 to 30% by weight, preferably  
from 2 to 25% by weight, of the total granular composition.

9 A detergent composition as claimed in any preceding claim, characterised by an average bulk density within the range of from 600 to 1200 kg/m<sup>3</sup>, preferably from 650 to 1000 kg/m<sup>3</sup>.

5