



US 20050082269A1

(19) **United States**

(12) **Patent Application Publication**

**Haag et al.**

(10) **Pub. No.: US 2005/0082269 A1**

(43) **Pub. Date: Apr. 21, 2005**

(54) **APPARATUS AND METHOD FOR HEATING A STEERING WHEEL**

**Related U.S. Application Data**

(63) Continuation of application No. 10/232,649, filed on Aug. 30, 2002, now Pat. No. 6,815,642.

(75) Inventors: **Ronald Helmut Haag**, Clarkston, MI (US); **Mansour Ashtiani**, Beverly Hills, MI (US)

(60) Provisional application No. 60/341,983, filed on Dec. 19, 2001.

Correspondence Address:

**Scott A. McBain**  
**DELPHI TECHNOLOGIES, INC.**  
Legal Staff, Mail Code: 480-410-202  
P.O. Box 5052  
Troy, MI 48007-5052 (US)

**Publication Classification**

(51) **Int. Cl.<sup>7</sup>** ..... **B60L 1/02**

(52) **U.S. Cl.** ..... **219/204**


(57) **ABSTRACT**

Provided herein is a method of making a heated steering wheel, comprising depositing an electrically conductive layer on at least a portion of a steering wheel substrate to produce thereon a heating element for receiving an electrical current and providing a source of heat. Also disclosed is a heating element for a steering wheel and a heated steering wheel assembly formed using this method.

(73) Assignee: **DELPHI TECHNOLOGIES, INC.**

(21) Appl. No.: **10/983,521**

(22) Filed: **Nov. 8, 2004**

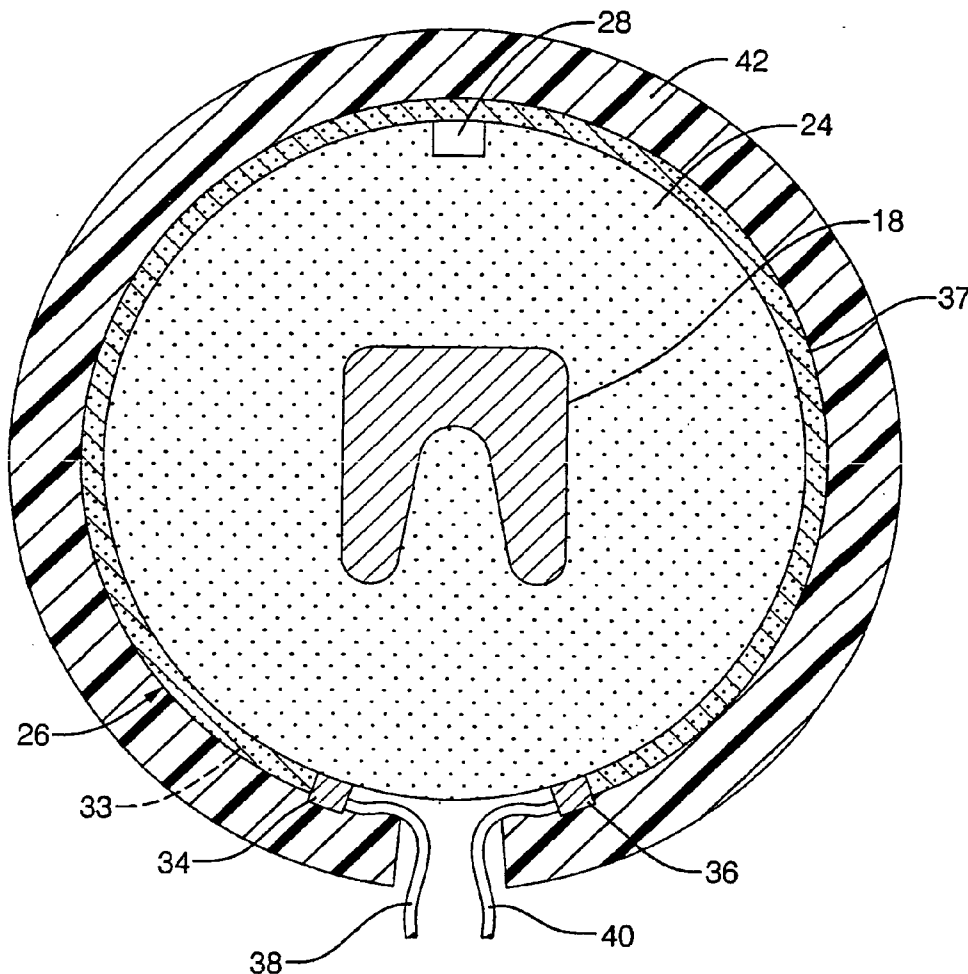

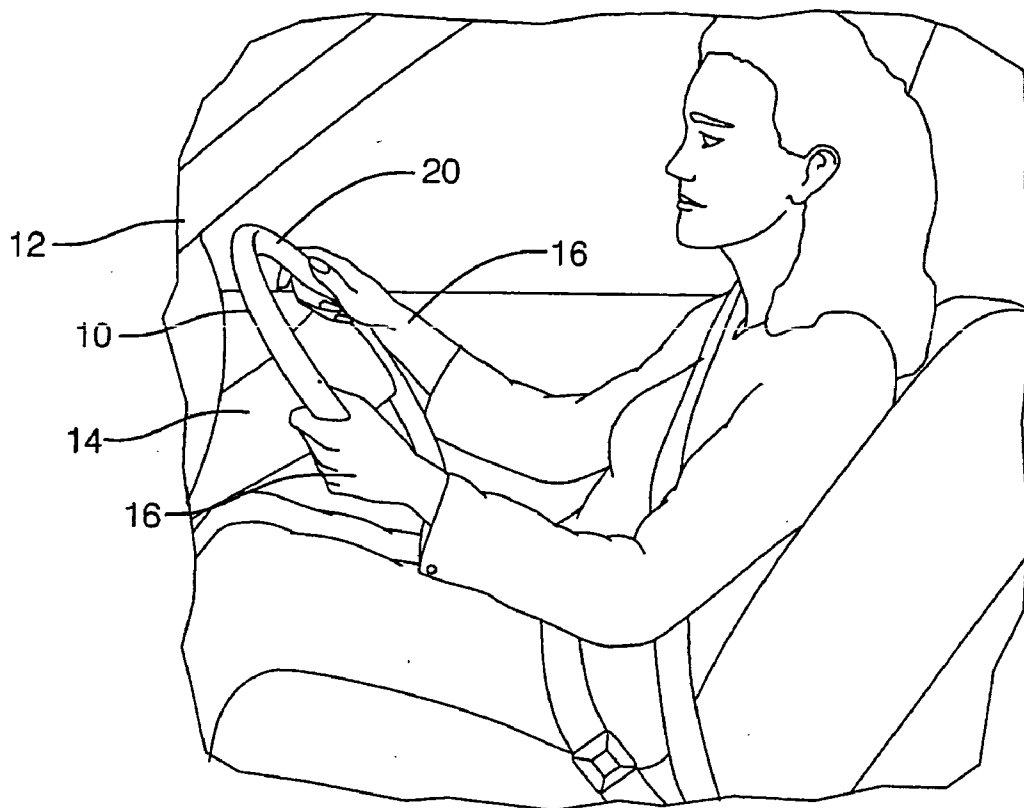


FIG. 1

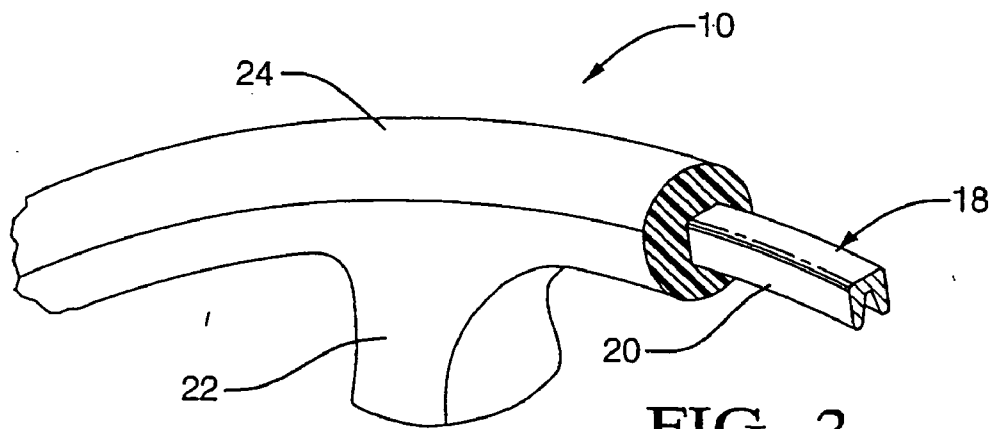


FIG. 2

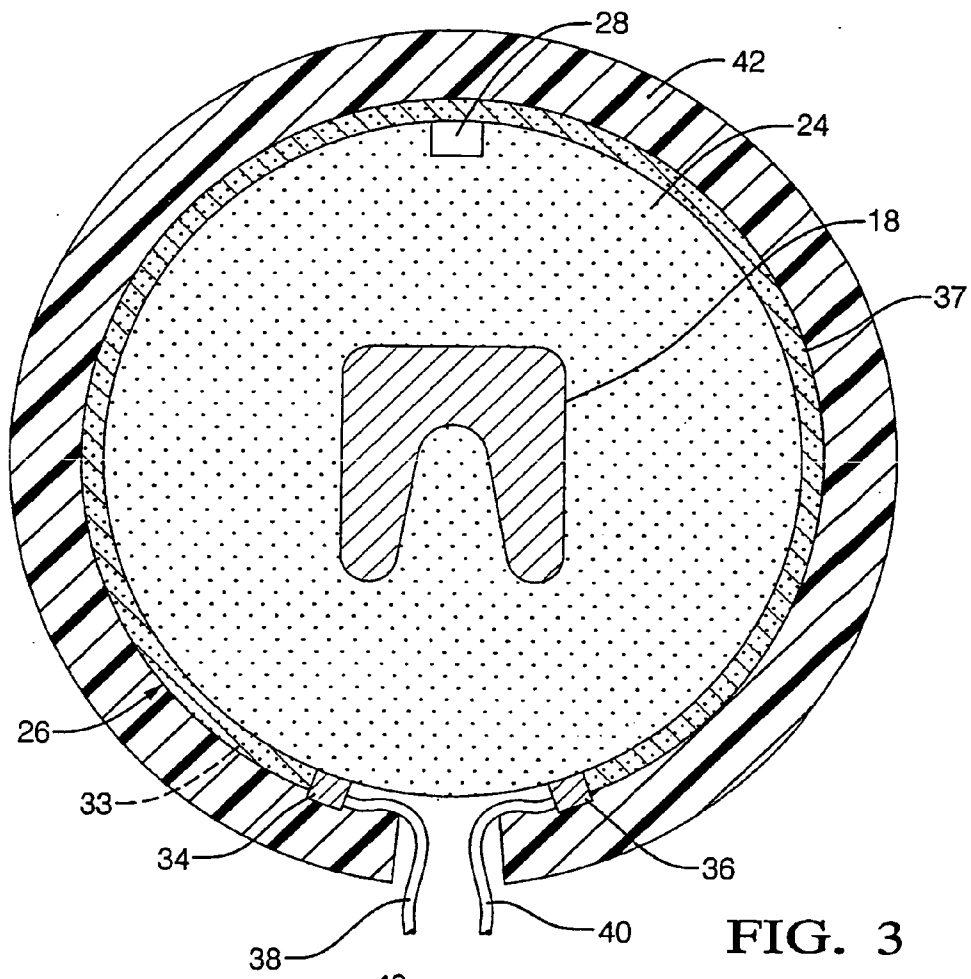


FIG. 3



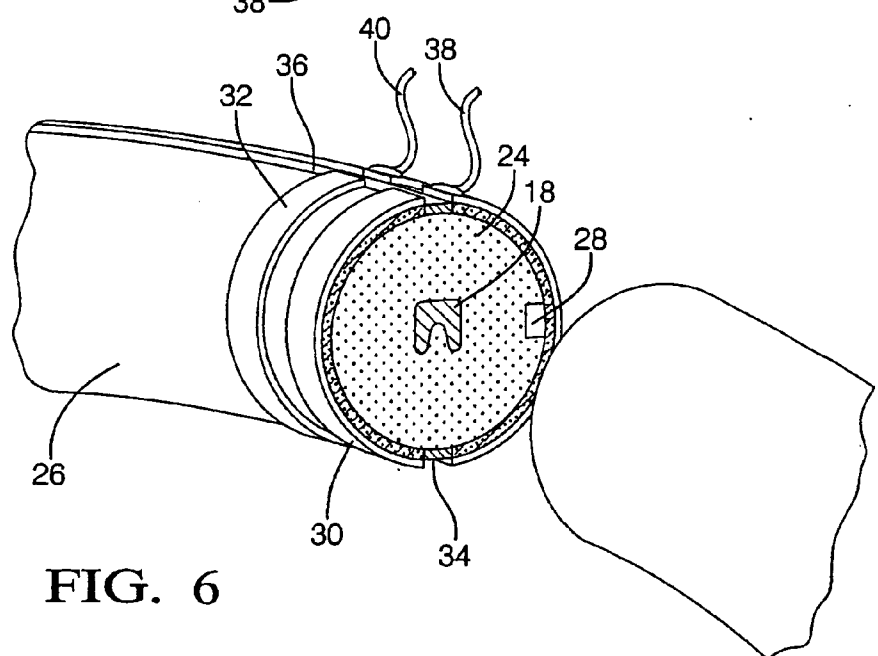


FIG. 6

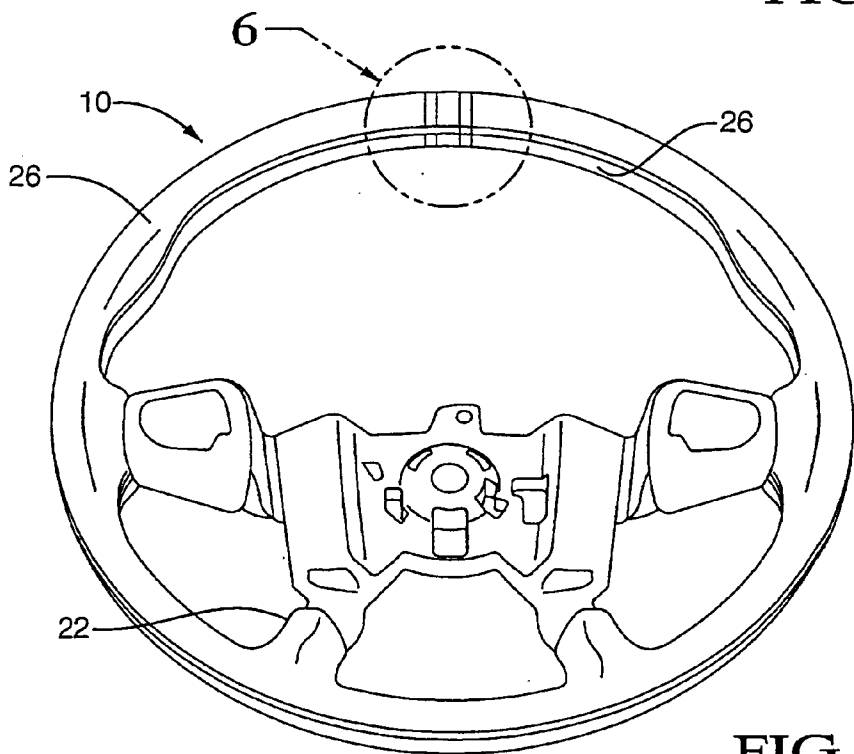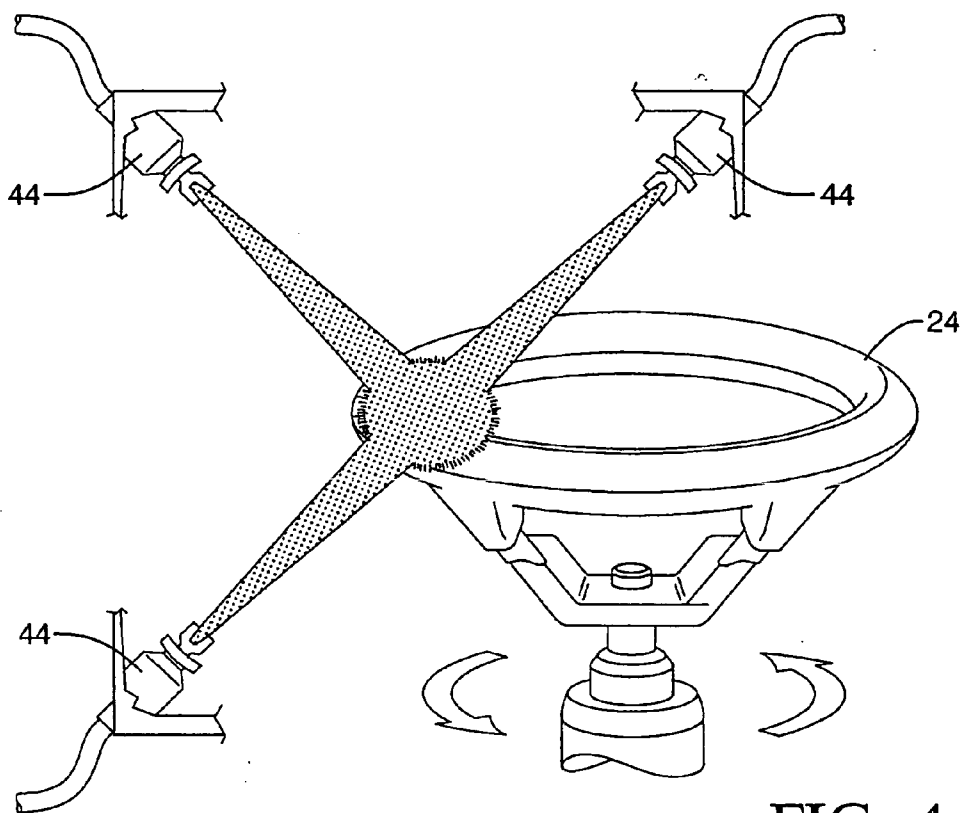

**APPARATUS AND METHOD FOR HEATING A STEERING WHEEL**

**CROSS REFERENCE TO RELATED APPLICATIONS**

[0001] This application claims the benefit of United States Provisional Patent Application, No. 60/341,983, filed on Dec. 19, 2001, Attorney Docket Number DP-306965, the contents of which are incorporated herein by reference thereto.

**BACKGROUND OF THE INVENTION**

[0002] A number of attempts have been made to provide a heated steering wheel to alleviate touching of a cold steering wheel by a driver, especially during cold weather.

[0003] Previous approaches involved the use of a length of resistance wire as a heating element, either embedded within the steering wheel, within a protective sheath, and/or extending within a hollow steering wheel. An electrical current is then arranged to pass through the resistance wire. However, various factors effect the utility of these arrangements, including the inherent complexity required in applying the heating element, along with the major structural modifications required within the steering wheel itself, all of which add cost to the manufacture.

[0004] Assembling a heating steering wheel can be labor intensive due to the complex three-dimensional shape of modern steering wheels and the poor elongation characteristics of heating elements. Imperfections in the outer surface of the steering wheel, some of which are artifacts of the process used to form it, can effect performance. For example, the so-called parting line from molding the steering wheel may serve as a wear point where abrasion of a heating element occurs during normal use.

**SUMMARY OF THE INVENTION**

[0005] Provided for herein is a method of making a heated steering wheel comprising depositing an electrically conductive layer on at least a portion of a steering wheel substrate to produce thereon a heating element for receiving an electrical current and providing a source of heat.

[0006] Also disclosed is a heating element for a steering wheel comprising an electrically conductive layer deposited on at least a portion of a steering wheel substrate arranged to receive an electrical current and to provide a source of heat.

[0007] Further disclosed is a heated steering wheel assembly comprising an electrically conductive layer deposited on at least a portion of a steering wheel substrate to produce thereon a heating element for receiving an electrical current and providing a source of heat; and a second layer deposited over at least a portion of said heating element.

[0008] Preferably, the heating element disclosed is easily applied directly to the outer surface of a steering wheel substrate. Also preferably it is disposed over the entire surface to be heated so as to provide a smooth outer surface in that the outer surface is essentially free from defects present in the underlying substrate.

[0009] The above-described and other features and advantages of the present invention will be appreciated and

understood by those skilled in the art from the following detailed description, drawings, and appended claims.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0010] The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

[0011] **FIG. 1** is a perspective view of a heated steering wheel, according to one embodiment of the present invention, illustrated in operational relationship with a vehicle;

[0012] **FIG. 2** is a cross-sectional view of a portion of a steering wheel;

[0013] **FIG. 3** is a cross-sectional view of a heated steering wheel;

[0014] **FIG. 4** is a perspective view of a method of spray depositing a heating element onto a steering wheel;

[0015] **FIG. 5** is a perspective view of a heated steering wheel having inlaid bus bars; and

[0016] **FIG. 6** is a cross sectional view of **FIG. 5**, section A.

**DETAILED DESCRIPTION OF THE INVENTION**

[0017] Referring now to **FIG. 1**, one embodiment of a heated steering wheel **10** is illustrated in an operational configuration inside a partially shown vehicle, generally designated at **12**. Heated steering wheel **10** is operably connected to a steering mechanism **14**. Heated steering wheel **10** is gripped by an operator's hand **16** to guide vehicle **12** in a desired direction. Advantageously, heated steering wheel **10** warms up the operator's hands **16** when the ambient temperature is cool.

[0018] Referring now to **FIGS. 2 and 3**, heated steering wheel **10** includes a frame portion **18** that defines the shape of the heated steering wheel **10**. Preferably, frame portion **18** is made from a metal material such as magnesium. Frame portion **18** includes an inner rim (not shown), an outer rim **20** circumscribing inner rim, and at least a spoke **22** interconnecting the inner rim with outer rim **20**. The inner rim, outer rim **20**, and spoke **22** form an integral frame portion **18** for heated steering wheel **10**.

[0019] Heated steering wheel **10** also includes a support member **24** that encloses frame portion **18**, preferably around outer rim **20** and over spokes **22**. Support member **24** may be a flexible cushion member such as a polymeric foam. Alternatively, support member **24** may be a rigid member, such as a polymeric resin (e.g., plastic).

[0020] Heated steering wheel **10** also includes a heating element **26**. The heating element **26** is deposited directly on the support member **24** and preferably positioned such that it is in electrical contact with a first bus bar **34** and a second bus bar **36** attached to, inlaid, and/or deposited on support member **24**. The bus bars are in turn connected to an electrical source through, for example, a first terminal wire **38** and a second terminal wire **40**, which provides electrical current to the conductive heating element **26** to provide heat. The bus bars and terminal wires attached to the bus bars, as

well as any desired temperature sensing heat output control device **28**, such as a thermistor, are positioned in contact with the heating element **26**.

**[0021]** The heating element comprises an electrically conductive layer **26** deposited directly on the surface of support member **24**. The electrically conductive layer **26** is comprised of an electrically conductive material, which may include metal, electrically conductive carbon including carbon and/or graphite particles, fibrils, fibers, micro-tubes, and a combination comprising at least one of the foregoing. Also included are metal coated carbon and/or graphite particles, fibrils, fibers, micro-tubes, and a combination comprising at least one of the foregoing. The preferred electrically conductive material for use herein is also thermally conductive. More preferred are conductive layers comprising copper, silver, nickel, alloys of one of the foregoing, and combinations comprising at least one of the foregoing metals.

**[0022]** In one embodiment, the electrically conductive layer is formed from a curable electrically conductive ink comprising an electrically conductive material and a curable medium deposited directly on support member **24**. The term "curable, cured, and curing" as used herein with regard to the electrically conductive ink, refers to any appropriate drying, reacting, crosslinking, solidification, evaporation of solvent, and the like required to convert the electrically conductive ink into a dry, preferably non-tacky state. These include air-drying, heat curing, curing through irradiation including, for example through exposure to UV light, and the like.

**[0023]** The curable medium may comprise a resin, preferably one selected from the group consisting of thermosetting resins, elastomeric resins, thermoplastic resins, and combinations comprising at least one of the foregoing. Suitable thermosetting resins for use herein include alkyds, diallyl phthalates, epoxies, melamines, phenolics, polyesters, urethanes, rigid silicones, and the like. Suitable elastomeric resins include acrylates, butyls, chlorosulfonated polyethylene, fluorocarbons, fluorosilicones, polysulfides, polyurethanes, neoprenes, nitriles, silicones, styrene, butadienes, and the like. Suitable thermoplastic resins include acetates, acrylics, cellulose, chlorinated polyethers, fluorocarbons, nylons (polyamides), polycarbonates, polyethylenes, polypropylenes, polyimides, polyphenylene oxides, polystyrenes, polysulfones, vinyls, and the like. The preferred curable medium being acrylics.

**[0024]** Preferably the electrically conductive material is dispersed in an ink as a finely divided particle, powder, and/or flake. More preferably, the electrically conductive material is dispersed within the ink to form an essentially uniform mixture, admixture and/or composition that is readily sprayed to form an essentially uniform layer on a substrate. The ink may also include a solvent, a drying retarding agent, a surfactant, a viscosity modifying agent, or a combination comprising at least one of the foregoing. Suitable solvents for use herein include both water and organic solvents. For example, a curable conductive ink comprising a silver and copper mixture such as Electrodag SP-029, Electrodag 18DB70X (both available commercially from Acheson Colloids Company, Port Huron, MI, U.S.A.), or the like may be used.

**[0025]** Important to providing an appropriate amount of heat energy, is the surface resistivity of the electrically

conductive layer. Suitable levels of surface resistivity depend on the total surface area required, the amount of heat required, and the voltage applied to produce the heat. Preferably, the heating element has an average surface resistivity of less than or equal to about 2 ohms based on an operational voltage of 14 volts, an average power requirement of 100 Watts.

**[0026]** Also important in providing the required amount of heat energy is the thickness of the conductive layer. Preferably, the thickness for the conductive layer will provide less than or equal to about 2 ohms of resistance as measured above (i.e., at 14 volts and 100 Watts), distributed over the surface being coated. The entire steering wheel may be heated, but there are also positions on the steering wheel more prone to be in contact with the drivers hands at any one point in time, especially when the vehicle is first placed into operation. These positions include those commonly referred to as the 10 and 2 positions, so named to correspond to the location of those same numbers on a clock face.

**[0027]** A non-uniform heat load may be applied to these, or other discrete positions on the steering wheel such that the resistivity local to those positions is varied by varying the thickness of the conductive layer to form localized heat zones. These heat zones result from the increased power dissipated from the thinner areas as compared to the thicker areas, both of which are simultaneously provided with the same amount of current.

**[0028]** The method by which the conductive layer is applied to the surface of the steering wheel needs to be suitable to form a continuously conductive layer over the desired portion of the steering wheel support member. Suitable methods of deposition include dipping, spray coating, gas assisted spray coating, electrospray coating, powder coating, screen printing, ink-jet printing, electrostatic printing, and the like.

**[0029]** In accordance with an exemplary embodiment, the conductive layer is spray coated upon the exterior surface of support member **24**. Referring to **FIG. 4**, the spray coating deposition process includes application of the conductive layer from at least one stationary spray nozzle **44**, while rotating the steering wheel support member to be coated. In yet another alternative embodiment, the position of spray nozzles **44** may be varied while the support member **24** is held in a stationary position. Combinations including these two approaches are also envisioned for use herein. In the event only a portion of the steering wheel support member is to be coated, various portions of the support member may be masked prior to deposition or in the alternative, the deposition occurs through printing, spraying and other techniques capable of providing the layer of conductive material where needed, without masking, and with a minimal amount of over spray. Examples of suitable printing processes include gas (e.g., air) assisted spraying which directs the sprayed material onto the surface with minimal if any amount of waste.

**[0030]** The conductive layer may be a single layer of conductive material, or in the alternative may include a plurality of layers, at least one of which is electrically conductive. This plurality of layers may also include protection layers applied to provide resistance to wear and abrasion, protection from liquids, or a combination comprising at least one of the foregoing properties to the steering

wheel. These layers may be applied to the steering wheel substrate prior to and/or after the conductive layer has been applied.

[0031] In order to provide heat, the heating element must be supplied with electrical power. The electrical power may be supplied to the heating element through end wires arranged in connection with the heating element. Also, the electrical power may be supplied through bus bars arranged on and/or in the steering wheel support as shown in the embodiment of **FIGS. 5 and 6**. In this embodiment, the first and second bus bars **34** and **36** are inlaid into the steering wheel support member **24**. Electrical connection from these bus bars to the conductive coating is supplied through first and second end connectors **30** and **32** respectively. The attachment of the end connectors to the bus bars may be by way of soldering, crimping, welding or the like, and need only provide an adequate amount of electrical contact to conduct the needed power. Also, the bus bars may be affixed to the steering wheel support, molded into the steering wheel support, but are preferably spray deposited onto the steering wheel in a manner similar to that of the conductive layer deposition. The first and second bus bars are then put into electrical contact with the power source through first and second terminal wires **38** and **40**.

[0032] In another embodiment, a control device for controlling the heat output or temperature of the heating element may also be incorporated. For example, a thermistor arranged in thermal contact with the heating element may be disposed in electrical connection with the power supply to regulate the output of the heating element. One example of such a controller is illustrated in U.S. Pat. No. 6,172,342, filed on Sep. 15, 1999, the contents of which are incorporated herein by reference thereto.

[0033] Once the heating element **26** is deposited over the surface of the support member **24**, it is capable of providing heat to the support member, and/or to a second layer **42** disposed over heating element **26** (see **FIG. 3**). Second layer **42** can provide the exterior surface of heated steering wheel **10**, which is gripped by operator's hands **16**, and may also provide a decorative appearance to heating steering wheel **10**. It should be appreciated that second layer **42** may be made from a combination of materials to achieve the desired decorative appearance. For example, a portion of second layer **42** covering outer rim **20** and spoke **22** may be a material such as leather, while a portion of the second layer **42** covering the inner rim may be a material such as plastic. It may be applied to the assembly through spraying and/or dipping in a manner similar to the application methods of the conductive layer. In the case of leather or cloth, the second layer **42** may be sewn and/or wrapped around the steering wheel support.

[0034] Advantageously, the deposited heating element provides for the elimination of irregularities and protrusions, collectively referred to as imperfections, associated with conventional heating elements. Such imperfect include pock-marks, bubbles, processing marks and artifacts, and the so-called parting line, which is an artifact of the molding process by which the steering wheel substrate was formed. The presence of such imperfections within the steering wheel substrate provides a point source where excessive wearing of the heating element can occur during normal use. Also, imperfections can be seen through exterior (e.g.,

leather) coverings resulting in a non-aesthetically pleasing assembly. It should be appreciated that the deposited heating element may be applied to a variety of wheel designs such as a leather-wrapped design, or a two-shot, molded polyurethane design. It is also suitable for two-, three-, and four-spoke designs.

[0035] The deposited heating element provides for easy assembly of the element during the manufacturing process of the heated steering wheel. Instead of applying a heating element directly on the steering wheel with adhesive or other means, the deposited heating element allows for a quick, accurate, and less damaging assembly on the heated steering wheel, especially in areas like the finger forms and spoke areas, unlike traditional heating elements that may require stretching in these areas. Thus, the assembly of the heated steering wheel is less labor intensive. Also, the preformed heating element can be fully tested prior to assembly and production of the final steering wheel assembly.

[0036] While the invention has been described with reference to an exemplary embodiment, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the invention will include all embodiments falling within the scope of the appended claims.

1. A method of making a heated steering wheel, comprising:

providing a steering wheel with a non-conductive substrate material having a non-uniform surface;

spraying an electrically conductive layer on at least a portion of said substrate material to produce thereon a heating element having an average surface resistivity of less than or equal to about 2 ohms based on an operational voltage of 14 volts for receiving an electrical current and providing a source of heat, said electrically conductive layer comprising a silver plated copper pigment and a thermoplastic binder;

providing a bus bar to provide an electrical connection to said electrically conductive layer, wherein said electrically conductive layer is applied in a manner to accommodate said non-uniform surface and said bus bar such that a smooth surface is provided.

2. A heated steering wheel assembly, comprising:

an electrically conductive layer spray deposited on at least a portion of a non-uniform steering wheel substrate to produce thereon a heating element for receiving an electrical current and providing a source of heat, said heating element being applied in a manner to provide a smooth outer surface while being applied to said non-uniform steering wheel substrate; and

a second layer deposited over at least a portion of said heating element, wherein said electrically conductive layer comprises a silver pigment and an acrylic binder,

wherein said steering wheel substrate comprises a non-conductive material encapsulating a magnesium frame.

3. A method of making a heated steering wheel, comprising:

providing a steering wheel insert with a non-conductive substrate material having a non-uniform surface;

spraying an electrically conductive layer on at least a portion of said substrate material to produce thereon a heating element for receiving an electrical current and providing a source of heat, said electrically conductive layer;

providing a bus bar to provide an electrical connection to said electrically conductive layer, wherein said electrically conductive layer is applied in a manner to accom-

modate said non-uniform surface and said bus bar such that a smooth surface is provided, wherein said non-conductive substrate material is polyurethane and said electrically conductive layer comprises two elements disposed in a manner to avoid deposition of said electrically conductive layer on a parting line of said substrate material,

wherein said electrically conductive layer is formed from a curable electrically conductive ink comprising an electrically conductive material and a curable medium comprising a resin selected from the group consisting of thermosetting resins, elastomeric resins thermoplastic resins, and combinations comprising at least one of the foregoing.

\* \* \* \* \*