

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2008 (09.10.2008)

PCT

(10) International Publication Number
WO 2008/119737 A1

(51) International Patent Classification:
F23D 14/70 (2006.01) *F23D 14/62* (2006.01)
F23R 3/28 (2006.01)

(74) Common Representative: SIEMENS AKTIENGESELLSCHAFT; Postfach 22 16 34, 80506 München (DE).

(21) International Application Number:
PCT/EP2008/053653

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 27 March 2008 (27.03.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
07006732.7 30 March 2007 (30.03.2007) EP

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US):
SIEMENS AKTIENGESELLSCHAFT [DE/DE];
Wittelsbacherplatz 2, 80333 München (DE).


(72) Inventor; and

(75) Inventor/Applicant (for US only): WILBRAHAM, Nigel
[GB/GB]; 44, Coldstream Drive, Wordsley, Stourbridge,
West Midlands DY8 5QZ (GB).

Published:
— with international search report

(54) Title: COMBUSTION PRE-CHAMBER

FIG 2

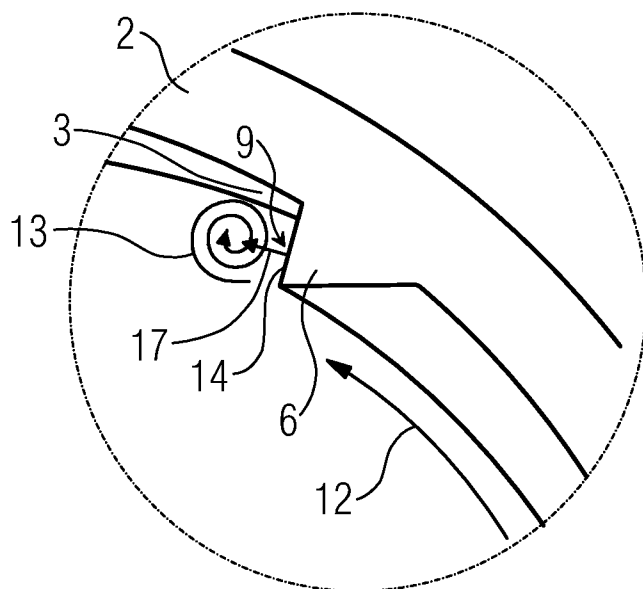

(57) Abstract: Disclosed is a combustion pre-chamber (1), with an upstream end (2) and a downstream end (3), the combustion pre-chamber (1) comprising: a transition channel (4) formed by a wall (5), the wall (5) extending between the upstream end (2) and the downstream end (3), and at least one flow trip (6) arranged on the wall (5) and tapering in height and width to 10 the downstream end (3). Further disclosed are a burner assembly, comprising a combustion pre-chamber (1), and a gas turbine engine.

WO 2008/119737 A1

Description

Combustion pre-chamber

5

FIELD OF THE INVENTION

The invention relates to a combustion pre-chamber, a burner assembly and a gas turbine engine.

10

BACKGROUND OF THE INVENTION

Air pollution is a worldwide concern and many countries have enacted stricter laws further limiting the emission of pollutants from gas turbine engines or offer fiscal or other benefits for environmentally sound installations. Although the prior techniques for reducing the emissions of NO_x from gas turbine engines are steps in the right direction, the need for additional improvements remains.

20

There are two main measures by which reduction of the temperature of the combustion flame can be achieved. The first is to use a fine distribution of fuel in the air, generating a fuel/air mixture with a low fuel fraction. The thermal mass of the excess air present in the reaction zone of a lean premixed combustor absorbs heat and limits the temperature rise of the products of combustion to a level where thermal NO_x is not excessively formed. The second measure is to provide a thorough mixing of fuel and air prior to combustion. The better the mixing, the fewer regions exist where the fuel concentration is significantly higher than average, the fewer the regions reaching higher temperatures than average, the lower the fraction of thermal NO_x will be.

30

Usually the premixing of fuel and air in a gas turbine engine takes place by injecting fuel into an air stream in a swirling zone of a combustor which is located upstream from the combustion zone. The swirling produces a mixing of fuel and air before the mixture enters the combustion zone.

35

US 6,152,726 describes a burner, comprising an upstream rotation generator, a mixing section downstream from the upstream rotation generator, at least one transition channel
5 and a mixing pipe downstream from the transition channels and at least one rotation generator on the mixing pipe end side.

Although this kind of burner provides good results with regard to good pollutant emissions, there is still space for
10 improvements.

SUMMARY OF THE INVENTION

An object of the invention is to provide an improved
15 combustion pre-chamber allowing for a better pre-mixing of gaseous fuel and compressor air to provide a homogeneous fuel/air mixture and thereby reduce formation of NO_x. Another objective is to provide a burner assembly with an improved combustion pre-chamber. Still another objective is to provide
20 a gas turbine engine with an improved burner.

These objectives are achieved by the claims. The dependent claims describe advantageous developments and modifications of the invention.

25

An inventive combustion pre-chamber comprises flow trips arranged on the wall of the pre-chamber to promote fuel/air mixing. The swirling flow inside the pre-chamber encounters these flow trips. The flow trips create vortices that are
30 positioned on the leeward side of the flow trips and have axes parallel to the respective flow trip. This means the vortices will have "axes" extending towards the exit lip at the downstream end of the pre-chamber.

35 Ordinarily, flow trips would not be placed on the wall of a pre-chamber due to flashback risk. Flow trips, especially at the end of the pre-chamber, could generate flame attachment points onto the pre-chamber wall which in turn could lead to

a burn through. The inventive pre-chamber therefore comprises flow trips tapering in height and width to the downstream end of the combustion pre-chamber since the flashback risk is mitigated by the reduction in the trip height to near zero at the exit lip at the downstream end of the pre-chamber. Since the flow trip height and width decreases towards the exit of the pre-chamber the associated vortex generation decreases too and so decreases the vortex near the pre-chamber exit lip, preventing a flame attaching to this vortex or 'flashing back' onto the vortex.

In an advantageous embodiment, the air flow around the pre-chamber, the pre-chamber being in the machine centre-casing plenum, can be used to still further mitigate the risk of flashback by injecting compressor air through effusion holes. Effusion holes can be arranged in the wall of the transition channel of the combustion pre-chamber and in the flow trips, respectively. They provide additional flashback protection by admitting air into the boundary layer to form a film on the wall of the pre-chamber boundary layer. In the film, the fuel air mixture is weakened to below the flammability limit.

It is particularly advantageous when effusion holes are arranged on the flow trip edge where they provide flashback protection where flashback is most likely to occur.

Additionally, the amount of air can be locally increased near potential flashback risk areas such as the trailing edge of a flow trip - by increasing the number of effusion holes in those locations.

Regarding injection openings in the transition channel and especially on the flow trips, various placements are possible. However, the back pressure on the fuel injection for a windward injection system might be unfavourable. It is therefore advantageous to have the fuel injection openings arranged on a leeward side of the flow trips to inject fuel downstream in the vortices created by the flow trip.

In a further advantageous embodiment, fuel injection will occur near the upstream end of the transition channel to inject the fuel into the upstream end of the vortex.

5 Injecting further downstream increases the flashback risk.

It is particularly advantageous when the flow trips are perpendicular to the main flow efflux such that a flow trip edge follows a line defined by a main swirling flow efflux front near the pre-chamber wall. If, for example, the swirling flow traces a clockwise helical path around the pre-chamber, the flow trips would be arranged on the wall of the pre-chamber with an anti-clockwise helical orientation.

15 By such a design a better pre-mixing of fuel, especially gaseous fuel, with compressor air and a homogeneous fuel/air mixture is achieved to reduce formation of NO_x.

BRIEF DESCRIPTION OF THE DRAWINGS

20

The invention will now be further described with reference to the accompanying drawings in which:

Figure 1 represents a view of the inventive combustion pre-chamber from the swirler to the combustor,

25

Figure 2 is a closer view on the encircled section of Figure 1 showing flow trip details,

Figure 3 is a perspective view of an inventive combustion pre-chamber with helical flow trips,

30

Figure 4 is a perspective view of an inventive combustion pre-chamber with non-helical flow trips, and

Figure 5 shows an exploded view of part of a burner assembly.

35 In the drawings like references identify like or equivalent parts.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 is a view of an embodiment of the inventive combustion pre-chamber 1 looking onto the upstream end 2 of the combustion pre-chamber 1 in downstream direction. The wall 5 of the combustor pre-chamber 1 is tubular and the flow trips 6 are helical and taper out at a downstream end 3 of the combustion pre-chamber 1 (the tapering out can better be seen in Figures 3 and 4). The cross-section of the flow trips 6 is triangular. The swirl of the main efflux of the fuel-air mixture 12 created in the swirler assembly 15 (see Figure 5) is indicated by arrows.

Figure 2 is a closer view on the encircled section of the combustor pre-chamber 1 shown in Figure 1. The main fuel/air mixture 12 efflux encounters the flow trip 6. The flow trip 6 creates a vortex 13 that is positioned on the leeward side 14 of the flow trip 6. Additional fuel is injected through fuel injection openings 9 into the vortex 13 created by the flow trip 6.

Figure 3 shows the perspective view of an embodiment of the inventive combustion pre-chamber 1 with helical flow trips 6 arranged on the transition channel 4 formed by a wall 5 and tapering out at the downstream end 3 of the combustion pre-chamber 1. Fuel injection openings 9 are arranged on a leeward side 14 of the helical flow trips 6. With this combustor pre-chamber 1 design the direction of rotation of the main efflux of the fuel/air mixture 12 created in a swirler assembly 15 (see Figure 5) would be as indicated by the arrows. A flange 10 is arranged at the upstream end 2 of the combustion pre-chamber 1 having bolt holes 11 arranged in it. The bolt hole 11 pattern allows for mounting the combustion pre-chamber 1 onto a swirler assembly 15.

35

With reference to Figure 4, a perspective view in essentially upstream direction on the downstream end 3 of an embodiment of the combustion pre-chamber 1 with non-helical

flow trips 6 is shown. As in Figure 3, a flange 10 with bolt holes 11 is arranged at the upstream end 2 of the combustion pre-chamber 1 connecting to the transition channel 4. The non-helical flow trips 6 have a triangular cross-section and taper out at the downstream end 3 of the wall 5 of the transition channel 4 of the combustion pre-chamber 1. Fuel injection openings 9 are arranged on the flow trips 6 close to the upstream end 2 of the combustion pre-chamber 1. Further downstream, first and second effusion holes 7,8 are arranged both in the flow trips 6 and in the wall 5 of the combustion pre-chamber 1.

With reference to Figure 5 parts of a burner assembly are shown in an exploded view. The burner assembly comprises a swirler assembly 15 and a combustion pre-chamber 1. The orientation of the vanes 16 in the swirler assembly 15 is such that the fuel injection openings 9 in the combustion pre-chamber 1 are on a leeward side 14 of the main efflux of the fuel/air mixture 12 created in the swirler assembly 15.

Claims

What is claimed is:

1. A combustion pre-chamber (1), having an upstream end (2)
5 and a downstream end (3), the combustion pre-chamber (1)
comprising:
a transition channel (4) formed by a wall (5), the wall (5)
extending between the upstream end (2) and the downstream end
(3), and
10 at least one flow trip (6) arranged on the wall (5) and
tapering in height and width to the downstream end (3).
2. The combustion pre-chamber (1) as claimed in claim 1,
wherein the wall (5) is tubular.
15
3. The combustion pre-chamber (1) as claimed in claim 1 or
claim 2, wherein the at least one flow trip (6) extends
between the upstream end (2) and the downstream end (3).
4. The combustion pre-chamber (1) as claimed in any of the
20 preceding claims, wherein the at least one flow trip (6) is
helical.
5. The combustion pre-chamber (1) as claimed in any of the
25 preceding claims, wherein a profile/cross-section of the at
least one flow trip (6) is triangular.
6. The combustion pre-chamber (1) as claimed in any of the
preceding claims, wherein at least one fuel injection opening
30 (9) is arranged on the at least one flow trip (6).
7. The combustion pre-chamber (1) as claimed in claim 6,
wherein the at least one fuel injection opening (9) is
arranged closer to the upstream end (2) than to the
35 downstream end (3).

8. The combustion pre-chamber (1) as claimed in any of the preceding claims, further comprising first effusion holes (7) arranged in the wall (5).

5 9. The combustion pre-chamber (1) as claimed in claim 8, wherein the first effusion holes (7) are arranged closer to the downstream end (3) than to the upstream end (2).

10 10. The combustion pre-chamber (1) as claimed in any of the preceding claims, wherein second effusion holes (8) are arranged on the at least one flow trip (6).

15 11. The combustion pre-chamber (1) as claimed in claim 10, wherein second effusion holes (8) are arranged downstream of the at least one fuel injection opening (9).

12. The combustion pre-chamber (1) as claimed in any of the preceding claims, further comprising a flange (10).

20 13. A burner assembly comprising a combustion pre-chamber (1) as claimed in any of the preceding claims.

25 14. The burner assembly as claimed in claim 13, wherein the combustion pre-chamber (1) is arranged downstream of a swirler assembly (15) and connected with the flange(10).

30 15. The burner assembly as claimed in claim 13 or claim 14, wherein the at least one fuel injection opening (9) is arranged on a leeward side (14) of the at least one flow trip (6).

35 16. The burner assembly as claimed in claims 13 to 15, wherein a direction of rotation of the at least one flow trip (6) is in opposition to the direction of rotation of the main efflux created by the swirler assembly (15).

17. A gas turbine engine comprising a burner assembly as claimed in claims 13 to 16.

FIG 1

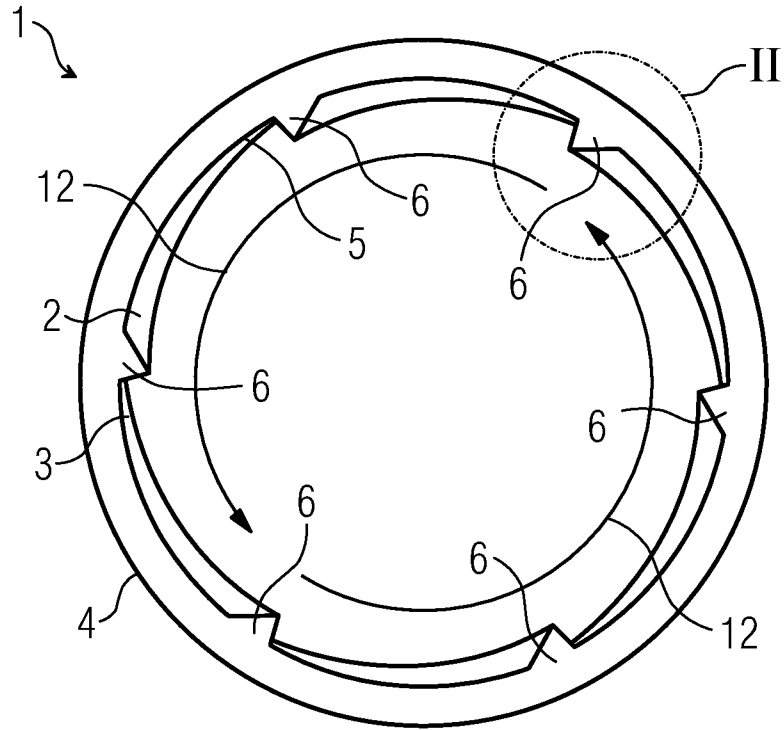


FIG 2

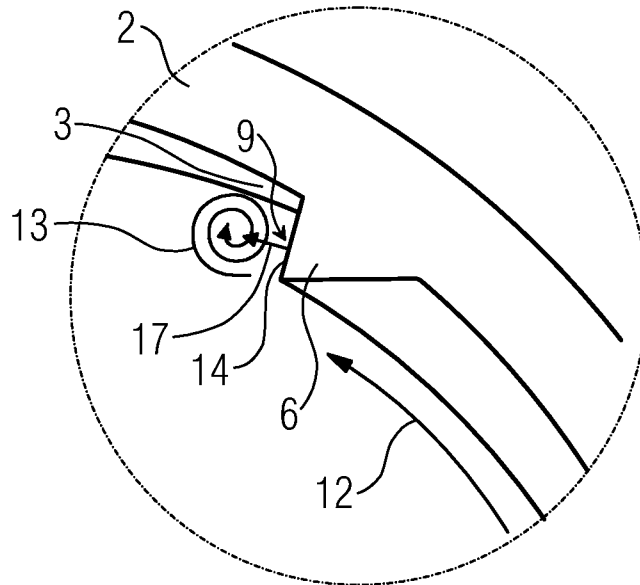


FIG 3

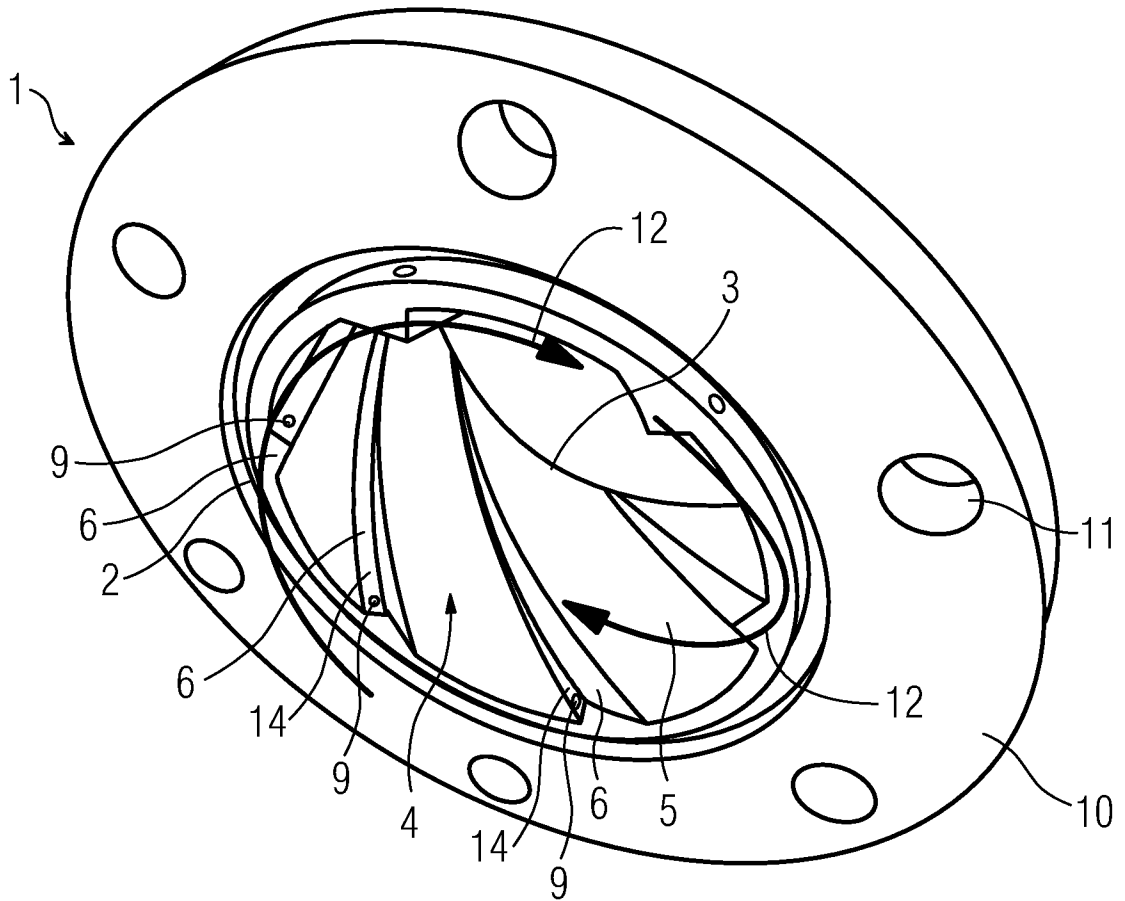


FIG 4


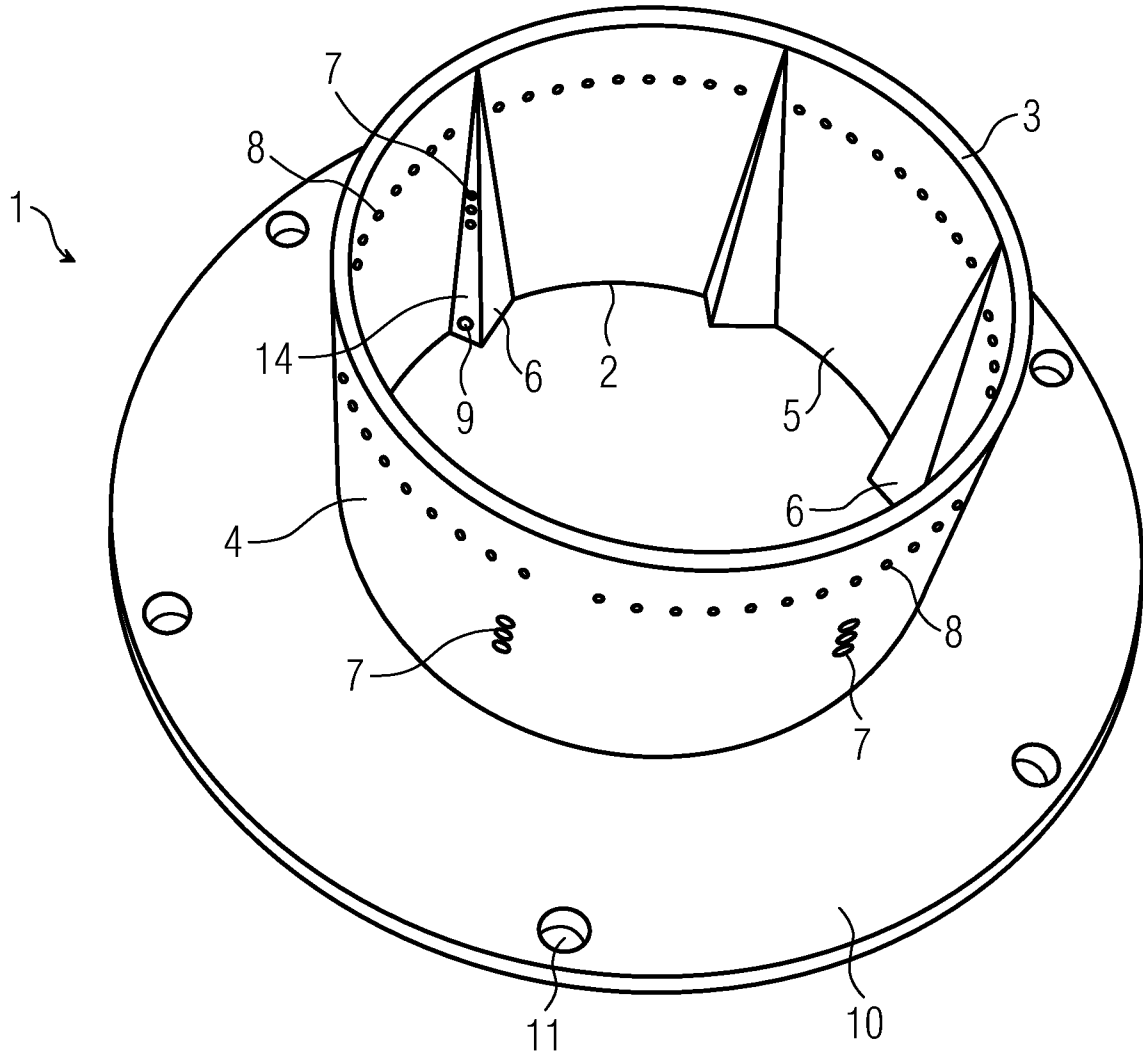


FIG 5

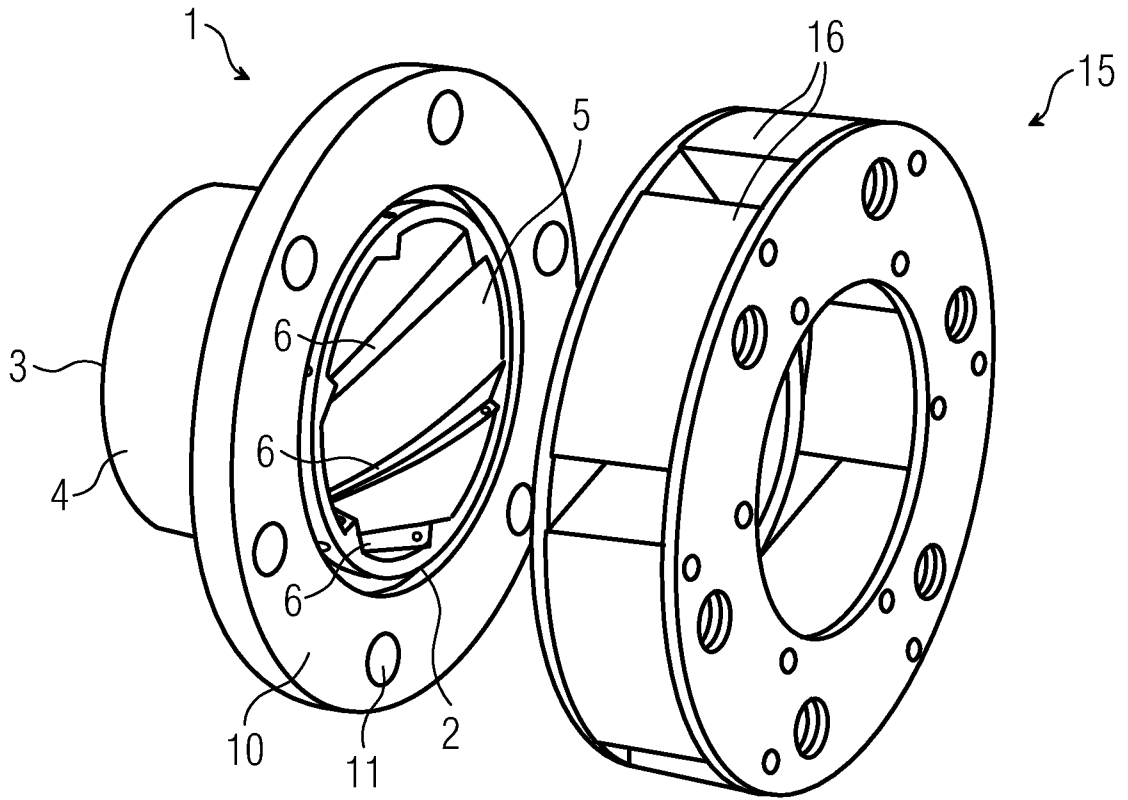

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2008/053653

A. CLASSIFICATION OF SUBJECT MATTER INV. F23D14/70 F23R3/28 F23D14/62		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) F23D F23R		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2006/048405 A (ALSTOM TECHNOLOGY LTD [CH]; KNOEPFEL HANS PETER [CH]) 11 May 2006 (2006-05-11)	1-4, 8, 9, 12-14, 17
Y	page 7, paragraph 3 - page 8, paragraph 1; figure 1	6, 7, 10, 11, 15, 16
Y	----- EP 0 733 861 A (ABB MANAGEMENT AG [CH]) 25 September 1996 (1996-09-25) column 6, line 25 - line 31 column 9, line 20 - line 24 column 10, line 6 - line 23 column 11, line 44 - line 48 column 12, line 12 - line 16 figures 1, 6, 8, 14 ----- -/--	6, 7, 15
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.		
<input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family	
Date of the actual completion of the international search	Date of mailing of the international search report	
16 July 2008	23/07/2008	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Mougey, Maurice	

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2008/053653

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 745 809 A (ABB MANAGEMENT AG [CH]) 4 December 1996 (1996-12-04) column 4, line 24 - line 37; figures 1,4 column 6, line 3 - line 24 -----	10,11
Y	GB 2 414 292 A (BELL IAN STEPHEN [GB]) 23 November 2005 (2005-11-23) page 1, paragraph 1 page 3, paragraph 5 page 7, paragraphs 2,4,5 page 8, paragraph 1 figures 7,11 -----	16
X	US 2 320 575 A (JOHN DUNN) 1 June 1943 (1943-06-01) page 1, column 2, line 10 - line 21 page 1, column 2, line 6 - line 13 figure 1 -----	1-5, 12-14
X	US 6 152 726 A (RUCK THOMAS [CH] ET AL) 28 November 2000 (2000-11-28) cited in the application column 3, line 56 - column 4, line 4; figures 1,9-12 column 7, line 45 - column 8, line 16 -----	1,2,6-9, 12,13, 15,17
A	JP 59 027107 A (BABCOCK HITACHI KK) 13 February 1984 (1984-02-13) abstract -----	1-4, 12-14
A	DE 102 05 428 A1 (ALSTOM SWITZERLAND LTD [CH]) 11 September 2003 (2003-09-11) paragraphs [0019], [0020]; figures 1,2 -----	1,2,5, 13,14,17
A	EP 1 048 898 A1 (ABB RESEARCH LTD [CH] ALSTOM SWITZERLAND LTD [CH]) 2 November 2000 (2000-11-02) paragraph [0018]; figures 2,3 -----	1,2,5, 13,17
A	US 5 340 306 A (KELLER JAKOB [US] ET AL) 23 August 1994 (1994-08-23) column 3, line 39 - line 58 -----	1,2,5-7, 13,15,17
A	EP 1 265 029 A (ALSTOM SWITZERLAND LTD [CH]) 11 December 2002 (2002-12-11) paragraphs [0018], [0019]; figure 2 -----	1,2,13, 17
A	EP 0 671 590 A1 (SNECMA [FR]) 13 September 1995 (1995-09-13) column 1, line 1 - line 12 column 5, line 33 - line 39 figure 11 -----	1,2,13, 17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2008/053653

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 2006048405	A	11-05-2006	CN 101095012 A EP 1807656 A1 JP 2008519237 T US 2007202453 A1	26-12-2007 18-07-2007 05-06-2008 30-08-2007
EP 0733861	A	25-09-1996	CN 1142036 A DE 19510744 A1 JP 8270948 A US 5829967 A	05-02-1997 26-09-1996 18-10-1996 03-11-1998
EP 0745809	A	04-12-1996	CN 1160150 A DE 19520291 A1 JP 9014603 A US 5735126 A	24-09-1997 05-12-1996 17-01-1997 07-04-1998
GB 2414292	A	23-11-2005	NONE	
US 2320575	A	01-06-1943	NONE	
US 6152726	A	28-11-2000	DE 59810284 D1 EP 0994300 A1	08-01-2004 19-04-2000
JP 59027107	A	13-02-1984	NONE	
DE 10205428	A1	11-09-2003	NONE	
EP 1048898	A1	02-11-2000	DE 10022969 A1 US 6196835 B1	15-11-2001 06-03-2001
US 5340306	A	23-08-1994	DE 59104727 D1 EP 0548396 A1 JP 3219875 B2 JP 5240437 A	30-03-1995 30-06-1993 15-10-2001 17-09-1993
EP 1265029	A	11-12-2002	DE 10128063 A1 KR 20020095094 A US 2002187448 A1	23-01-2003 20-12-2002 12-12-2002
EP 0671590	A1	13-09-1995	DE 69500969 D1 DE 69500969 T2 FR 2717250 A1 JP 3305909 B2 JP 7260150 A US 5592819 A	11-12-1997 26-03-1998 15-09-1995 24-07-2002 13-10-1995 14-01-1997