

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2012年1月5日 (05.01.2012)



(10) 国际公布号
WO 2012/000206 A1

- (51) 国际专利分类号:
G02B 6/44 (2006.01) *G02B 6/36* (2006.01)
H02G 15/013 (2006.01)
- (21) 国际申请号: PCT/CN2010/074947
- (22) 国际申请日: 2010年7月2日 (02.07.2010)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (71) 申请人: 戚郁芬 (CHI, Yu-Fen) [CN/CN]; 中国台湾省台北县永和市民族街67巷27弄9号3楼, Taiwan (CN)。
- (72) 发明人: 及
- (75) 发明人/申请人 (仅对美国): 邢之光 (HSING, Chih-Kuang) [CN/CN]; 中国台湾省台北县永和市民族街67巷27弄9号3楼, Taiwan (CN)。
- (74) 代理人: 北京安信方达知识产权代理有限公司 (AFD CHINA INTELLECTUAL PROPERTY LAW OFFICE); 中国北京市海淀区学清路8号B座1601A, Beijing 100192 (CN)。
- (81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB,

BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。

- (84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)。

本国际公布:

- 包括国际检索报告(条约第21条(3))。
- 包括经修改的权利要求(条约第19条(1))。

(54) Title: OPTICAL CABLE CONNECTION CASING ADAPTED FOR OPERATION OF GUIDING AND CONNECTING OPTICAL CABLE TO BRANCHING HALFWAY

(54) 发明名称: 适于光缆中途引接分歧接续作业的光缆接线壳

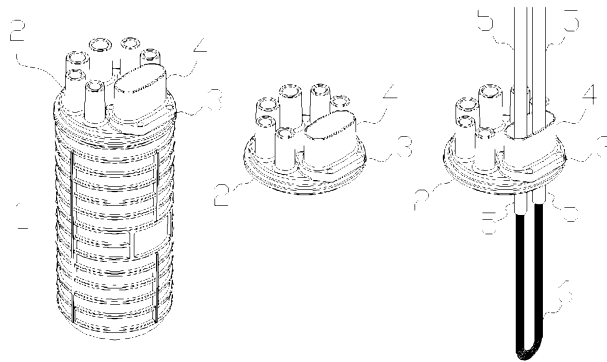


图 1 (A) / FIG. 1 (A)

(57) Abstract: An optical cable connection casing (1) includes at least one cable in-out end surface (2) on which at least one connection part (3) and at least one first hollow tubular column (4) are located. The connection part (3) and the first hollow tubular column (4) allow the optical cable (5) to pass in and out the connection casing (1) through the connection part (3) and the first hollow tubular column (4) in the form of double optical cables after the optical cable (5) being oppositely bent without cutting off the optical fiber core of the optical cable (5), respectively; wherein the optical cable (5) will be guided and connected to a branching halfway. The connection part (5) allows the optical cable (5) to be waterproofed by a mechanical waterproof component (7). The first hollow tubular allows the optical cable (5) to be waterproofed by a heat shrinkable tube (9) or an elastic shrinkable tube (8). When the heat shrinkable tube (9) is used, a branching clip (901) is also needed. When the elastic shrinkable tube (8) is in use, an auxiliary fitting for gap-filling and waterproofing is also needed.

[见续页]

WO 2012/000206 A1



(57) 摘要:

一种光缆接线壳(1)包括至少一缆线进出端面(2), 缆线进出端面(2)上有至少一连接部(3)和至少一第一中空管柱(4)。连接部(3)和第一中空管(4)分别允许光缆(5)不截断光缆(5)的光纤芯而被对弯之后, 以双条光缆的形式穿过连接部(3)和第一中空管(4)进出接线壳(1), 其中, 光缆(5)将在中途被引接并与分歧接续。连接部(5)允许光缆(5)以机械式防水部件(7)来防水。第一中空管柱(4)允许光缆以热缩管或弹性收缩管来防水。当使用热缩管(9)时, 还需分歧夹(901); 当使用弹性收缩管(8)时, 还需填缝防水辅助装置。

OPTICAL CABLE CONNECTION CASING ADAPTED FOR OPERATION
OF GUIDING AND CONNECTING OPTICAL CABLE TO BRANCHING
HALFWAY

CROSS-REFERENCE TO RELATED APPLICATION AND CLAIM OF
PRIORITY

[0001] The application claims the benefit of Patent Cooperation Treaty (PCT) Application No. PCT/CN2010/074947, filed on July 2, 2010, in the World Intellectual Property Organization, now published as WO 2012/000206 A1 on January 5, 2012, the disclosures of which are incorporated herein in their entirety by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to an optical fiber cable enclosure applying to a branch splicing operation of the backbone cable. Particularly, an improved optical fiber cable enclosure for branch splicing operation of the backbone cable treated with waterproof treatment. The integration structure of the cable entry board and its comprehensive versatility result in enhancing the selectivity for the waterproof treatment of optical fiber cable enclosure for branch splicing operation of the backbone cable, increasing flexibility for the construction activities, reducing the cost for the telecommunication practitioner, and resolving various problems including the restricted selectivity, the inconvenience during the construction, and the increased operation cost for the present technical of waterproof treatment of optical fiber cable enclosure for branch splicing operation of the backbone cable.

BACKGROUND OF THE INVENTION

[0003] In the art of telecommunications, cable television, surveillance system and other types of cable transmission industry, the optical fiber are extensively used to transmit audio, data and video messages. The optical fiber used for transmitting messages to the destination place is usually spliced and wired in an optical fiber cable splice enclosure. An optical fiber cable splice enclosure is equipped with a cable entry board, and a cable entry board is equipped with a cable entry opening so as to render the optical fiber entering into the optical fiber cable splice enclosure where the splicing and wiring operations are performed for the entered cable.

[0004] Over the decades, the optical fiber is usually used as a splicing backbone, and most of the optical fiber cable splice enclosures are used in the straight direct splicing operation (combining one optical fiber which is cut off with another optical fiber having the same counts of fiber cores) and the mid-span splicing operation (distributing an optical fiber having more counts of fiber cores as the mid-span optical fiber having less counts of fiber cores). Currently, due to the advent of FTTH (fiber to the home), a large number of fibers is sent to the customer end by using the fiber equipment, such as an optical fiber cable splice enclosure. Accordingly, the optical fiber cable splice enclosure applies not only to straight direct splicing and mid-span splicing but also to a large number of branch splicing operation of the backbone cables (A backbone cable with more counts of core wires, while the cable is in its route and encounter users that need an optical fiber service. An optical fiber of a portion that has not be used to splice for another users to use after splicing with another different core wire by the optical fiber enclosure. The most parts of the backbone cable

can not be bent, especially the optical fiber core wires are used from another user).

[0005] For the state of the art of the optical fiber cable, the cable entry board has a waterproof treatment for branch splicing operation of a backbone cable for accepting the entering cable splice enclosure. There are two kinds of waterproof treatment, including a mechanical processing manner and a heat-shrink processing manner, where the mechanical processing manner further has a single-piece type processing scheme, a dual-piece type processing scheme and a multiple-piece type processing scheme, and the heat-shrink processing manner can always adopt the single-piece type processing scheme. The cable entry board treated with the mechanical dual-piece type and multiple-piece type waterproof treatment has more sophisticated structure, more complex assembler and higher cost than that treated with the mechanical single-piece type waterproof treatment, and the construction quality for waterproof ability is more obvious than that of the single-piece type. The mechanical single-piece type waterproof treatment cable entry board used for branch splicing operation of a backbone cable has almost the same cost as compared with the heat-shrink single-piece type one. Therefore, the cable entry board with the single-piece type waterproof treatments of both the mechanical or heat-shrink manners is a preferred selection for branch splicing operation of a backbone cable for telecommunication practitioner.

[0006] For the aforementioned mechanical and heat-shrink single-piece type waterproof treatment cable entry boards for branch splicing operation of a backbone cable in the existing technology, the mechanical waterproof treatment optical fiber cable splice enclosure has advantages such as more safe, and better waterproof ability (strict construction) as compared with the heat-shrink

waterproof treatment one which is suitably used as the underground cable in the ponded and waterlogged sewer system underneath . However, on the other hand, it also has shortcomings regarding requiring more components and material cost than the heat-shrink waterproof treatment one. The heat-shrink treatment optical fiber cable splice enclosure has advantages regarding requiring less components and material cost than the mechanical water proof treatment one, and has shortcomings regarding construction quality, and affecting waterproof ability, if the optical fiber inside has been bent, so that it is more suitable for use in the suspension circumstances rather than in the underground ponded and waterlogged circumstances. Accordingly, for the sake of safety, the telecommunication practitioner is capable of reducing cost by using the heat-shrink waterproof treatment optical fiber cable splice enclosure subject to the suspension circumstances. On the contrary, it is suitable for using mechanical waterproof treatment optical fiber cable splice enclosure to ensure the quality and safety for use in the underground ponded and waterlogged circumstances and the circumstances which is supposed to be far from fire.

[0007] Therefore, if an optical fiber cable splice enclosure for branch splicing operation of a backbone cable equipped with the single-piece type cable entry board capable of adopting not only the mechanical processing manner but also the heat-shrink processing manner to process the waterproof treatment can be provided, the above-mentioned problems which is related to costs and supposed to be resolved by using different type of waterproofed treatment cable entry boards in the optical fiber cable splice enclosure can be simply resolved by using an integral type of both mechanical and heat-shrink cable entry board in the optical fiber cable splice enclosure. In order to overcome the shortcomings existing in the current technology, the present technology utilizes the heat-shrink

waterproofed component in cooperation with the waterproofed adhesive or the elastic waterproofed pad with an adhesion and a plasticity to connect with the mechanical waterproof treatment single-piece type cable entry board by a screwable manner; however, the shortcomings remain including losing integration structure for the cable entry board (the aforementioned single-piece type), increasing the complexity for components, increasing the work flow processes for screwing connection and material cost and the likes.

[0008] So, if the optical fiber cable splice enclosure in the existing technology can be improved, the shortage of waterproof treatment for branch splicing operation of a backbone cable can be improved, the construction quality and safety can be enhanced, and the construction maintenance and cost can be significantly reduced.

[0009] Thus, in view of and in order to overcome the drawbacks and defects arising in the prior art, “a telecommunication optical fiber cable splice enclosure having the connection part, the hollow cylindrical tube and the connected part” is thus conceived and provided by the applicant. The particular design in the present invention not only solves the problems described above, but also is easy to be implemented. Thus, the invention has the utility for the industry. The following descriptions are a brief explanation for the invention.

SUMMARY OF THE INVENTION

[0010] In order to overcome the shortcomings in the current technology, the present invention aims to provide an optical fiber cable splice enclosure for branch splicing operation of a backbone cable which includes at least one cable entry board; at least one connection part configured on the cable entry board wherein the backbone cable has a first segment extending through the respective connection part to form a U-turn in the optical fiber cable splice enclosure and a

second segment extending through the connection part out of the optical fiber cable splice enclosure; at least one first hollow cylindrical tube connected with the respective connection part; and at least one of a heat-shrink tube and a flexible shrinkable tube, each of which has one end waterproofing a connection between the first hollow cylindrical tube and the connection part, and a second end waterproofing the first and the second segments at an external side of the cable splice enclosure. Therefore, the optical fiber cable splice enclosure, where its cable entry board of a single structure (single type) is capable entering the cable enclosure of the branch splicing operation of a backbone cable by using mechanical waterproof component or flexible shrinkable tube or heat-shrink tube to function as waterproof treatment. The optical fiber cable splice enclosure of the existing technology, wherein the cable entry board of single structure (single type) just has one connection part, wherein the backbone cable to be involved in the branch splicing operation of the backbone cable and to be waterproofed with a mechanically waterproof part, under a condition that an optical fiber core wire of the backbone cable is free from being cut, after bent, in a dual cable manner penetrates the at least one connection part so as to enter and exit by the cable enclosure; or wherein the cable entry board of single structure (single type) just has a first hollow cylindrical tube, wherein the backbone cable to be involved in the branch splicing operation of the backbone cable and to be waterproofed with one of a heat-shrink tube of a manifold clip accessory, under the condition that an optical fiber core wire of the backbone cable is free from being cut, after bent, in the dual cable manner penetrates the at least one hollow cylindrical tube so as to enter and exit by the cable enclosure. Therefore, the optical fiber cable splice enclosure of the present invention uses single structure (single type) to enter and exit the cable entry board, providing the branch

splicing operation of a backbone cable to enter the cable enclosure by using mechanical waterproof component or flexible shrinkable tube or heat-shrink tube to function as waterproof treatment. The integration structure of the cable entry board and its comprehensive versatility lead to enhancing the selection of waterproof treatment of optical fiber cable enclosure for branch splicing operation of the backbone cable, increasing flexibility of construction, reducing the cost of communication corporation, solving the present technical of waterproof treatment of optical fiber cable enclosure for branch splicing operation of the backbone cable, including selective limit, construction inconvenience, and increasing maintenance and operation cost for enterprise.

[0011] Furthermore, the optical fiber cable splice enclosure of the present invention further includes at least one first hollow cylindrical tube which is disposed on the at least one connection part. The less small volume of the optical fiber cable splice enclosure, the more convenient to collect, and more amounts of the cable entry boards, the more convenient for cable's splicing and wiring. Usually, optical fiber cable splice enclosure uses one entrance and exit of the branch splicing operation of a backbone cable, and more the amounts of entrance and exit (usually having 4) more better. In order to make fully use of the cable entry board with limited areas, the optical fiber cable splice enclosure of the cable entry board provide common opening for the first cylindrical tube of the branch splicing operation of a backbone cable and the connection part of the branch splicing operation of a backbone cable. Hence, the hollow cylindrical tube formed on the one connection part of the cable entry board.

[0012] Furthermore, the optical fiber cable splice enclosure of the present invention further includes at least one mechanical waterproof component configured on the connection part to form a first waterproof structure thereon

and fixing the first and the second segments to form a second waterproof structure thereon. Hence, the cable enclosure of the present invention can use mechanical waterproof component to waterproof for the cable entry board of the branch splicing operation of a backbone cable.

[0013] Furthermore, the optical fiber cable splice enclosure of the present invention further includes the first and the second segments having a fixing area, and the mechanical waterproof component includes a pair of fixtures each of which has an inside portion, plural fixing screws for fixing the pair of fixtures, an adhesive material disposed on the fixtures and the fixing area to form the second waterproof structure, and an elastic waterproof pad disposed on the connection part to form the first waterproof structure.

[0014] Furthermore, the optical fiber cable splice enclosure of the present invention further includes at least one branching clip used to urge the second end between the first and the second segments downward until the second end has a middle portion rested on a top of the first hollow cylindrical tube, wherein the respective heat-shrink tube wraps an exterior of the respective first hollow cylindrical tube after shrunk by heating and a part of the respective first and the second segments to form a third waterproof structure. Hence, the cable enclosure of the present invention can use heat-shrink tube of manifold clamp to complete the waterproof treatment for the cable entry board of the branch splicing operation of a backbone cable. The purpose of using the manifold clamp is to put it among the heat-shrink tube and dual cable before heat-shrink tube shrinks by heating so that the heat-shrink can wrap the dual cable tightly after shrinking.

[0015] Furthermore, the optical fiber cable splice enclosure of the present invention further includes at least one waterproofing auxiliary device, which

fixes the first and the second segments and cooperates with the flexible shrinkable tube and the first hollow tube having an external end to form a fourth waterproof structure, and the flexible shrinkable tube wraps an exterior of the first hollow cylindrical tube and the waterproofing auxiliary device protruding from the external end to form a fifth waterproof structure. Hence, the cable enclosure of the present invention can use flexible shrinkable tube having filling gap waterproofing auxiliary device to complete the waterproof treatment for the cable entry board of the branch splicing operation of a backbone cable. The flexible shrinkable tube is made of high elongation, high tensile strength and flexible body of good flexible recovery rate. The pad with strip inside the flexible shrinkable tube has spiral pipe to enlarge the opening size. The method of waterproof uses a part of enlarged flexible shrinkable tube to cover the outside part of the first hollow cylindrical tube. The other part of enlarged flexible shrinkable tube c covers the filling gap waterproofing auxiliary device of first hollow cylindrical tube which connected with first hollow cylindrical tube that is penetrated. After drawing back the inner pad in the hard plastic spiral stripe of the flexible shrinkable tube wall, the flexible shrinkable tube becomes closely to previous enlarged smaller opening size, wherein the smaller opening size is smaller than the diameter of the first hollow cylindrical tube and filling gap waterproofing auxiliary device to form a constrictive fifth waterproof structure. The purpose of using the filling gap waterproofing auxiliary device is because of the optical fiber of the branch splicing of a backbone cable so that under a condition that an optical fiber core wire of the backbone cable is free from being cut, in a dual cable manner penetrates the entrance and exit of the cable of the cable entry board of the optical fiber cable splice enclosure to enter the enclosure for splicing and wiring. The gap between the dual cable is capable

of wrapping the concave gap of elliptic cylinder alike or circular cylinder tightly of the forth waterproof structure after forming the shrinking of the flexible shrinkable tub by using filling gap waterproofing auxiliary device.

[0016] Furthermore, the optical fiber cable splice enclosure of the present invention further includes the first and the second segments having a fixing area, the waterproofing auxiliary device includes a pair of fixtures, each of which has an inside portion, plural fixing screws for fixing the pair of fixtures, and an adhesive material disposed on the fixtures and the fixing area to fix the first and the second segments so as to form the fifth waterproof structure.

[0017] Furthermore, the optical fiber cable splice enclosure of the present invention further includes the cable entry board has at least one second hollow cylindrical tube, through which the first and the second segments pass the optical fiber cable enclosure.

[0018] Furthermore, the optical fiber cable splice enclosure of the present invention further includes the flexible shrinkable tube and the heat-shrink tube wraps an exterior of the second hollow cylindrical tube and a portion of the first and the second segments to form a sixth waterproof structure. The optical fiber of the straight direct splicing and mid-span splicing penetrates the second hollow cylindrical tube to enter the cable enclosure in a manner of single optical fiber under a condition that an optical fiber core wire of the backbone cable is being cut, so the waterproof treatment of optical fiber using flexible shrinkable tube doesn't need to use filling gap waterproofing auxiliary device, and the waterproof treatment of optical fiber using heat-shrink tube doesn't need to use manifold clam.

[0019] Furthermore, the optical fiber cable splice enclosure of the present invention further includes at least one first fixture device therein, wherein the

backbone cable includes an optical fiber core wire forming the U-turn, and the at least one fixture device is one selected from a group consisting of a ring fastener, a band fastener, a clamp joint and a combination thereof, and fixes the optical fiber core wire thereon. The transmission quality and waterproof effect of the cable splicing is affected due to the connected outside cable of the optical fiber cable splice enclosure is usually shaken or pulled by the effect of an external force and inertia. Therefore, the optical fiber cable splice enclosure of the present invention has a first fixture device to fix the cable coverage of the backbone cable so that optical cable inside the enclosure wouldn't be subject to the extended and connected cable outside the enclosure to loose, so as to enhance and ensure the cable transmission quality and waterproof effect.

[0020] Furthermore, the optical fiber cable splice enclosure of the present invention further includes at least at least one brace having an optical fiber collection disk, wherein a position of the first hollow cylindrical tube is located at a position without the possibility of causing the backbone cable being blocked and interfered by the optical fiber collection disk while the backbone cable passes the cable splice enclosure via the first hollow cylindrical tube along axis thereof. Therefore, the optical fiber cable splice enclosure with small internal space while the backbone cable enters the cable enclosure can avoid being subject to the blocking and interfering to be bent by optical fiber collection plate so as to result in poor quality of transmission. This could result in enhancing the transmission quality of the cable and miniaturizing the optical fiber cable splice enclosure.

[0021] Furthermore, the optical fiber cable splice enclosure of the present invention further includes one cable entry board mounts thereon at least one second hollow cylindrical tube, and a position of the second hollow cylindrical

tube is located at a position without the possibility of causing the backbone cable being blocked and interfered by the optical fiber collection disk while the backbone cable passes the cable splice enclosure via the second hollow cylindrical tube along the axis thereof.

[0022] Furthermore, the optical fiber cable splice enclosure of the present invention further includes at least one second fixture device for fixing the at least one brace, wherein the second fixture device matches with the at least one cable entry board to provide a position for the backbone cable to pass the cable splice enclosure via the second hollow cylindrical tube along the axis thereof so as to fix the brace at the position different from that of the fiber collection disk brace. The fixture, collection, allocation and the location of the related components for backbone cable in the fiber collection plate brace have common mode and technology. Therefore, the entrance and exit of the cable is not suitable to change, when needed, it has best benefit to change the entrance and exit for backbone cable. Therefore, the optical fiber cable splice enclosure of the present invention has the second fixture device so as to provide the backbone cable to enter the cable entry board to different entrance to the enclosure. The fixture, collection, and allocation of the related optical fiber collection plate brace can operate in the existing technology so that it can reduce the adverse effects due to the change of the entrance and exit of the backbone cable, enhance the scope of application of the entrance and exit of the cable entry board, and ensure the technical quality of the related operations.

[0023] Furthermore, the optical fiber cable splice enclosure of the present invention further includes an exterior portion and at least one third fixture device, wherein the third fixture device has at least one first fixing part, having two fixing holes and two screws, and at least one second fixing part configured

thereon and including a fixing component is one selected from a group consisting of a ring fastener, a band fastener, a clamp joint and a combination thereof, the first fixing part fixes the third fixing device via the two fixing holes and the two screws, the fixing component fixes the backbone cable on the exterior portion thereof, and the backbone cable extends through the first hollow cylindrical tube, has a waterproof treatment with one of the flexible shrinkable pipe and the heat-shrink tube, and is fixed to the third fixture device. The waterproof effect of waterproof structure of the cable for the cable entry board is affected owing to the connected outside cable of the optical fiber cable splice enclosure is usually shaken or pulled by the effect of an external force and inertia. Therefore, the optical fiber cable splice enclosure for its outside part of the present invention has a third fixture device to fix and connect with the cable coverage of the cable of outer waterproof structure so that the waterproof structure of the cable entry board can avoid be subject to be shaken or pulled by the outer cable of connected waterproof structure for the cable enclosure and affect its waterproof effect.

[0024] Furthermore, the optical fiber cable splice enclosure of the present invention further includes one third fixture device having at least one first fixing part fixed to the cable entry board, and at least one second fixing part, wherein the backbone cable going through the cable entry board and into the optical fiber cable splice enclosure is fixed to the second fixing part by one being selected from a group consisting of a screw, a mortise, a clamp joint, a ring fastener, a band fastener and a combination thereof.

[0025] The invention presents an optical fiber cable splice enclosure for branch splicing operation of a cable, wherein the splice enclosure includes a cable, including: a cable entry board; a connection part configured on the cable

entry board so that the cable has a first segment extending through the connection part to form a U-turn in the cable splice enclosure and a second segment extending through the connection part out of the cable splice enclosure; a first hollow cylindrical tube connected with the connection part; and one of a heat-shrink tube and a flexible shrinkable tube, having one end waterproofing a connection among the first hollow cylindrical tube, the connection part and the cable entry board, and a second end waterproofing the first and the second segments at an external side of the cable splice enclosure.

[0026] The invention presents a cable splice enclosure for branch splicing operation of a cable, wherein the splice enclosure includes: a connection part, wherein the cable has a first segment extending through the connection part to form a U-turn in the cable splice enclosure and a second segment extending through the connection part out of the cable splice enclosure; a cable entry board configuring thereon the connection part passing therethrough the first and the second segments extending ; and one of a heat-shrink tube and an flexible shrinkable tube, having one end waterproofing a connection between the connection part and the cable entry board, and a second end waterproofing the first and the second segments at an external side of the cable splice enclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] Fig. 1(A) to Fig. 1(B) are the schematic diagrams illustrating the optical fiber cable enclosure 1 suitable for the backbone cable for the branch splicing operation and having the cable entry board 2 for use in the embodiment 1 in accordance with the present invention.

[0028] Fig. 2 is a schematic diagram illustrating using the heat-shrink tube 9 to function as the waterproof treatment for the backbone cable 5 for the branch splicing operation in the present embodiment 1.

[0029] Fig. 3(A) to Fig. 3(D) are the schematic diagrams illustrating using the mechanical waterproof component 7 to function as the waterproof treatment for the backbone cable 5 for the branch splicing operation in the present embodiment 1.

[0030] Fig. 4(A) to Fig. 4(C) are schematic diagrams illustrating using the flexible shrinkable tube 8 to function as the waterproof treatment for backbone cable 5 for the branch splicing operation in accordance with the present embodiment 1.

[0031] Fig. 5 is a schematic diagram illustrating the cable entry board 2 of the optical fiber enclosure 1 suitable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention.

[0032] Fig. 6 is a schematic diagram illustrating the interior of the optical fiber cable enclosure 1 suitable for the backbone cable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention.

[0033] Fig. 7 is a schematic diagram illustrating the interior of the optical fiber cable enclosure 1 suitable for the backbone cable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention.

[0034] Fig. 8 is a schematic diagram illustrating optical fiber cable splice enclosure 1 suitable for the backbone cable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention.

[0035] Fig. 9 is a schematic diagram illustrating the optical fiber cable splice enclosure 1 suitable for the backbone cable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0036] The present invention “optical fiber cable splice enclosure for branch splicing operation of backbone cable” is exemplarily described by

reference to the preferred embodiments and examples, which renders a person having ordinary skill in the art to achieve the present invention accordingly. It is to be understood that these examples are intended in an illustrative rather than in a limiting sense. It is contemplated that modifications and combinations will readily occur to those skilled in the art, which modifications and combinations will be within the spirit of the invention.

[0037] Embodiment 1

[0038] Please referring to Fig. 1(A) to Fig. 1(B), which are the schematic diagrams illustrating the optical fiber cable enclosure (housing, casing, shell, closure) 1 suitable for the backbone cable for the branch splicing operation and having the cable entry board 2 for use in the embodiment 1 in accordance with the present invention. The cable entry board 2 is formed to have a connection part 3 and a first hollow cylindrical tube 4. The first hollow cylindrical tube 4 has an integrated structure which is formed on the inner edge of the connection part 3 integrally formed with the connection part 3. The optical fiber 5 having an optical fiber core wire 6 to be involved in the backbone cable for the branch splicing operation can be bent subject to a condition that an optical fiber core wire 6 of the backbone cable is free from being cut off. After bent, the optical fiber core wire 6 is folded in a dual cable formation and penetrates both the first hollow cylindrical tube 4 and the connection part 3 and then enters into the cable enclosure 1 in Figure 1(A). One of either the mechanical waterproof component 7, the flexible shrinkable tube 8 or the heat-shrink tube 9 can be selected to function as the waterproof treatment for the backbone cable 5 for the branch splicing in the embodiment 1. The method of the embodiment is disclosed as follows.

[0039] Please referring to Fig. 2, which is a schematic diagram illustrating using the heat-shrink tube 9 to function as the waterproof treatment for the backbone cable 5 for the branch splicing operation in the present embodiment 1. When using the heat-shrink tube 9 to function as the waterproof treatment for the backbone cable 5 for the branch splicing operation, it additionally requires the manifold clamp 901. After heating the heat-shrink tube 9 and the manifold clamp 901 on the backbone cable 5 for the branch splicing operation and covering the first hollow cylindrical tube 4 and penetrating the first hollow cylindrical tube 4 into the cable enclosure 1, the heat-shrink tube 9 is tightly shrunk to wrap an exterior of the first hollow cylindrical tube 4 and partly wrap an exterior of the backbone cable 5 for the branch splicing operation which penetrates the first hollow cylindrical tube 4 and enters into the cable enclosure 1, so as to form a third waterproof structure. The waterproof treatment for the backbone cable 5 for the branch splicing operation and the cable entry board 2 is completed.

[0040] Please referring to Fig. 3(A) to Fig. 3(D), which are the schematic diagrams illustrating using the mechanical waterproof component 7 to function as the waterproof treatment for the backbone cable 5 for the branch splicing operation in the present embodiment 1. The mechanical waterproof component 7 in the present embodiment 1 includes two pieces of constrictive outer enclosure 701, the pressing screw 702, a waterproof tape 703 with adhesion and plasticity and an elastic waterproof pad 704 (as shown in Fig. 3(A)). When using the mechanical waterproof component 7 to function as the waterproof treatment for the backbone cable 5 for the branch splicing operation under a condition without damaging the connection part 3, the integration structure of the first hollow cylindrical tube 4 formed on the inner edge of the connection

part 3 of the cable entry board 2 is to be removed (as shown in Fig. 3(B)). Then the waterproof tape 703 is placed in one side of the dual concave sinks for containing dual optical fibers on the constrictive outer enclosure 701. The waterproof tape 703 tightly wraps at the junction of the U-turn optical fiber and the constrictive outer enclosure 701, wherein the optical fiber core wire 6 inside the U-turn optical fiber of the backbone cable 5 used for the branch splicing operation penetrating the connection part 3 and entering into the cable enclosure 1 is not cut off. The pressing screw 702 is used to lock the pair of pieces of the constrictive outer enclosure 701 to form a first waterproof structure (as shown in Fig.3(C)). Next, the elastic waterproof pad 704 is placed on the position where the connection part 3 is ready to be combined with constrictive outer enclosure 701, and the backbone cable 5 for the branch splicing operation is penetrated through the connection part 3 into the cable enclosure 1. Next, the constrictive outer enclosure 701 is combined with the connection part 3 by the screwable manner to form a tighten second waterproof structure (as shown in Fig. 3(D)). The waterproof treatment for the backbone cable 5 for the branch splicing operation and the cable entry board 2 is completed.

[0041] Please referring to Fig. 4(A) to Fig. 4(C), which are schematic diagrams illustrating using the flexible shrinkable tube 8 to function as the waterproof treatment for backbone cable 5 for the branch splicing operation in accordance with the present embodiment 1. When using the flexible shrinkable tube 8 to function as the waterproof treatment for the backbone cable 5 for the branch splicing operation, the first hollow cylindrical tube 4 on the inner edge of the connection part 3 is not required to be removed, but the flexible shrinkable tube 8 and the gap-filling waterproofing auxiliary device are required to be used. The gap-filling waterproofing auxiliary device in the present embodiment 1

includes two pieces of semi-elliptical constrictive outer enclosure 801 with dual concave sinks for containing dual optical fibers, a pressing screw 802, the adhesive and plastic waterproof tape with double adhesive sides 803, and the elastic waterproof pad 804 with single adhesive side (as shown in Fig. 4(A)). Place the waterproof tape with double adhesive sides 803 on one piece of semi-elliptical constrictive outer enclosure 801 with dual concave sinks for containing dual optical fibers, the waterproof tape with double adhesive sides 803 wraps at the junction of the U-turn optical fiber and the semi-elliptical constrictive outer enclosure 801, wherein the optical fiber core wire 6 inside the U-turn optical fiber of the backbone cable 5 used for the branch splicing operation penetrating the first hollow cylindrical tube 4 and entering into the cable enclosure 1 is not cut off. Next, the pressing screw 802 is used to lock the semi-elliptical constrictive outer enclosure 801 tightly so as to form an elliptical waterproof structure. Next, the remaining and squeezed-out portion of the adhesive and plastic waterproof tape with double adhesive sides 803 owing to being tightly locked is removed from the semi-elliptical constrictive outer enclosure 801 with dual concave sinks for containing dual optical fibers. Next, the elastic waterproof pad 804 with single adhesive side wraps the outer side of the semi-elliptical constrictive outer enclosure 801 with dual concave sinks for containing dual optical fibers, whereby the fourth waterproof structure (as shown in Fig. 4 (B)) is formed within the semi-elliptical constrictive outer enclosure 801 with dual concave sinks for containing dual optical fibers. Next, the flexible shrinkable tube 8 covers the backbone cable 5 formed with the fourth waterproof structure for the branch splicing operation and prepared to be treated with the waterproof treatment with the flexible shrinkable tube 8. The backbone cable 5 formed with the formed fourth waterproof structure is bent to form a U-turn

configuration and is sent to pass through the first hollow cylindrical tube 4 into the cable enclosure and then is fixed on the cable enclosure 1. The flexible shrinkable tube 8 is then used to wrap the outer part of the first hollow cylindrical tube 4, and the elliptical cylindrical tube not penetrating the first hollow cylindrical tube 4 of the fourth waterproof structure, so as to form a fifth structure (Fig 4(C)). The waterproof treatment between the backbone cable 5 for the branch splicing operation and the cable entry board 2 is completed.

[0042] Please referring to Fig. 5, which is a schematic diagram illustrating the cable entry board 2 of the optical fiber enclosure 1 suitable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention. The cable entry board 2 has six second hollow cylindrical tubes 10 providing the optical fiber cable 11 for the straight direct splicing operation and the mid-span splicing operation to pass through the cable enclosure 1. The second hollow cylindrical tubes 10, which can be selected as a flexible shrinkable tube 8 (or a heat-shrink tube 9 as well), wraps the outer part of the second hollow cylindrical tubes 10 as well as wraps a portion of the optical fiber cable 11 of the outer part of the second hollow cylindrical tube 10 that passes through the second hollow cylindrical tube to connect with the cable enclosure 1, so as to form a waterproof structure (Fig. 5). If the second hollow cylindrical tube 10 and the optical fiber cable 11 have a relatively smaller diameter or is scratched, the elastic waterproof tape 804 with single adhesive side can be used to wrap to expand the diameter to be fit with the size of the flexible shrinkable tube 8 to fill the scratches.

[0043] Please referring to Fig. 6, which is a schematic diagram illustrating the interior of the optical fiber cable enclosure 1 suitable for the backbone cable for the branch splicing operation for use in the embodiment 1 in accordance with

the present invention. Inside the optical fiber enclosure 1, there disposes a first fixture device 12, wherein the first fixture device 12 uses the stainless steel ring fastener 13 to fix the introducing optical fiber cable 11 at the first fixture device 12.

[0044] Please referring to Fig. 7, which is a schematic diagram illustrating the interior of the optical fiber cable enclosure 1 suitable for the backbone cable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention. Inside the optical fiber enclosure 1, there disposes an optical fiber collection disk brace 14. The positions where the first cylindrical tube 4 and the second cylindrical tube 10 situate on the cable entry board 2 for respectively providing the backbone cable 5 for the branch splicing operation to pass through and providing the backbone cable for straight direct splicing operation 501 to pass through, are allocated at a straight route after entering into the optical fiber cable enclosure 1 for the backbone cable 5, 501, which are not blocked and interfered by the optical fiber collection disk 15 on the optical fiber collection disk brace 14. there is a second fixture device 16 disposed inside the optical fiber cable enclosure 1 for fixing the optical fiber collection disk brace 14. The second fixture device 16 can fix the optical fiber collection disk brace 14 at different position in correspondence with the entrance and exit of the cable entry board 2 for the backbone cable 5, 501 to pass through, and to (as shown in Fig. 7). In addition, the optical fiber cable splice enclosure 1 suitable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention, the entrance and exit position where the second hollow cylindrical tube 10 situate on the cable entry board 2 for the mid-span splicing optical fiber cable 11 to pass through is allocated at a straight route after entering into the optical fiber cable enclosure 1 for the optical fiber 6, which are

not blocked and interfered by the optical fiber collection disk 15 on the optical fiber collection disk brace 14 (as shown in Fig. 6).

[0045] Please referring to Fig. 8, which is a schematic diagram illustrating optical fiber cable splice enclosure 1 suitable for the backbone cable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention. When the heat-shrink tube 9 is functioned as the waterproof treatment for the backbone cable 5 for the branch splicing operation, a third fixture device 17 on the outer part of the cable enclosure 1 is utilized to fix the optical fiber to be processed with the waterproof treatment by heat-shrink tube 9 and passing through the first cylindrical tube 4, wherein the third fixture device 17 includes a first fixing part 18 and a second fixing part 19 connected with the first fixing part 18. The first fixing part 18 fixes the third fixture device 17 within two screw fixing holes on the outer side of the connection part 3 of the cable entry board 2 by using the screwable manner. The second fixture device 19 fixes the optical fiber 5 outside the waterproof structure of the heat-shrink tube 9 on the third fixture device 17 by using stainless steel ring fastener 20 so as to avoid the loosening of the waterproof structure of the heat-shrink tube 9 of the cable entry board 2 which is affected by the bending of the optical fiber 5 connected with the outer part of the cable enclosure 1, while the optical fiber cable enclosure 1 is moved.

[0046] Please refer to Fig. 12, which depicts a diagram showing a communication cable splice enclosure according to embodiment 5 of the present invention. A first fixation device 10 for fixing the cable is disposed in the communication cable splice enclosure, and the first fixation device 10 fixes the jacket of the cable 5 using the stainless steel ring fastener 101, so that the cable 5 in the communication cable splice enclosure 1 avoids being loosened by the

movement of the portion of the cable 5 outside the communication cable splice enclosure 1.

[0047] Embodiment 2

[0048] Please referring to Fig. 9, which is a schematic diagram illustrating the optical fiber cable splice enclosure 1 suitable for the backbone cable for the branch splicing operation for use in the embodiment 1 in accordance with the present invention. The difference between the embodiment 1 and embodiment 2 is that the connection part 3 and the first cylindrical tube 4 formed on the cable entry board 2 can also be formed on the different position respectively.

[0049] From the above descriptions of Embodiments 1 and 2, the present invention provides a telecommunication optical fiber cable splice enclosure having the connection part, the hollow cylindrical tube and the connected part and the enclosure can effectively improve the existing technology, for overcoming the defects such as poor function, high cost, inconsistent construction quality and unsafe construction etc.. Therefore, the present invention enhances the whole function, increases the construction quality and safety, and significantly reduces the cost for construction and maintenance for the related practitioner.

[0050] In the claims which follow and in the preceding description of the invention, except where the context requires otherwise due to express language or necessary implication, the word “comprise” or variations such as “comprise” or “comprising” is used in an inclusive sense, i.e. to specify the presence of the stated features but not to preclude the presence or addition of further in various embodiment of the invention.

[0051] It is to be understood that if any prior art publication is referred to herein, such reference does not constitute an admission that the publication

forms a part of the common general knowledge in the art, in Australia or any other country.

The English translation of Claims (WO 2012/000206 A1)

The claims defining the present invention are as follows:

1. An optical fiber cable splice enclosure for branch splicing operation of a backbone cable, comprising: at least one cable entry board; at least one connection part configured on the cable entry board, wherein the backbone cable has a first segment extending through the connection part to form a U-turn in the optical fiber cable splice enclosure and a second segment extending through the connection part out of the optical fiber cable splice enclosure; at least one first hollow cylindrical tube connected with the connection part; and at least one of a heat-shrink tube and a flexible shrinkable tube, each of which has one end waterproofing a connection between the first hollow cylindrical tube and the connection part, and a second end waterproofing the first and the second segments at an external side of the cable splice enclosure.
2. The optical fiber cable splice enclosure as claimed in Claim 1, wherein the at least one first hollow cylindrical tube is disposed on the at least one connection part.
3. The optical fiber cable splice enclosure as claimed in Claim 2, further comprising at least one mechanical waterproof component configured on the connection part to form a first waterproof structure thereon and fixing the first and the second segments to form a second waterproof structure thereon.
4. The optical fiber cable splice enclosure as claimed in Claim 3, wherein the first and the second segments have a fixing area, and the mechanical waterproof component comprises a pair of fixtures each of which has an inside portion, plural fixing screws for fixing the pair of fixtures, an adhesive

material disposed on the fixtures and the fixing area to form the second waterproof structure, and an elastic waterproof pad disposed on the connection part to form the first waterproof structure.

5. The optical fiber cable splice enclosure as claimed in Claim 1, further comprising at least one branching clip used to urge the second end between the first and the second segments downward until the second end has a middle portion rested on a top of the first hollow cylindrical tube, wherein the heat-shrink tube wraps an exterior of the first hollow cylindrical tube after shrunk by heating and a part of the first and the second segments to form a third waterproof structure.
6. The optical fiber cable splice enclosure as claimed in Claim 1, further comprising at least one waterproofing auxiliary device, which fixes the first and the second segments and cooperates with the flexible shrinkable tube and the first hollow cylindrical tube having an external end to form a fourth waterproof structure, and the flexible shrinkable tube wraps an exterior of the first hollow cylindrical tube and the waterproofing auxiliary device protruding from the external end to form a fifth waterproof structure.
7. The optical fiber cable splice enclosure as claimed in Claim 6, wherein the first and the second segments have a fixing area, the waterproofing auxiliary device comprises a pair of fixtures, each of which has an inside portion, plural fixing screws for fixing the pair of fixtures, and an adhesive material disposed on the fixtures and the fixing area to fix the first and the second segments so as to form the fifth waterproof structure.
8. The optical fiber cable splice enclosure as claimed in Claim 1, wherein the cable entry board has at least one second hollow cylindrical tube, through which the first and the second segments pass the optical fiber cable enclosure.

9. The optical fiber cable splice enclosure as claimed in Claim 8, wherein the one of flexible shrinkable tube and the heat-shrink tube wraps an exterior of the second hollow cylindrical tube and a portion of the first and the second segments to form a sixth waterproof structure.
10. The optical fiber cable splice enclosure as claimed in Claim 1, further comprising at least one first fixture device therein, wherein the backbone cable includes an optical fiber core wire forming the U-turn, and the at least one fixture device is one selected from a group consisting of a ring fastener, a band fastener, a clamp joint and a combination thereof, and fixes the optical fiber core wire thereon.
11. The optical fiber cable splice enclosure as claimed in Claim 10, further comprising therein at least one brace having an optical fiber collection disk, wherein a position of the first hollow cylindrical tube is located at a position without the possibility of causing the backbone cable being blocked and interfered by the optical fiber collection disk while the backbone cable passes the cable splice enclosure via the first hollow cylindrical tube along the axis thereof.
12. The optical fiber cable splice enclosure as claimed in Claim 11, wherein the at least one cable entry board mounts thereon at least one second hollow cylindrical tube, and a position of the second hollow cylindrical tube is located at a position without the possibility of causing the backbone cable being blocked and interfered by the optical fiber collection disk while the backbone cable passes the cable splice enclosure via the second hollow cylindrical tube along the axis thereof.
13. The optical fiber cable splice enclosure as claimed in Claim 12, further comprising therein at least one second fixture device for fixing the at least one

brace, wherein the second fixture device matches with the at least one cable entry board to provide a first position for the backbone cable to pass the cable splice enclosure via the second hollow cylindrical tube along the axis thereof so as to fix the brace at a second position different from the first position.

14. The optical fiber cable splice enclosure as claimed in Claim 13, further comprising an exterior portion and at least one third fixture device, wherein the third fixture device has at least one first fixing part, having two fixing holes and two screws, and at least one second fixing part configured thereon and including a fixing component being one selected from a group consisting of a ring fastener, a band fastener, a clamp joint and a combination thereof, the first fixing part fixes the third fixing device via the two fixing holes and the two screws, the fixing component fixes the backbone cable on the exterior portion thereof, and the backbone cable extends through the first hollow cylindrical tube, has a waterproof treatment with one of the flexible shrinkable pipe and the heat-shrink tube, and is fixed to the third fixture device.
15. The optical fiber cable splice enclosure as claimed in Claim 13, further comprising at least one third fixture device having at least one first fixing part fixed to the cable entry board, and at least one second fixing part, wherein the backbone cable going through the cable entry board and into the optical fiber cable splice enclosure is fixed to the second fixing part by one being selected from a group consisting of a screw, a mortise, a clamp joint, a ring fastener, a band fastener and a combination thereof.
16. A cable splice enclosure for branch splicing operation, comprising:
 - a cable entry board;
 - a connection part configured on the cable entry board for a cable to

pass, in an oppositely bending manner, the connection part to enter the cable enclosure;

a first hollow cylindrical tube connected with the connection part; and

a waterproof component used to wrap the oppositely bent cable,

wherein, the waterproof component is one selected from a group consisting of a waterproofing auxiliary device, a heat-shrink tube, a flexible shrinkable tube and a combination thereof.

17. A cable splice enclosure for branch splicing operation , comprising:

a cable entry board;

a connection part configured on the cable entry board; and

a filling gap waterproofing auxiliary device connected with the connection part to wrap the oppositely bent cable to form a first waterproofing structure, the first waterproofing structure connected with the connection part.

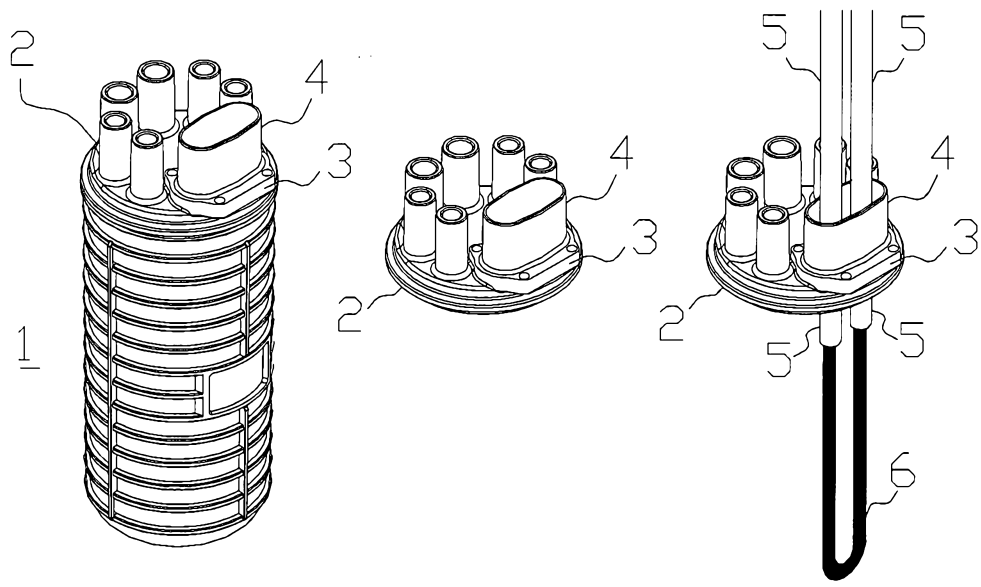


Fig. 1 (A)

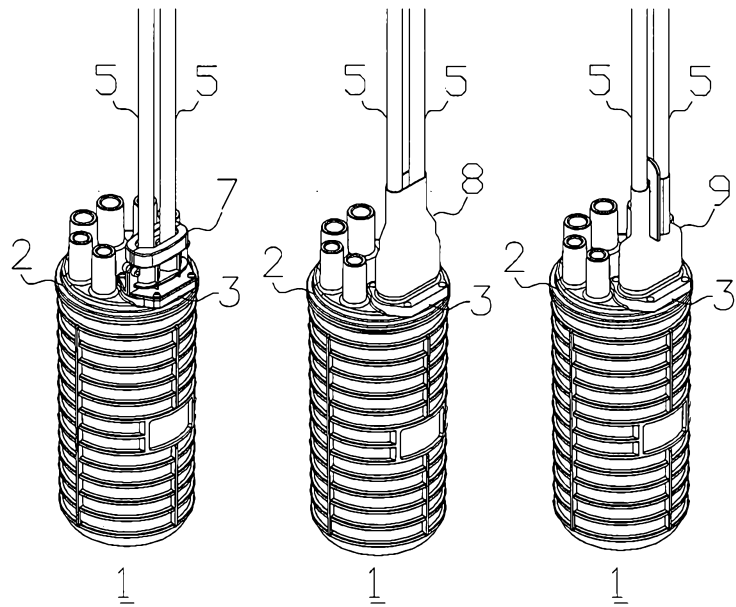


Fig. 1 (B)

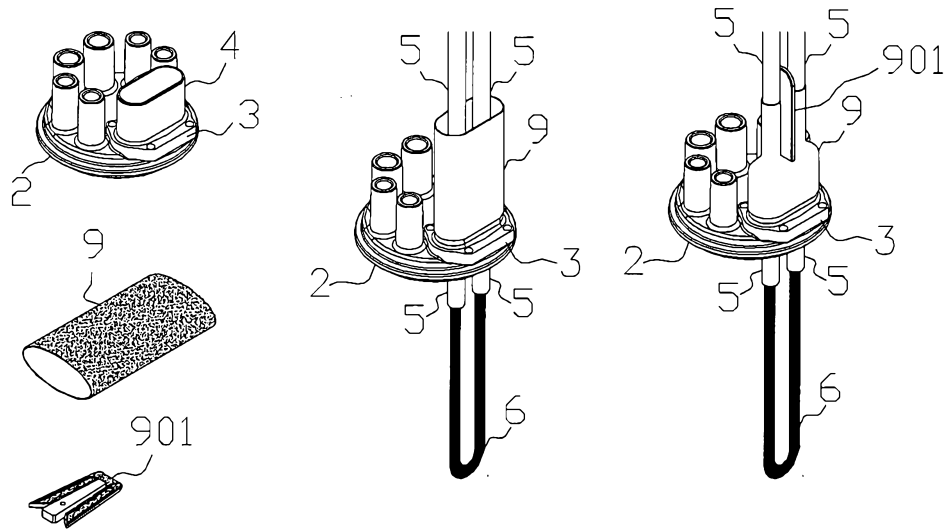


Fig. 2

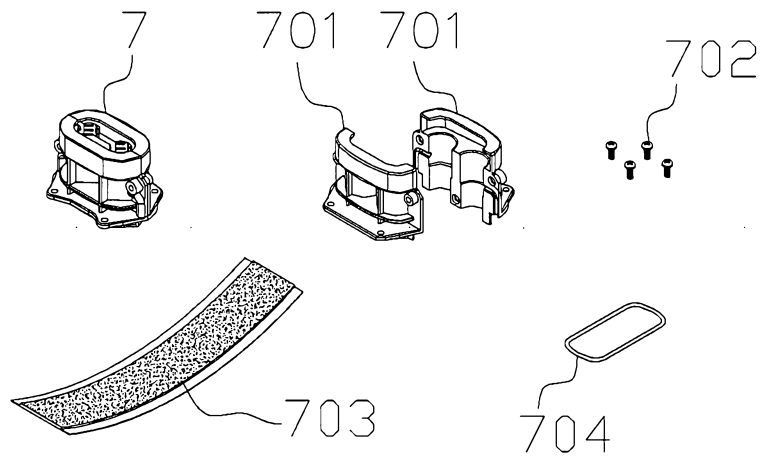


Fig. 3 (A)






Fig. 3 (B)

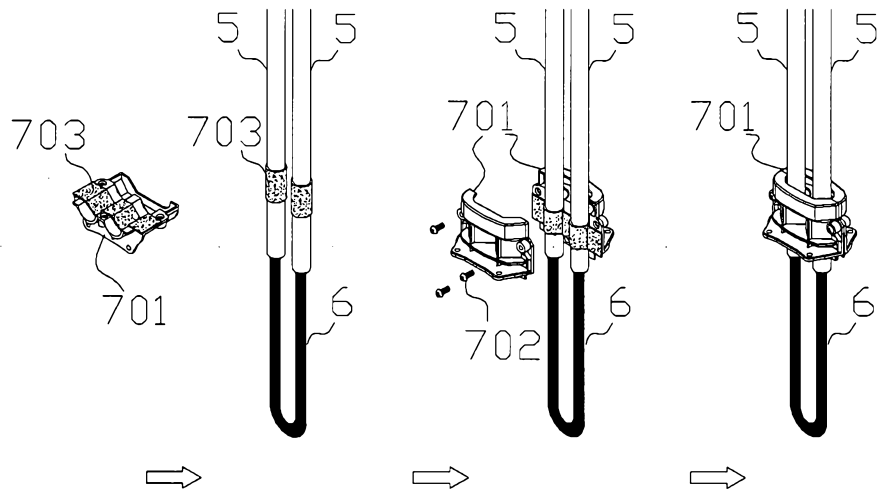


Fig. 3 (C)

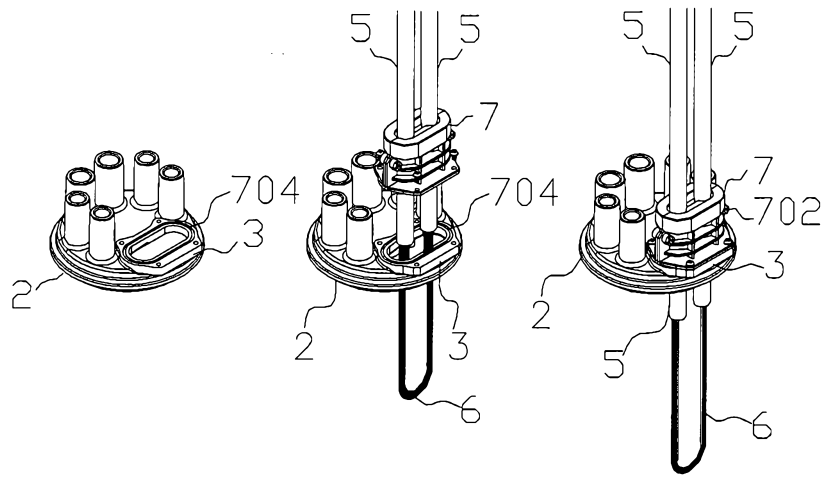


Fig. 3 (D)

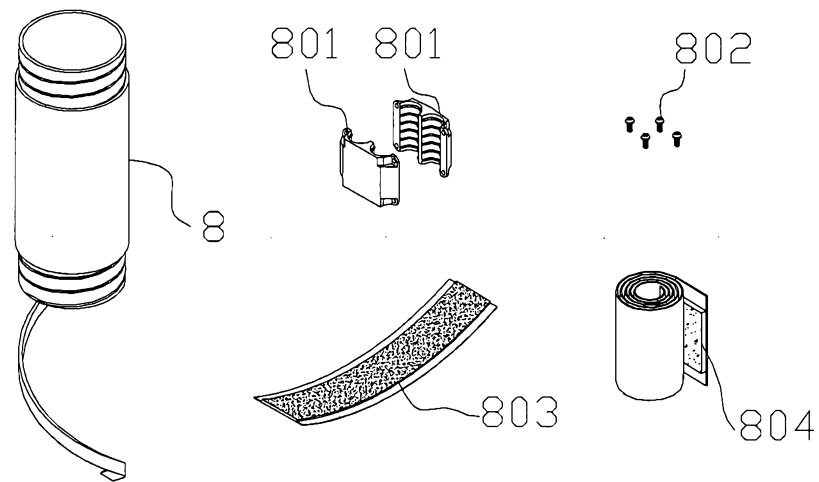


Fig. 4 (A)

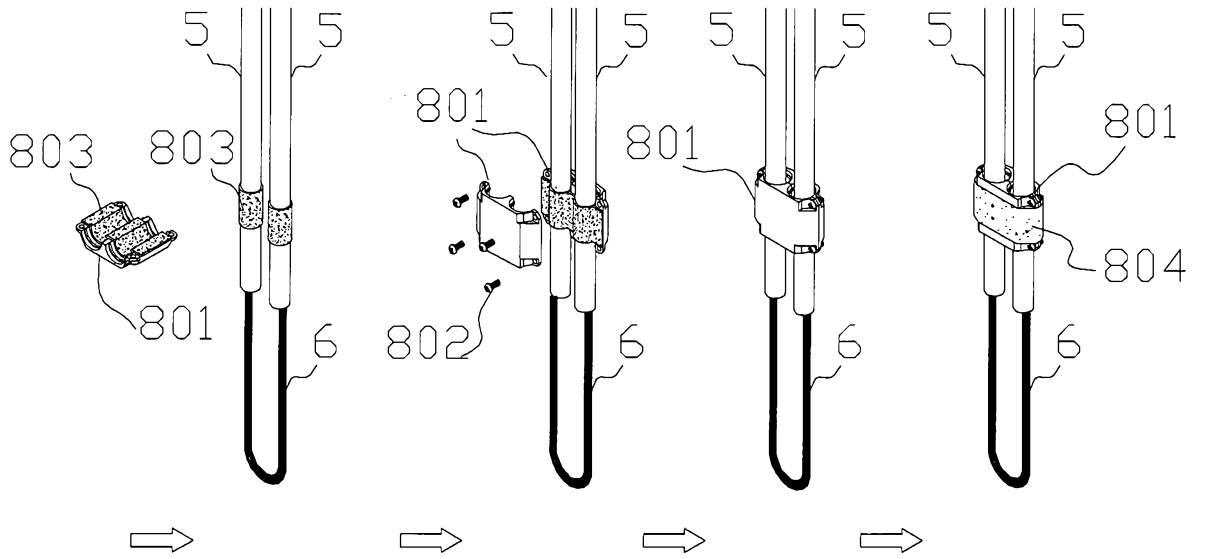


Fig. 4 (B)

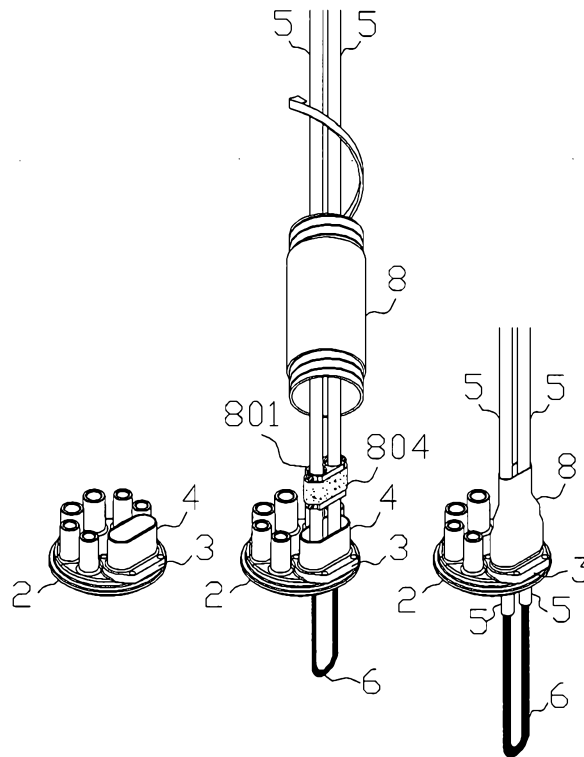


Fig. 4 (C)

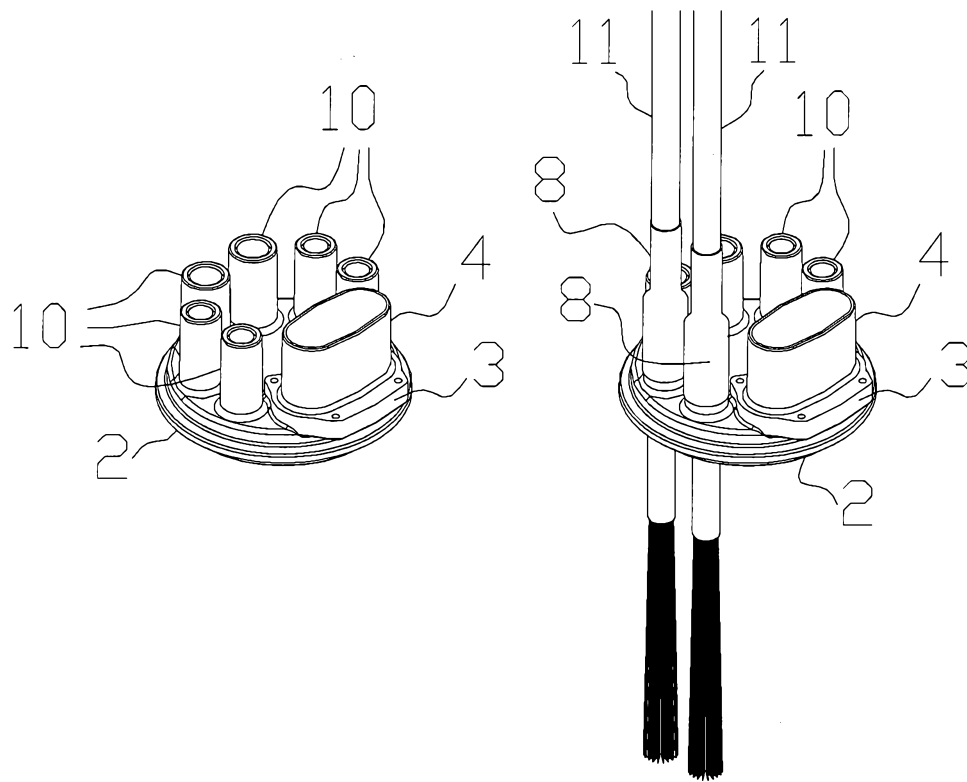


Fig. 5

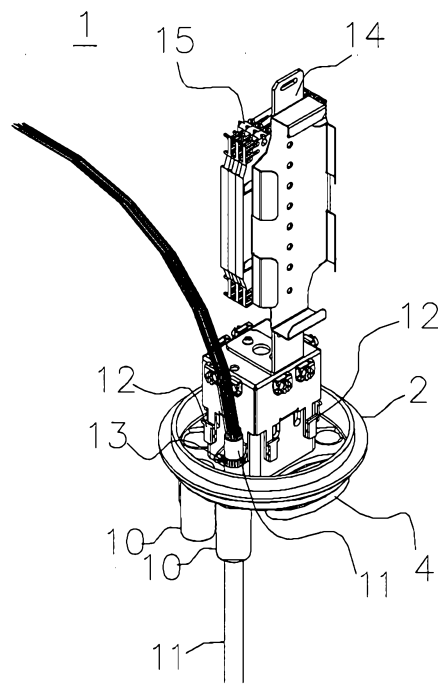


Fig. 6

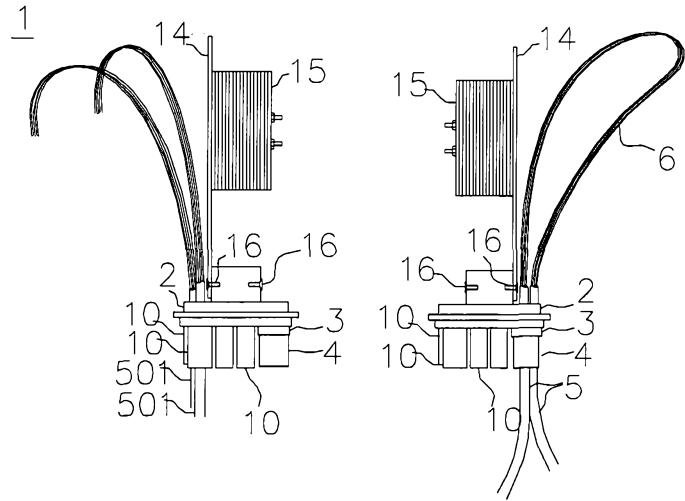


Fig. 7

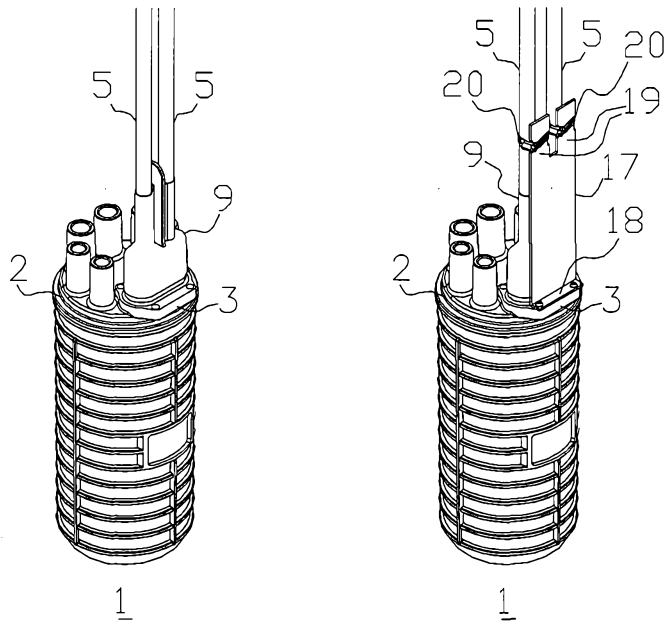


Fig. 8

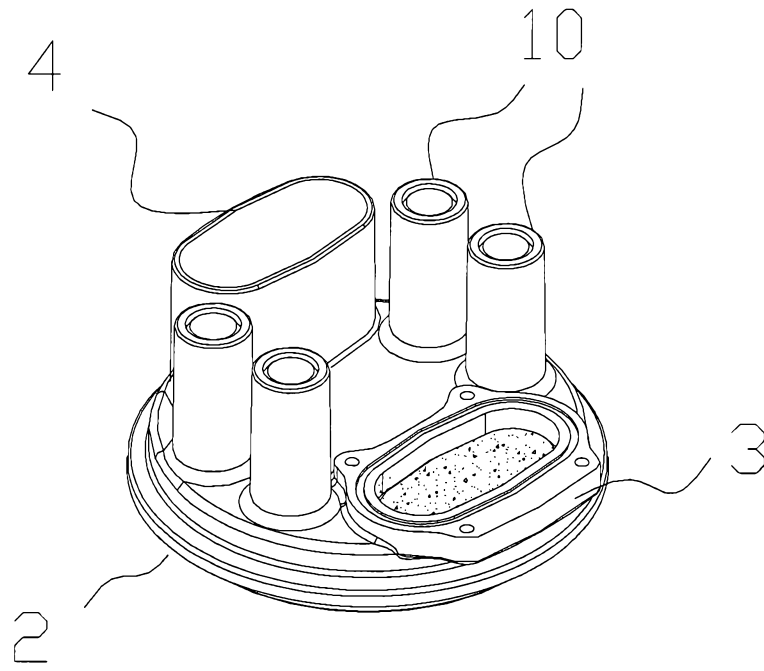


Fig. 9