




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : G06F 15/72</p>	<p>A1</p>	<p>(11) International Publication Number: WO 93/00650 (43) International Publication Date: 7 January 1993 (07.01.93)</p>
<p>(21) International Application Number: PCT/AU92/00302 (22) International Filing Date: 19 June 1992 (19.06.92)</p> <p>(30) Priority data: PK 6942 28 June 1991 (28.06.91) AU PK 7305 19 July 1991 (19.07.91) AU PK 8643 1 October 1991 (01.10.91) AU PK 8645 1 October 1991 (01.10.91) AU PK 9218 30 October 1991 (30.10.91) AU</p> <p>(71)(72) Applicant and Inventor: LIM, Hong, Lip [SG/AU]; 203/35-47 Wilson Lane, Darlington, NSW 2008 (AU).</p> <p>(74) Agent: SPRUSON & FERGUSON; G.P.O. Box 3898, Sydney, NSW 2001 (AU).</p>		<p>(81) Designated States: AU, CA, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IT, LU, MC, NL, SE).</p> <p>Published <i>With international search report.</i></p>

(54) Title: IMPROVEMENTS IN VISIBILITY CALCULATIONS FOR 3D COMPUTER GRAPHICS

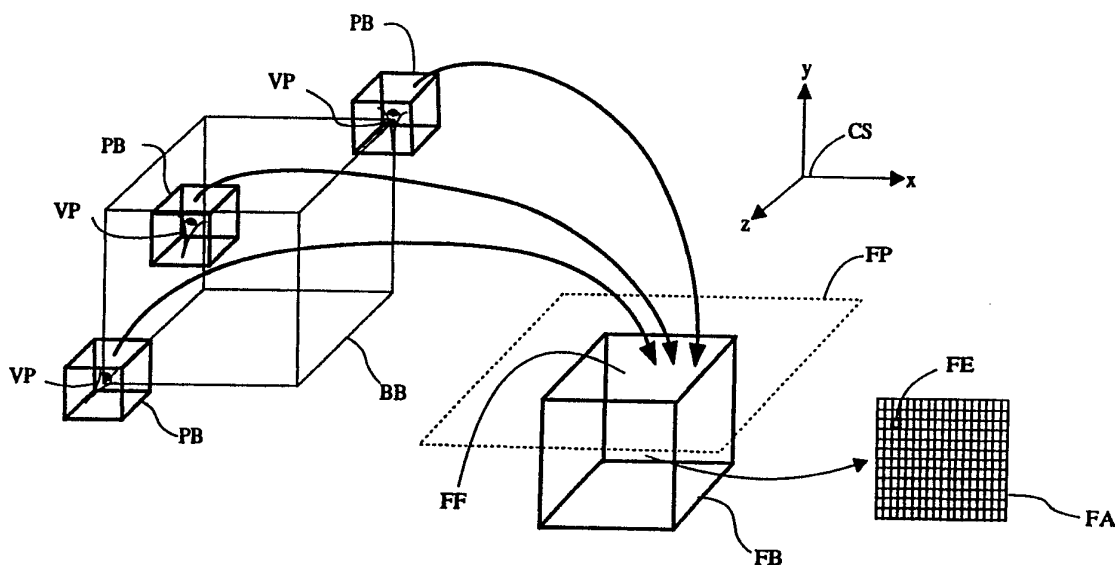

(57) Abstract

Disclosed is a method of reducing the complexity of hidden surface removal in 3D graphic systems. A fuzzy projection (FF) of a surface (SU) as seen from a number of viewpoints (VP) in a bounding box (BB) is stored in a buffer (FA) having elements (FE). A combination of all the patches (PT) of the surface (SU) viewed from a fuzzy region (FR) where surfaces can be either visible, hidden, or unable to be determined with certainty as to whether or not visible/hidden. A non-fuzzy region (NF) describes those patches (PT) that are always visible.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MI	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Licchtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

IMPROVEMENTS IN VISIBILITY CALCULATIONS FOR3D COMPUTER GRAPHICSFIELD OF INVENTION

The present invention relates to computer graphics and, in particular, to the efficient determination of visible and/or invisible surfaces to thereby preferably permit improved hidden surface removal, generally in 3D systems.

BACKGROUND ART

Visible surface detection is one of the most basic operations in 3D graphics. It is applied to generate images of surfaces directly visible to a viewer. Recently, it has also been adopted in the radiosity calculations to compute the energy interactions between surfaces.

The standard strategy of visible surface detection is to divide surfaces into patch elements and compare the spatial relationship between these elements. Using this strategy, the visibility of surfaces cannot be determined until they have been analysed in detail. Although many techniques have been developed to address this issue, none are ideal as they either still require elaborate analysis of surfaces, or they impose various restrictions to the scene.

The limitations of the current techniques can seriously affect the speed of visible surface computation. If the scene is complicated, many surfaces may be invisible. However, the image generation is often slowed down by the need to analyse each surface element in detail.

The same limitation has also seriously affected the efficiency of the radiosity computations. Currently, these computations are very slow due to the need to elaborately compute the visibility between every pair of surface elements. Again, these computations may be substantially reduced if surface elements obviously visible or invisible to each other can be more easily computed.

The early visible surface techniques mainly applied various sorting schemes to find the occluding surface primitives. However, with the advancement in hardware technology, it is now common practice to reduce the need for sorting and comparisons by using a large amount of fast memory. This memory may be used to store the object data, such as a BSP-tree. It may also be used to store the depth and surface projection data, as with a z-buffer.

The z-buffer method is simple and has a very low growth rate. However, it still requires depth evaluations and comparisons at each pixel by all the patches projecting onto it, because their visibility is unknown.

5 The BSP-tree method has the advantage that if the scene is static, an orderly traversal of the BSP-tree is generally sufficient to establish the depth order. However, it still requires the scan-conversion of each path. In addition, the technique needs to re-compute the BSP-tree whenever objects in the scene move.

10 There have been two main strategies of avoiding detailed depth analysis of totally invisible entities. One strategy, applies the property that visibility changes can only occur at the contour edges of surfaces. Visibility computations of internal edges or patches can be reduced by first comparing them with these edges.

15 An alternative strategy is to use the invisible coherence of the scene. These techniques apply the property that an edge is likely to remain invisible in a scan line if it is invisible in the last scan line. Such an edge may therefore be treated specially to avoid unnecessary depth comparisons.

20 Although the above strategies can reduce some visibility computations, they have limitations. The contour-oriented techniques can operate only in environments which consist exclusively of convex or non-penetrating surfaces. Both the contour-oriented and the scan line approaches are also limited in their ability to reduce visibility
25 computations. In the former, an edge still needs to be tested against the contour edges even if it is invisible. In the latter, all the invisible edge segments at each scan line have to be sorted. These segments also require depth comparisons with the pixels they are on. Finally, all these techniques require some sorting or searching.

30 SUMMARY OF THE INVENTION

 It is an object of the present invention to substantially overcome, or ameliorate, the problems associated with the prior art, through provision of an improved method for performing visibility calculations.

35 In accordance with one aspect of the present invention there is disclosed a method of reducing the complexity of visibility calculations required for the production of multi-dimensional computer generated

images or the reduction of multi-dimensional data to multi-dimensional data having at least one less dimension, said method comprising the steps of:

- 5 (1) prior to an occlusion or invisibility relationship computation (known per se) being carried out on a plurality of surfaces, selected viewpoints to be calculated are divided into groups;
- (2) for selected ones of said surfaces, determining for each said group whether each said selected surface is
 - 10 (a) an always unoccluded surface, an always hidden surface, or a remaining surface; or
 - (b) an always unoccluded surface, or a remaining surface; or
 - (c) an always hidden surface, or a remaining surface;wherein said remaining surface is a surface which is
15 unable to be determined with certainty as to whether it is either unoccluded or hidden;
- (3) exempting from said occlusion or invisibility relationship computation those surfaces which are either always unoccluded or always hidden;
- (4) maintaining a record of said remaining surfaces; and
- 20 (5) carrying out occlusion or invisibility relationship computations on said remaining surfaces.

In accordance with another aspect of the present invention there is disclosed a method of reducing the visibility related computations in an environment consisting of three-dimensional abstract or physical
25 surfaces, said method comprising the steps of:

- (1) prior to a visibility computation (known per se) being carried out, some or all viewpoints or possible occurrences of viewpoints are classified into groups of viewpoints;
- (2) defining one or more projection surfaces (known per se) for
30 the purpose of generating simultaneous projections of surfaces or surface elements with respect to a group of viewpoints;
- (3) for selected surfaces, and for each group of viewpoints, determining whether those surfaces or their surface elements are always invisible to said group by computing and comparing their simultaneous
35 projections on said projection surfaces;

(4) ignoring or treating specially some or all surfaces or surface elements which are always invisible to said group of viewpoints during the actual visibility or visibility related computations for some or all viewpoints in said group.

5 In accordance with another aspect of the present invention there is disclosed a method of reducing the visibility, radiosity or visibility related computations in an environment consisting of three-dimensional abstract or physical surfaces, said method comprising the steps of:

10 (1) prior to a visibility computation (known per se) being carried out, some or all viewpoints or possible occurrences of viewpoints are classified into groups of viewpoints;

(2) defining one or more projection surfaces (known per se) for the purpose of the simultaneous projections of surfaces or surface elements with respect to a group of viewpoints;

15 (3) dividing each of said projection surfaces into regular or irregular grids;

(4) defining a data structure which organizes computer storage for storing of projections on said grids;

20 (5) for each of the selected surfaces and for each group of viewpoints, simultaneously projecting said surfaces or their surface elements onto the projection surfaces, computing grid cells which are always under the projections, storing the furthest possible distances between viewpoints of said group and said surfaces to provide surface distances corresponding to those cells in said computer storage;

25 (6) for each patch element of said surfaces, determining those said grid cells that said patch element might project onto, comparing the depths stored in the cells with the furthest possible depth between the patch element and said group of viewpoints to determine whether the patch element is always occluded by other surfaces;

30 (7) ignoring or treating specially some or all surfaces or surface elements which are always visible to said group of viewpoints during the actual visibility or visibility related computations for some or all viewpoints in said group.

BRIEF DESCRIPTION OF THE DRAWINGS

35 A preferred and a number of other embodiments of the present invention will now be described with reference to the drawings in which:

- Figs. 1A and 1B show two viewpoint hierarchies;
Fig. 2 illustrates the projections at an arbitrary viewpoint;
Fig. 3 shows the relationship between projection boxes and a fuzzy
projection box;
- 5 Fig. 4 shows the creation of fuzzy and non-fuzzy regions;
Figs. 5A, 5B and 5C show a front-facing surface and its
corresponding fuzzy and non-fuzzy regions;
Fig. 5D shows a point that is not totally hidden to a viewpoint
bounding box;
- 10 Fig. 5E shows a point that is totally hidden to a viewpoint
bounding box;
Figs. 6A to 6D show the detection of totally invisible patches;
Figs. 7A and 7B show the detection of totally visible/non-hiding
patches:
- 15 Figs. 8A to 8D show the scan-conversion of the non-fuzzy regions;
Figs. 9A to 9D show the scan-conversion of the fuzzy regions; and
Fig. 10 illustrates the mapping between a cache and the fuzzy array.
Figs. 11A and 11B show views of a front-facing surface region;
Figs. 12A, 12B and 12C show cut-plane views of the projection of
20 surface regions;
Figs. 13A, 13B and 13C show respectively one, two and four room
models used in testing the preferred embodiment;
Fig. 14 illustrates the direct computation of the fuzzy region of
an edge;
- 25 Fig. 15 shows a hemi-cube pyramid structure;
Appendix 1 describes The Detection of Patches Front-Facing to a
Viewpoint Bounding Box;
Appendix 2 describes The Computation of the Fuzzy Extent of
Boundary Edges and Patches;
- 30 Appendix 3 describes The Computation of the Non-Fuzzy Regions;
Appendix 4 describes The Scan-Conversion of the Fuzzy Regions;
Appendix 5 describes Using a Cache to Speed up the Access and
Writing of Fuzzy Elements Within the Fuzzy Extent of a Patch;
Appendix 6 describes the direct computation of the fuzzy region of
35 an edge;
Appendix 7 describes scan-conversion of patches on the hemi-cube
pyramid; and

Appendix 8 is a list of references.

BEST AND OTHER MODES FOR CARRYING OUT THE INVENTION

The preferred embodiments relate to various methods for calculating three dimensional computer graphic images and they are generally termed
5 herein as the "fuzzy projection methods".

A Simple Fuzzy Projection Method

In this embodiment a method is provided to map the projections of entities at one or more viewpoints to a set of planes. This embodiment also provides a means to compute regions which contain all these
10 projections and regions which are within each and every projection. The spatial position, time and the optical properties described in this embodiment can be replaced by other physical or abstract variables if the replacement does not affect the mathematical relationship of entities in the graphic image.

15 Prior to detailed discussion of this and the other embodiments, it is useful to introduce various terms and define variables used in 3D graphics.

Firstly, with reference to Figs. 1A, 1B and 2, a viewer, as shown by the eyeballs in the Figs., is an abstract and dimensionless observer
20 where the visibility of its surrounding objects is to be obtained. A point is visible to a viewer if a ray fired from the viewer to it is not blocked by any opaque object. There can be more than one viewer at any time and each viewer may move or rotate over the time. A viewpoint VP is the spatial position and orientation of a viewer at an instance of time.
25 A view vector VV is a vector from the viewpoint VP to a point PO being observed (see Fig. 2).

Several viewpoints VP can be grouped together through certain properties they share. Related groups of viewpoints may in turn form a higher level group. This merging may be repeated to create a viewpoint
30 hierarchy. A current group is the group of viewpoints VP that are currently being considered. In Fig. 1A, viewpoints VP_1 , VP_2 , VP_3 and VP_4 each reside on a path PA_1 and represent viewpoints at times 1, 2, 3 and 4, and can be considered as one group. Similarly, for the viewpoints VP_5 - VP_7 .

35 Each group of viewpoints is associated with a coordinate system called the group coordinate system CS. A viewpoint bounding box BB of a group of viewpoints VP is the smallest right quadrangular prism enclosing

these viewpoints and whose edges are parallel to the axes of the group coordinate system. If the positions or occurrences of a group of viewpoints are not precisely defined, the associated viewpoint bounding box should be the said prism which encloses the space likely to be occupied by these viewpoints. A group of viewpoints may be lying on a plane or a point. In such cases, the viewpoint bounding box may degenerate into a plane or a point. A point PO is totally visible from the bounding box BB if it is always visible from every possible viewpoint VP in the box BB. Conversely, a point is totally invisible from the bounding box if it is hidden from the view of every possible viewpoint VP in the box BB. In Fig. 1A, viewpoints VP_1 - VP_4 reside in a bounding box BB_1 , and viewpoints VP_5 - VP_7 reside in a bounding box BB_2 . The boxes BB_1 and BB_2 can be considered as first level bounding boxes. If the boxes BB_1 and BB_2 are combined, a second level bounding box BB_3 is formed. Rather than the bounding box being a square or rectangular prism, it can also be an ellipsoid, sphere or arbitrary volume.

A viewpoint group may be degenerated and contain only a single viewpoint. In this manner, all the techniques applicable to a normal viewpoint group are also applicable to a single viewpoint. In this case, the viewpoint bounding box BB degenerates into a point which coincides with the viewpoint VP.

In Fig. 1B, multiple viewers at different times are illustrated. A path PA_2 of one viewer of a group is shown extending between locations at two points in time. VP_8 represents the viewpoints at time "1" and VP_9 the viewpoints at time "2", with BB_4 the bounding box at time "1" and BB_5 the bounding box of the union of the viewpoints VP_8 and VP_9 .

Referring now to Fig. 2, shown is a projection box PB, a right quadrangular prism with its centre on a viewpoint VP and its edges parallel to the principal axes of the current group coordinate system CS. The six facets of the box PB are called the projection faces PF. Each projection face PF is on a plane called a projection plane PP. The projection PR of a point PO_1 in the direction perpendicular to a projection plane PP is the intersection between that plane PP and the view vector VV from the viewpoint VP to the point PO_1 . Conversely, since a straight line emanating from the viewpoint VP can only intersect

the projection point PR on a projection plane PP, a location on that plane also represents a unique viewing direction from the viewpoint.

In this manner:

$$VV = PO_1 - VP$$

5 The area around the visible space point PO_1 is a visible patch PT and the view vector VV passes through this to an invisible space point IP, occluded by the patch PT.

The projection calculations on each plane are identical to the finding of the image region of an object in the direction perpendicular
10 to that plane. The projection of an object to a projection plane PP therefore represents its image region in the direction parallel to the normal N of that plane.

A viewpoint VP may not be omni-directional but has a limited field of view. Hence certain projection faces may be partially or totally
15 unobservable from the viewpoint. The hidden area of a projection face PF can be obtained by intersecting it with the viewing horizon of the viewpoint VP.

Locations on the projection plane PP can be expressed by a coordinate system CS called the projection coordinates. The origin of
20 this coordinate system is at the centre of the projection face PF. Its x, y axes are parallel to the edges and its z axis is parallel to the normal of the face.

Because they are all parallel, the projection coordinate systems of the current group of viewpoints VP have the same scale factor so that
25 points having the same viewing direction from their viewpoints always have the same projection coordinates.

If points on two surfaces project on the same location, PR for example, on a projection face PF, an occlusion is taking place. The point on the surface further to the viewpoint VP is hidden by the point
30 on the surface closer to the viewpoint VP unless the latter is transparent. This can be determined by the distances d between these points PR and the viewpoint VP.

Every edge of the projection boxes PB of a group is parallel to one of the principal axes (x, y or z) of the respective group coordinate
35 system CS. Since the vectors parallel to the principle axes can have at most six directions, these faces are classified by their normal directions into six sets.

This is shown in Fig. 3 where viewpoints VP_1 , VP_2 and VP_3 , each with respective projection boxes PB_1 , PB_2 and PB_3 , reside within a bounding box BB_1 .

The projections on projection boxes PB_1 - PB_3 can be correlated
5 by another box whose edges are also parallel to the axes of the current group coordinate system CS. This box is called the fuzzy projection box FB. It is called "fuzzy" because it is the combined projection of a single surface (or object, entity, etc.) from all viewpoints, with the combined projection creating a fuzzy image of the surface. Each face of
10 the box is called a fuzzy projection face FF. The face FF lies on a plane called the fuzzy projection plane FP. A projection coordinate system can be defined for a fuzzy projection plane FP and the fuzzy projection face PF on it. Similar to the projection coordinate systems CS of the projection planes, the origin of this coordinate system is at
15 the centre of the fuzzy projection face FF and its axes are respectively parallel to the edges and the normal of the face FF.

By setting the scale factor of the projection coordinate system of each of the fuzzy projection planes to be the same as the scale factor of their associated projection planes PP, each set of projection
20 planes/faces have a one-to-one mapping with the fuzzy projection plane/face that is facing the same direction. Points on a projection plane/face can therefore be linearly mapped to the associated fuzzy projection plane/face.

Points on a set of projection planes having the same projection
25 coordinates, and hence representing the same viewing direction, map to a point on the associated fuzzy projection plane that has the same coordinates. Therefore, similar to the projection planes PP, a point on the fuzzy projection plane FP also represents a unique viewing direction. However, the point is not associated with a particular viewpoint.

30 Since the viewpoints VP can have a limited field of view, some areas of the projection planes may be unobservable. The hidden area of a fuzzy projection face FF is the area where the corresponding areas on all the associated projection faces are hidden. A fuzzy projection face FF is inactive if all its area is hidden.

35 To sample the projections on the fuzzy projection box FB, each fuzzy projection plane FP is tessellated by two sets of parallel and evenly spaced grid lines forming a fuzzy array FA. By ensuring that

there are always grid lines on the edges of the fuzzy projection faces FF, these faces are divided into identical rectangular or square cells. Each cell is called a fuzzy element FE. Each element FE, in addition to representing the viewing direction associated with its centre, also
5 represents a unique solid angle A of viewing directions, as seen in Fig. 2, represented by its perimeter.

Although other representation schemes such as the quadtree subdivision can be applied. All the z-buffer oriented operations would be accordingly changed to operation under such schemes, however the
10 regular subdivision of the faces is considered the most efficient embodiment of the present invention.

Surfaces in the viewing environment are approximated by meshes of patches PT. A surface can also be represented by a hierarchy of patches. Different levels of the hierarchy are meshes of patches at
15 different details. Each patch PT is treated as flat and is approximated by a polygon. The projection of a surface SU to a viewpoint VP is the region combining all the projection regions of its patches. This region is called the projection region PE of the surface. Since the projection region PE of a patch PT represents its image region, the projection
20 region PE of a surface SU also represents the image region of that surface.

The smallest right quadrangular prism just enclosing the patch and whose edges are parallel to the axes of the current group coordinate system is called the bounding volume of the patch. The shortest and
25 longest depths of a patch are the shortest and longest depths between the current viewpoints and points on the patch. The depth corresponds to the z-magnitude in the coordinate direction perpendicular to the projection planes currently being considered. As they are usually
difficult to find, they are approximated by the shortest and the longest
30 depths between the viewpoint bounding box and the bounding volume of the patch, which can be determined by partitioning the space by the planes of the viewpoint bounding box and determining which partitions the bounding volume of the patch is in.

This is shown in Fig. 4 where a patch PT of a surface is viewed
35 from points VP_1 , VP_2 and VP_3 in a bounding box BB_1 . Associated with each viewpoint VP_1 - VP_3 is a projection region PE_1 - PE_3 which

is seen to intersect with the corresponding projection face PF_1 - PF_3 in a different manner for each viewpoint VP_1 - VP_3 .

The projections of the patch PT on the same set of projection faces PF_1 - PF_3 can be mapped to the associated fuzzy projection face FF .

5 The areas on the fuzzy projection box FB_1 containing all these mappings are called the fuzzy (combined) regions FR of the patch because logically the region is fuzzy. They cannot tell whether the patch PT_1 actually projects on the corresponding area on each projection box PB_1 - PB_3 .

Similar to the case of patches, the fuzzy region FR of a surface SU
10 is produced by combining the mappings of the surface projections for a number of patches. In this manner each projection region of the surface is the logical-OR of all the projections of the patches, and the fuzzy projection of each patch is the logical-OR of its projection regions. Accordingly, the fuzzy region FR of a surface SU is also the logical-OR
15 of the fuzzy projections of its patches. This region is equivalent to the superimposition of all the images of the surface seen from the current viewpoints.

On the fuzzy projection box FB_1 , there can also be areas which are always mapped on by the projection regions of the surfaces from the
20 current group of viewpoints. On these areas the logical-AND of the projection regions PE_1 - PE_3 of the surface SU is true. Because the outcomes of the logical-AND operations are always a subset of the outcomes of the logical-OR operations, these areas are always within the fuzzy region FR of the surface SU .

25 Logically the areas are non-fuzzy as the projection status of the corresponding areas on the current projection boxes is always true. Therefore they are called the non-fuzzy region NF . An alternative term is the umbra region.

The non-fuzzy region NF of a surface SU can be obtained by mapping
30 the projections of the surface at all the current group of viewpoints on the fuzzy projection box FB and finding the area within every projection. However, this is costly if there are many viewpoints. To reduce the computations, a series of approximations which err on the side of caution are applied.

35 It will be apparent to those skilled in the art that there can exist plural non-fuzzy regions for each surface.

Referring to Fig. 5A, the first approximation assumes that the viewpoints can be at any position in the current viewpoint bounding box BB_2 and each viewpoint has a field of view containing all the possible fields of view of the current group of viewpoints. The patches PT_n facing all these viewpoints are determined. They are called the front-facing patches. A method for finding these patches is described in detail in Appendix 1.

Interconnected front-facing patches PT_n are grouped into surface regions called the front-facing sub-surfaces SU_2 . The edges at the borders of these regions are called the boundary edges BE.

Since the front-facing patches PT_n , and their boundary edges BE, are facing all the possible viewpoints VP in the viewpoint bounding box BB, a front-facing sub-surface SU_2 never curves back and is always facing these viewpoints. The projections of its boundary edges BE therefore always surround its projection region PR.

Similar to the patches as shown in Fig. 5B, the projection of each boundary edge BE can be mapped on the fuzzy projection box FB_1 . A fuzzy region FR_1 of the edge BE_1 is the region on the box FB_1 which contains all the projection mappings of that edge at every possible viewpoint in the current viewpoint bounding box BB_2 .

The fuzzy regions of all boundary edges belonging to a front-facing sub-surface can be combined into an area called the fuzzy boundary region BF. If a point is not in the fuzzy boundary region BF, the boundary edges BE do not project on all the associated points on the projection boxes. Because any change of projection status must be at the projection of the boundary edges, the point must be within every mapping of the projection regions of the front-facing sub-surface SU, or it must be outside all the mappings.

Since the fuzzy region is the combined projection of the front-facing sub-surface, any area within it must be mapped by at least one projection region of the sub-surface. Therefore, the areas inside it but outside the fuzzy boundary region BF always contain the mappings of the projection regions of the sub-surface. These areas by definition are the non-fuzzy region NF_1 of the front-facing sub-surface.

As the viewpoints can have any orientation and be anywhere in the viewpoint bounding box BB, the fuzzy region FR of an edge is difficult to compute. However, the extent of this region on a fuzzy projection face

can be more easily obtained. The computation of this extent is described in Appendix 2. The smallest rectangle totally enclosing this extent and with boundary on the grid lines of the fuzzy projection plane is called the fuzzy extent EF of the edge on that plane.

5 This is seen in Fig. 5C where the same fuzzy projection face of Fig. 5B is shown in which the fuzzy boundary region BF_1 is replaced by the fuzzy extents EF, of the boundary edges BE_1 ... etc.

The region containing all the fuzzy extents EF of the boundary edges always encloses the fuzzy boundary region of the front-facing
10 sub-surface. Therefore, the subtraction of it from the fuzzy region FR produces an area always within the non-fuzzy region. This area is used to approximate the non-fuzzy region NF.

If a surface contains large patches and hence large boundary edges, the use of the fuzzy extents to approximate its fuzzy boundary region may
15 be inefficient. The fuzzy regions of its boundary edges can be directly evaluated using the method described in appendix 6. Alternatively, each edge can be divided into sub-edges. The fuzzy region of that edge can then be replaced by the fuzzy extents of its sub-edges.

An Invisibility Fuzzy Projection Method for the Detection of Totally
20 Invisible Patches.

In this embodiment a method is provided to compare the mappings of entities on the fuzzy projection faces FF associated with a group of viewpoints VP. Through this operation, entities which may be treated as invisible to all these viewpoints, can be detected.

25 Referring to Fig. 6A, a viewpoint boundary box BB_3 is shown to observe three patches PA_A , PT_B and PT_C through a mesh surface SU_M . Figs. 6B, 6C and 6D show respectively the fuzzy extents EF_A , EF_B and EF_C for the patches PA_A , PT_B and PT_C on respective fuzzy projection faces FF_{A-C} . Also shown is the non-fuzzy region NF_3
30 of the mesh surface SU_M .

The determination of totally invisible surfaces is based on a property of the non-fuzzy regions. In Fig. 5D, point P02 is hidden by surface SU1 from viewpoint VP11 in the current viewpoint bounding box BB5. If the point is visible from another viewpoint VP10 which is also
35 in BB5, then SU1 has to curve back and reach behind P02. However, in such a situation part of SU1 next to a point SP would become back-facing to viewpoint VP12 in BB5. SU1 would then contain several front-facing

surfaces which do not contain the surface around P02. The non-fuzzy region of SU1 then would not cover the projection mapping of P02.

Because of the above property, if the projection mapping of a point from an arbitrary point in the current viewpoint bounding box is within the non-fuzzy region of a surface, and if that point is behind the surface from the viewpoint, that point would always be hidden by the surface from all viewpoints in the box. This is shown in Fig. 5E. Here, the invisibility detection is performed using a single viewpoint (either one of VP13 or VP14 or other in the box BB6).

The above observation can be used to detect totally invisible patches, each patch whose visibility is to be determined is selected. The fuzzy elements within the projection mapping of the patch from a viewpoint in the viewpoint bounding box are accessed. If the distance stored in each element is smaller than the depth of the patch from the viewpoint in the direction associated with that element, the patch is an always invisible patch because of the property of non-fuzzy regions just mentioned.

To reduce the above computations, the projection mapping of the patch can be substituted by the extent of that mapping, or the fuzzy extent of the patch. Alternatively, the depth of the patch from the viewpoint may be replaced by the longest possible depth between the patch bounding box and the viewpoint or the viewpoint bounding box. Such approximations always err on the side of caution and do not affect the correctness of hidden surface computations.

A 2D fuzzy arrays FA_A , FA_B , FA_C , with as many storage elements as the fuzzy elements EF on each active fuzzy projection face FF_{A-C} are allocated to store the mapping information on the face. All the fuzzy arrays FA_{A-C} are collectively called a fuzzy buffer generally, a memory that is two-dimensionally addressable.

Each fuzzy element EF contains a depth field. The depth field stores the depth of the patch PT whose fuzzy extent EF surrounds the fuzzy element FE.

A cycle of fuzzy buffer computations is applied for each group of viewpoints. First, the depth fields are initialized to infinity to indicate that no surface has yet been projected on the projection box PB.

The fuzzy extents EF of the boundary edges BE and the fuzzy extents EF of the patches PT of a front-facing sub-surface of selected opaque surfaces are computed (as described in Appendix 2). Usually, large surfaces are selected. Based on these extents, the non-fuzzy region NF of the front-facing sub-surface is computed by a scan line technique described in Appendix 3. Furthermore, the fuzzy region of an edge can be found by direct computation as described in Appendix 6.

Using the above, the longest depth of the fuzzy elements in each horizontal segment of every non-fuzzy region are obtained. The distance stored in each element of the array is compared with the depth stored in the corresponding element in the fuzzy buffer. If the latter is larger, it is replaced by the former.

After all the non-fuzzy regions of the opaque front-facing sub-surfaces have been updated to the fuzzy elements, each element in the fuzzy buffer contains the longest depth of the closest surface that can be seen from a chosen viewpoint in the current viewpoint bounding box in the direction associated with that element. The fuzzy buffer can then be used to compute patches totally invisible from the current viewpoint bounding box. These patches are deemed to be totally invisible patches.

To detect totally invisible patches, the fuzzy elements within the fuzzy extent, the projection mapping, or the extent of the mapping, of each patch are accessed. If the depth stored in each element is smaller than the shortest depth of the patch, the patch is always hidden in the direction represented by that element. Because of the property of non-fuzzy regions, or because of the property that the fuzzy extent covers all the possible viewing directions of the patch, the patch is totally invisible if it is found to be hidden at every fuzzy element within that extent.

As seen in Fig. 6B, the fuzzy extent EF_A of patch PT_A falls entirely within the non-fuzzy region NF_3 . Accordingly, the patch PT_A is hidden from the viewpoints in the bounding box BB_3 .

In Fig. 6C, the fuzzy extent EF_B of patch PT_{VB} both inside and outside the non-fuzzy region NF_3 . Accordingly, those four elements outside may be either visible or hidden, and for the six elements inside, for all view directions through those elements, the patch PT_B is hidden.

In Fig. 6D, the fuzzy extent EF_C of patch PT_C passes the depth test for every fuzzy buffer element it falls on. Patch PT_C is always invisible from the bounding box BB_3 .

5 Since there is always substantial overlappings between the fuzzy extents of adjacent patches, a high-speed cache can be used to speed up the reading and writing of the fuzzy elements within the fuzzy extent of each patch. The cache can also be used in the visibility fuzzy projection technique discussed in the next section. Appendix 5 describes in more detail the use of a cache memory.

10 A Visibility Fuzzy Projection Method for the Detection of Totally visible Patches.

In this embodiment a method is provided to compare the mappings of entities on the fuzzy projection faces associated with a group of viewpoints. Through this operation entities which may be treated as
15 visible and not hiding other entities to all these viewpoints can be detected.

For simplicity and speed, this method assumes that every surface does not hide itself in any viewing direction from the current viewpoint bounding box except those parts which do not face that direction. This
20 implies that no two parts of the same surface that are facing a viewpoint in the bounding box would hide each other. All the planar and quadric surfaces have this property. Other surfaces can be subdivided into smaller surfaces which satisfy this criterion.

As seen in Fig. 7A, a viewpoint bounding box BB_4 observes three
25 patches PT_D , PT_E and PT_F arranged about a mesh surface SU_N .

Similar to the technique for detecting totally invisible patches, a fuzzy buffer consisting of several arrays is used to store the results of projections on the fuzzy elements.

Every element of the fuzzy buffer contains a field called the
30 homogeneous indicator. This is a three-valued field which indicates whether there is any projection on the associated grid cell on the fuzzy projection box and whether one or more surfaces are being projected onto the cell. The indicator is zero if it is not enclosed by any fuzzy region. The indicator is one if it is inside the fuzzy region of one
35 surface. The indicator is two if it is within the fuzzy regions of more than one surface.

First, the homogeneous indicators are initialized to zero. This shows that no surface has yet been projected on the fuzzy buffer.

Using the scan-conversion technique described in Appendix 4, the horizontal segments of the fuzzy region of each surface are obtained.

5 The homogeneous indicators under each segment are examined. Each indicator is incremented by one if it is zero or one.

After the fuzzy regions of all the surfaces have been updated into the fuzzy buffer, each patch is examined. It is ignored if it has been detected as totally invisible by the invisibility fuzzy projection
10 technique.

If the homogeneous indicators within the fuzzy extent of the patch are all one, only one surface can be seen from the current viewpoint bounding box in all viewing directions within that fuzzy extent. The surface has to be the one the patch is on. The patch therefore does not
15 hide other surfaces. Since the front-facing parts of the surface do not hide each other, the patch is always visible unless when it is back-facing. The patch is called a totally visible/non-hiding patch.

If some of the homogeneous indicators within the fuzzy extent of the patch are not one, the patch might be covering or be occluded by
20 patches of other surfaces at certain viewpoints in the current viewpoint bounding box.

This is shown in Fig. 7B where the fuzzy projection face FF_4 is shown with each element having either the value 0, 1 or 2. As indicated for the patches PT_D and PT_F and their corresponding fuzzy elements
25 FE_D and FE_F , these are not totally visible and not hiding other patches as some of the fuzzy elements within their respective fuzzy extents are mapped to more than one surface. Patch PT_E is totally visible/non-hidden as all its fuzzy elements FE_E within its extent are mapped only to one surface (i.e. SU_n).

30 MODIFIED VISIBILITY FUZZY PROJECTION METHOD

The above technique scan-converts the fuzzy regions of each surface twice because each fuzzy element may be overlapped by the fuzzy regions of several patches of the same surface. This can be avoided by using a linked list called the projected patch list to store the overlapped
35 patches for each fuzzy element. Other data structures such as an array can also be used in place of the linked list. The modified technique consists of the following steps:

1. As the original technique, each fuzzy element contains a homogeneous indicator and a surface ID field. It also contains a projected patch list. The homogeneous indicator and the surface ID fields are initialized to zero and null respectively to indicate that no surface has been projected on the fuzzy element. The projected patch list associated with the element is initialized to the null list.

2. Each patch contains a totally visible indicator. This indicator is initialized to ON. Each patch in the environment is accessed. The fuzzy region of each patch is computed and each element within it is accessed.

3. If the homogeneous indicator of each fuzzy element accessed is zero, the fuzzy element has not been projected onto by the fuzzy regions of any surface. The surface ID of the current patch is written to the surface ID field. The homogeneous indicator is set to one. If the totally visible indicator of the current patch is ON, its ID is added to the projected patch list of the current fuzzy element. Otherwise there is no such necessity because the projected patch list is used to reset the totally visible indicators of patches.

4. If the homogeneous indicator is one, the surface ID of the current patch is compared with the surface ID stored in the surface ID field of the current fuzzy element. If they are the same and the totally visible indicator of the patch is ON, the ID of that patch is added to the projected patch list associated with the current fuzzy element.

If the ID's of the two surfaces are different, the homogeneous indicator is set to two to indicate that there is more than one surface projecting onto the current fuzzy element. The current patch and all the patches with ID's stored in the projected patch list of the current element may not be totally visible. Therefore, their totally visible indicators are set to OFF. Records in the projected patch list can be removed after all their totally visible indicators have been updated.

5. If the homogeneous indicator is two, the current fuzzy element has already been found to be projected onto by more than one surface. The current patch therefore may not be totally visible. The totally visible indicator of its record is set to OFF.

6. After the processing of all patches, a patch is determined to be totally visible if its totally visible indicator has not been set to OFF.

```
The pseudo-code of the above processing is shown below:
initialize the totally invisible indicators of all patches to ON;
initialize the homogeneous indicator of all fuzzy elements to
    zero;
5  clear all projected patch lists of the fuzzy elements;
   for (each patch of the current surface)
   do
     for (each fuzzy element under the fuzzy region of the patch)
     do
10      if (the homogeneous indicator is zero)
        then
          write the surface ID of the current patch to the surface ID
            field;
          set the homogeneous indicator to one;
15      if (the totally invisible indicator of the current patch is
            not OFF)
          add the patch ID to the projected patch list of the
            fuzzy element;
        endif
20      else if (the homogeneous indicator is one)
        then
          if (the surface ID of the current patch is the same
            as the surface ID stored in the fuzzy element)
          then
25          if (the totally invisible indicator of the current
            patch is not OFF)
            add the patch ID to the projected patch list of
              the fuzzy element;
          endif
30          else
            set homogeneous indicator to two;
            set the totally invisible indicator of the
              current patch and each patch indexed by the
                projected patch list of the fuzzy element to
35              OFF;
          endif
        endif
      endif
    endif
  endif
```

```

        else
            set the totally invisible indicator of the current
                patch to OFF;
        endif
5         done
    done

```

Use of the Visibility and Invisibility Methods for the Radiosity Methods

By the application of the foregoing methods, a list of the totally invisible patches and the totally visible/non-hiding patches can be
 10 obtained for a viewpoint group. The visibility of these patches remains the same for all the subgroups and viewpoints under that group. Therefore these patches need not go through elaborate visibility computations in these subgroups and viewpoints.

For each viewpoint in the group, the totally invisible patches may
 15 be ignored. The totally visible/non-hiding patches need not be compared with other patches to determine their visibility and form-factors. Their form-factors can be computed directly from their orientations, positions and shapes using mathematical formulas describing the radiative transfer between surfaces.

20 If a patch is bright or close to the current group of viewpoints, the direct form-factor computations need to be carried out in higher accuracy. The patch can be subdivided into smaller patches and the form-factor computations are carried out for these sub-patches instead. Alternatively, accurate radiative transfer formulas such as the Nussel
 25 analog technique can be used. This technique finds the fractional area of the patch after it has been projected onto the surface and then the base of a hemisphere whose centre is at the viewpoint.

If accurate form-factor computations are not required, the form-factor of a patch for the current group of viewpoints may be
 30 obtained by assuming that it is constant throughout that patch. The standard form-factor equation can be simplified to:

$$F = \cos A * \cos B * A / (\pi r * r)$$

where A and B respectively are the angles between the view vectors and the normals of the observed patch, and the patch the viewpoint is on, and
 35 r is the distance between the viewpoint and the centre of the observed patch.

The fuzzy projection methods require orderly top-down traversal of viewpoints according to their hierarchy. However, in techniques such as the progressive refinement methods, the receiving patches are usually accessed in decreasing order of their brightness. Therefore, if these
5 techniques are used in conjunction with the fuzzy projection methods, the form-factor computations of some viewpoints in a group may not have been carried out since not all the viewpoints within the group may be processed in one go. Information about which are the totally visible/non-hiding patches and which are the totally invisible patches of
10 the partially completed group has to be stored in memory. The outstanding viewpoints in the group can then use this information when their turn to be processed has arrived. This information can be removed when all the viewpoints in the group have been processed.

In techniques such as the progressive refinement methods (known per
15 se), the form-factors between patches have to be repeatedly computed. Therefore, if memory permits, the information about which patches are totally visible/non-hiding and which patches are not totally invisible may not be removed and can be advantageously used.

In the first round of computations, all the fuzzy projection and
20 normal hemicube computations for every receiving patch are carried out as required. During these computations, the emission patches at each group/viewpoint are classified into three groups: totally visible/non-hiding, totally invisible, and the remainder. This classification information is stored using data structures such as arrays
25 or linked lists.

In subsequent rounds of computations, where the form factors between patches have to be re-evaluated, the fuzzy projection computations are not repeated. The totally visible/non-hiding and the totally invisible patches of each viewpoint can be simply retrieved from
30 the stored information.

The memory for storing the classification of patches for each group of viewpoints can be reduced by several methods. First, since patches found to be totally visible/non-hiding or totally invisible from a group will maintain the same status for all its subgroups, they need not be
35 repeatedly stored.

Secondly, because the union of the three lists of patches is the set of all the patches that need to be classified for each group of

viewpoints, only two lists need to be stored for the group. To further reduce storage, the smallest pair of the three lists can be kept.

Also, because the records of patches are usually orderly organized and accessed, the patch IDs in the lists usually have some order. The
5 differences between the IDs of successive patches in the lists are often much smaller than the magnitude of these IDs. Whenever this occurs, these differences instead of the patch IDs can be stored. A sign bit can be used to distinguish between the ID's and difference values. The list can be sorted by the ID for more efficient use of this arrangement.

10 Finally, the visibility status of patches often do not change much from one group of viewpoints to an adjacent group of viewpoints. Therefore, using the patch lists of a viewpoint group as a starting point, a series of nearby groups can store their patch lists incrementally. Starting from the first group, each adjacent group only
15 needs to store the lists of patches that need to be deleted from, and added to the patch lists of the previous group to form the current lists. Again, a special field can be used to distinguish the use of this arrangement.

ENHANCING THE ACCURACY OF FORM-FACTOR COMPUTATIONS.

20 The fuzzy projection techniques can also be used to achieve optimal accuracy of the form-factor computations. After the filtering off of totally invisible patches by the invisibility technique, the visibility technique detects totally visible and non-hiding patches. As mentioned above, different methods which yield different accuracy in the
25 computations of the form-factors of these patches can be applied.

The remaining patches are not totally invisible. They are also not totally visible/non-hiding. The accuracy of their form-factor computations can be determined by the following steps:

a. First, several levels are defined such that each of them
30 corresponds to a level of accuracy to be reached by the form-factor computations of patches. Each accuracy level determines the strategies of form-factor computations such as the resolution of the hemicube buffer, the level of details of patches, whether to use ray-tracing instead of the hemicube buffer, or the number of rays traced per sampling
35 point.

b. All the patches not found to be totally invisible or totally visible are classified by their accuracy level according to their

brightness, importance, distance from the current group of viewpoints, and other properties. Each patch record has a field which stores its accuracy level. An accuracy level field is also allocated for each fuzzy element in the fuzzy buffer. Each field is initialized to the lowest
5 accuracy level.

c. Patches are accessed in the order such that those having higher accuracy levels are scan-converted first.

For each patch accessed, the same scan-conversion of their fuzzy extents applied in the visibility fuzzy projection computations is
10 carried out. However, instead of the homogeneous indicators, the accuracy level fields in each fuzzy element access is examined. If the value in a field is larger than the accuracy level of the patch, the patch is likely to be hiding or be hidden by a patch at a higher accuracy level. The accuracy level of the patch is set to this value. If the
15 value is smaller than the original accuracy level of the patch, the later is written to the former.

d. After the processing of all patches, the updated accuracy level of each patch shows the maximum level of accuracy its form-factor computations needs to be carried out for the current group of
20 viewpoints. If this level is higher than the accuracy the patch can provide, it may be recursively subdivided and replaced by sub-patches whose accuracy matches the level.

If the actual surface of a patch is curved, the projections of its sub-patches may be outside its projection. Therefore, for the subdivision
25 strategy to be effective, the fuzzy extent of each entity should contain the fuzzy extents of all its sub-entities during all the fuzzy projections. It can be approximated by the fuzzy extent of the axis-aligned bounding box containing all these sub-entities.

e. The accuracy level field of a fuzzy element indicates the
30 accuracy of the computations that needs to be carried out in the corresponding viewing directions from the current group of viewpoints or the corresponding regions on the hemicubes of these viewpoints. The form-factor of a patch can be computed in variable resolutions which match the different accuracy requirements of the fuzzy elements covered
35 by that patch. This can be done in either the ray-tracing or the hemicube approach of form-factor computations.

f. In the ray-tracing approach, the form-factors of patches at a viewpoint is computed by tracing rays in all observable directions. For each of the current group of viewpoints, the number of rays to be fired within a solid angle associated with a fuzzy element depends on the accuracy level of that element. If the level is high, more than one ray should be traced. Conversely, if the accuracy levels of several adjacent fuzzy elements are low, only one ray may be traced for the directions associated with these elements.

g. In the hemicube approach, different regions on the hemicube should have different sampling resolutions which match the accuracy requirements of the fuzzy elements associated with these regions. This can be achieved by the use of a pyramidal representation called the hemicube pyramid. The scan-conversion of patches on the hemicube pyramid is described in Appendix 7.

15 Use of the Visibility and Invisibility Methods for Hidden Surface Computations

In this embodiment a method is provided to apply the computed results of the visibility and invisibility fuzzy projection methods in the hidden surface computations.

20 In shadow computations, in applications where a series of images are to be taken, such as computer animation, flight simulation, or dynamic graphics, the hidden surface removal operations need to be repeated many times. The position of the viewer when an image of the surrounding is taken may be treated as a viewpoint. The viewpoints may also be combined into a hierarchy of viewpoint groups.

If the combined field of view of the current viewpoint group is narrow, the projection boxes and the fuzzy projection box can be flattened so that only a fuzzy projection plane and its associated projection planes are active for the current group of viewpoints.

30 By using the invisibility fuzzy projection method, patches found to be totally invisible to a group of viewpoints, do not need to be considered for the subgroups and the individual viewpoints in the group.

By using the visibility fuzzy projection method no depth computations and comparisons of totally visible patches during the scan-conversion is necessary.

35 Use of the Visibility and Invisibility Methods for the Ray Tracing Computations

In this embodiment a method is provided to apply the computed results of the visibility and invisibility fuzzy projection techniques in the ray tracing techniques.

In a ray tracing application, the objects and surfaces in the environment are often organized as a hierarchical geometric model. If the number of rays traced from a node of the geometric model justifies the use of the fuzzy buffer methods, a viewpoint group is created by treating every point on the surfaces of that node where a ray might emit as a viewer. The position of the viewer at any instance of time is a viewpoint. The viewpoints can be grouped into a hierarchy of viewpoint groups.

From the fuzzy buffer computations, patches which are totally visible/non-hiding to a group of viewpoints corresponding to each node and patches which are totally invisible to this group of viewpoints.

When a ray is traced from a node, all the totally invisible patches need not be considered. Also, the ray is tested first with the totally visible/non-hiding patches. If the ray hits one of those patches, no further testing with other patches need to be carried out as the patch being hit is the closest one on the path of the ray.

If both the radiosity method and the ray tracing techniques are used, the results of the fuzzy buffer computations can be used for both methods.

USE OF THE VISIBILITY AND INVISIBILITY FUZZY PROJECTION TECHNIQUES IN COMPUTER VISION.

The visibility and invisibility fuzzy projection techniques can be used in computer vision. The occlusion analysis of objects is a vital operation in computer vision. Based on this analysis, hypotheses are made to construct a 3D model. This model is then matched with the vision data or existing models. It may be repeatedly matched and refined until it is acceptable. Usually there are a lot of uncertainty and vagueness in the vision data and the hypothesis. Such imprecision can be accommodated by the present techniques in the following ways:

1. During the model construction phases, a viewpoint bounding box can be defined which include all the likely positions of the viewpoint.
2. During the model construction phase, a 3D model is generated based on the vision data. However, if the exact locations and shapes of entities such as edges and patches are uncertain, the entities may be

approximated by the bounding boxes which contain all their likely locations.

3. Based on the hypothesized model, the invisibility and visibility techniques are carried out to compute totally visible surfaces, totally invisible surfaces and surfaces whose visibility cannot be determined.

4. The totally visible surfaces correspond to the vision data whose information is relatively explicated. Such data may be treated as successfully interpreted or more cursorily checked. Areas on the fuzzy projection box which are projected onto by surfaces whose visibility cannot be determined correspond to the vision data which are more obscured. The areas on the image plane corresponding to these areas are further analysed.

5. In the next round of analysis, the hypothesis becomes more refined. The viewpoint bounding box and bounding boxes of entities may be accordingly shrunked.

The preferred embodiment has been implemented on a general purpose computer adapted via programming in the C-language and tested using a set of models which differ in depth complexity. Three of the models are shown in Figs. 13A, 13B and 13C. The visible surface computations have been computed for five nearby viewpoints. The times of hidden surface computations under different pixel and patch resolutions have been measured and are shown below.

Example 1.

Coarse patches, coarse screen pixels (400 X 400 pixels), resolution of fuzzy buffer : 400 X 400 pixels

30 Model	Normal Hidden Surface Removal		Fuzzy Hidden Surface Removal		
	CPU time for 5 viewpoints (sec)	Total Patches	CPU time for fuzzy computations(sec)	CPU time for 5 view-points(sec)	Patches invisible to all viewpoints
1 room	11.2	10807	1.2	11.1	157
2 room	21.8	19137	2.1	17.3	3942
35 3 room	35.7	27467	2.9	23.9	9041
4 room	46.3	35797	3.6	25.6	16140

Example 2.

Coarse patches, fine screen pixels (1000 X 1000 pixels), resolution of fuzzy buffer : 400 X 400 pixels

5		Normal Hidden Surface Removal		Fuzzy Hidden Surface Removal		
		Model	CPU time for 5 viewpoints (sec)	Total Patches	CPU time for fuzzy computations(sec)	CPU time for 5 viewpoints(sec)
10	1 room	20.7	10807	1.2	20.7	157
	2 room	40.8	19137	2.1	32.4	3942
	3 room	56.4	27467	2.9	37.8	9041
	4 room	72.9	35797	3.6	40.0	16140

Example 3.

15 Fine patches, coarse screen pixels (400 X 400 pixels), resolution of fuzzy buffer : 400 X 400 pixels

20		Normal Hidden Surface Removal		Fuzzy Hidden Surface Removal		
		Model	CPU time for 5 viewpoints (sec)	Total Patches	CPU time for fuzzy computations(sec)	CPU time for 5 viewpoints(sec)
25	1 room	25.0	21263	2.0	24.1	1605
	2 room	41.1	38293	2.5	25.0	15301
	3 room	60.6	55323	3.4	29.1	28712
	4 room	80.7	72353	4.6	33.8	42103

Example 4.

Fine patches, fine screen pixels (1000 X 1000 pixels), resolution of fuzzy buffer : 400 X 400 pixels

		Normal Hidden Surface Removal		Fuzzy Hidden Surface Removal		
5	Model	CPU time for 5 viewpoints (sec)	Total Patches	CPU time for fuzzy computations(sec)	CPU time for 5 view-points(sec)	Patches invisible to all viewpoints
	1 room	42.0	21263	2.0	40.5	1605
	2 room	75.9	38293	2.5	45.4	15301
	3 room	111.3	55323	3.4	53.8	28712
10	4 room	148.3	72353	4.6	61.9	42103

The above results indicate that the overhead of the preferred embodiment is low. It also indicates that substantial computation savings can be achieved when the depth complexity of the models is high.

There are a number of advantages to be gained by applying the
 15 strategies in the disclosed embodiments. Firstly, they do not have the restrictions encountered by the earlier hidden surface algorithms. For example, they do not preclude the presence of intersecting surfaces or patches in the environment. In addition, surface patches can be curved and the scene need not be static. The method also has very little
 20 computational overhead. Because it operates on a z-buffer, it can be easily implemented in hardware.

The preferred embodiment can be further enhanced using heuristics. In applications such as the interactive walkthrough of the interior of a building, the surfaces most likely to form large crisp (non-fuzzy, umbra)
 25 regions are those representing walls, floors and ceilings. Therefore, only the crisp regions of these surfaces need to be scan-converted to the fuzzy buffer.

In addition to reducing hidden surface removal computations, the preferred method can also be used in the radiosity method. Currently the
 30 radiosity method is very slow, mainly because it needs to compute the visibility of surfaces for a large number of surface points to determine the form-factors. However, by grouping these points and treating them as groups of viewpoints, the preferred embodiment can be used to determine surfaces totally visible to a group of these points. The fuzzy
 35 computations for each viewpoint bounding box is apportioned among all viewpoints in the box. Because there would be viewpoint for every

surface point, the density of viewpoints in each viewpoint bounding box could be very high. Therefore, the advantage of using the method in the radiosity method can be more than in the normal hidden surface removal.

The methods disclosed can also be used in virtual reality
5 applications and other applications where abstract data is utilized. In the future such an application would need to display complex and dynamic environments in real time using the radiosity method. With the addition of a time dimension, the density of viewpoints in each viewpoint bounding box could be an order of magnitude higher than that of the radiosity
10 method. Consequently, the methods disclosed could substantially speed up these applications. Other applications include the manipulation of physical data such as the generation, processing and display of scientific data such as energy spectra data.

The foregoing describes only a number of embodiments of the present
15 invention and modifications, obvious to those skilled in the art, can be made thereto without departing from the scope of the present invention.

APPENDIX 1

The Detection of Patches Front-Facing to a Viewpoint Bounding Box

Referring to Fig. 2, whether a patch PT is facing a viewpoint VP can be determined by the angle A between the normal N of the patch PT and the view vector VV. The latter is the vector from the viewpoint VP to the centre of the patch PT. The cosine of the angle is:

$$\begin{aligned} \cos A &= N \cdot (PO - VP) * k \\ &= k (N_x (x' - x) + N_y (y' - y) + N_z (z' - z)) \\ &= k (N_x x' + N_y y' + N_z z' - N_x x - N_y y - N_z z) \end{aligned}$$

10 where VP = (x, y, z) is the position of the viewpoint, N = (Nx, Ny, Nz) is the unit normal of the patch, and PO = (x', y', z') is the position of the patch centre. k is a positive coefficient which turns the view vector (VV = PO-VP) into a unit vector.

15 If the patch PT is facing the viewpoint bounding box BB, the angle A must be obtuse. Hence cosine A must be negative for every possible viewpoint VP in the box. To check this, the maximum value of the cosine of A is found. If it is positive, then the patch would be back-facing to certain viewpoints in the bounding box.

20 Since PO and N are constant vectors, the maximization of cosine A requires each of Nx x, Ny y and Nz z to be minimized. Depending on the signs of the components of N, either the maxima or the minima of x, y and z are used. These coordinates correspond to the locations of the corners of the current viewpoint bounding box.

25 If a patch moves or rotates over time and the viewpoint bounding box contains viewpoints at different times, then the smallest cosine A at each instance of time may be computed and the smallest of them chosen.

Patches with bounding volumes inside or intersecting the viewpoint bounding box are always treated as not front-facing. These patches can be detected by an initial bounding volume check.

30 Fig. 11A shows a cut-plane view of a surface region SU_R front-facing a set of viewpoints VP_7, VP_8, VP_9 and Fig. 11B shows the same surface region front-facing to a viewpoint bounding box BB_R .

Since the front-facing-patches PT_F are facing all possible viewpoints in the box BB_R , the region SU_R never curves back and is always facing these viewpoints. The view projections of the border of the region SU_R therefore always enclose its projection. This property can be used in
5 subsequent fuzzy projection computations.

Figs. 12A-12C show cut-plane views of projections of surface regions front facing to a group of viewpoints and their respective bounding boxes.

In Fig. 12A if all patches PT_A in a surface region are front
10 facing, the projections BP_A of the boundary edges of the region always surround the projection PE_A of that region.

In Fig. 12B if some surface patches PT_B in a surface region are
not front facing, the region may curve back. The projections BP_B of
the boundary edges of the region may be inside the projection PE_B of
15 that region.

In Fig. 12C the projection BP_C of the boundary of each
front-facing region of a convoluting surface still encloses the
projection PE_C of the region.

APPENDIX 2

The Computation of the Fuzzy Extent of Boundary Edges and Patches

As shown in Fig. 2, the projection coordinates PR (X,Y) of a point PO (x',y',z') to a viewpoint VP (x,y,z) on the projection plane PP facing the positive z direction is

$$X = (x' - x) * d / (z' - z) \quad (1)$$

$$Y = (y' - y) * d / (z' - z) \quad (2)$$

where d is the shortest distance from the viewpoint to the projection plane facing the z direction.

To maximize X and Y, the minimum values of x and y are used. If X and Y are to be minimize, the maxima of x and y are used. Since z is part of the divisors, whether to use its maximum or minimum value depends on the signs of (x' - x) and (y' - y) after choosing the extreme values of x and y. Since the edges of the viewpoint bounding box are parallel to the axes, viewpoints having these extreme x, y and z values are at the corners of the box.

According to equations (1) and (2), the points which have the extreme values in x', y' and z' would yield the maximum and minimum projections. However, these points might not be on the current projecting entity, which can be a boundary edge or a patch.

To overcome the problem, the bounding volume of the entity is used to approximate that entity. Its projections can be used as an estimation as they enclose the projections of that entity.

Sometimes an entity may be subdivided into sub-entities. Its position and shape may also be non-static over time or uncertain. Hence the bounding volume of an entity should be a volume that encloses all the space it is likely to occupied, and all the bounding volumes of its sub-entities that are likely to be considered.

Hence the bounding volume of an entity should enclose all its sub-entities that are likely to be considered in the computations.

Following the derivations above, the maxima of x' and y' and the minima of x and y are used to maximize the projections. Whether to

maximize or minimize $(z' - z)$ depends on the signs of $(x' - x)$ and $(y' - y)$. If these terms are positive, the term should be minimized. Hence the smallest z' and the largest z are used. Otherwise, the largest z' and the smallest z are instead chosen.

5 The finding of the minimum projections is the opposite of maximization. Hence the decisions to minimize or to maximize the individual terms are accordingly changed.

 Having obtained the projections which give the maximum and minimum X and Y values, these projections are mapped to the fuzzy projection
10 plane FP whose normal is toward the z direction.

 A rectangle on the plane with these projections as corners and with edges parallel to the edges of the corresponding fuzzy projection face FF can be defined. They are either rounded up or down to create another region which contains the original rectangle and all the pixels under
15 it. This is the fuzzy extent EF of the patch on the fuzzy projection plane FP.

 By rotating the axes, the same equations (1) and (2) can be used for projection planes facing other directions if the terms in equations (1) and (2) are accordingly permuted. The fuzzy extents corresponding to
20 these planes can then be similarly obtained.

 If a patch is within the viewpoint bounding box, then for some viewpoints z' is smaller than or equal to z in equations (1) and (2). The fuzzy extents would then extend to infinity in the directions which can be determine by the signs of the denominators and numerators in these
25 equations.

APPENDIX 3

The Computation of the Non-Fuzzy Regions

To compute the non-fuzzy region, it is first necessary to obtain its relationship with the fuzzy boundary region and one of the projection regions.

Consider two viewpoints in the current viewpoint bounding box and a point on a fuzzy projection plane. Assume that the projection of the front-facing sub-surface at one viewpoint maps on that point and at the other viewpoint does not map on that point.

Because the change of projection status can only occur at the projections of boundary edges, on a curve joining the two points there must exist another viewpoint such that the projection of a boundary edge from it would map on the same point on the fuzzy projection plane. Since this curve can be totally inside the current viewpoint bounding box, that point must be within the fuzzy region of the boundary edges for that bounding box.

If a point on a fuzzy projection plane is within the mapping of a projection region of the front-facing sub-surface, and if it is outside the fuzzy region of the boundary edge, then the point is always within the projection regions of the sub-surface for all the viewpoints in the current viewpoint bounding box. The point is by definition inside the non-fuzzy region. Since the fuzzy boundary region is always within the area containing the fuzzy extents of boundary edges, the point is still inside the non-fuzzy region if the former is approximated by the latter.

Based on the above, the approximated non-fuzzy region can be obtained by finding the projection region of the front-facing sub-surface from a viewpoint in the current viewpoint bounding box, projecting it to the fuzzy region, and subtracting all its area intersected with the fuzzy extents of the boundary edges. A modified scan line algorithm may be used for this task.

First, an arbitrary viewpoint in the current viewpoint bounding box is selected. Usually the centre of the bounding box is chosen. This viewpoint is called the chosen viewpoint. The projection coordinates of the edges in the front-facing sub-surface from this viewpoint are found.

Since the projection coordinate system and the fuzzy projection coordinate system have one-to-one mapping, the mapping of the former to the latter is trivial.

This is followed by the computations of the fuzzy extents of the patches described in Appendix 2.

An illustration of such an arrangement is shown in Fig. 8A where two patches A and B intersect a scan line SL and have respective fuzzy extents EF_A and EF_B of their boundary edges.

Two active edge lists are maintained during the processing of scan lines. The first list contains the active edges of the patches. The second list contains the pairs of active vertical edges of the fuzzy extents of boundary edges.

In Fig. 8A, the first active edge list is:

A1 A2 B1 B2

the second active edge list is:

E1 E2 E3 E4

During the processing of successive scan lines, entries in the list are added when they become active in the current scan line. They are deleted from the list when the last scan lines they are active have been processed.

A scan line array with as many elements as the number of horizontal elements in the current fuzzy array is maintained. Each element of the array contains a depth field and a boolean field called the overlap indicator. The depth field is used to store the depth of the patch whose fuzzy extent surrounds the fuzzy element. The overlap indicator indicates whether the element is under the non-fuzzy region. The depth fields are initialized to negative infinity. The overlap indicators are set to zero.

The pairs of edges in the first active edge list are then processed. The span of each pair of these edges represents the segment of a patch in the current scan line. The overlap indicators of the elements within the span are set to one. The value stored in the depth field of each of these elements is compared with the depth of the patch with respect to the chosen viewpoint. It may be approximated by the maximum depth from the viewpoint to the patch or the patch bounding box. If the former is smaller, it is replaced by the latter.

The computation of the segments of patches requires the finding of the intersections between the current scan line and the active edges. This computation can be avoided by using the leftmost or rightmost position of each edge depending on whether it is at the left or right side of the span. This inaccuracy is allowed because it is always offset by the fuzzy extents of the boundary edges.

The pairs of active edges in the second active edge list are then accessed. The span of each pair represents the segment of the fuzzy extent of a boundary edge in the current scan line. All the overlap indicators of the elements within the span are reset to zero.

After all the records in the active edge lists have been processed, the elements in the scan line array where the overlap indicators are one are within the segment of the non-fuzzy region in the current scan line. The depth fields contain the maximum possible depth of the region in the viewing directions represented by these elements.

The depth stored in each element of the array is compared with the depth field of the corresponding element in the fuzzy buffer. If the latter is larger, it is replaced by the former.

Returning to the Figs., Fig. 8B shows the scan line array after scan-conversion of the active edges of patch A. Fig. 8C shows the scan-conversion of the active edges of patch B. Fig. 8D shows the scan line array after the elements within the fuzzy extents EF_A and EF_B of the boundary edge have been reset.

APPENDIX 4

The Scan-Conversion of the Fuzzy Regions

To obtain the fuzzy regions, a modified scan line algorithm to that of Appendix 3 is used.

5 An active edge list is maintained during the processing of scan lines. The list contains pairs of vertical edges of the fuzzy extents of patches active in the current scan line. During the processing of successive scan lines, entries in the list are added when they become active in the current scan line. An entry is deleted from the list when
10 the last scan line it is active has been processed.

For the arrangement of Fig. 9A (similar to Fig. 8A, but for fuzzy regions), the active edge list is:

E1 E2 E3 E4.

A scan line array with as many elements as the number of horizontal
15 elements in the current fuzzy array is maintained. Each element of the array is a boolean field called the overlap indicator which indicates whether the element is under the fuzzy region.

For each scan line, the entries in the active edge list are accessed. The span between each pair represents the segment of the fuzzy
20 extent of a patch in the current scan line. All the overlap indicators of the elements within the span are set to one.

After the processing of the entries in the active edge list. The array elements whose overlap indicators are one now contain the segment of the fuzzy region in the current scan line.

25 Fig. 9B shows the state of the scan line array after the elements within the fuzzy extent EF_A of patch A have been updated.

Fig. 9C shows the state of the scan line array after the elements within the fuzzy extent EF_B of patch B have been updated.

APPENDIX 5

Using a Cache to Speed up the Access and Writing of
Fuzzy Elements Within the Fuzzy Extent of a Patch.

The fuzzy buffer methods described herein require the reading and
5 writing of the fuzzy elements within the fuzzy extent of each patch.
Since there are usually substantial overlaps between the fuzzy extents of
adjacent patches, the access and update of these elements can be reduced
by storing their information in high speed cache.

The cache may be in many forms. One example, shown in Fig. 10, is
10 to use a cache buffer CB and two cross-reference tables CR_1 and CR_2 .
The cache buffer CB is a 2D array, in which each element contains fields
which are the mirror of the fields on a fuzzy buffer element that need to
be read or written. The cross-reference tables CR_1 and CR_2
respectively contain as many elements as the number of rows and columns
15 in the 2D array. Depending on the array it is in, each element in the
table contains either a row (CR_1) or a column (CR_2) field which is
used to cross-reference the rows and columns of the 2D array with the
rows and columns of the current fuzzy array FA. For each element in the
cache, the cross-reference tables CR_1 and CR_2 contain a reset switch
20 to indicate whether it has been reset.

Initially, all the reset switches are initialized to one. The
centre of the cache buffer CB is mapped to the centre of the fuzzy extent
of the first patch to be read. After the fuzzy elements within the fuzzy
extent of the first patch are read, information in these elements are
25 stored in the cache buffer CB elements according to the mapping. The
mappings of rows and columns in the cache are updated into the cross
reference table CR_1 and CR_2 , respectively. The reset switch in the
updated elements in these table and the cache buffer CB are set to zero.

Before reading the fuzzy elements within the fuzzy extent of the
30 second patch, data in the cache buffer CB is first read. If an element
has already been stored in the cache buffer CB, no access to the cache
buffer CB to obtain its information is necessary.

To maximize the efficiency of the cache, any adjacent patch is
accessed first. After the processing of a series of patches, there may be

a patch whose mapping covers the boundary of the cache. The affected rows or columns are wrapped around. The rows at the opposite edges become the next rows or columns for the patch.

5 Before the writing of the patch data into the cache buffer CB, each element in the cross-reference table CR_1 and CR_2 within the rows of the columns of the current patch mapping are checked. If the reset switch is on or if the mapping value conforms to the current mapping, the whole row or column of cache elements have not been used and there is no problem in using them. Otherwise, the row or the column needs to be
10 reclaimed. The original data in the whole row or column of cache elements are written back to the fuzzy buffer and then initialized. The affected element in the cross-reference table is updated with the new mapping. After that, the patch data can then be written into these newly-reclaimed cache elements.

15 The writing from the cache buffer CB to the fuzzy buffer can be performed in burst mode. Hence when such task occurs, several adjacent rows or columns of the cache elements may be written to the fuzzy buffer and re-initialized even though some of the elements may not need to be re-claimed.

APPENDIX 6Direct Computation of the Fuzzy Region of an Edge.

Assume that the equation of the edge is expressed as:

$$x = az + b \quad (1)$$

$$5 \quad y = cz + d \quad (2)$$

2. Assume that all the coordinates of a viewpoint P in the current viewpoint bounding box is (x_0, y_0, z_0) .

3. The image projection of a point T (x, y, z) on the edge with respect to P is

$$10 \quad X = D \frac{x - x_0}{z - z_0} \quad (3)$$

$$15 \quad Y = D \frac{y - y_0}{z - z_0} \quad (4)$$

4. Since (x, y, z) and (x_0, y_0, z_0) are uncertain, the region comprising all possible values of (X, Y) forms an area which is the fuzzy region of the edge.

5. By substituting (2) into (4) and rearranging,

$$20 \quad z = \frac{Dd - Dy_0 + Yz_0}{Y - Dc} \quad (5)$$

If Y is known, the extrema of z can be found by substituting the appropriate extrema of y_0 and z_0 into the above equation. All points on the edge having z within these extrema could project at Y from viewpoints in the current viewpoint bounding box.

6. substituting (1) into (3),

$$30 \quad X = D \frac{az + b - x_0}{z - z_0} \quad (6)$$

Notice that in (6) there is no local extremum of X for changing z. Hence by assigning the extrema of z found from section 5 and the appropriate extreme values of x0 and z0 into (6), the two extrema of X can be found. These values correspond to the maximum and minimum possible X for a particular value of Y.

7. A scan line approach can be used to approximate the fuzzy region of the edge. Substituting (2) into (4) and rearranging,

$$Y = D \frac{c z + d - y_0}{z - z_0} \quad (7)$$

By assigning the appropriate extreme values of z, y0 and z0 into (7), the maximum and minimum values of Y are obtained. These values are rounded up and down respectively to cover all scan lines the edge may project onto. Each of these scan lines corresponds to a value of Y. From section 5 and 6, the maximum and minimum of X can be found. The area within these values is the scan line segment of the fuzzy region of the edge. The corresponding segment of the expanded fuzzy region of that edge is the further rounding of the segment to fully cover all the grid cells it projects cover.

The above technique computes the expanded fuzzy regions by scan-converting the segments of the regions on the X scan lines. For edges more horizontal than vertical, the expanded fuzzy regions may be more accurately computed by scan-converting the segments of the regions on the Y scan lines.

This is shown in Fig. 14 where the fuzzy region takes on a scan-line shape about the fuzzy region of the edge. This is substantially smaller than the fuzzy extent of the edge.

APPENDIX 7SCAN-CONVERSION OF PATCHES ON THE HEMICUBE PYRAMID

This appendix describes an efficient technique for scan-converting a patch on a plane which contains cells with different resolutions. It
5 can be used to compute the form-factor of patches in the radiosity method with or without the use of the fuzzy projection techniques.

The technique uses a data structure called the hemicube pyramid. Each level of the pyramid contains a set of 2D arrays. Each array
10 corresponds to a level and a projection face. Each element of the array corresponds to a pixel on the plane. Note that the hemicube may be a prism rather than a cube and not all its planes need to be active.

An element in the array is called a pyramid element. In addition to the information needed in an original hemicube element, it contains an
15 sub-division indicator and a pointer. The sub-division indicator is initially set to OFF. The indicator becomes active if its level is less than the required accuracy level of patches projected onto it.

The pointer is used to link a pyramid element with one of the pyramid elements at the higher accuracy level and within its region. To
20 enable more accurate sampling, the elements to be linked are usually chosen such that an element accessed by the pointers from an element at the lower accuracy level is as close to the centre of the latter as possible.

The organization of the hemicube pyramid corresponding to a face of the hemicube is shown in Fig. 15.

25 After the initialization of the hemicube pyramid, patches are accessed in decreasing order of accuracy and scan-converted to the hemicube pyramid. This order of access ensures that patches are scan-converted in resolutions equal to or finer than their own optimal projection resolutions and the optimal projection resolutions of patches
30 they might occlude.

For each projecting patch, the hemicube projection resolution corresponding to its accuracy level is found. Each hemicube pyramid element belonging to that resolution and under the projection of that patch is accessed.

If the accessed element is already at the most accurate level, or if its sub-division indicator is not on, the ID of the current patch is written into the current element if that patch is closer than the so-far closest patch stored in the element, as in the normal hemicube scan-conversion. If this update occurs, all the ancestors of the current element until the element whose sub-division indicator has already been set to on are accessed. The sub-division indicator of each accessed element is set to on.

Note that the recursive access of ancestor elements can instead be carried out for all elements under the patch projection immediately after they have been found. However, if the possibility that patches are invisible is high, carrying out the recursion after determining that the patch is closer is more efficient as it does not need to be applied on elements if that patch is hidden.

If the sub-division indicator of the current element is ON, patches requiring more accurate form-factor evaluation have been projected onto the element. Therefore, each of its daughter elements under the projection of the current patch is accessed and the above computations are repeated.

After the scan-conversion of all projecting patches, the elements in all the levels are scanned. From the projection information stored in these elements, the form factors of the patches are computed.

If highly accurate form-factor computations and hence very high hemi-cube resolutions are required, relatively large amounts of memory are needed to store the hemi-cube arrays. The initialization and scanning of these arrays for form-factor accumulation is also costly.

Since patches requiring very fine projections are relatively few, the above problem can be overcome by using sparse matrices to store active (sub-divided) elements corresponding to high resolution levels. Each matrix is a one-dimensional array. Active elements are stored in it at positions determined by a hashing function parameterized by pixel positions.

High accuracy form-factor computations can also be achieved using ray-tracing in conjunction with hemicube computations. All the patches are still scan-converted to the hemicube pyramid or the normal hemicube. However, the scan-conversion of patches requiring high accuracy in

form-factor computations is only used to determine how other patches are blocked by them. Instead, their form-factors are determined by tracing rays from them.

5 The content of the hemicube pyramid can be used to speed up the ray-tracing. During the scan-conversion of a patch that is also ray-traced, patches stored in the buffer that are closer to it are determined. When ray-tracing it, these patches may be tested with the rays first as they are more likely to block these rays.

APPENDIX 8REFERENCES

1. Aggarwal J. K., "Dynamic Scene Analysis," in "Image Sequence Processing and Dynamic Scene Analysis," Huang, T. S. (Eds,) 1981, Springer-Verlag, pp. 40-73.
5
2. Appel A. "The Notion of Quantitative Invisibility and the Machine Rendering of Solids", Proc. of the ACM National Conference, 1967, Thompson Books , Washington DC, pp.387-393.
3. Baum, D. R., Rushmeier H. E., Winget J. M., "Improving Radiosity Solutions through the use of Analytically Determined Form-factors", 10 Computer Graphics, Vol 23 Number 3, 1989, pp. 325- 334.
4. Bradler, N., Tsotsos, J. K., (Eds) "Motion: Representation and Perception," North-Holland, 1986.
5. Catmull, E. "A Subdivision Algorithm for Computer Display of Curved Surfaces", PhD Thesis, Report UTEC-CSc-74, University of Utah, 1975.
15
6. Chang, S. S. L., Zadeh, L. A., "On Fuzzy Mapping and Control," IEEE Transactions on Systems, Man, and Cybernatics, Vol.SMC-2, No. 1, January 1972, pp. 30-34.
7. Cohen, M. F., D.P. Greenberg, "The Hemi-Cube: A Radiosity Solution for Complex Environment," SIGGRAPH 85, pg. 31-40.
20
8. Cohen, M.F., Chen, S.E., Wallace, J.R., Greenberg, D.P., "A Progressive Refinement Approach to Fast Radiosity Image Generation," SIGGRAPH 88, pg. 75-84.
9. Crocker, G. A., "Invisibility Coherence for Faster Scan-Line Hidden Surface Algorithms," SIGGRAPH'84, pp. 315-321.
25
10. Fournier, A., Fussell, D., "On the power of the Frame Buffer," ACM Transactions of Graphics, April 1988, pp. 103-128.
11. Fuch, H., Kedem, Z., Naylor, B. F., "On Visible Surface Generation by A Priority Tree Structures," SIGGRAPH'80, pp. 124-133.
- 30 12. Gordon, D., "Front-to-Back Display of BSP Trees," IEEE CG&A, September 1991, pp. 79-85.
13. Haines, E. A., Wallace, J. R., "Shaft Culling for Efficient Ray-Traced Radiosity," unpublished paper, July 1991.
14. Hornung, C. "A Method for Solving the Visibility Problem", IEEE
35 Computer Graphics and Applications, July 1984, pp.26-33

SUBSTITUTE SHEET

15. Hubschman, H., Zucker, S.W., "Frame-to-Frame Coherence and the Hidden Surface Computation: Constraints for a Convex World," SIGGRAPH 81, 45-54.
16. Immel, D. S., Cohen, M. F., "A Radiosity Method for Non-Diffuse
5 Environments," Computer Graphics, Vol. 4, 1986, pp. 133-142.
17. Jain, R., Haynes S., "Imprecision in Computer Vision," in "Advances in Fuzzy Sets, Possibility and Applications," Wang, P. (Ed), Plenum Press, 1983, pp. 217-236.
18. Kanatani, K., "Group-Theoretical Methods in Image Understanding,"
10 Springer Verlag, 1990.
19. Kaufmann, A., "Theory of Fuzzy Subsets, Vol. 1, Fundamental Theoretical Elements", Academic Press, 1975.
20. Ligomenides, P. A., "Modeling Uncertainty in Human Perception," in "Uncertainty in Knowledge-Based Systems," Bouchon, B., Yager, R.
15 (Eds), Springer Verlag, 1986, pp. 337-346.
21. Lim, H. L., "Fast Hidden Surface Removal Through Structural Analysis and Representation of Objects and Their Contours," CGI'87, Japan, 1987, pp. 75-88.
22. Marks, J., Walsh, R., Christensen, J., Friedell, M., "Image and
20 Intervisibility Coherence in Rendering", Proceedings of Graphics Interface'90, Toronto, Ontario, May 1990, pp. 17-30.
23. Recker, R. J., George D. W., Greenberg D. P., "Acceleration Techniques for Progressive Refinement Radiosity," Proceedings, 1990
25 Symposium on Interactive 3D Graphics, Snowbird, Utah, Computer Graphics, pg. 59-66.
24. Ruspini, E. H., "A New Approach to Clustering," Information Control, Vol. 15, pp. 22-32.
25. Siedlecki, W., Siedlecka, K., Sklansky, J., "Mapping Techniques for Exploratory Pattern Analysis," in "Pattern Recognition and
30 Artificial Intelligence," Gelsema, E. S., Kanal L. N., (Eds), Elsevier Science, 1988, pp. 277-299.
26. Sillion, F., Puech, C., "A General Two-Pass Method Integrating Specular and Diffuse Reflection," SIGGRAPH 1989, pg. 335-344.
27. Subbarao, M., "Interpretation of Visual Motion: A Computational
35 Study," Pitman, London, 1988.

28. Sutherland, I.E., Sproull, R.F., Schumacker, R.A., "A Characterization of Ten Hidden Surface Algorithms", Computing Surveys, Vol. 6, No. 1, 1974, pp.1-55
29. Teller, S. J., "Visibility Preprocessing for Interactive Walkthrough," Computer Graphics, Vol. 25, No. 4, July 1991.
- 5 30. Wallace, J. R., Elmquist, K. A., Haines, E. A., "A Ray Tracing Algorithm for Progressive Radiosity", Computer Graphics, Volume 23, Number 3, July 1989, pp. 315-324.
31. Yee, L., "Spatial Analysis and Planning under Imprecision",
10 North-Holland, 1988.
32. Zadeh, L. A., "Fuzzy Sets", Information and Control. Vol. 8, 1965, pp. 338-353.

CLAIMS:

1. A method of reducing the complexity of visibility calculations required for the production of multi-dimensional computer generated images or the reduction of multi-dimensional data to multi-dimensional data having at least one less dimension, said method comprising the steps of:

(1) prior to an occlusion or invisibility relationship computation (known per se) being carried out on a plurality of surfaces from selected viewpoints to be calculated, said viewpoints are divided into groups;

(2) for selected ones of said surfaces, determining for each said group whether each said selected surface is

(a) an always unoccluded surface, an always hidden surface, or a remaining surface; or

(b) an always unoccluded surface, or a remaining surface; or

(c) an always hidden surface, or a remaining surface;

wherein said remaining surface is a surface which is unable to be determined with certainty as to whether it is either unoccluded or hidden;

(3) exempting from said occlusion or invisibility relationship computation those surfaces which are either always unoccluded or always hidden;

(4) maintaining a record of said remaining surfaces; and

(5) carrying out occlusion or invisibility relationship computations on said remaining surfaces.

2. A method as claimed in claim 1, wherein step (4) comprises updating a previous record.

3. A method as claimed in claim 1, wherein step (4) comprises creating a new record.

4. A method as claimed in claim 1, wherein said images are selected from the group consisting of graphic images, computer vision data, abstract data and physical data.

5. A method as claimed in claim 1, wherein the reduction in complexity involves a reduction in the number and/or duration of visibility calculations.

6. A method as claimed in claim 1, wherein the visibility calculations form part of a series of radiosity calculations.
7. A method as claimed in claim 6, wherein step (3) involves the direct computation of said unoccluded surfaces.
8. A method as claimed in claim 1, wherein one or more of said surfaces are sub-sets of a primary surface.
9. A method as claimed in claim 1, further including the steps of:
 - (6) determining for each boundary of selected ones of said surfaces, the extent to which that boundary defines a boundary area which represents the viewing direction with which the edge of the boundary could be seen;
 - (7) determining the combined projection of said selected ones of said surfaces and determining the combined projection of the boundary edges of said each selected surface;
 - (8) subtracting from the combined surface projection the combined boundary edge projection to form an umbra region of said each selected surface; and
 - (9) carrying out said occlusion or invisibility relationship computations on said umbra regions and said combined projection of said each selected surface.
10. A method as claimed in claim 9, wherein the extent of the boundary area is coincident with a scan-line representation of any of said selected surfaces.
11. A method as claimed in claim 9 or 10, wherein the combined surface projection is replaced by a projection area of the corresponding surface as seen from a viewpoint in said group.
12. A method as claimed in claim 11, wherein said calculations are further simplified by detecting, and not carrying out an occlusion or invisibility relationship computation for, surface areas which are totally hidden as a consequence of their depth from the current group of

viewpoints and the presence of nearby surface areas of lesser depth when viewed from the current group of viewpoints, said detecting of said totally hidden surface areas comprising the steps of:

(10) for each range of viewing directions related to said group of viewpoints allocating a depth plane to the projection surface of the corresponding surfaces in that viewing direction, each element of the projection surface having a plurality of depth values associated with the viewpoints in the group viewing the corresponding surface area;

(11) for each surface area selecting the depth value for each element and storing same to define the depth values of the projection surface, thus representing the depth value of the umbra region;

(12) similarly determining the depth value of the combined surface projection; and

(13) comparing the depth value of the umbra region with that of the combined surface projection, and if the former is smaller, then deeming that surface forming the combined surface projection is totally hidden.

13. A method as claimed in claim 12 wherein step (11) selects the smallest of the approximate largest depth values of surfaces projected on each element.

14. A method as claimed in claim 12 wherein step (12) selects the smallest possible depth value of each element.

15. A method as claimed in claim 1, wherein said calculations are further simplified by detecting, and not carrying out an occlusion or invisibility relationship computation for, surface areas which are totally unoccluded, said detecting of said totally unoccluded areas comprising the steps of:

(14) prior to step (5), creating and storing a combined projection for each of selected ones of said surfaces or surface elements and for each element of each stored combined projection, indicating whether the element is either;

(a) not within the combined projection of any of said selected surfaces;

- (b) within the combined projection of a single one of said selected surfaces; or
- (c) within the combined projection of more than one of said selected surfaces; and

(15) scanning the combined projection of each said selected surface and where, in all elements for one projection are indicated by step (14(b)), deeming the surface so projected is totally unoccluded.

16. A method as claimed in claim 1, wherein said surfaces are arranged in a hierarchy represented by varying levels of details.

17. A method of reducing the visibility related computations in an environment consisting of three-dimensional abstract or physical surfaces, said method comprising the steps of:

(1) prior to a visibility computation (known per se) being carried out, some or all viewpoints or possible occurrences of viewpoints are classified into groups of viewpoints;

(2) defining one or more projection surfaces (known per se) for the purpose of generating simultaneous projections of surfaces or surface elements with respect to a group of viewpoints;

(3) for selected surfaces, and for each group of viewpoints, determining whether those surfaces or their surface elements are always invisible to said group by computing and comparing their projection mappings or simultaneous projections on said projection surfaces;

(4) ignoring or treating specially some or all surfaces or surface elements which are always invisible to said group of viewpoints during the actual visibility or visibility related computations for some or all viewpoints in said group.

18. A method of reducing the visibility, radiosity or visibility related computations in an environment consisting of three-dimensional abstract or physical surfaces, said method comprising the steps of:

(1) prior to a visibility computation (known per se) being carried out, some or all viewpoints or possible occurrences of viewpoints are classified into groups of viewpoints;

(2) defining one or more projection surfaces (known per se) for the purpose of the simultaneous projections of surfaces or surface

elements with respect to a group of viewpoints;

(3) dividing each of said projection surfaces into regular or irregular grids;

(4) defining a data structure which organizes computer storage for storing of projections on said grids;

(5) for each of the selected surfaces or surface elements and for each group of viewpoints, simultaneously projecting said surfaces or their surface elements onto the projection surfaces, computing grid cells which are under the projections;

(6) ignoring or treating specially surface elements which are always visible to said group of viewpoints during the actual visibility or visibility related computations for selected viewpoints in said group.

19. A method of storing computer generated image data, said method comprising the steps of

(1) identifying a plurality image portions visible to a selected group of viewpoints,

(2) selecting those portions having a predetermined image characteristic and storing same in an organisation storage structure,

(3) for a first one of said selected portions, allocating a portion identifier and storing same together with image data of said first portion,

(4) for the remaining said selected portions, calculating a difference value identifier and storing same together corresponding image data of said selected portion, wherein any said selected portion is addressable by means of said portion identifier and one or more said difference value identifiers.

20. A method as claimed in claim 19 wherein the calculated difference value identifier represents an address difference value between a said remaining selected portion and said first selected portion.

21. A method as claimed in claim 19 wherein the calculated difference value identifier represents an address difference value between a said remaining selected portion and another said remaining selected portion, in which one of said remaining selected portions has a calculated

difference value identifier that represents an address difference value between a said remaining selected portion and said first selected portion.

22. A method as claimed in claim 19 wherein said storage structure is non-contiguous.

23. A method as claimed in claim 22 wherein said storage structure is a linked-list.

24. A method as claimed in claim 19 wherein said storage structure is contiguous.

25. A method as claimed in claim 22 wherein said storage structure is an array.

26. A method as claimed in claim 19 wherein said image portions are stored based upon a plurality of said predetermined image characteristics to give multiples sets of image data, in which any element of any set can be manipulated based upon a viewing from another group of viewpoints.

27. A method as claimed in claim 26 wherein said manipulation involves adding an element to a set, deleting an element from a set, or copying an element between any two or more sets.

28. A method as claimed in claim 27 wherein a plurality said predetermined image characteristics are available and only the smallest of the plurality less one corresponding set(s) are(is) retained, the other one being redundant.

29. A method of reducing the complexity of calculations required for the production of multi-dimensional computer generated images or the reduction of multi-dimensional data to multi-dimensional data having at least one less dimension, said method comprising the steps of:

(1) observing an object surface with a plurality of viewpoints, and defining a projection surface for each said viewpoint;

(2) creating a working surface and mapping each of said projection surfaces onto said working surface;

(3) computing a combined region on said working surface that contains at least one of the projections surfaces.

30. A method as claimed in claim 29 wherein prior to step (3) occurring, the step of:

(4) approximating the viewpoints by calculating a volume containing all of the viewpoints; and

in which step (3) uses said volume to approximate all said viewpoints.

31. A method of reducing the complexity of calculations required for the production of multi-dimensional computer generated images or the reduction of multi-dimensional data to multi-dimensional data having at least one less dimension, said method comprising the steps of:

(1) observing an object surface with a plurality of viewpoints, and defining a projection surface for each said viewpoint;

(2) creating a working surface and mapping each of said projection surfaces onto said working surface;

(3) computing a region that contains all the mappings.

32. A method as claimed in claim 31 wherein prior to step (3) occurring, the step of:

(4) approximating the viewpoints by calculating a volume containing all of the viewpoints; and

in which step (3) uses said volume to approximate all said viewpoints.

33. A method as claimed in claim 12 wherein said calculations for said remaining surfaces are further reduced in complexity by:

(16) establishing a plurality of accuracy levels required to be reached by form-factor computations of said remaining surfaces;

(17) allocating one of said accuracy levels to each of said always occluded surfaces, to each of said always hidden surfaces, and to each

element of said combined projection;

(18) updating the accuracy level of each said surface with the accuracy level of the corresponding element of the combined projection if the latter is larger, and subsequently scan-converting each of said surfaces in order commencing with those having the highest accuracy level and ending with those having the lowest accuracy level, the updated accuracy levels indicating the maximum level of accuracy for form-factor computations for each said surface; and

(19) determining if the updated accuracy level for each said surface is higher than that which said surface can provide, and if so, recursively subdividing the corresponding said surface into a plurality of sub-surfaces until the corresponding accuracy levels of said sub-surfaces match that of said surface.

34. A method as claimed in claim 33 wherein said form-factor computations are performed using a ray-tracing technique or a hemi-cube technique (both known per se).

35. A method of scan-converting a plurality of surfaces of a multi-dimensional computer generated image, said method comprising the steps of:

(1) creating a data structure comprising a plurality of two-dimensional arrays, each said array relating to a corresponding accuracy level for a projection of said surfaces as viewed from a viewpoint, the elements of each array being pixels on a projection plane;

(2) for each said element, providing an associated sub-division indicator, the sub-division indicator being adapted to indicate an active sub-division of the corresponding said element;

(3) initializing each said sub-division indicator to OFF;

(4) for each patch of each said surface, defining a desired accuracy for same and scan-converting the projection including said patches in decreasing order of accuracy into corresponding elements of said structure, and setting the sub-division indicator for each said element of the highest accuracy level to ON if that element corresponds to one of said patches;

(5) for each said element of the surface, if the sub-division

indicator is ON, accessing the sub-elements of said element which are under the projection, and if the indicator is not ON, update the patch in form to said sub-element, if the depth of the patch is less than the depth stored in the sub-element

(6) accessing each said element and adding a form-factor contribution of the element to the form-factor of a record of the patch whose own identifier is stored in the patch.

36. A computer system when adapted by program control to perform a method as claimed in any one of the preceding claims.

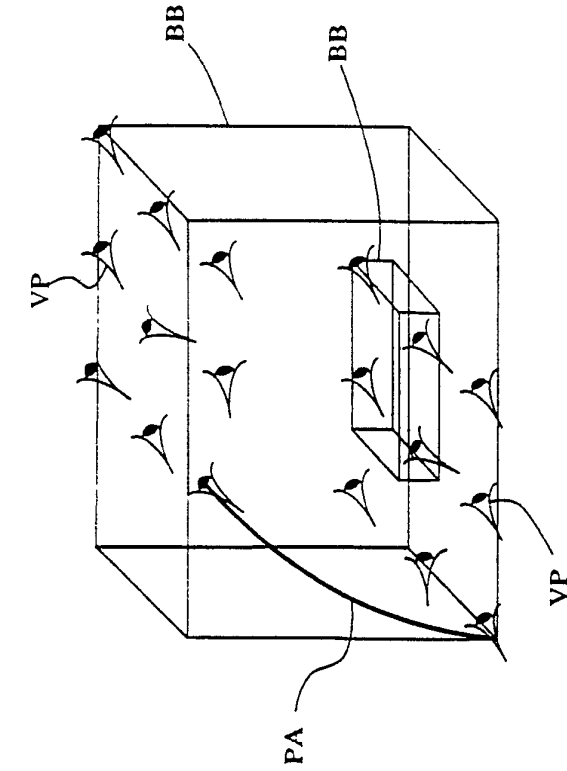


FIG. 1A

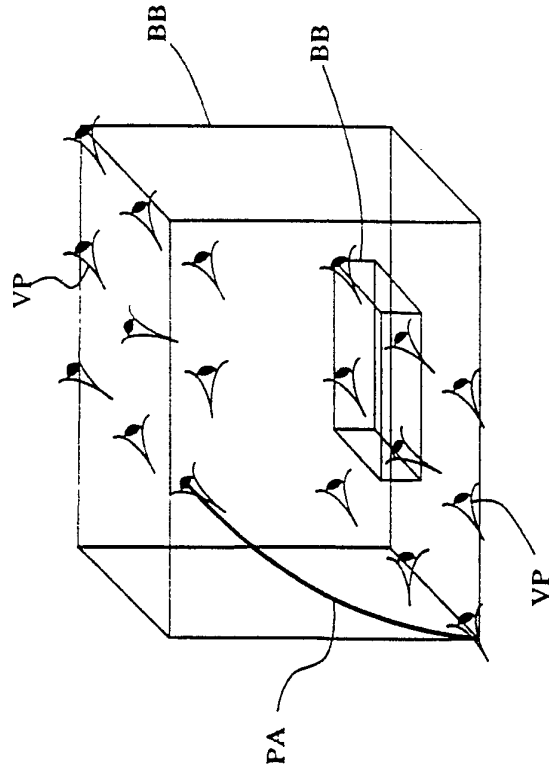


FIG. 1B

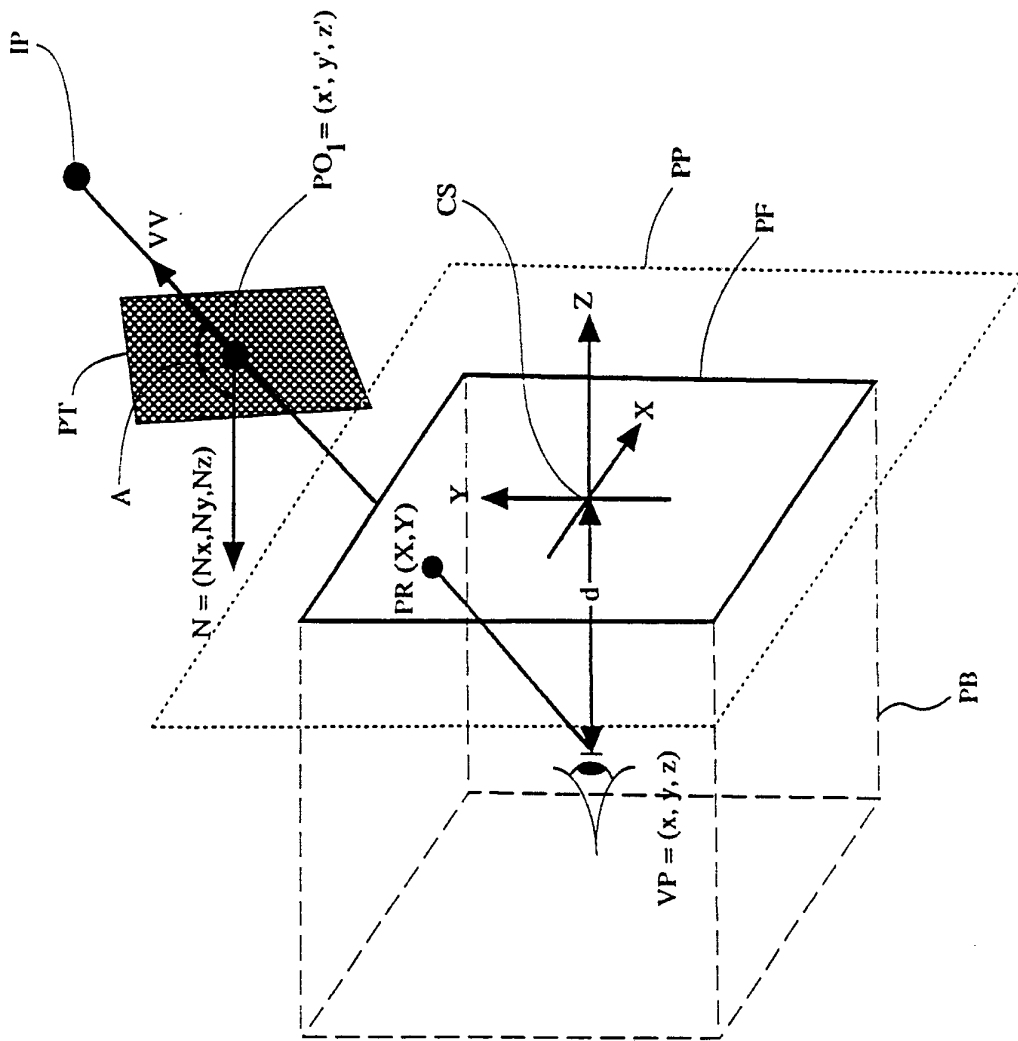


FIG. 2

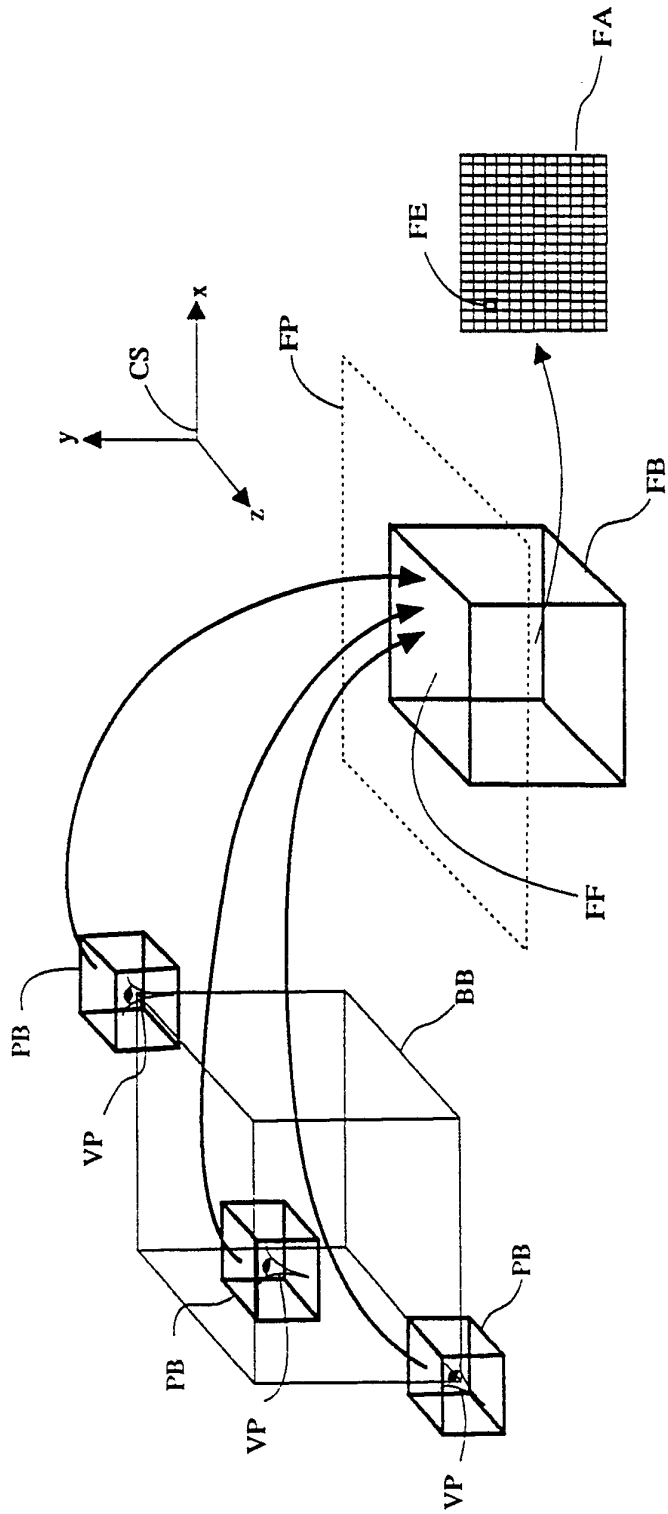


FIG. 3

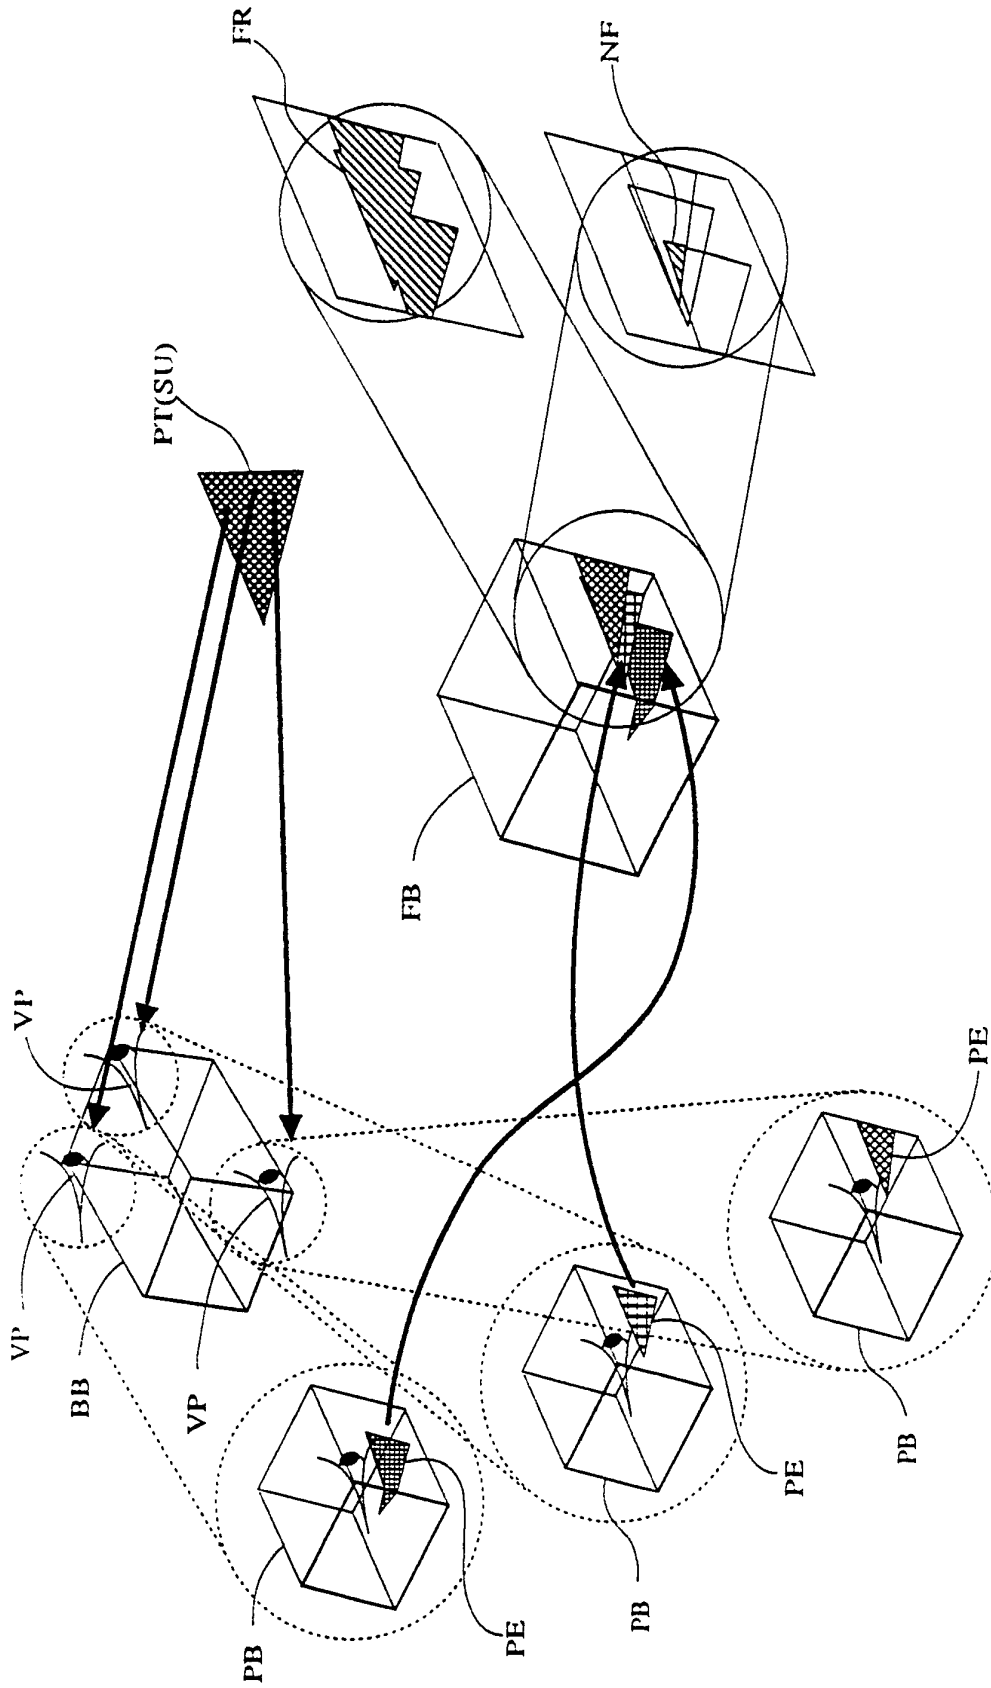


FIG. 4

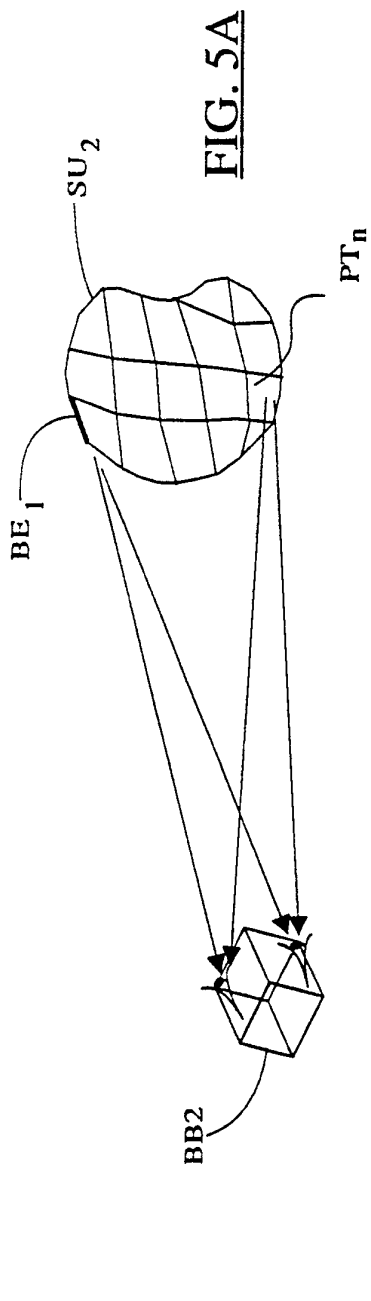


FIG. 5A

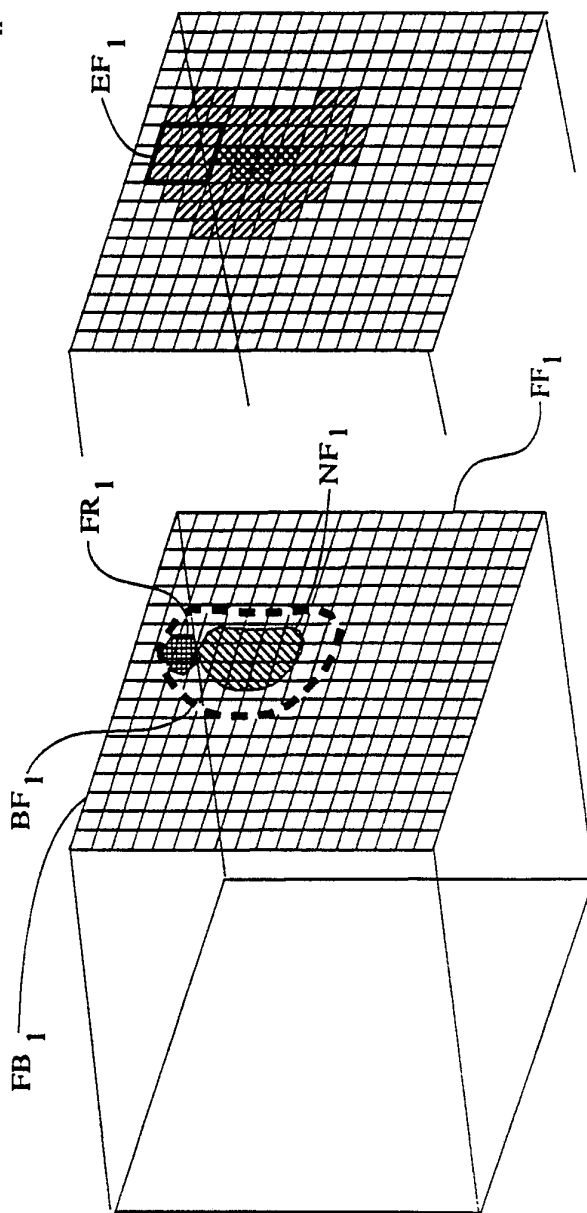







FIG. 5B

FIG. 5C

Legend:

-  Border of the fuzzy region
-  The fuzzy region of a boundary edge
-  Non-fuzzy region
-  Region combining the fuzzy extent of boundary edges
-  Approximated non-fuzzy region computed by subtraction from the fuzzy extent of boundary edges

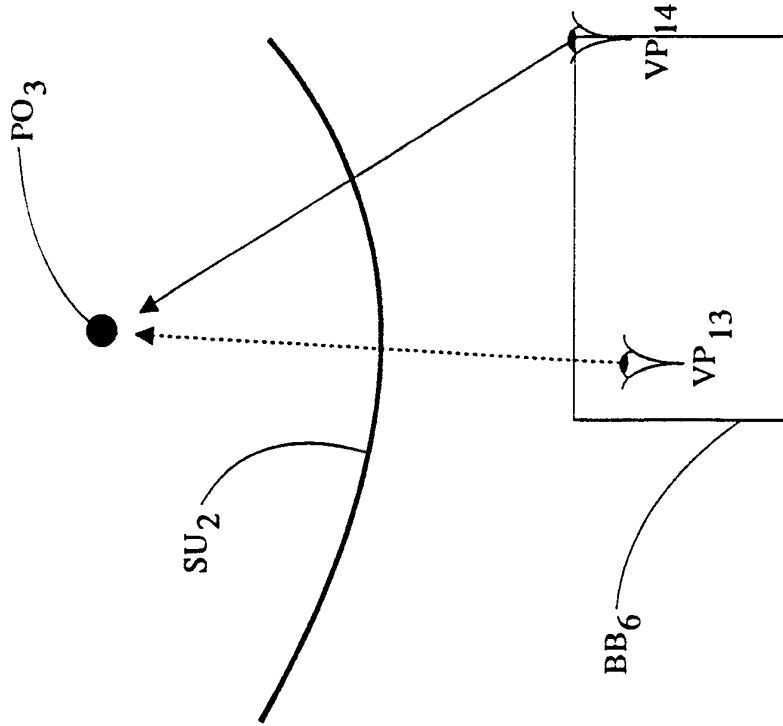


FIG. 5E

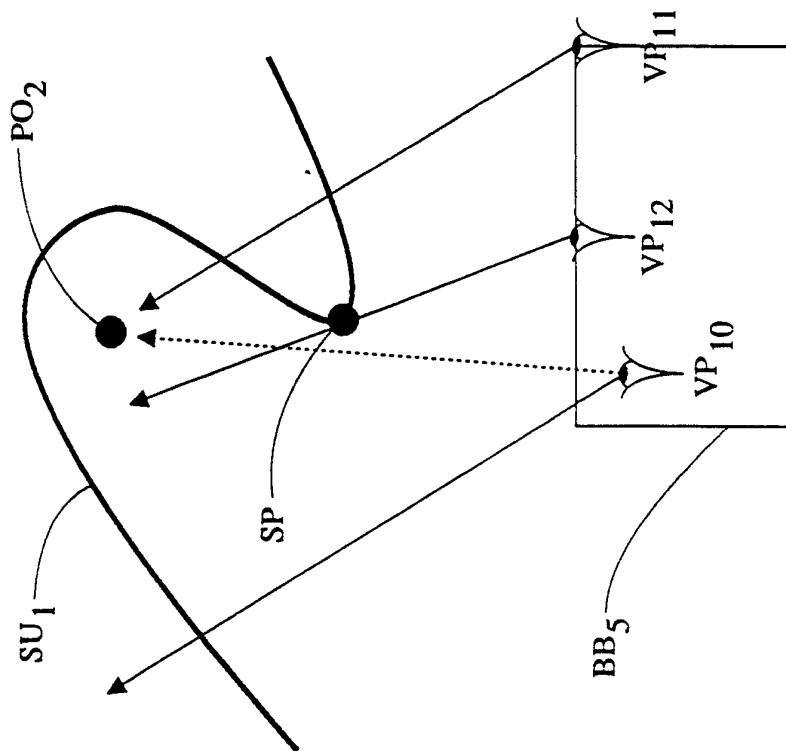
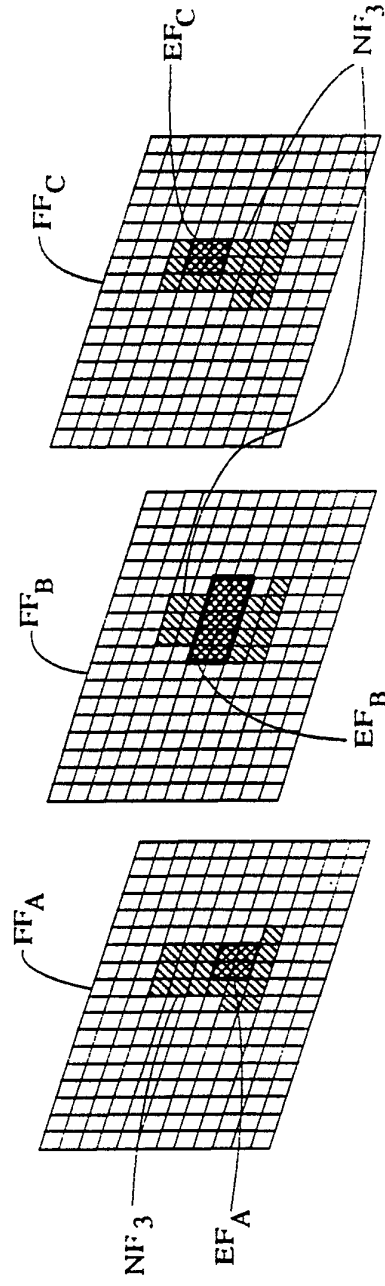
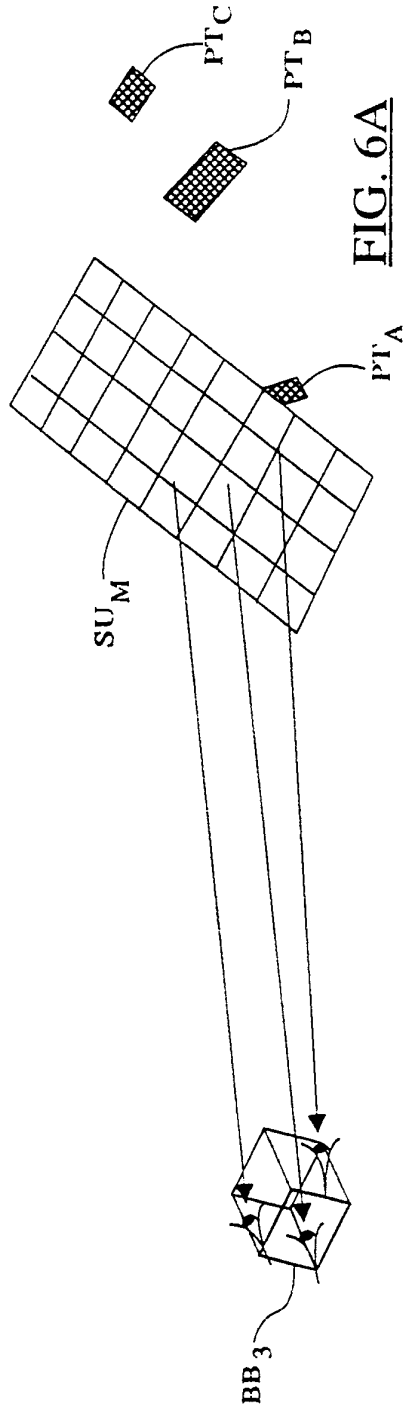


FIG. 5D



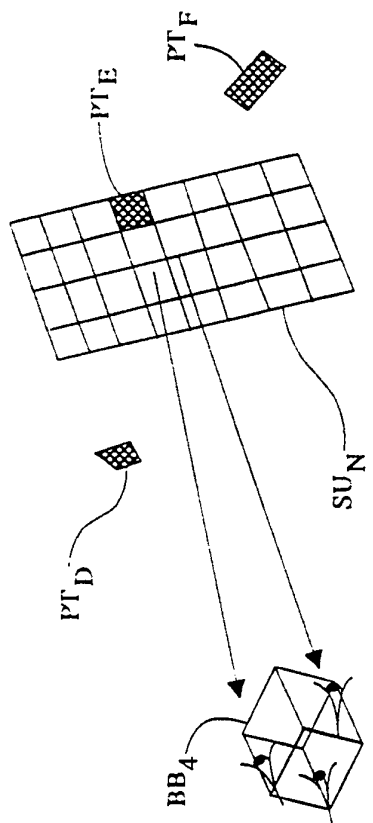


FIG. 7A

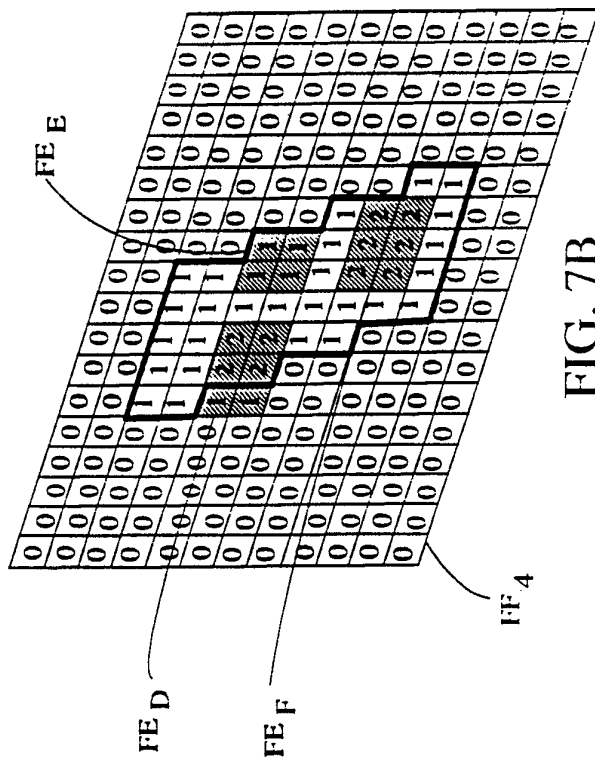


FIG. 7B

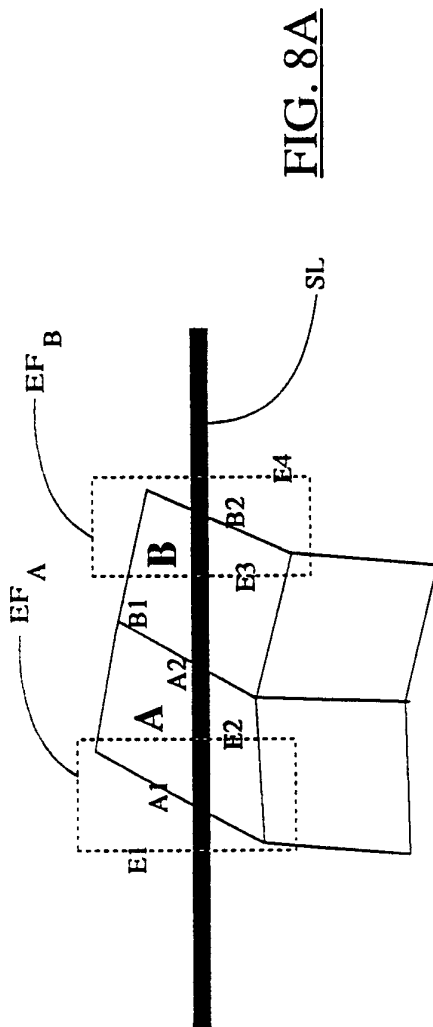


FIG. 8A

Scan line array




FIG. 8B




FIG. 8C




FIG. 8D

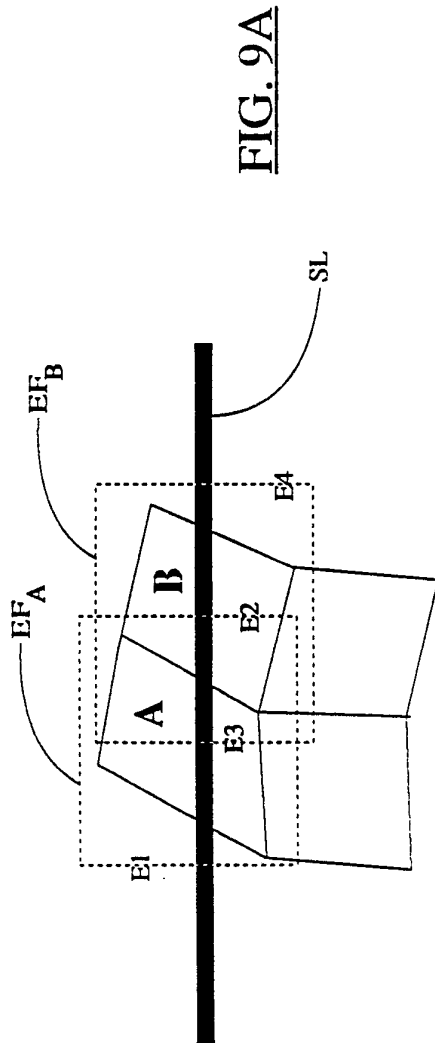


FIG. 9A




FIG. 9B




FIG. 9C

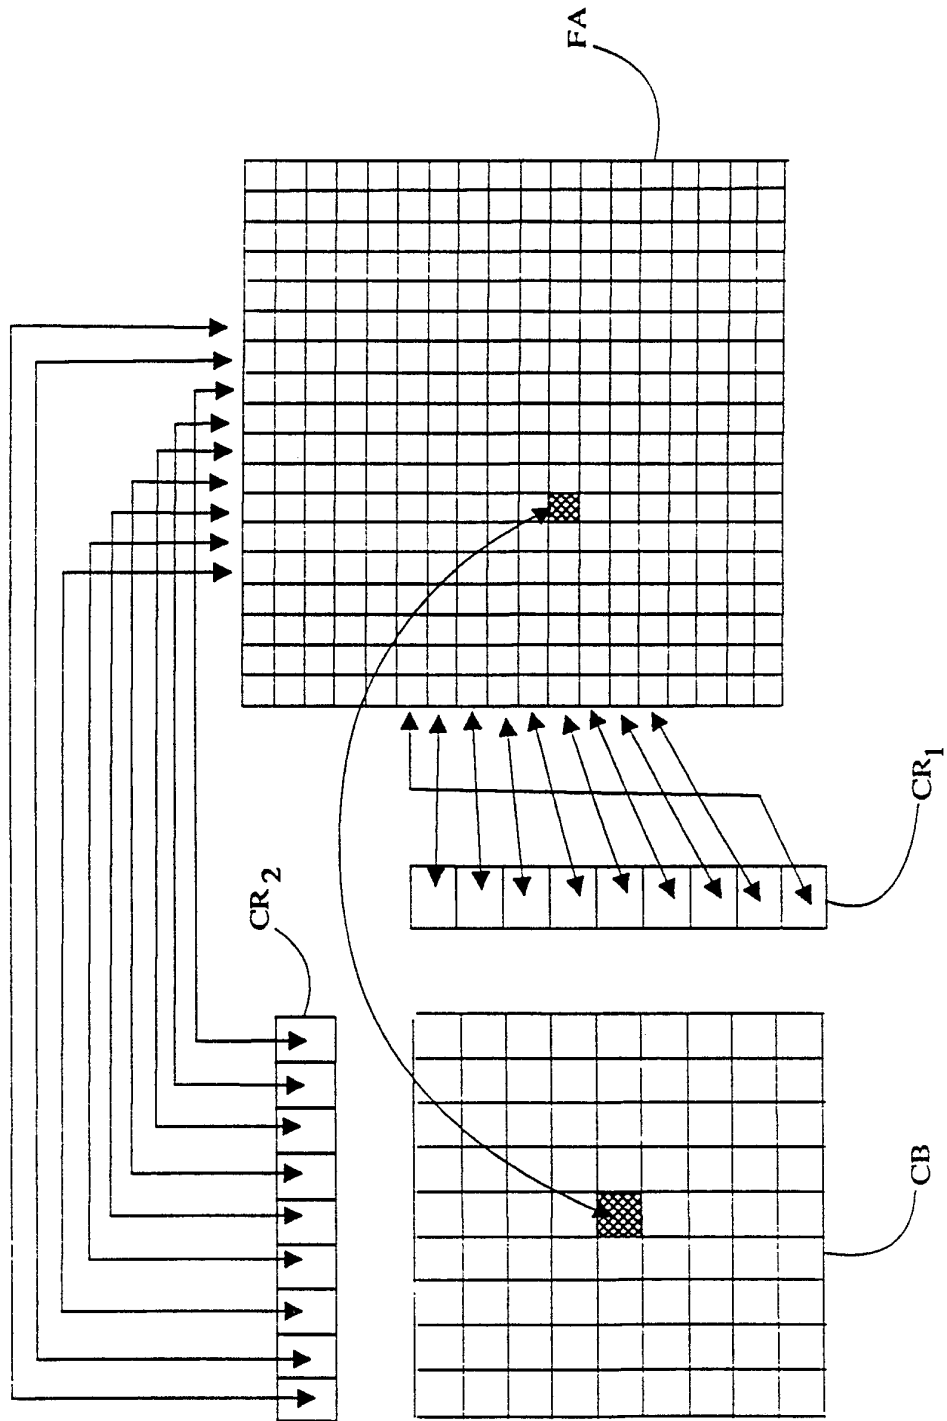


FIG. 10

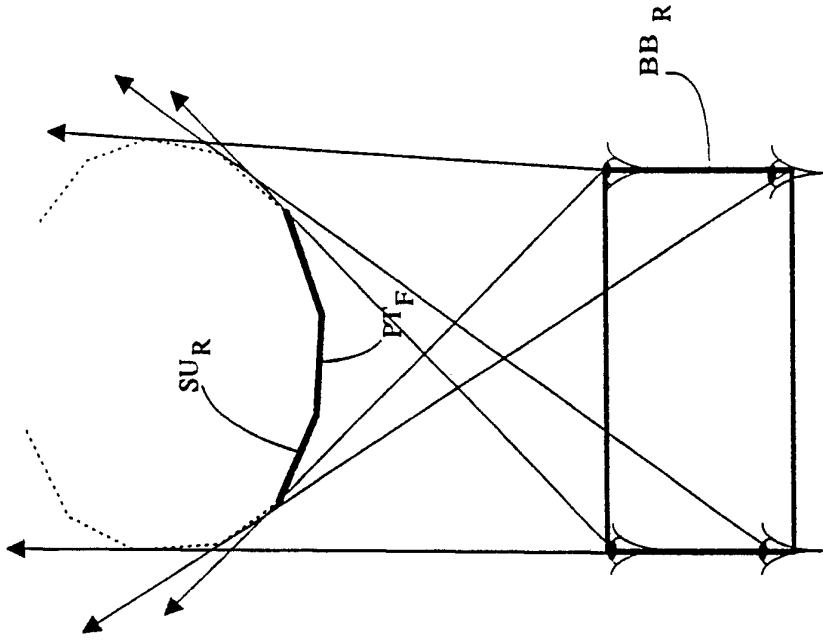


FIG. 11B

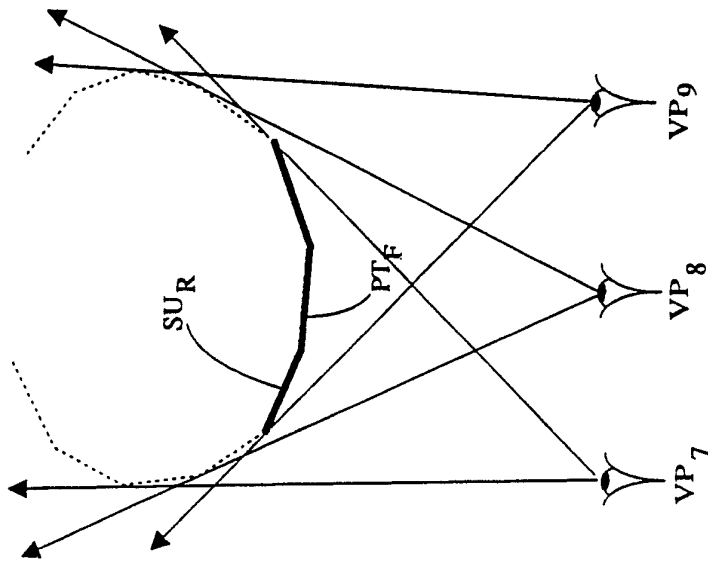


FIG. 11A

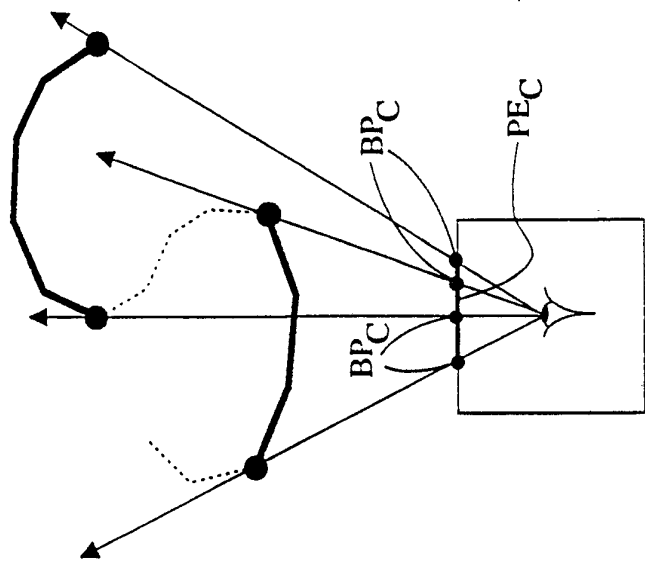


FIG. 12C

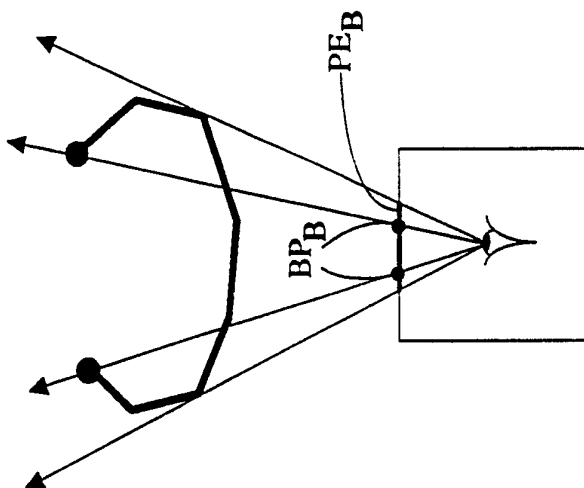


FIG. 12B

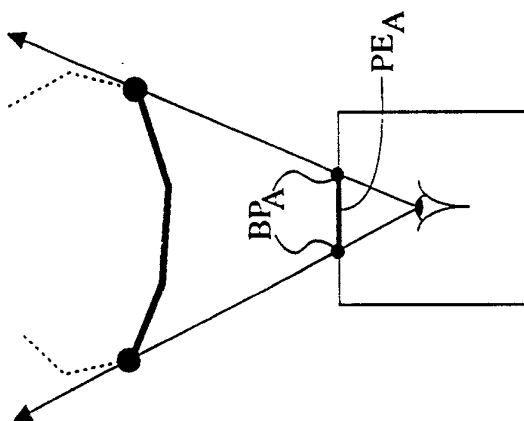


FIG. 12A

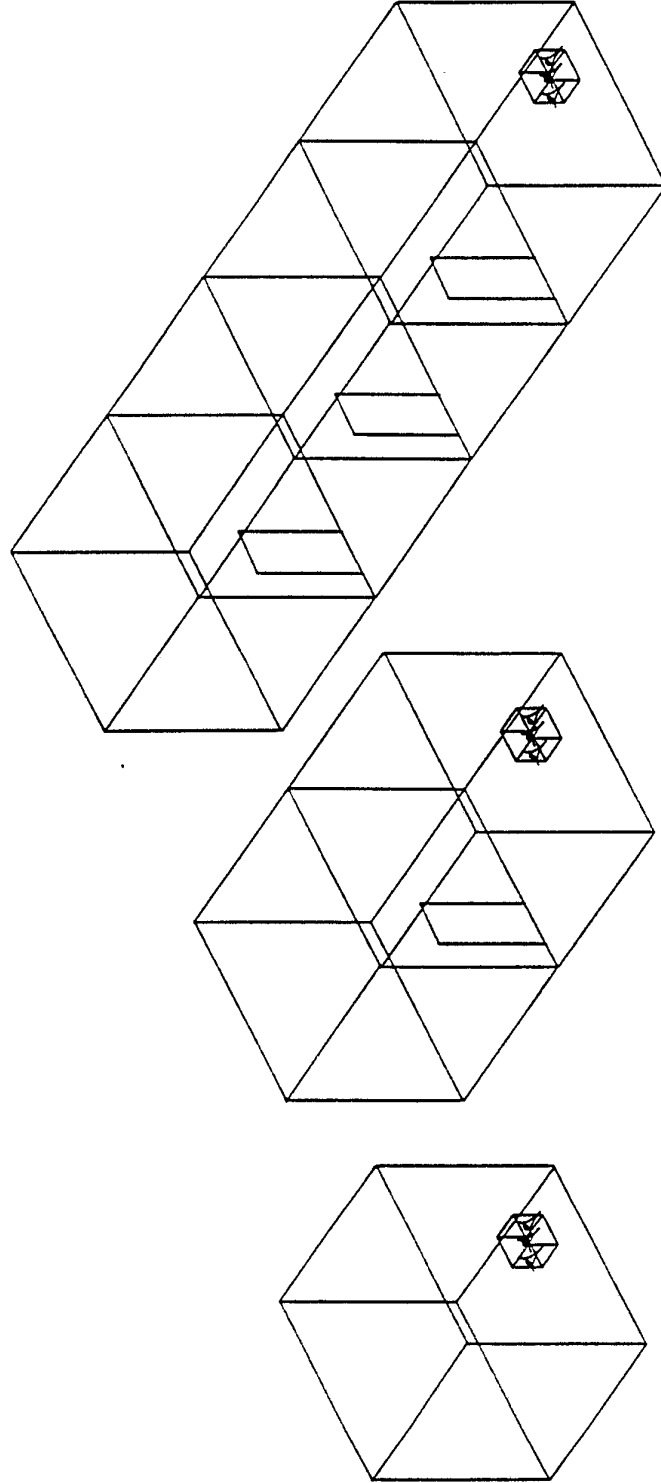


FIG. 13C

FIG. 13B

FIG. 13A

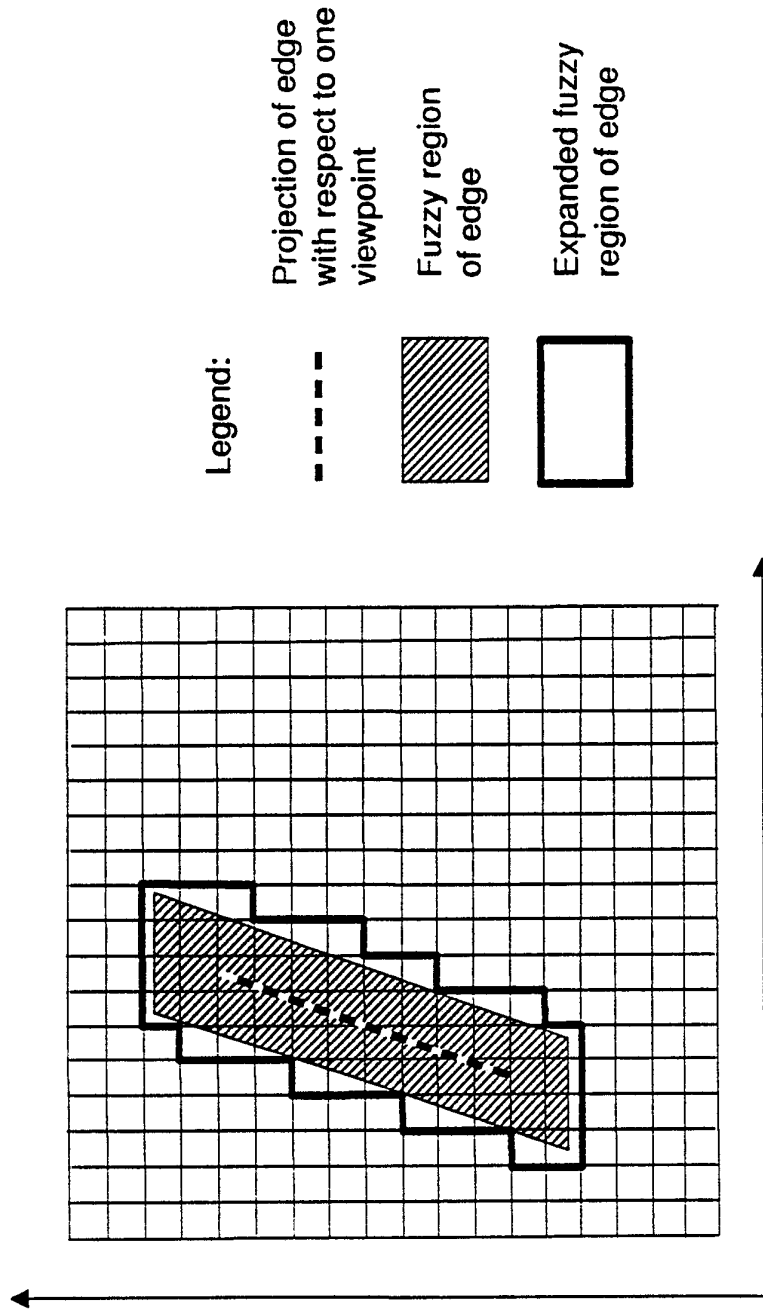


FIG. 14

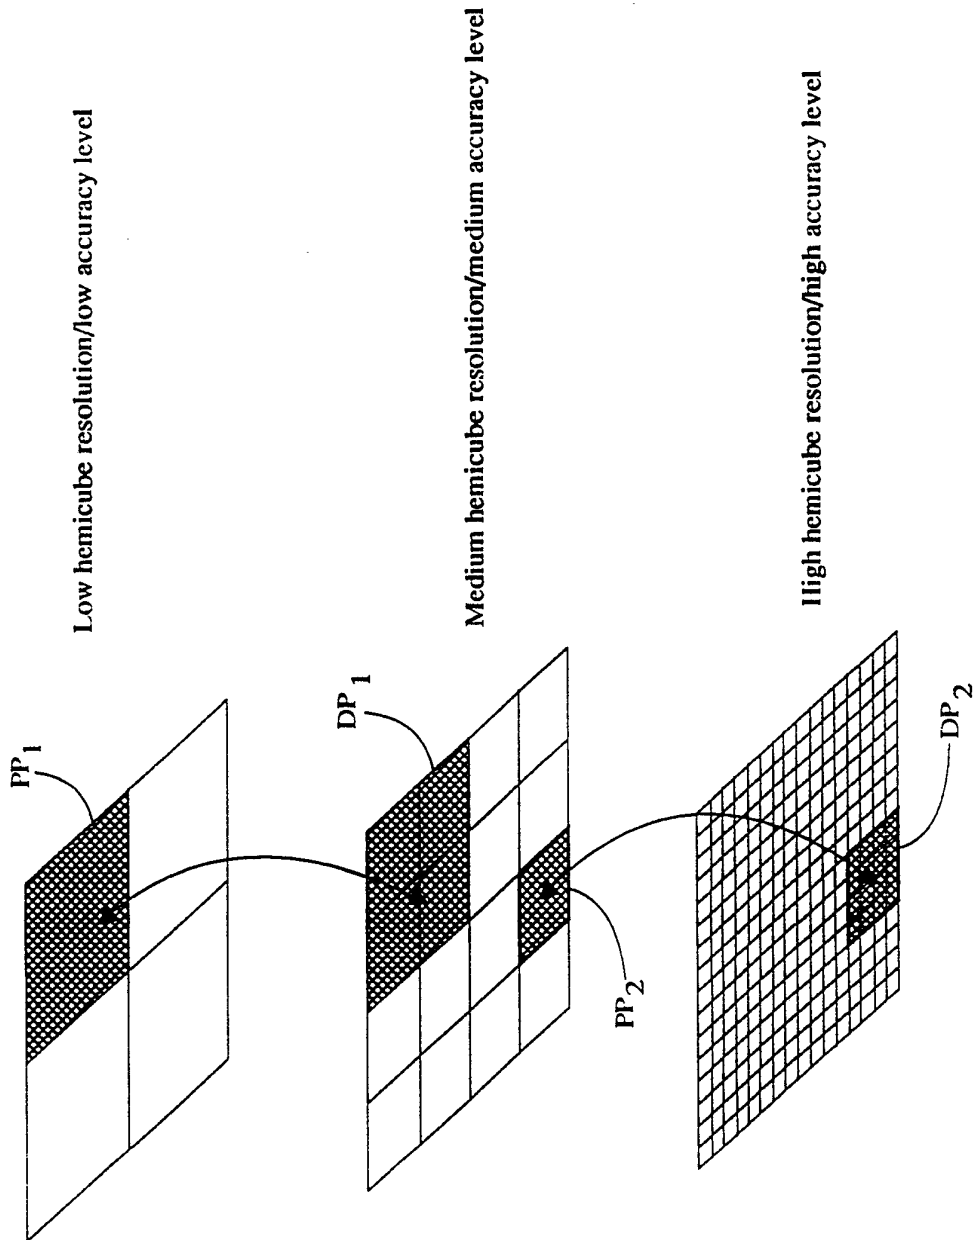



Fig. 15

A. CLASSIFICATION OF SUBJECT MATTER Int. Cl. ⁵ G06F 15/72 According to International Patent Classification (IPC) or to both national classification and IPC																						
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC : G06F 15/72 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU : IPC as above Electronic data base consulted during the international search (name of data base, and where practicable, search terms used)																						
C. DOCUMENTS CONSIDERED TO BE RELEVANT																						
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.																				
P,A	EP,A, 0481581 (PICKER INTERNATIONAL, INC) 22 April 1992 (22.04.92)																					
P,A	US,A, 5088054 (PARIS, II) 11 February 1992 (11.02.92)																					
P,A	US,A, 5086496 (MULMULEY) 4 February 1992 (04.02.92)																					
P,A	US,A, 5081698 (KOHN) 14 January 1992 (14.01.92)																					
A	GB,A, 2228850 (DALKIN INDUSTRIES LTD) 5 September 1990 (05.09.92)																					
A	US,A, 4901252 (FITZGERALD et al) 13 February 1990 (13.02.90)																					
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.																						
* Special categories of cited documents : <table border="0"> <tr> <td>"A"</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T"</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E"</td> <td>earlier document but published on or after the international filing date</td> <td>"X"</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L"</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y"</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O"</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td>"&"</td> <td>document member of the same patent family</td> </tr> <tr> <td>"P"</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																			
"P"	document published prior to the international filing date but later than the priority date claimed																					
Date of the actual completion of the international search 2 October 1992 (02.10.92)		Date of mailing of the international search report 7 Oct 1992 (07.10.92)																				
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No. 06 2853929		Authorized officer  J.W. THOMSON Telephone No. (06) 2832214																				

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate of the relevant passages	Relevant to Claim No.
A	US,A, 4819192 (KURAGANO et al) 4 April 1989 (04.04.89)	
A	US,A, 4697178 (HECKEL) 29 September 1987 (29.09.87)	

INTERNATIONAL SEARCH REPORT

Information on patent family members.

International application No.

PCT/AU92/00302

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
EP	481581	JP	4230582		
US	5081698	GB	2228652	JP	2289097
GB	2228850	JP	2178785		
US	4901252	CA	1222318	DE	3585055
		JP	61029973	EP	167880
US	4819192	CA	1260638	EP	193151
				JP	61195467
US	4697178	DE	3590274	EP	188537
		JP	62500126	WO	8600454
				GB	2179527
END OF ANNEX					