

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 April 2006 (20.04.2006)

PCT

(10) International Publication Number
WO 2006/042082 A2


- (51) International Patent Classification:
C25B 9/00 (2006.01) C02F 1/461 (2006.01)
- (21) International Application Number:
PCT/US2005/036098
- (22) International Filing Date: 7 October 2005 (07.10.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/617,159 8 October 2004 (08.10.2004) US
- (71) Applicant (for all designated States except US): **ELECTRIC AQUAGENICS UNLIMITED** [US/US]; 1464 W. 40 South, Suite 200, Lindon, UT 84042 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KINDRED, Douglas, Wayne** [US/US]; 1481 Mountain Reserve Drive, Kennewick, WA 98532 (US).
- (74) Agent: **BRADLEY, James, E.**; Bracewell & Giuliani LLP, P.O. Box 61389, Houston, TX 77208-1389 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD FOR PRODUCING ELECTROLYZED WATER

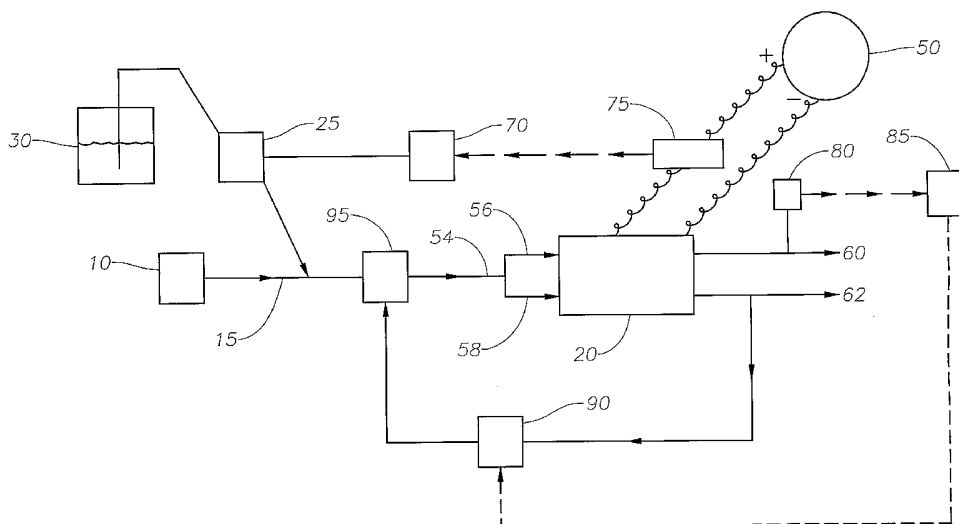

(57) Abstract: An apparatus for producing electrolyzed water includes an electrochemical cell and a solution reservoir containing a solution and having an outlet. An injection pump has an input end in fluid communication with the outlet of the solution reservoir and an output end in fluid communication with the electrochemical cell, wherein the injection pumps an amount of the solution from the solution reservoir to mix with a water solution and enter the electrochemical cell. A current feedback sensor senses a cell current in the electrochemical cell. A current control unit in data communication with the current feedback sensor and the injection pump wherein the current control unit compares the cell current with a preselected current and adjusts the amount of solution pumped from the injection pump responsive to the comparison. The apparatus may also include an automatic control feedback system to monitor and adjust pH.

WO 2006/042082 A2

APPARATUS AND METHOD FOR PRODUCING ELECTROLYZED WATER

Related Applications

[0001] This application claims the benefit under § 119(e) of U.S. Provisional Application S.N. 60/617,159, filed on 10/8/2004, which is hereby incorporated by reference in its
5 entirety.

Field of the Invention

[0002] The invention relates generally to an apparatus and method for producing stabilized electrolyzed water, and more particularly to a system that includes a control feedback loop responsive to a predetermined optimum current to control cell water
10 quality output.

Background of the Invention

[0003] Electrolyzed oxidizing (EO) water has been conventionally produced. Electrolyzed water is classified into three types: acidic electrolyzed water (germicidal, used for hygienic purposes), alkaline ionized water (having medical effects; drinking
15 water), and alkaline electrolyzed water (lipid-detergent). Acidic electrolyzed water is used to sanitize food-processing equipment and fresh-cut vegetables in food industries, because of its great potential for food-related and other disinfecting processes due to its high bacterial activity.

[0004] Acidic EO water is normally generated from the anode electrode through
20 electrolysis of a dilute aqueous NaCl solution. The Cl^- ions are electrochemically oxidized to Cl_2 gas on the anode surface, which gas is partially hydrolyzed to hypochlorous acid (HOCl) in solution phase and to other ions. The relatively high bactericidal activity of the acidic EO water is attributed to so-called active chlorine which comprises dissolved Cl_2 , OCl^- , and HOCl, and is also attributed to the high oxidation-
25 reduction potential (ORP) of the acidic EO water. However, the dissolved Cl_2 is readily

evaporated or otherwise lost from the acidic EO water during storage or a treatment period, resulting in a loss of bactericidal activity over time. This loss may also affect other important properties of EO water, such as its pH, ORP, and HOCl concentration, which should be known for proper use of the acidic EO water in a given service application.

- 5 [0005] Prior versions of electrolyzing devices include a system for producing electrolyzed oxidizing (EO) water wherein feed water solution including a saline solution component is supplied to an electrolytic cell comprising both an anode chamber and a cathode chamber. The feed water solution is cathodically electrolyzed in the cathode chamber to produce EO water as an antioxidant solution called alkaline catholyte.
- 10 Catholyte is a mild alkaline solution with a pH range of 10.5 to 12.0 and ORP of -600 to -900 mV. The feed water solution is anodically electrolyzed in the anode chamber to produce EO water as an oxidant solution called anolyte, whose pH is modified in the process. Anolyte is a strong oxidizing solution with a pH range of 0.0 – 8.5 and an Oxidation-Reduction Potential (ORP) of +600 to +1200mV.
- 15 [0006] It is desirable to have a preselected current maintained consistently in the electrochemical cell. Prior versions, however, had difficulties maintaining the current of the electrochemical cell at a current relatively close to the preselected current.

[0007] Summary

[0008] The invention includes an apparatus for producing electrolyzed water. The apparatus includes an electrochemical cell and a solution reservoir containing a solution and having an outlet. The invention also includes an injection pump having an input end
5 in fluid communication with the outlet of the solution reservoir and an output end in fluid communication with the electrochemical cell, wherein the injection pumps an amount of the solution from the solution reservoir to mix with a water solution and enter the electrochemical cell. The apparatus also includes a current feedback sensor to sense a cell current in the electrochemical cell and a current control unit in data communication
10 with the current feedback sensor and the injection pump wherein the current control unit compares the cell current with a preselected current and adjusts the amount of solution pumped from the injection pump responsive to the comparison.

[0009] Another embodiment of the apparatus includes an electrochemical cell having an input portion and an output portion and a solution reservoir containing a solution and
15 having an outlet in fluid communication with an electrochemical cell. The apparatus further includes a blend pump having an input end in fluid communication with a catholyte solution exiting the output portion of the electrochemical cell and an output end in fluid communication with the solution from the solution reservoir entering the electrochemical cell wherein the blend pump pumps an amount of the catholyte solution
20 from the output portion of the electrochemical cell to mix with the solution entering the electrochemical cell. The apparatus further includes a pH feedback sensor to sense an output pH of an amount of solution exiting the electrochemical cell and a pH control unit in data communication with the pH feedback sensor and the blend pump, wherein the pH control unit compares the output pH with a preselected pH and adjusts the amount of
25 catholyte solution pumped from the blend pump responsive to the comparison.

Brief Description of the Drawings

[0010] FIG. 1 shows a schematic diagram of the system in accordance with the present invention.

[0011] FIG. 2 shows a sectional view of the electrochemical cell of FIG. 1.

5 [0012] FIG. 3 shows a diagram of the steps included in the method in accordance with the present invention.

Detailed Description of the Invention

[0013] Although the following detailed description contains many specific details for purposes of illustration, anyone of ordinary skill in the art will appreciate that many variations and alterations to the following details are within the scope of the invention.

5 Accordingly, the exemplary embodiment of the invention described below is set forth without any loss of generality to, and without imposing limitations thereon, the claimed invention.

[0014] Referring to FIG. 1, water is provided from a water source 10 into a flow line 15 that supplies the water to a conventional EO water electrochemical cell 20. A variable speed injection pump 25 receives an aqueous solution from a solution reservoir 30 comprising, for example, a dilute sodium chloride (NaCl) solution. Alternatively, for example, hydrochloric acid, potassium chloride, magnesium chloride, and other salt compounds may be utilized in the solution reservoir 30.

[0015] The injection pump 25 pumps an amount of saline into the flow line 15 to mix with the water before entering the electrochemical cell 20, thus forming a feed water solution mixture to be electrolyzed. The feed water solution to be electrolyzed typically comprises a dilute aqueous NaCl solution, such as 0.01 % to 25% by weight NaCl solution, although the invention can alternatively be practiced to electrolyze other aqueous solutions of KCl, MgCl₂ and other salts.

20 [0016] Referring to Figure 2, an electrochemical cell 20 is formed by placing metallic electrodes 45, 47 into an electrolyte where a chemical reaction either uses or generates an electric current. The form of electrochemical cell 20 utilized in the invention is one in which an externally supplied electric current is used to drive a chemical reaction that would not occur spontaneously.

25 [0017] Electrochemical cell 20 includes a plurality of anode chambers 35 and cathode chambers 37 (only one shown) separated by a membrane 40. One or more flat plate-like anode electrodes 45 and cathode electrodes 47 (one of each electrode shown) are

disposed in the anode chambers 35 and cathode chambers 37, respectively. The anode and cathode electrodes 45, 47 can comprise titanium or titanium coated with a precious metal, such as platinum, or alternatively any other suitable electrode material. The cell electrodes 45, 47 preferably have a fixed surface area. The membrane 40 can comprise
5 either a non-ion selective separator membrane comprising, for example, non-woven polyester fabric, or an ion selective permeable membrane comprising, for example, a perfluorosulfonate ionomer. When the feed water solution to be electrolyzed comprises a dilute aqueous NaCl saline solution, the membrane 40 allows Na⁺ ions to move toward the cathode electrode 47 from the anode chamber 35 and Cl⁻ ions to move toward the
10 anode electrode 45 from the cathode chamber 37. The membrane 40 is spaced between the electrodes by electrically insulating plastic spacers. The electrodes 45, 47 are connected to a conventional electrical power supply 50.

[0018] The feed water solution is supplied to both the anode chambers 35 and cathode chambers 37 via a feed water solution supply conduit 54 that is branched to have an
15 anode supply conduit section 56 and cathode supply conduit section 58 from the common conduit 54. The anode supply conduit section 56 supplies the feed water solution only to anode chambers 35 via a manifold (not shown) that communicates with each of the plurality of anode chambers 35. The cathode supply conduit section 58 supplies the feed water solution only to cathode chamber 37 via a manifold (not shown) that communicates
20 with each of the plurality of cathode chambers 37.

[0019] The feed water solution is cathodically electrolyzed in the cathode chambers 37 to produce EO water as alkaline catholyte. The feed water solution is anodically electrolyzed in the anode chambers 35 to produce EO water as anolyte whose pH may be modified or adjusted. The pH-modified anolyte is discharged from the anode chambers
25 35 by way of an anolyte discharge conduit 60 for collection and use. The catholyte is discharged from the cathode chambers 37 by way of a catholyte discharge conduit 62 for collection, and in some embodiments may be recycled back to the anode chambers 35.

[0020] The pH of the anolyte discharged by way of conduit 60 from anode chambers 35 is controlled to be above approximately 5, and preferably between about 5 to 6, in order to provide more stable bactericidal activity over time where the active chlorine concentration of the anolyte is generally constant at all pH values in that range. Some applications benefit from producing an EO acidic output water at a higher pH to reduce potential corrosion of some surfaces that will be cleaned and to provide a more stable solution to preserve its bactericidal activity over longer periods of time. The invention is capable of generating EO acidic water over a wide range of outlet pH through the use of an automated pH control loop which controls the amount of catholyte recirculated to the inlet of the cell. This automated pH control loop and the separate cell current control loop provide the ability to independently adjust the chlorine concentration and the pH. This allows the user to select a pH setpoint of between 5 and 6 where nearly 100% of the chlorine generated in the more stable form of HOCl, hypochlorous acid.

[0021] Referring to FIG. 1, the pH of the acidic EO output water is measured by a pH sensor 80 located in the anolyte discharge conduit 60, which provides feedback of actual pH to a pH controller 85. The controller 85 automatically adjusts the speed of a blend pump 90 to control the actual pH to the pH setpoint of the controller 85. The blend pump 90 is connected to output line 62 and discharges to a mixing chamber 95 wherein the recirculated catholyte is thoroughly mixed with the water from the water source 10 and the solution from reservoir 30. Sensor 80, pump 90, and mixing chamber 95 comprise the automated pH control loop.

[0022] The power consumed in the electrolytic cell 20 affects the properties of the EO water leaving the cell 20. The electrolytic cell 20 preferably operates in a flooded condition, which causes the cell 20 to act as a variable resistor. Thus, varying the conductivity of the water in turn varies the cell 20 resistance. If voltage from the power supply 50 is held constant, as it is in some embodiments, then varying the conductivity of the water in the cell 20 may control the power to the electrolytic cell 20.

[0023] Referring to FIG. 1, a control unit 70 controls the pump speed of the saline injection pump 25, and thus controls the relative amount of saline injected into the electrochemical cell 20. An automatic feedback control loop is included in the system, enabling the control unit 70 to adjust and optimize the amount of saline injected into the cell 20. The control unit 70 operates responsive to feedback information from a current sensor 75 located between the power supply 50 and the electrochemical cell 20. Current sensor 75 senses the current supplied by the power supply 50.

[0024] The control unit 70 is provided with a value for the optimum current setpoint, which is predetermined and independently established. The automatic feedback loop comprising current sensor 75, control unit 70, and pump 75 provides feedback data of the actual cell current detected by the current sensor 75 to the control unit 70, and the control unit 70 responds by comparing the actual cell current with the setpoint current to determine the proper adjustment to the speed of the injection pump 25.

[0025] In operation, power is supplied to the electrochemical cell 20 from the power supply 50. The pump 25 delivers the solution from the solution reservoir 30 to mix with the water and any fluid pumped from the blend pump 90 to mix therewith. The current sensor 75 provides a feedback signal of the actual cell current consumed by the electrochemical cell 20, and communicates the actual cell current information back to the control unit 70 through an automatic control feedback loop. The control unit 70 receives the feedback signal from the current sensor 75, and responds by comparing the amps of the actual cell current with the amps of the predetermined optimum setpoint current. If the actual cell current does not equal the setpoint current, the control unit 70 changes or adjusts the output signal to the saline injection pump 25 to vary the pump speed. If the actual cell current is greater than the setpoint current, the pump speed is decreased. If the actual cell current is less than the setpoint current, the pump speed is increased.

[0026] Varying the pump speed of the injection pump 25 accordingly varies the amount of saline injected into the electrochemical cell 20, and as a result changes the conductivity of the feed water solution that enters the cell 20. The corresponding change

or adjustment in conductivity will result in an adjustment of the resistance in the electrochemical cell 20, and thus will result in an adjustment of the actual cell current toward the setpoint current. Such a feedback control system continues indefinitely until the actual cell current adjusts to become substantially equal to the predetermined optimum setpoint current, in order to ultimately optimize water quality output from the electrochemical cell 20.

[0027] The invention has several important advantages. The automatic current control feedback loop controls the electrochemical cell by automatically adjusting the conductivity of the water fed to the cell. Further, the system automatically adjusts the amount of chlorine generated to achieve the desired chlorine level. Further, the pH of the EO acidic output water may be automatically controlled by the pH feedback loop responsive to comparisons between the actual pH of the cell current and a predetermined optimum setpoint pH. The combination of these two automated control loops allows independent adjustment of HOCl and pH to allow the output water to be optimized to suit the specific application.

[0028] The invention can be practiced to produce anodically electrolyzed water for use in many hygiene-sensitive service applications for on-site generation of stable and strong disinfecting solution. Such applications include washing food surfaces, such as poultry products and fresh produce, as well as cleaning food contact surfaces such as food processing equipment, food handling facilities, utensils, and also washing hands in food industries, restaurants, service centers, and homes. The anolyte produced pursuant to the invention also is useful for cleaning other surfaces such as floors, carpets, and shower curtains to reduce cross-contamination in medical/dental services, homes, and nursing care facilities. The invention is also suited for agricultural applications to replace other chemical pesticides and fungicides.

Although some embodiments of the present invention have been described in detail, it should be understood that various changes, substitutions, and alterations can be made hereupon without departing from the principle and scope of the invention. Accordingly,

the scope of the present invention should be determined by the following claims and their appropriate legal equivalents.

That claimed is:

1. A method for producing electrolyzed water, the method comprising:
 - (a) flowing a solution into an input portion of an electrochemical cell;
 - (b) applying a cell current from a power source to the electrochemical cell;
 - 5 (c) sensing the cell current;
 - (d) electrolyzing the solution in the electrochemical cell to produce anolyte solution and catholyte solution electrolyzed water;
 - (e) comparing the cell current to a preselected current; and
 - (f) adjusting the amount of the solution flowing into the electrochemical cell
- 10 in response to the difference between the cell current and the preselected current.
2. The method of claim 1, wherein step (f) further comprises adjusting the amount of solution flowing into the electrochemical cell until the cell current becomes substantially equal to the preselected current
3. The method of claim 1, wherein the solution includes a component selected from
- 15 the group consisting of: sodium chloride, hydrochloric acid, potassium chloride, magnesium chloride, and salt compounds.
4. The method of claim 1, further comprising flowing water into a mixing chamber, and wherein step (a) further comprises flowing the solution into the mixing chamber and diluting the solution prior to entry into the electrochemical cell.
- 20 5. The method of claim 1, further comprising:

discharging the anolyte solution and the catholyte solution from the electrochemical cell;

sensing an output pH of the catholyte solution exiting the electrochemical cell;

comparing the output pH to a preselected pH; and

5 mixing a portion of the catholyte solution discharged from the electrochemical cell with a portion of the solution entering the electrochemical cell in response to a difference between the output pH and the preselected pH.

6. The method of claim 5, further comprising adjusting the amount of catholyte solution flowing into the electrochemical cell until the output pH becomes substantially
10 equal to the preselected pH.

7. The method of claim 5, wherein the preselected pH is greater than about 5.

8. The method of claim 7, wherein the preselected pH is in the range of about 5 to about 6.

9. A method for producing electrolyzed water, the method comprising:

15 (a) injecting an amount of a cleaning solution to mix with a water solution;

(b) flowing the mixture of the cleaning solution and the water solution into an input portion of an electrochemical cell;

(c) sensing a cell current in the electrochemical cell; and

(d) adjusting the amount of the cleaning solution flowed into the
20 electrochemical cell responsive to comparing the cell current with a preselected current.

(e) sensing an output pH of an amount of solution exiting an output portion of the electrochemical cell; and

(f) flowing an amount of a catholyte solution exiting the output portion of the electrochemical cell to mix with the cleaning solution entering the electrochemical cell
5 responsive to comparing the output pH with a preselected pH.

10. The method of claim 9, wherein the cleaning solution includes a component selected from the group consisting of: sodium chloride, hydrochloric acid, potassium chloride, magnesium chloride, and salt compounds.

11. The method of claim 9, wherein the preselected pH is greater than about 5.

10 12. The method of claim 11, wherein the preselected pH is in the range of about 5 to about 6.

13. An apparatus for producing electrolyzed water, the apparatus comprising:

an electrochemical cell having an input portion and an output portion, the electrochemical cell having first and second chambers separated by a membrane defining
15 an anode chamber and a cathode chamber;

a solution reservoir containing a solution and having an outlet and having an outlet in fluid communication with the electrochemical cell;

a first pump having an input end in fluid communication with the outlet of the solution reservoir and an output end in fluid communication with the chambers of the

electrochemical cell, wherein the first pump flows an amount of the solution from the solution reservoir to enter the electrochemical cell;

a current feedback sensor to sense a cell current in the electrochemical cell; and

a current control unit in data communication with the current feedback sensor and
5 the first pump, wherein the current control unit includes a feedback component that compares the cell current with a preselected current and adjusts the amount of solution flowed from the first pump responsive to the comparison between the cell current with the preselected current.

14. The apparatus of claim 13, further comprising a power supply unit that supplies
10 the electric current to the electrochemical cell, and wherein the current feedback sensor is positioned between the power supply unit and the electrochemical cell.

15. The apparatus of claim 13, wherein the current control unit adjusts an amount of chlorine entering the electrochemical cell.

16. The apparatus of claim 13, wherein the solution includes a component selected
15 from the group consisting of: sodium chloride, hydrochloric acid, potassium chloride, magnesium chloride, and salt compounds.

17. The apparatus of claim 13, further comprising:

a second pump having an input end in fluid communication with a catholyte solution exiting the output portion of the electrochemical cell and an output end in fluid
20 communication with the solution entering the input portion of the electrochemical cell, wherein the second pump flows an amount of the catholyte solution from the output

portion of the electrochemical cell to mix with the solution entering the electrochemical cell;

a pH feedback sensor to sense an output pH of an amount of solution exiting the electrochemical cell; and

5 a pH control unit in data communication with the pH feedback sensor and the second pump, wherein the pH control unit compares the output pH with a preselected pH and adjusts the amount of catholyte solution flowed from the second pump responsive to the comparison of the output pH with the preselected pH.

18. The apparatus of claim 17, wherein the output portion of the electrochemical cell
10 comprises an anolyte conduit and a catholyte conduit, wherein the pH sensor is in data communication with the anolyte conduit, and wherein the second pump is in fluid communication with the catholyte conduit.

19 The apparatus of claim 17, wherein the preselected pH is greater than about 5.

20. The apparatus of claim 19, wherein the preselected pH is in the range of about 5
15 to about 6.

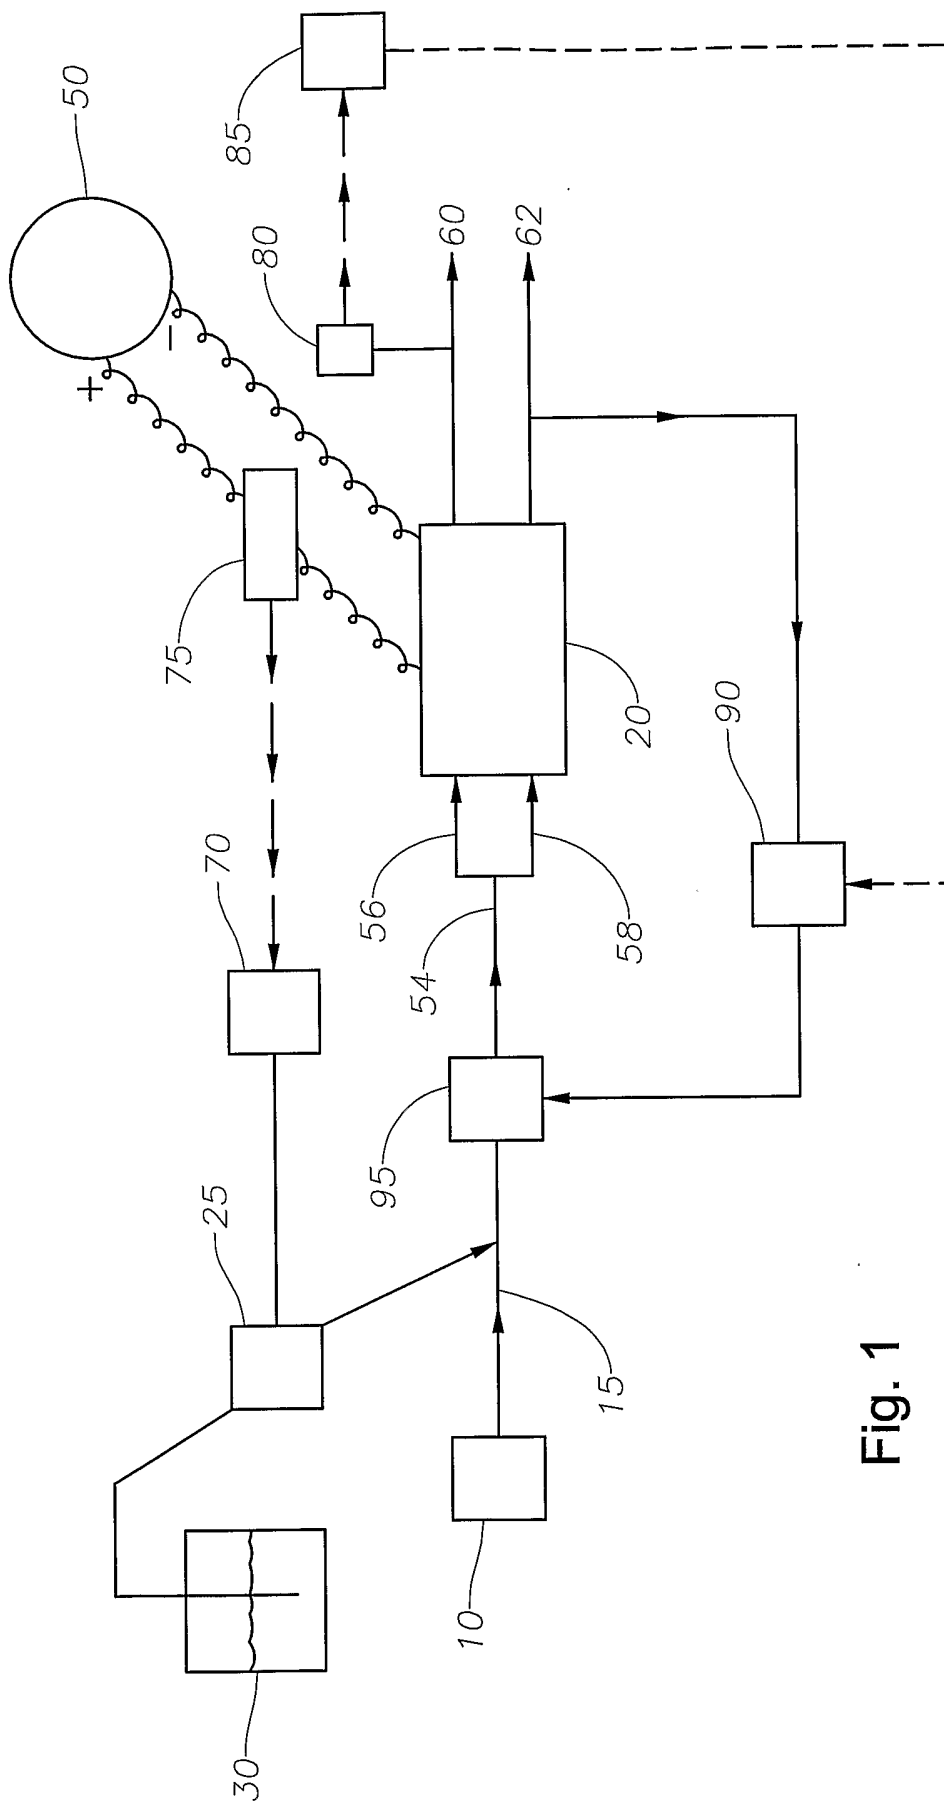


Fig. 1

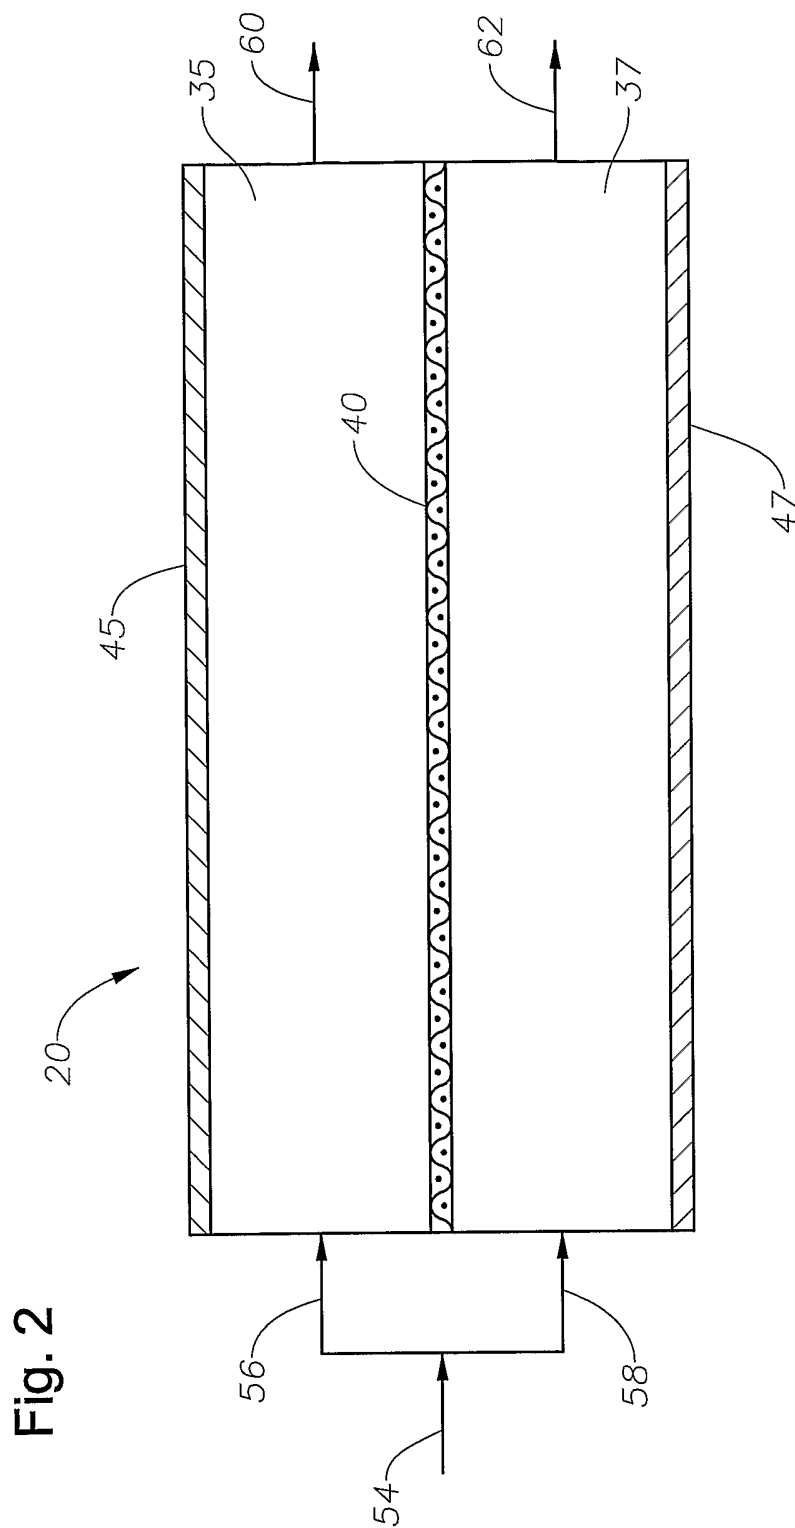


Fig. 3

