

(19)
(12)

(KR)
(B1)

(51) 。 Int. Cl. ⁷
H04B 1/40

(45)
(11)
(24)

2002 09 18
10 - 0353215
2002 09 05

(21) 10 - 1999 - 0053953
(22) 1999 11 30

(65) 2001 - 0049035
(43) 2001 06 15

(73) 3 416

(72) 372

(74)
:

(54)

가

가

4

(ERICSSON) (Bluetooth Protocol)

1 (master) (slave)
 (230) (110) (200) (100)
 (230) BT (210)
 (100) (200) 2 3

2 1 (100) 2 (134), 2(136)
 100) (I/F) (132) BT (130) RF / (138), (134) HCI(Host Control Interface)
 (110) 1(118) HCI /
 가 HCI RS232C USB, PC HCI
 (command), (event),

RF / (138) (134)

(134) 가

(134) (110) 1(118) 가 HCI R
 가
 F / (138) HCI
 1(118)
 2(136) (134) 1(118) 가 BT (130) 1(118)
 8) HCI (200)

(110) 1(118), (122), (120), BBA(116), RF / (114)
 (112) RF / (114)
 / (114) 1(118) RF
 (112) (ANT)

(110) 1(118) (BT) (
) (200)

(122) (ROM) , (RAM)

(120)

BBA(BaseBand Analog)(116)

(112) (ANT) RF / (114) (ANT)

3 1 (200) (200) BT
(210) RF / (212), (214), 3(216) I/F (218)
BT (210) (100) BT (130)
(200) (230) 4(234) (232) (236)
가 4(234) (232) HCI
BT (210) BT (210) 가 HCI

(110) (230) BT (130, 210) (110)
(236)

4 2 3 /

1 4

(110) 1(118) 4 (302) (120) 가
(304) (304) 1(118) 1(118) (306)
(230) (230) (110)

가 1(118) (130)
(230) (BASEBAND Connection) (230)
1(118) (306) (130)
(230) (RF) 1(118) (306)
(230) (X) 가 (308)
(110) (230) 가 10m 가

1(118) (308) (230)

1(118) (310)
(312)

1(118)
(130)

(230)
(120)

1(118) (316)

가

1(118)

가

(314)

(316)

가

가

가

(57)

1.

2.

3.

4.


가

가


가

5.

6.

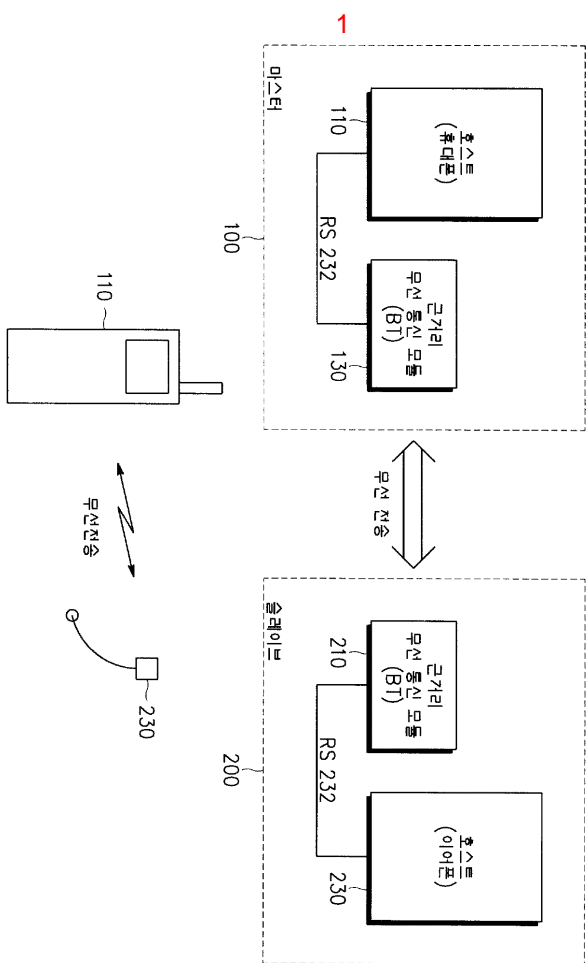


2

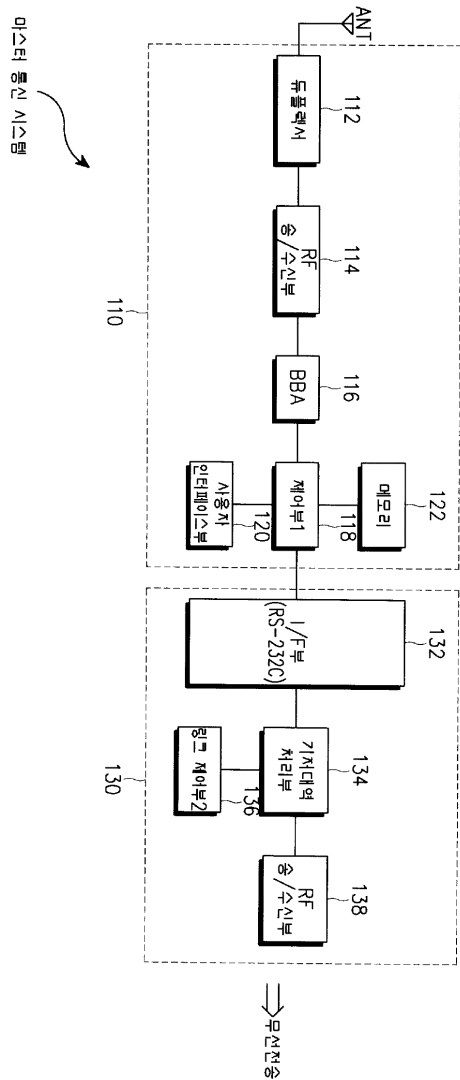

3

무선전송 ⇒

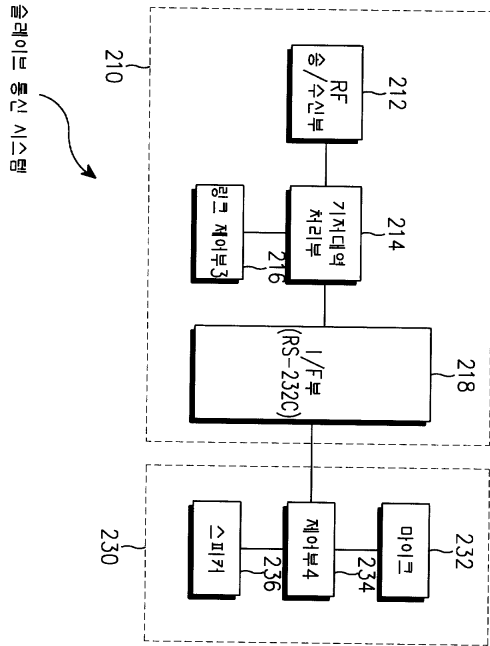

4

