(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 17 September 2009 (17.09.2009)

(10) International Publication Number WO 2009/113030 A2

- (51) International Patent Classification: C12P 19/14 (2006.01)
- (21) International Application Number:

PCT/IB2009/051027

(22) International Filing Date:

12 March 2009 (12.03.2009)

(25) Filing Language:

English

(26) Publication Language:

English

IN

IN

(30) Priority Data:

502/MUM/2008 12 March 2008 (12.03.2008) 520/MUM/2008 14 March 2008 (14.03.2008)

(71) Applicant (for all designated States except US): TATA CHEMICALS LTD. [IN/IN]; Bombay House, 24 Homi Modi Street, Mumbai 400001 (IN).

- (72) Inventors; and
- (75) Inventors/Applicants (for US only): AVALAKKI, Uday Kashinath [IN/IN]; Tata Chemicals Ltd., Innovation Centre, Ghotavde Phata, Urawde Road, Pirangut, Industrial Area, Gat No. 1139/1, Mulshi, Pune 412108 (IN). MAHESWARAN, Palamalai [IN/IN]; Tata Chemicals Ltd., Innovation Centre, Ghotavde Phata, Urawde Road, Pirangut, Industrial Area, Gat No. 1139/1, Mulshi, Pune 412108 (IN). SARAVANAN, Rengarajan [IN/IN]; Tata Chemicals Ltd., Innovation Centre, Ghotavde Phata, Urawde Road, Pirangut, Industrial Area, Gat No. 1139/1, Mulshi, Pune 412108 (IN).
- (74) Agents: WILSON, Neeti et al.; Anand And Anand, B-41, Nizamuddin East, New Delhi 110013 (IN).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

without international search report and to be republished upon receipt of that report (Rule 48.2(g))



(57) Abstract: The present invention deals with an improved process for the production of high yield of pure Galactooligosaccharides using microbial whole cells in a reactor with cross flow hollow fiber microfiltration system. The process is economical as cell biomass is used repeatedly and eliminated the need to cany out downstream processing for the removal of mono and disaccharides from the final product.

7033P1-P2PCT

PROCESS FOR THE PRODUCTION OF GALACTOOLIGOSACCHARIDES BY FREE CELLS

FIELD OF THE INVENTION

5

10

20

25

30

35

40

The present invention relates to a process for the production of high purity galactooligosaccharides/oligosaccharides. The present invention more particularly relates to a process for the production of galactooligosaccharides (GOS) by using microbial whole cells employed in a bioreactor with microfiltration membrane system. The novelty of the process includes the reuse of cell biomass in repeated cycles of biotransformation and the production of high purity (> 90 %) galactooligosaccharides (GOS) without the separation of mono and disaccharides.

15 BACKGROUND OF THE INVENTION

Galactooligosaccharides find widespread use in the industry as prebiotic compounds. A number of processes have been developed for the production of galactooligosaccharides. Some processes involve the use of β-galactosidase enzyme obtained from different microbial sources, example Aspergillus oryzae, Bullera singularis, Candida, Kluveromyces sp., Bacillus circulans, Lactobacillus bulgaricus, Streptococcus thermophilus, and Bifidobacterium sp., (Akiyama et. al., 2001, Ribu et. al., 2001, Tzortiz et. al., 2005, Jorgensen et al., 2001, Shin et. al., 1998, US5032509, EP00272095A2).

Use β -galactosidase enzyme or whole cells in immobilized matrices in place of free whole cells or enzymes has also been reported (Akiyama et. al., 2001, Ribu et. al., 2001, Tzortiz et. al., 2005, Jorgensen et al., 2001, Shin et. al., 1998, US5032509, EP00272095A2). A combination of β -galactosidase enzyme and *Saccharomyces cerevisiae* cells has been co-immobilized in calcium alginate beads to produce ethanol from whey (Axelsson et al., 1991, Lewandoska et al., 2003 and Hideo et al., 1984). The objective was to cleave lactose to glucose and galactose and thereby yeast can produce more ethanol.

The processes involving immobilized whole cells or enzyme over the free enzyme has certain advantages (1) catalytic power is stabilized (2) the immobilized matrices can be recycled which reduces cost and (3) products can be isolated in a simple manner. However, the use of immobilized

7033P1-P2PCT

enzymes depends upon the cost benefit and technical feasibility factors. In some processes, the extraction and purification of enzyme is costly and in some cases the enzyme denatures after extraction. Under such conditions, the use of immobilized or coimmobilized whole cells has added advantages over the immobilized enzymes (Zhang et al., 1992, Kiss et al., 1999).

The most prevalent method of whole cell immobilization is cell entrapment in hydrocolloids like alginate, carrageenan, polyacrylamide, agarose, gelatin, gellan gum (US5175093, US5288632, US5093253, US4572897, US5070019, US5759578, US5939294 and US5034324, Birnbhaum et al., 1981). JP2005042037, JP5815243, and JP561132890 describe the use of polyvinyl alcohol with polyethylene glycol and boric acid as a successfully alternative to other hydrocolloids.

15 Chang et al., 1998 mixed microbial cells in calcium chloride solution containing small amount of xanthan gum and then dropped into sodium alginate. The capsule membrane formed by ionic bond between calcium and alginate prevented swelling of the membrane and resulted in a high concentration of microbes within the capsule.

20

25

5

10

US5034324 discloses that polyvinyl alcohol has a high affinity for microorganisms and provides mechanical strength and durability sufficiently high for use in any reactor, and high resistance to water and chemicals. Jianlong et al., (2004) used acryl amide as polymerizing agent in the polyvinyl alcohol matrix with boric acid as cross-linking agent to overcome the swelling of polyvinyl alcohol gels in aqueous solution.

However use of immobilized cells has following disadvantages;

30

- a. The matrix and Cross linking agents must comply regulatory approval for the use in food grade conditions.
- b. Mechnical stability of immobilized beads with cells is poor
- c. Constraints in the diffusion of substrate and products and hence the efficiency of bioconversion is less than in free cells.
- d. Because of low conversion efficiency, the product separation form unreacted substrate and impurities is a challenging task

35

40

US 716451 describe mixing of the saccharide solution, obtained after hydrolysis, with ethanol and passing through activated carbon column to remove the mono and disaccharide components. The galactooligosaccharide component is eluted using pure ethanol. This downstream processing results

7033P1-P2PCT

in substantially pure galactooligosaccharide solution However, this process is not efficient due to the loss in the yield of galactooligosaccharides. Also, it is not economical due to the use of ethanol.

To overcome the limitation of activated carbon column treatment, EP00272095A2 and US5032509 describe loading of the saccharide solution on a strong cation exchange resin followed by elution of galactooligosaccharides with water at 60 to 80 °C. This process can improve the yield of galalctooligosaccharide. However, it is not cost effective because of the use of costly strong cation exchange resin.

Therefore, the need for a cost effective process that results in the production galactooligosaccharides of high purity and yield galactooligosaccharides continues to prevail.

15

20

SUMMARY OF THE INVENTION

The main object of the present invention is to provide a process for the production of galactooligosaccharides (GOS) of high purity and yield using whole cells of yeasts in a bioreactor with microfiltration membrane system.

The other object of the present invention is the use of mixed whole cells of yeasts for the production of GOS.

25 Further object of the invention is to obtain GOS without the use of any costly resins.

Further the present invention provides a color less GOS syrup using carbon polishing along with concentrator.

30

Furthermore, the present invention provides amorphous powder/crystalline GOS using spray driers/crystallizers.

Accordingly, the present invention provides a process for production of high purity galactooligosaccharides by free cells comprising:

a. growing of a microorganisms producing enzyme for hydrolying sugar to oligosaccharide under optimum medium and conditions to obtain cell biomass of *B. singularis* and *Saccharomyces sp.*,

7033P1-P2PCT

5

10

15

20

30

35

40

b. hydrolysis of lactose and utilization of produced glucose by mixed microbial culture,

- c. separating galactooligosaccharides from microbial culture using microfiltration membrane system/centrifugation,
- d. filtering said galactooligosaccharides using a deep bed filter with cotton and activated carbon/carbon filter at a flow rate of 10-30ml/min,
- e. concentrating galactooligosaccharides at the temperature range of 40-60°C in vacuum evaporator so as to obtain a syrup having 70-80% dissolved solids,
- f. drying said syrup to obtain high purity of galactooligosaccharides in amorphous form powder,
- g. crystallizing said amorphous powder to obtain crystalline galactooligosaccharides.

In accordance with one embodiment of the invention, the immobilized whole cells of yeasts are used in a sequential reactor composed of a series of reactors wherein the hydrolysis products from one reactor serve as the feed for the next reactor in the series.

In accordance with another embodiment, the yeast cells are coimmobilized and used in a single reactor.

The present invention eliminates the need for the down stream process for the separation of contaminating saccharides.

This process of coimmobilization of whole cells can be applied to other products such as oligosaccharides, organic acids and other biotechnological process where more than microorganisms are involved.

BRIEF DECRIPTION OF DRAWINGS

The process described in this invention will become apparent from the drawings given below:

- Fig. 1: Reuse of free cells for galactooligosaccharide production.
- Fig.2: Production of GOS by free cells of B. singularis and mixed cells of B. singularis and Saccharomyces sp.

7033P1-P2PCT

20

40

Fig.3: GOS production by reuse of immobilized matrix.

DETAILED DESCRIPTION OF THE INVENTION

A novel and improved process for production of high purity galactooligosaccharides by free cells comprises production of cell biomass in shaker flask and/or fermentor using the optimized growth medium, separation of cells from the fermentation media using centrifugation/microfiltration membrane system, use of mixed cultures in a bioreactor for the production of GOS and utilization of glucose produced, estimation of purity of GOS by HPLC using sugar columns, separations of GOS form the microbial cells using centrifugation/microfiltration membrane system, filtration of GOS using a depth carbon filter/deep bed filter having filter media and activated carbon, concentration of GOS to obtain in syrup (70-80% dissolved solids) form, drying/crystallization of GOS to obtain in amorphous/crystalline powder form.

In accordance with the first embodiment, the cell biomass of B. singularis and Saccharomyces sp were produced in the shaker flask and/or fermentor using the optimized growth medium.

In accordance with the second embodiment, the mixed microbial cultures of *B. singularis* and *Saccharomuces sp.* (1:1 ratio dry wt. basis).

In accordance with the third embodiment, mixed microbial cell biomass was transferred to a reactor tank fitted with microfiltration membrane system and hydrolysis is carried using 15-45%, preferably 30% lactose at about 3 to 10 pH, at about 10-60 °C, preferably 30 °C, in about 12 to 48 hours having agitation speed in the range of about 50 to 200 rpm such that the purity of GOS reached more than 90%. Hydrolyzed mass was circulated through microfiltration to collect permeate (50% of reacted mass) for the downstream process. Fresh batch of lactose solution (30%) was charged into the reactor for the second cycle of hydrolysis. Hydrolysis cycles were repeated by adding the said additional biomass to compensate the desired conversion efficiency i.e. until there is 10-20% drop in efficiency even with the addition of additional of 10% cell biomass.

The filtration of galactooligosaccharides is done by using a deep bed filter with cotton and activated carbon/carbon filter at a flow rate of 10-30ml/min, preferably 20 ml/min.

7033P1-P2PCT

In accordance with the fourth embodiment, permeate was passed through a carbon polisher and then through 0.2 micron microfiltration to remove the color and suspended carbon particles.

5

In accordance with the fifth embodiment, the carbon polished hydrolyzed solution was passed through a concentrator at 40-60 °C, in vacuum to obtain syrup of 70-80 % dissolved solid content.

- In accordance with the sixth embodiment of the invention, the carbon polished hydrolyzed solution was passed through a spray drier under pressure through the nozzles in the temperature range of about 110-140 °C to obtain the dry powder.
- The present invention is further illustrated in the following examples. However, the scope of the invention should not be limited to these examples as the person skilled in the art can easily vary the proportion of the ingredients and combinations.
- 20 Example 1: Isolation of lactose hydrolyzing B. singularis culture

B. singularis, TCL-IC/NUT-1, was isolated from dairy effluents by serial dilution method on Yeast-Malt-Peptone (YMP) medium of the following composition; Yeast extract 0.3%, Malt extract 0.3%, Peptone 0.5%, Dextrose 1% and Lactose 1%, and agar 2.0 %, pH 6.5.

25

35

Working stock culture: The cultures were streaked on YMP slants and incubated for 48 h at 27 °C. These slant cultures were used as working stock culture.

Preparation of inoculum: 50 ml YMP medium in 250 ml flask was inoculated with a loop full of culture from the slants and incubated in a shaker for 48 h at 27 °C at 180 rpm.

Shake flask trials: 150 ml of YMP medium in 500 ml flasks was inoculated with 5% inoculum and incubated on the shaker for 48 h at 27 °C at 180 rpm. The samples from the shake flask were taken aseptically and assayed for GOS production as given in Example 2.

Fermentation trials: 3 l of YMP medium was charged in 5 l fermentor and sterilized. The fermentor was inoculated with 5% inoculum from the shaker

7033P1-P2PCT

flask. Fermentation was carried out at 27 °C, pH 4.5, 600 rpm agitation, and with 1 vvm of air to maintain 40-60% dissolved oxygen. The samples from fermentor were taken at 24, 48 and 67 h to determine maximum GOS production as described in Example 2.

.

5

10

Example 2: Assay for galactooligosaccharide production

25 ml of the cell suspension from the shaker flask or fermentor was centrifuged to obtain cell pellet. The cell pellet was suspended in 15 ml of 40% lactose solution and kept on shaker at 50°C and 280 rpm agitation. 0.5 ml of the samples was taken out centrifuged to remove the cell biomass. The supernatant was diluted 50 times with milli Q water. 5 μl of diluted samples was injected in to the HPLC system.

HPLC analysis: The concentration of sugars (glucose, galactose, lactose, and Galactooligosaccharides) was determined by HPLC. The HPLC (Waters 717) system consisted of refractive index detector (waters W2467) and carbohydrate column Phenomenex (RNM 00h-0316, REZEX 300 mm L X 7.5 mm, pore size 8 u) ID column. The column temperature was maintained at 80°C. Water was used as mobile solvent with flow rate of 0.5 ml/min. Galactooligosaccharides and other sugars were determined as weight percentage of total sugars based on the area of peak.

Experiment 3: Production of galactooligosaccharides by free cells of *B. singularis*

25 ml of cell suspension from the shaker flask or fermentor was centrifuged to obtain cell pellet. The cell pellet was suspended in 15 ml of 30% lactose solution and kept on shaker at 50 $^{\circ}$ C and 180-rpm agitation.

30

Table:1 Galactooligosaccharide production by free cell of B. singularis.

Reaction	time	% GOS
(h)		
1		16.00
3		25.40
6		35.20

7033P1-P2PCT

10

15

25

The results in Table 1 indicate the galactooligosaccharides production is higher than reported by Yang et al., while it is same as reported by Shin et al.199

5 Experiment 4: Effect of lactose concentration on the galactooligosaccharide production by whole cells of *B. singularis*

100g of cured beads were suspended in 120 ml of 20 and 40% aqueous lactose solution, pH 4.5, for hydrolysis. Hydrolysis was carried out on shaker flask at 180 rpm agitation and 30 °C. Half a milliliter sample is taken at different time intervals and processed for galactooligosaccharide by HPLC.

Table 2: Effect of lactose concentration on the galactooligosaccharide

production by whole cells of B. singularis

Lactose	GOS	Glucose	Lactose
%	%	%	%
20	40.96	15.51	43.53
30	41.80	16.20	42.00
40	42.52	17.20	40.60

There was no significant difference in the GOS production with the increase in lacose concneration from 20 to 40 % (Table 2).

20 Experiment 5: Kinetics of GOS production

Table 3: Kinetics of galactooligosaccharide production by whole cells of *B. singularis*

Reaction	% sugar			
time (h)	GOS	Glucose	Lactose	
2	17.00	6.06	75.85	
6	28.71	11.54	59.57	
9	35.77	2.42	51.27	
12	41.0	17.02	40.69	

The results of Table 3 indicate that lower the concentration of lactose higher the galactooligosaccharide production. Low galactooligosaccharide

7033P1-P2PCT

5

10

15

20

25

35

production at high lactose concentration may be due to substrate inhibition and/or glucose produced during hydrolysis of lactose.

Experiment 6: Isolation of Saccharomyces sp.

This strain was isolated from contaminated dextrose syrup on MYGP medium composed of Malt extract 0.3%, Yeast extract 0.3%, Glucose 1.0%, Peptone 0.5% and agar 2.0 %, pH 6.4. The strain was characterized for the utilization of glucose and lactose. The strain, TCL-IC/NUT-2, growing only in presence of glucose and not in the presence of lactose was selected (lac, glc⁺). Production of cell biomass from this strain in shaker flask and fermentor was similar to *B. singularis* except for the growth medium.

Experiment 7: Hydrolysis of lactose and glucose by Saccharomyces sp.

25 ml of the cell suspension from the shaker flask or fermentor was centrifuged to obtain cell pellet. The cell pellet was suspended in 15 ml of 20% lactose and 2% glucose solution and kept on shaker at 50°C and 180 rpm agitation. The samples were taken at regular intervals of time and assayed for residual lactose and glucose concentration by HPLC as described in Example 2.

Table 4: Hydrolysis of lactose and glucose by Saccharomyces sp.

Hydrolysis	Residual sugar (%)		
time (h)	Lactose	Glucose	
0	100	100	
3	86.44	5.21	
5	92.61	4.75	

The results of Table 4 show that *Saccharomyces sp.* utilize glucose preferably compared to lactose. Thus, the culture has been characterized as lac⁻, glc⁺

30 Experiment 8: Effect of mixed free cells of B. singularis and Saccharomyces sp.

25 ml of the cell suspension of *B. singularis* and 25 ml suspension of *Saccharomyces sp* from the shaker flask or fermentor was mixed and centrifuged to obtain cell pellet. The cell pellet was suspended in 15 ml of

7033P1-P2PCT

20

25

30% lactose solution and kept on shaker at 30 °C and 180 rpm agitation. Half a milliliter sample was taken at different time intervals and processed for galactooligosaccharide by HPLC.

5 Table 5: Production of Galactooligosaccharide by mixed free cells of *B. singularis* and *Saccharomyces Sp.*

Hydrolysis time (h)	% GOS production
1	50.80
2	76.04
4	77.95
5	74.85
7	70.26

The results of Table 5 indicate that purity of GOS increased to 70.26 % in 7 h as acompared to 35% GOS with B. singularis (Table 3).

Experiment 9: Production of galactooligosaccharides by mixed cells in a reactor with microfiltration system

The whole cells of *B. singularis* and *Sacccahromyces Sp.* were mixed in equal concentrations (1:1 dry weight basis) with 30% w/w lactose solution in a reactor. The reaction temperature was maintained at 30 °C. After 24 h samples were taken and analyzed for GOS concentration (**Table 6**)

Experiments	% Sugar			
	GOS	Lactose	Glucose	Galactose
Expt 1	91.49	8.51	0.00	0.00
Expt 2	91.36	8.64	0.00	0.000.00
Expt 3	90.69	9.31	0.00	

Example 10: Repeated cycles of GOS production

Whole cells of B. singlualris and Saccharomyces sp. were mixed as in the Example 9 in reactor attached with cross flow microfiltration system with membrane made up of Polyether sulfonate of 0.5 micron pore size, 340 mm lumen dia (ID) and area of 0.6 meter. When the purity of GOS reached more than 90%, 50% percent of the solution was removed by passing through cross flow microfiltration system through permeate and fresh lactose

7033P1-P2PCT

solution 30% was added to make up the volume in the reactor to start the next cycle. The cycle was repeated until there was 10% drop in the purity of GOS

5 The results from figure 1 indicated that more than 90 % pure GOS was produced in the reactor in 39 repeated cycles wherein the cell biomass was reused in the GOS production.

Experiment 11: Concentration of GOS

10

The solution obtained from the experiment 10 was pooled and filtered through activated carbon pad to remove the color. The carbon polished hydrolyzed solution is passed through a concentrator at 40-60 °C, in vacuum to obtain syrup of 70-80 % dissolved solid content.

15

20

Experiment 12: Spray drying of GOS

The dilute galactooligosaccharides is sprayed in a spray direr (Bovan make) of capacity 4kg/h was used for making GOS powder. Five liters of dilute GOS of having $25~^{0}$ Brix was sparged at rate of 40m/min through the nozzle. The other process parameter maintained apart form the flow rate is temperature in the range of $125-130~^{0}$ C under pressure. The obtained product had shown a white color powder.

7033P1-P2PCT

We Claim:

1. A process for production of high purity galactooligosaccharides by free cells comprising:

5

a) growing of a microorganisms producing enzyme for hydrolying sugar to oligosaccharide under optimum medium and conditions to obtain cell biomass of *B. singularis* and *Saccharomyces sp.*,

10

b) hydrolysis of lactose and utilization of produced glucose by mixed microbial culture,

c) seperating galactooligosaccharides from microbial culture using microfiltration membrane system/centrifugation,

15

d) filtering said galactooligosaccharides using a deep bed filter with cotton and activated carbon/carbon filter at a flow rate of 10-30ml/min,

20

e) concentrating galactooligosaccharides at the temperature range of 40-60°C in vacuum evaporator so as to obtain a syrup having 70-80% dissolved solids,

25

f) drying said syrup to obtain high purity of galactooligosaccharides in amorphous form powder,

25

g) crystallizing said amorphous powder to obtain crystalline galactooligosaccharides.

30

2. The process as claimed in claim 1, wherein *B. singluaris* and *Saccharomyces sp* are isolated from whey effluent and contaminated sugar solution, respectively.

35

3. The process as claimed in claim 1, wherein Saccharomyces sp. is lac-glu+, gal+.

35

4. The process as claimed in claim 1, wherin said cell biomass is optionally prepared from β -galactosidase enzyme producing microbial cultures like Aspergillus Oryzae, Candida, Kluveromyces Sp.,

7033P1-P2PCT

5

10

15

30

35

Bacillus Circulans, Lactobacillus Bulgaricus, Streptococcus thermophilus and Bifidobacterium sp.


- 5. The process as claimed in claim 1 wherein said growth of cell biomass is by shaker flask and fermentation.
 - 6. The process of claim 1, wherein said enzyme that hydrolyses lactose to oligosaccharide is β-galactosidase, glucose isomerase, catalase, lactate dehydrogenase, and combinations thereof.
- 7. The process as claimed in claim 1, wherein the ratio of the microbial cell is in the range of 1:1 to 1:2 on dry weight basis.
- 8. The process as claimed in claim 1, wherein hydrolyzation reaction is carried out in a bioreactor by using about 15 to about 45%, preferably 30% lactose solution of about 3 to about 10 pH, at about 10 to 60°C in about 12 to 48 hours having agitation speed in the range of about 50 to 200 rpm.
- 9. The process as claimed in claim 1, wherein hydrolysis cycles are repeated by adding said additional biomass to compensate the desired conversion efficiency.
- 10. The process as claimed in claim 1, wherein filteration of said galactooligosaccharides using a deep bed filter with cotton and activated carbon/carbon filter at a flow rate of 20 ml/min,
 - 11. The process as claimed in claim 1, wherein permeate is passed through carbon polisher followed by 0.2 micron microfiltration membrane system to remove the color and suspended carbon particles.
 - 12. The process as claimed in claim 1, wherein the carbon polished hydrolyzed solution is passed through a concentrator at 40-60 °C, in vacuum to obtain syrup of 70-80 % dissolved solid content.
 - 13. The process as claimed in claim 1, wherein the membrane system is selected from PES, PTFE, regenerated cellulose or ceramic hallow fiber, TFF cassette membrane.

7033P1-P2PCT

14. The process as claimed in claim 1, wherein the dilute galactooligosaccharides is sprayed under pressure through the nozzles in the temperature range of 100 to 135 °C.


7033P1-P2PCT

SHEET 1/3

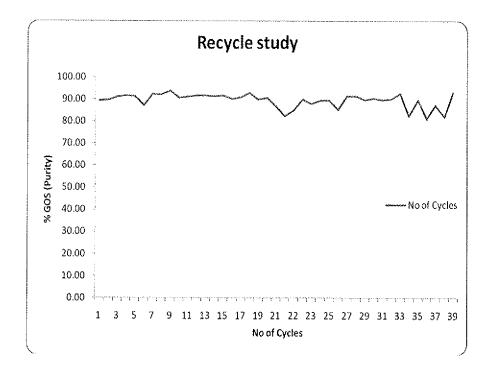

7033P1-P2PCT

SHEET 2/3

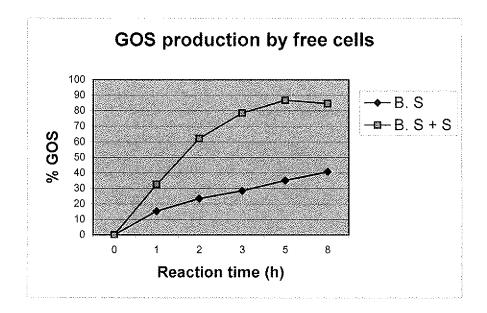

7033P1-P2PCT

SHEET 3/3

