



US 20040163254A1

(19) **United States**

(12) **Patent Application Publication**
Miyagawa et al.

(10) **Pub. No.: US 2004/0163254 A1**

(43) **Pub. Date: Aug. 26, 2004**

(54) **METHOD FOR MANUFACTURING
INJECTION HOLE MEMBER**

Publication Classification

(76) Inventors: **Masanori Miyagawa, Kariya-city (JP);
Tsunehiro Uehara, Suwa-city (JP)**

(51) **Int. Cl.7** **B21D 51/16**

(52) **U.S. Cl.** **29/890.142; 239/5; 239/596;
239/584; 29/557**

Correspondence Address:
**NIXON & VANDERHYE, PC
1100 N GLEBE ROAD
8TH FLOOR
ARLINGTON, VA 22201-4714 (US)**

(57) **ABSTRACT**

A lead hole is formed in a base material of an injection hole member with a straight punch, and then, a taper hole is formed in the base material by widening the lead hole with a taper punch. An intersection line between a virtual plane perpendicular to a central axis of the lead hole and an inner peripheral surface of the lead hole is elliptic in shape, whose major axis is directed along an intersection line between a virtual plane, which includes the central axis of the lead hole and a thickness direction axis of the base material, and the virtual plane perpendicular to the central axis of the lead hole. An intersection line between a virtual plane perpendicular to a central axis of the taper punch and an outer peripheral surface of the taper punch is round in shape.

(21) Appl. No.: **10/746,262**

(22) Filed: **Dec. 29, 2003**

(30) **Foreign Application Priority Data**

Dec. 27, 2002 (JP) 2002-381501
Dec. 27, 2002 (JP) 2002-381687
Dec. 27, 2002 (JP) 2002-381753
Nov. 14, 2003 (JP) 2003-385684

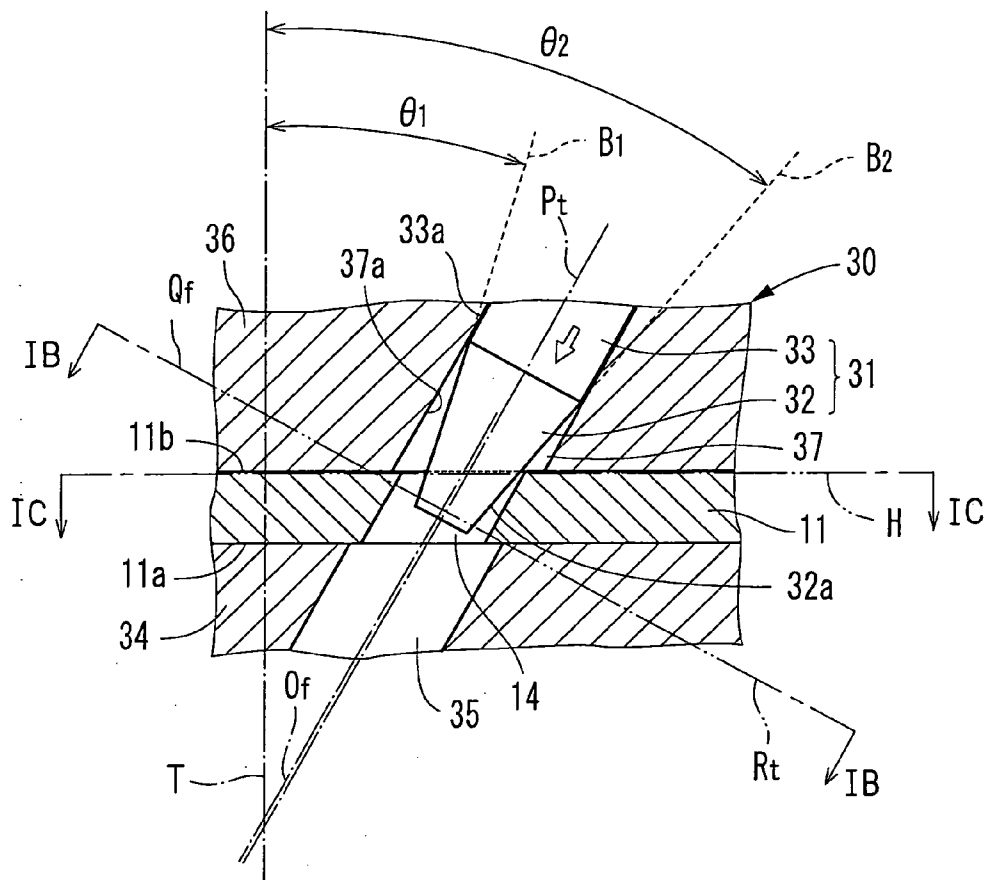


FIG. 1A

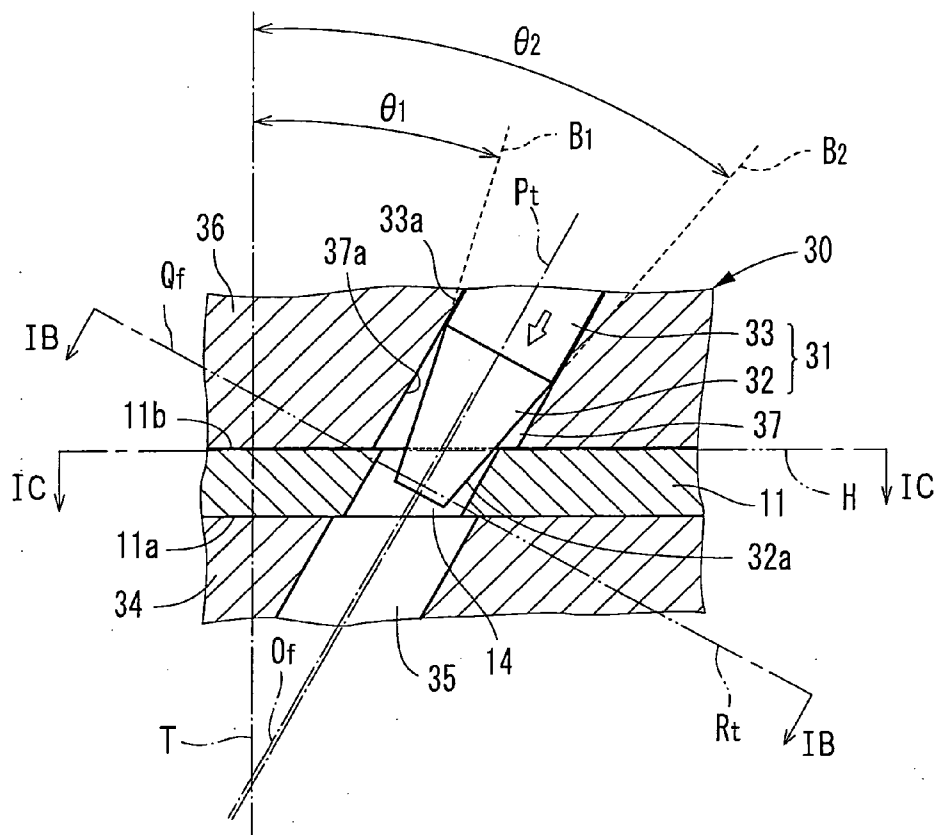


FIG. 1B

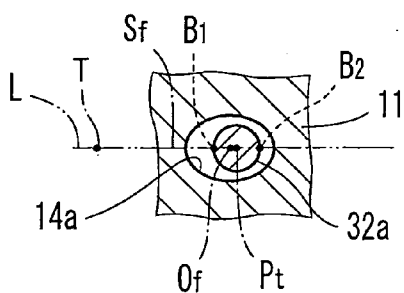


FIG. 1C

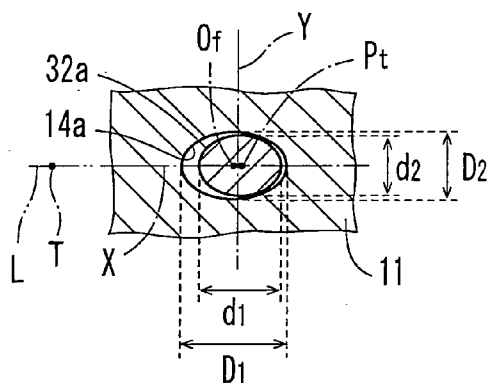


FIG. 2

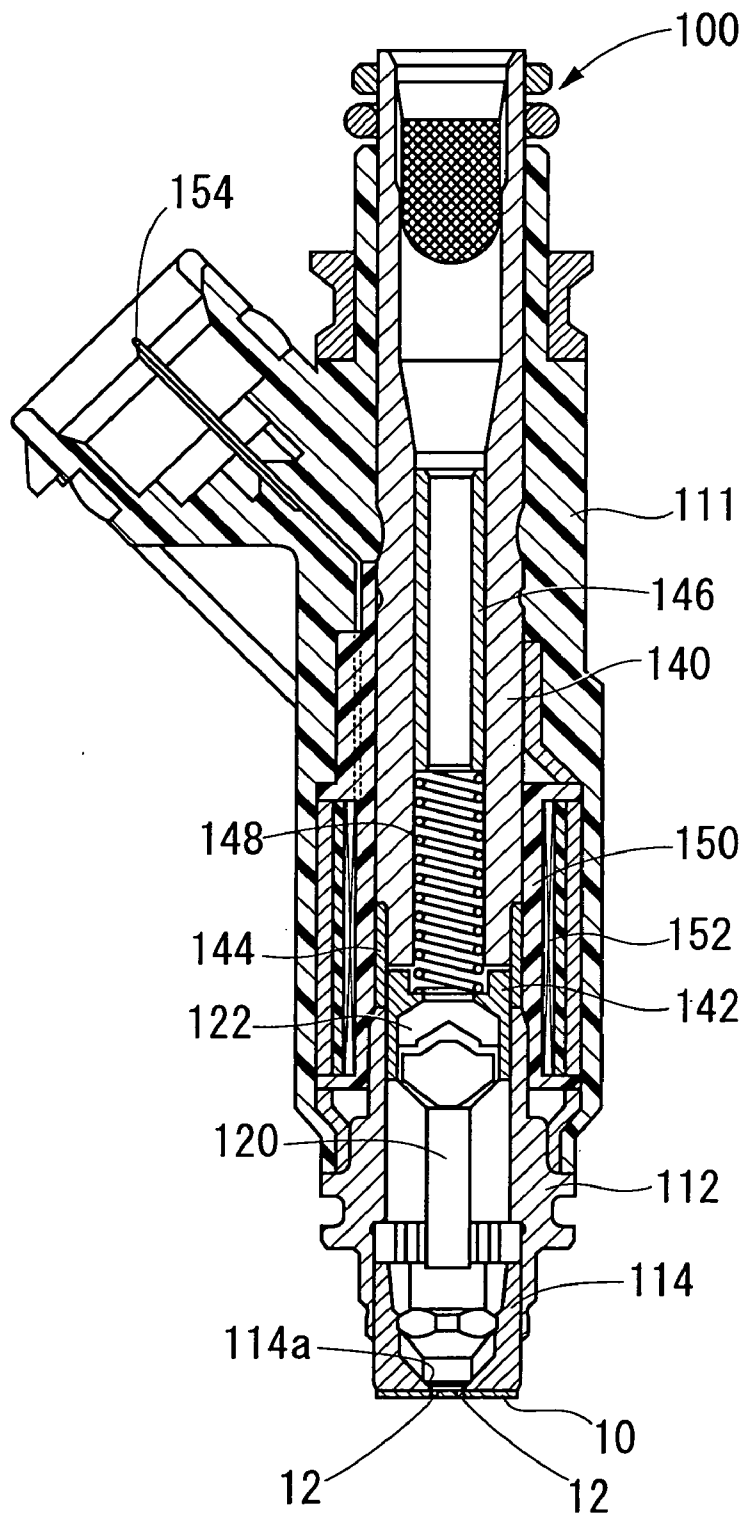


FIG. 4

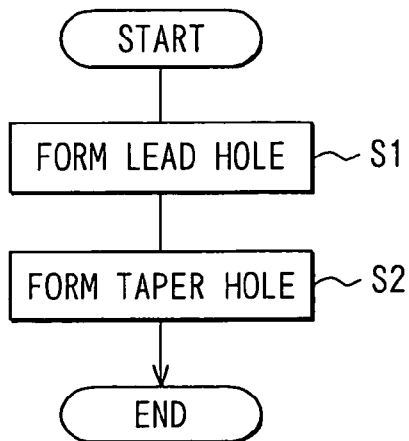


FIG. 5A

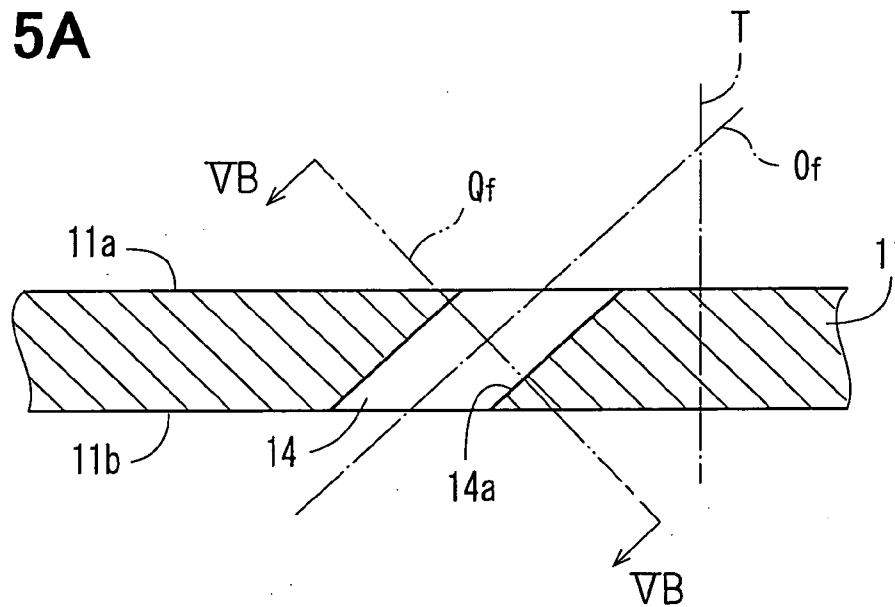


FIG. 5B

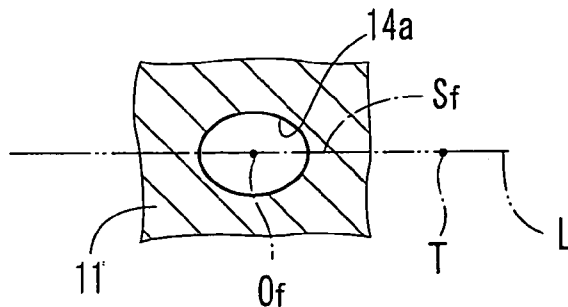


FIG. 7A

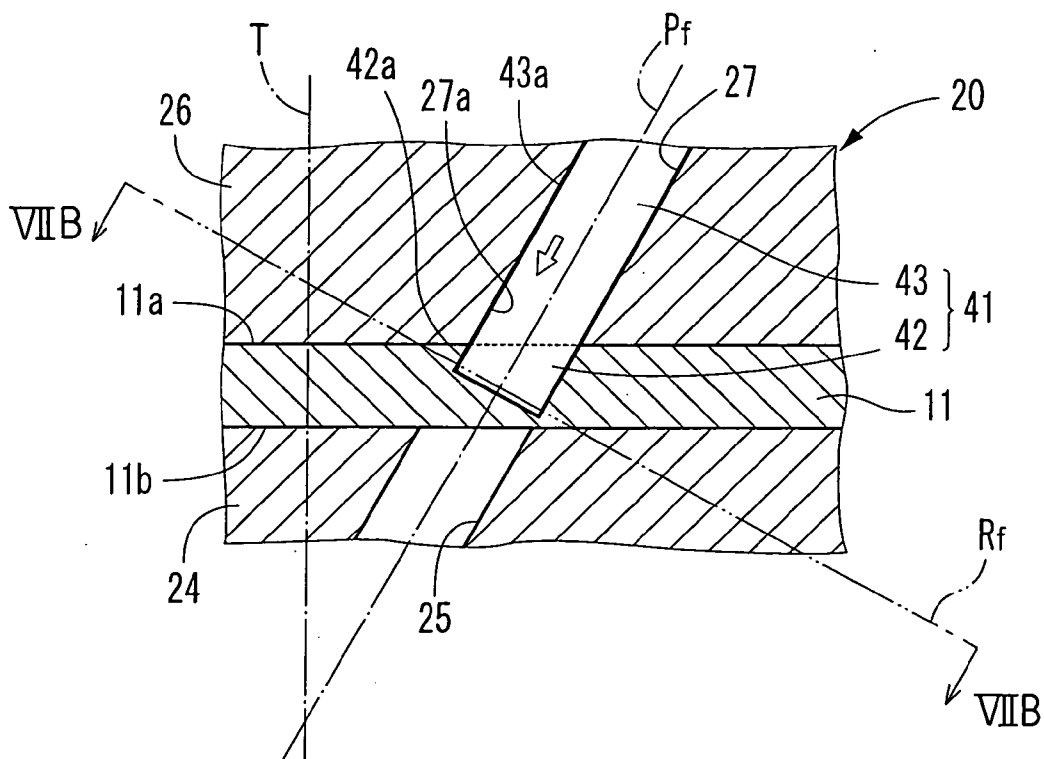


FIG. 7B

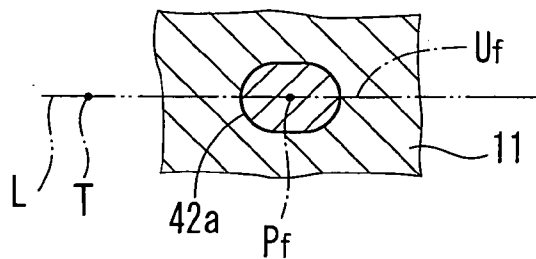


FIG. 8A

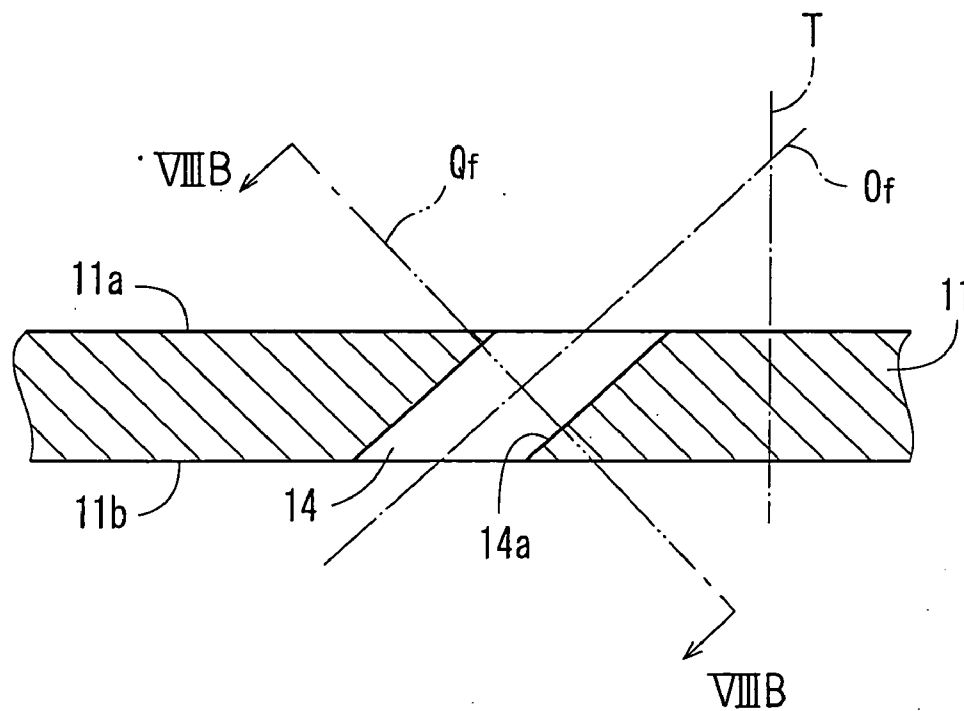


FIG. 8B

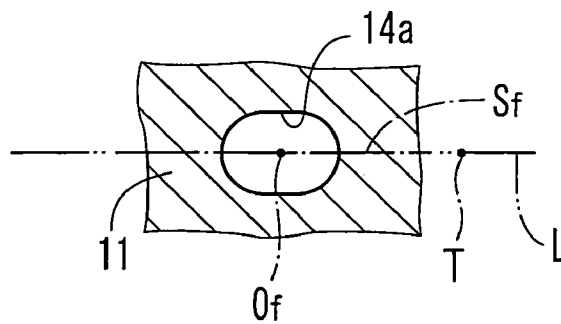


FIG. 9A

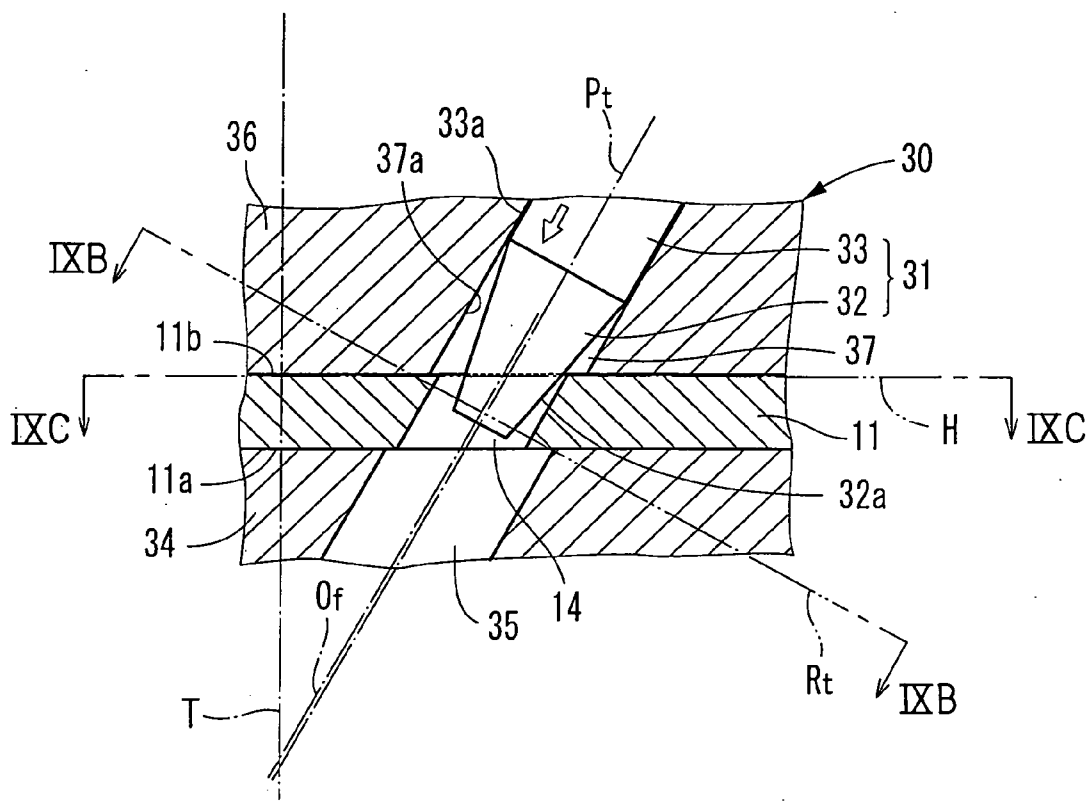


FIG. 9B

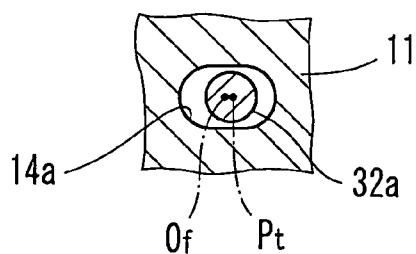


FIG. 9C

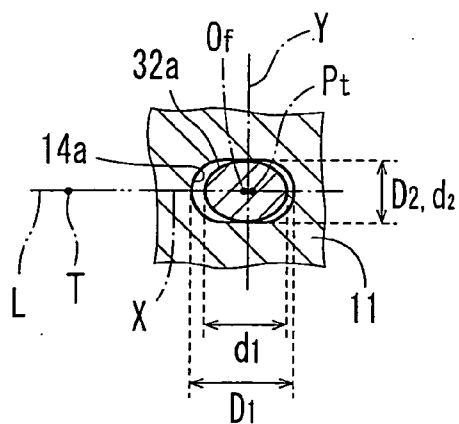


FIG. 10A

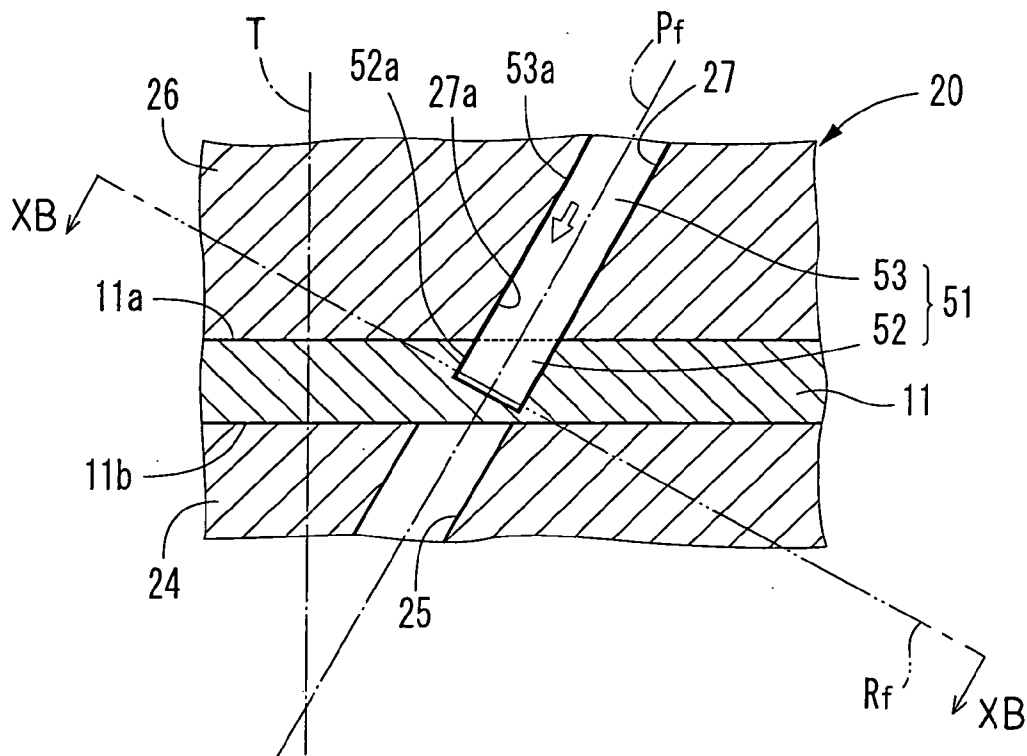


FIG. 10B

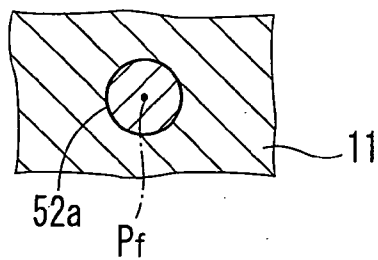


FIG. 11A

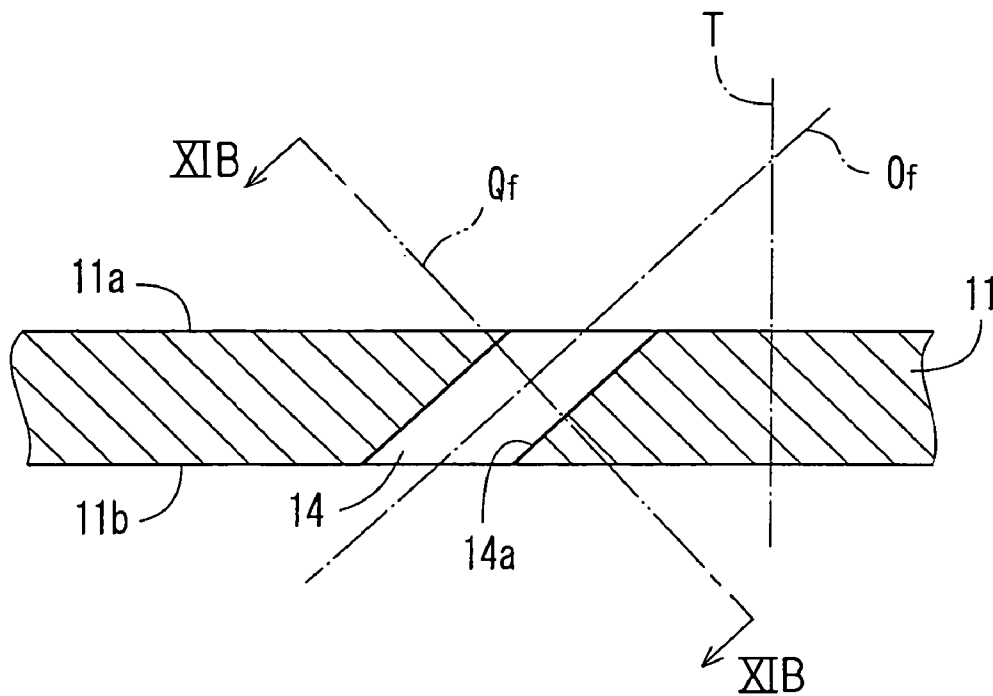


FIG. 11B

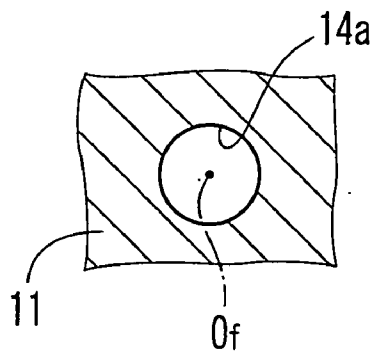


FIG. 13A

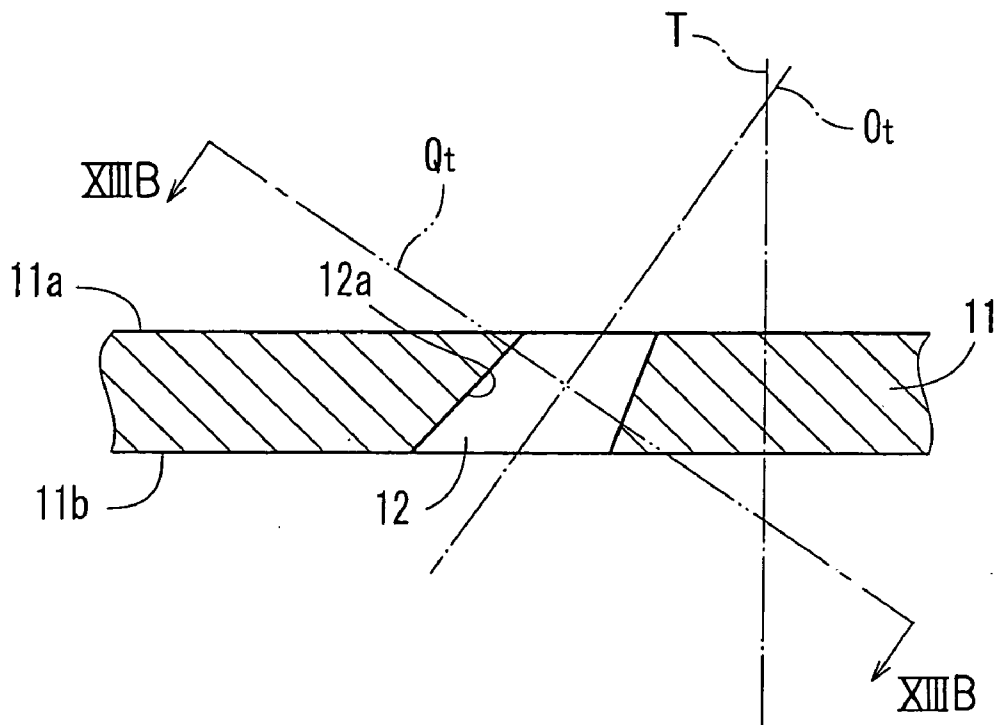


FIG. 13B

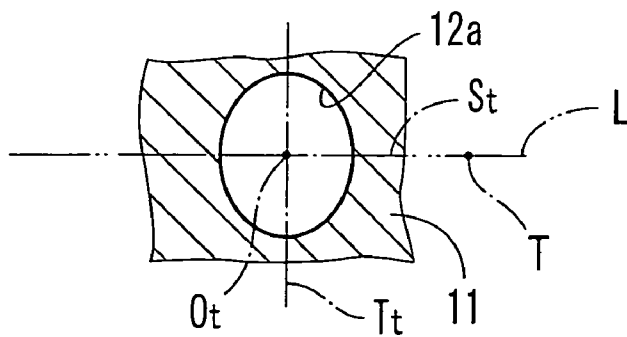


FIG. 15A

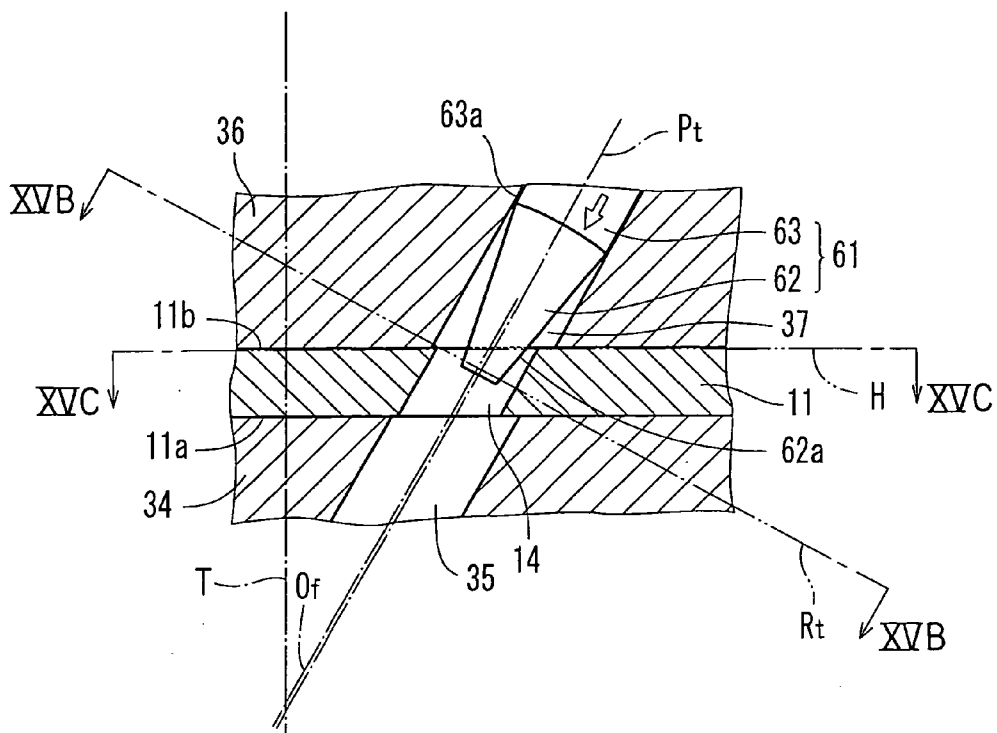


FIG. 15B

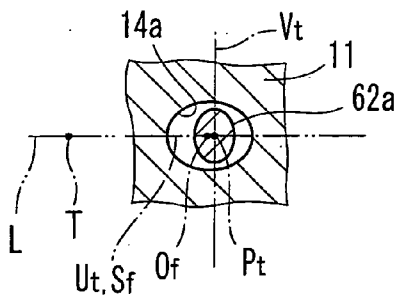


FIG. 15C

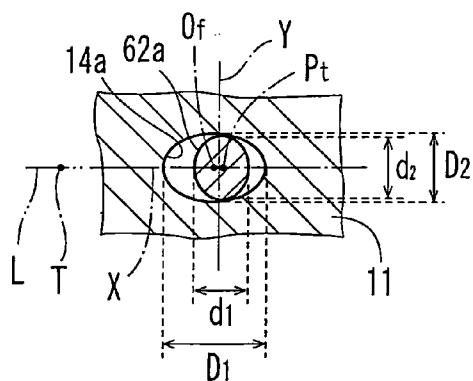


FIG. 17A

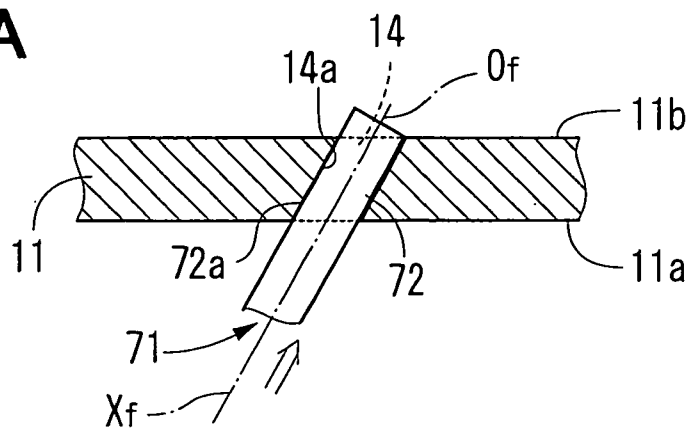


FIG. 17B

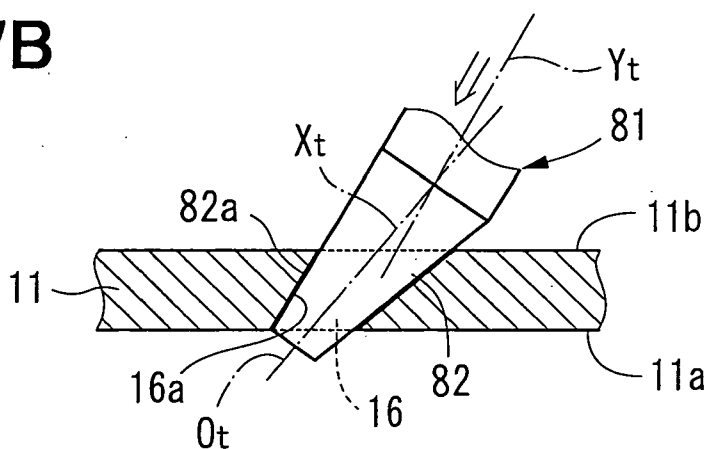


FIG. 17C

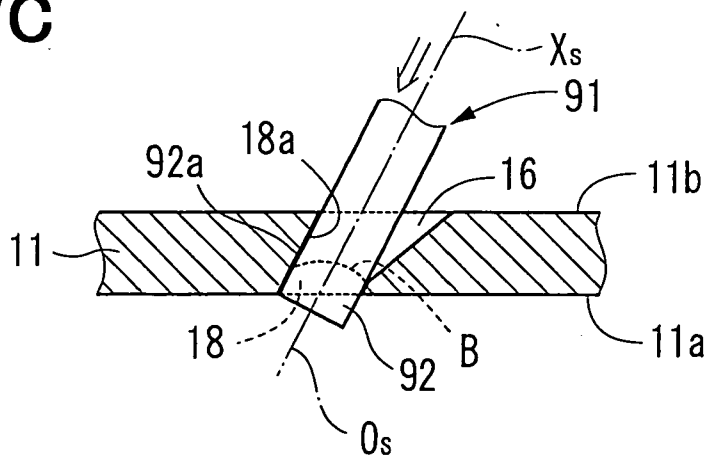


FIG. 18

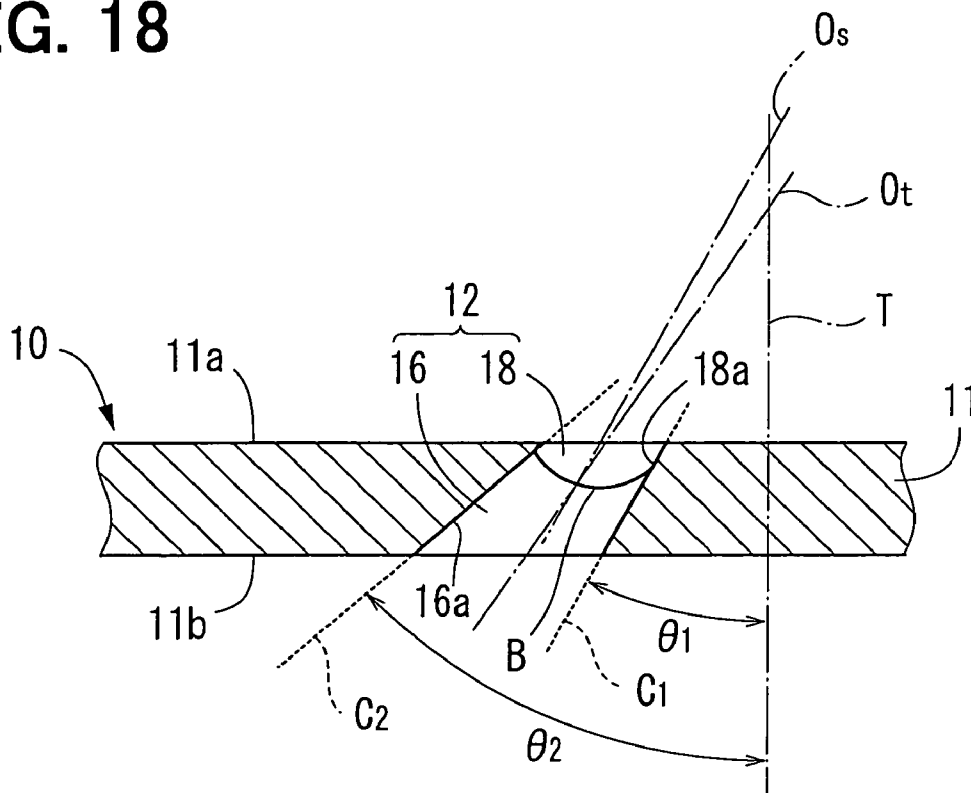


FIG. 19

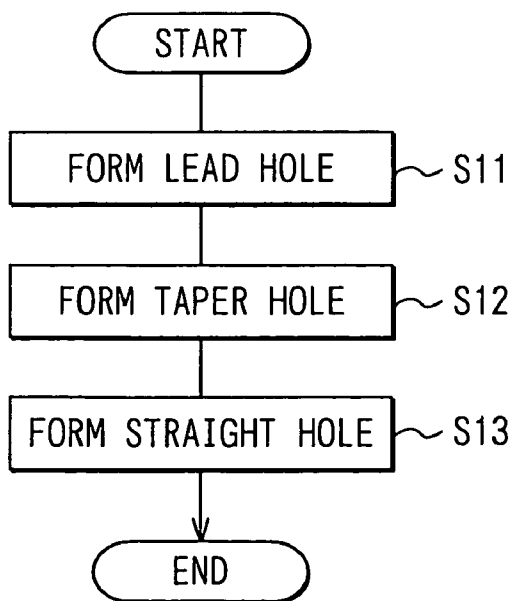


FIG. 20

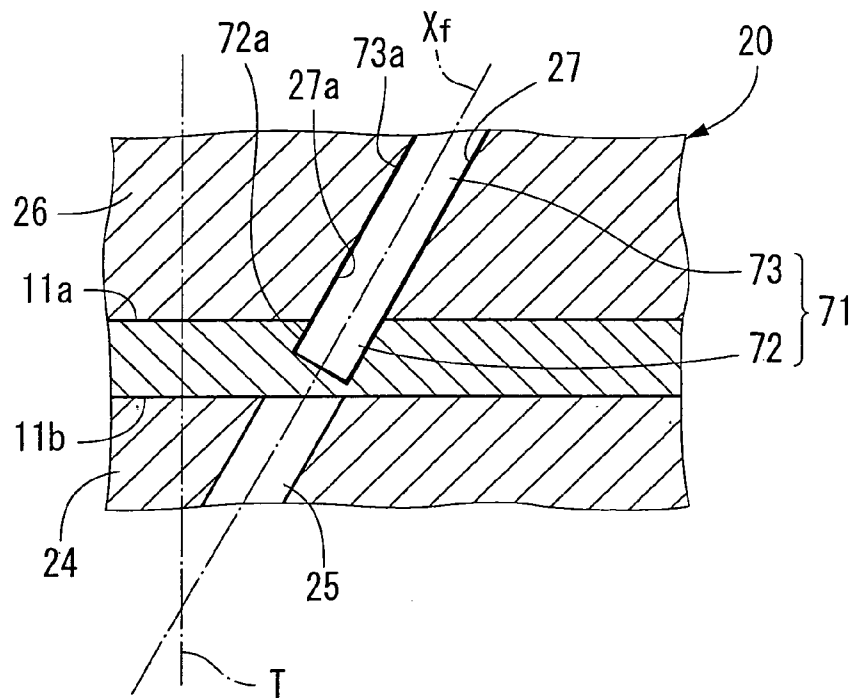


FIG. 21

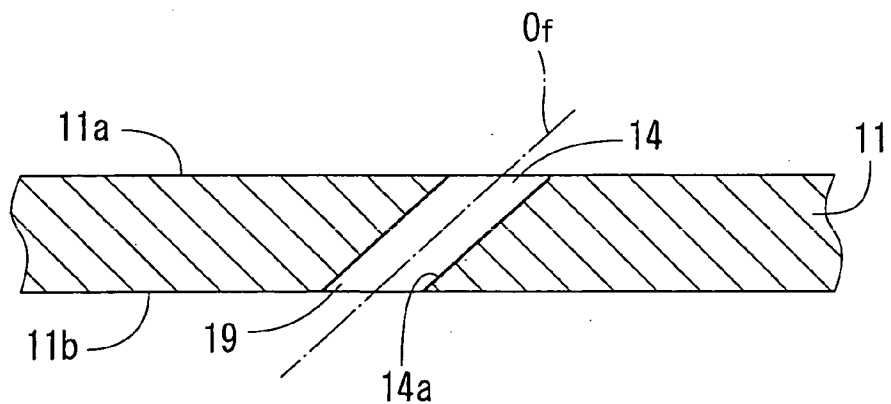


FIG. 22

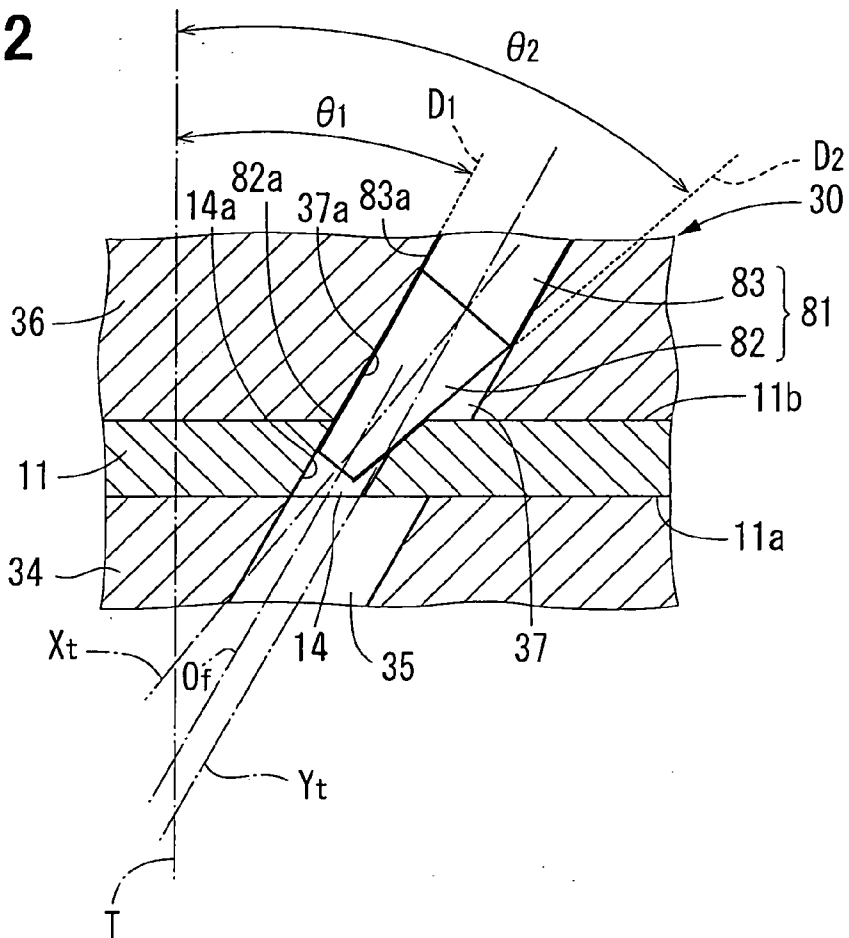


FIG. 23

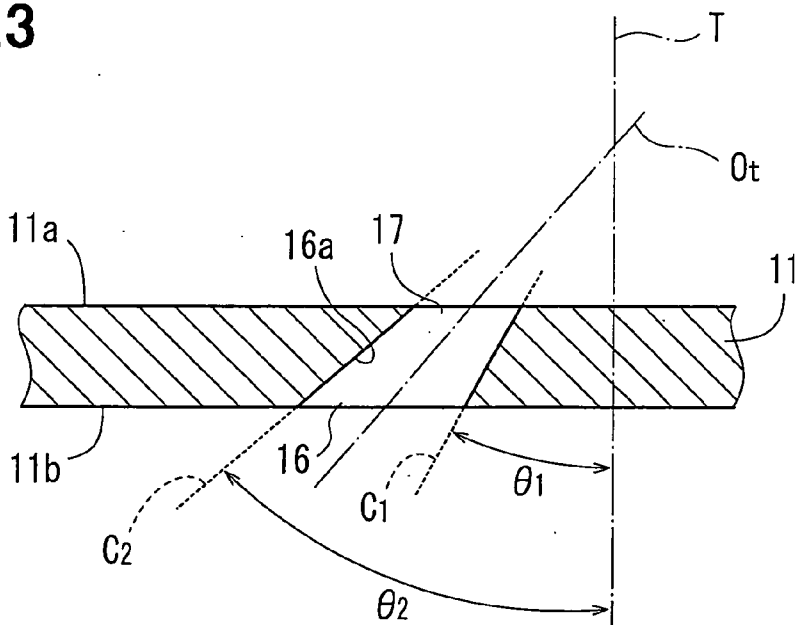


FIG. 25A

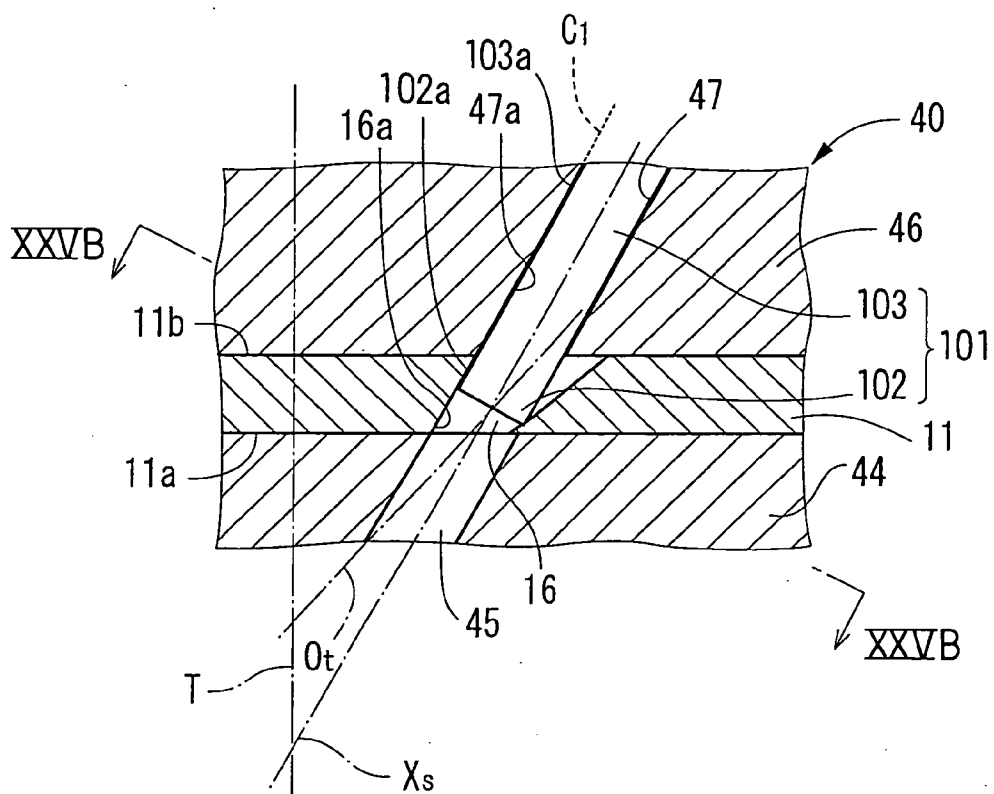


FIG. 25B

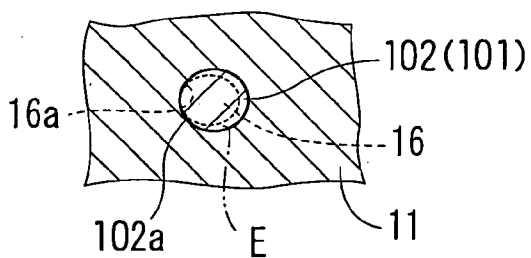


FIG. 26

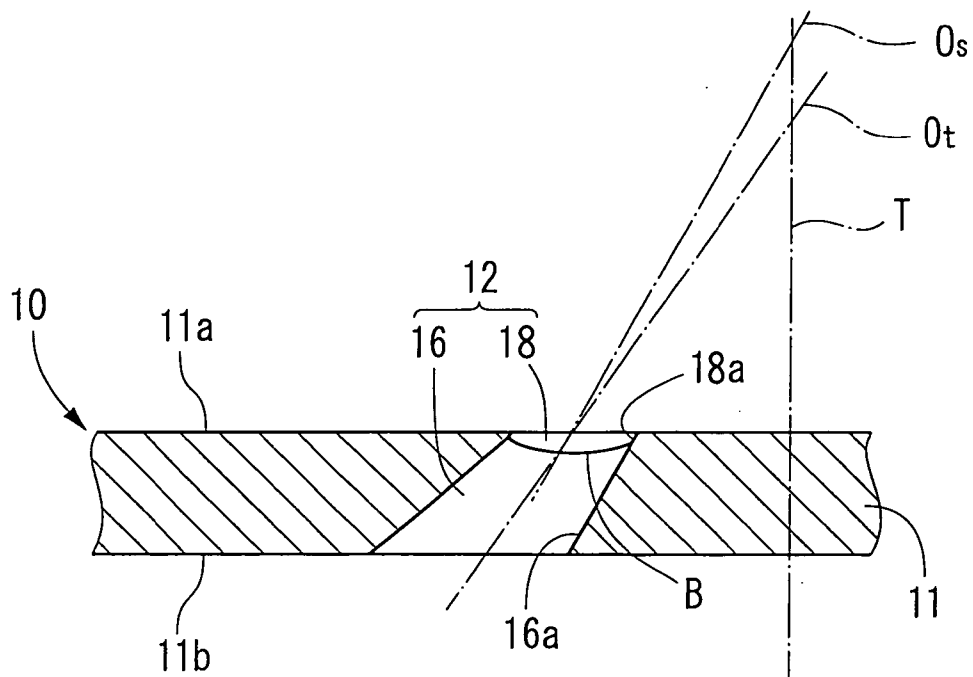


FIG. 27A

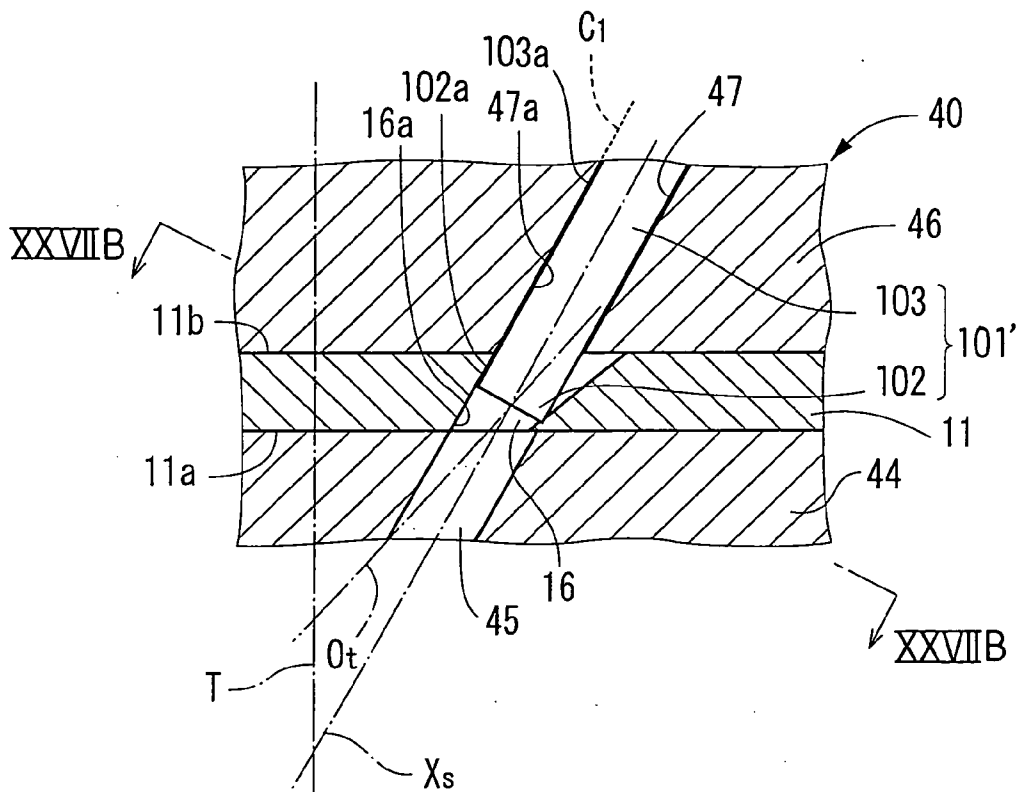


FIG. 27B

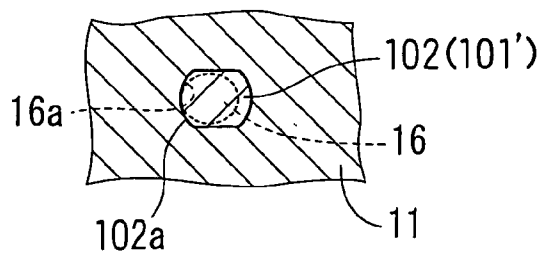


FIG. 28

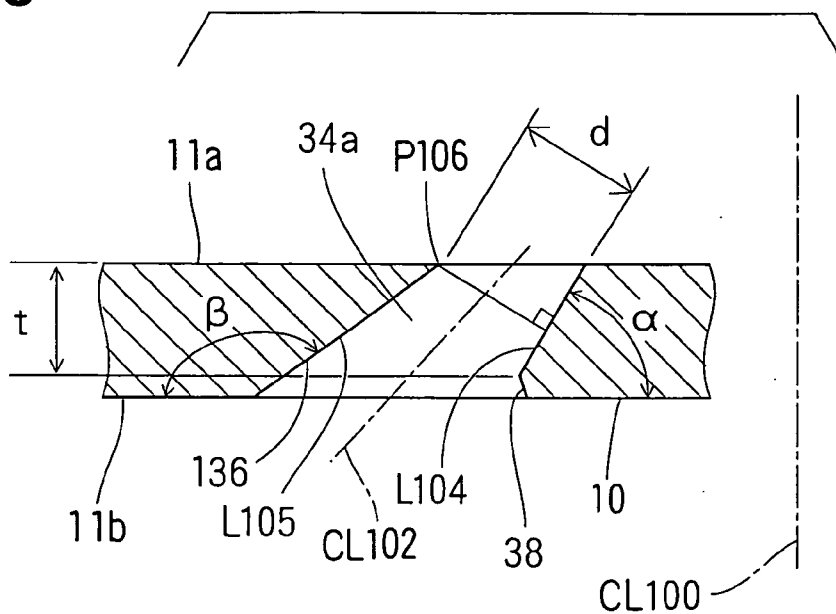


FIG. 29

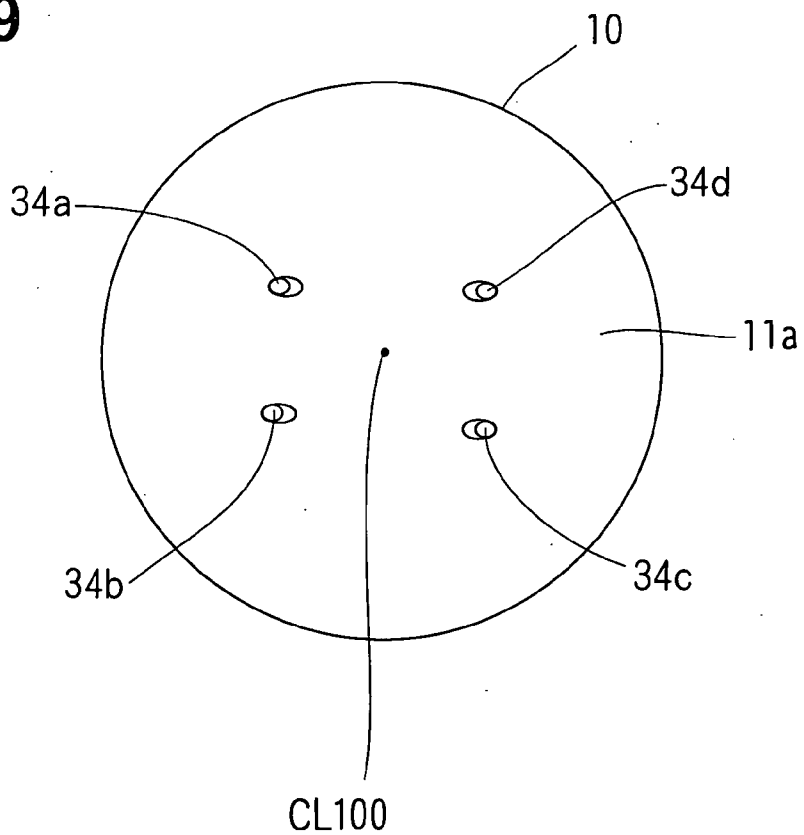


FIG. 30

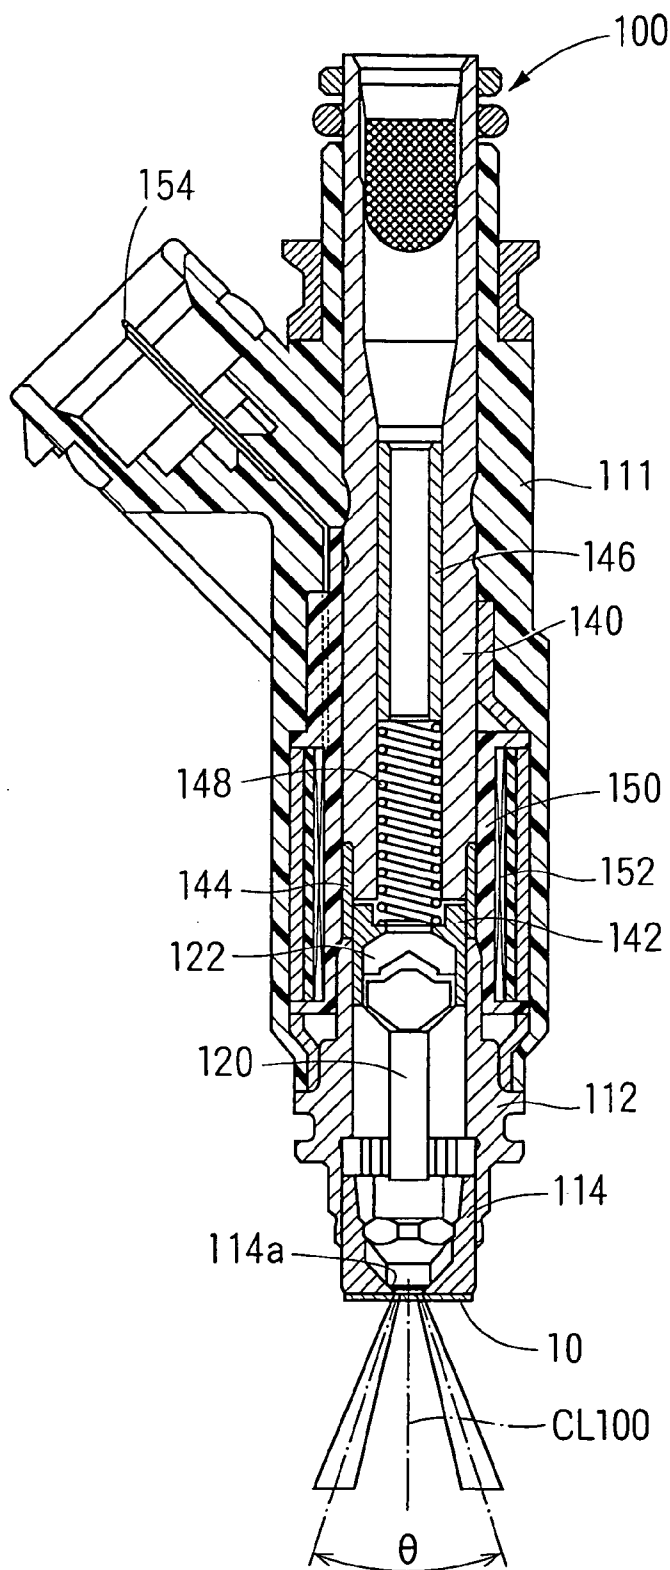


FIG. 31

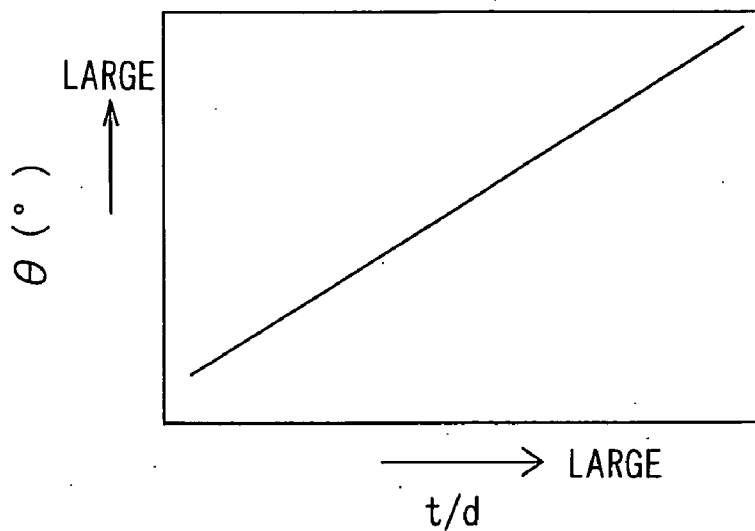


FIG. 32

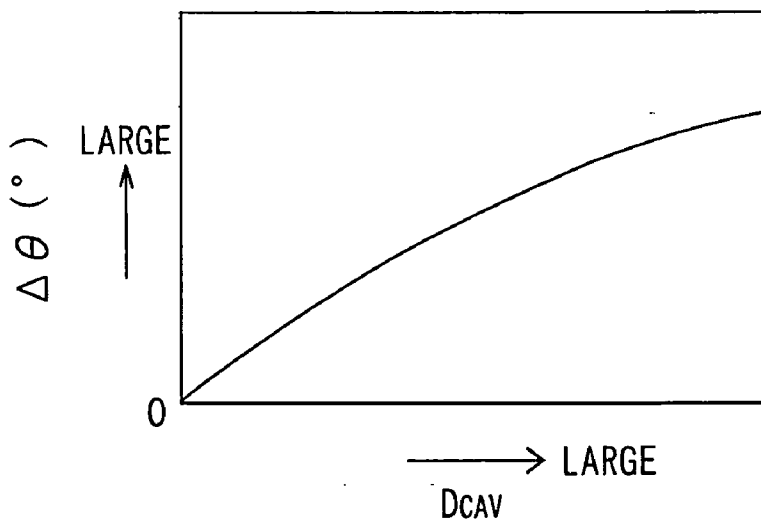


FIG. 33A

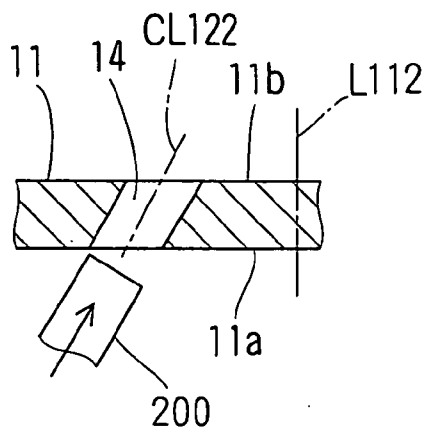


FIG. 33B

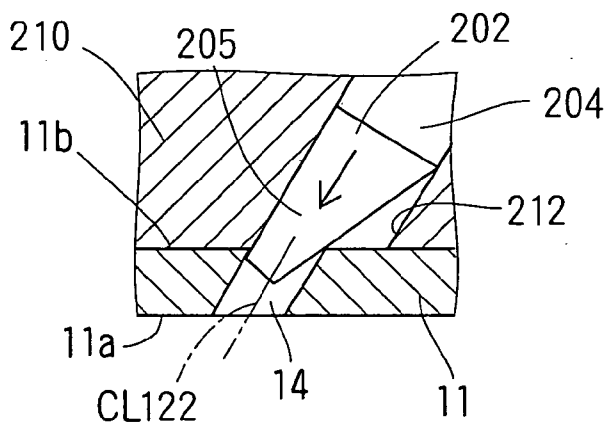


FIG. 33C

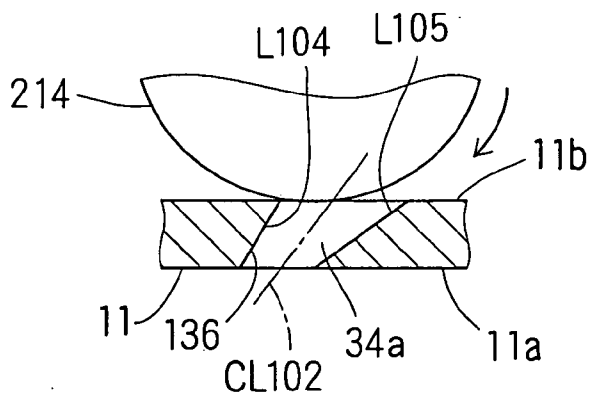


FIG. 33D

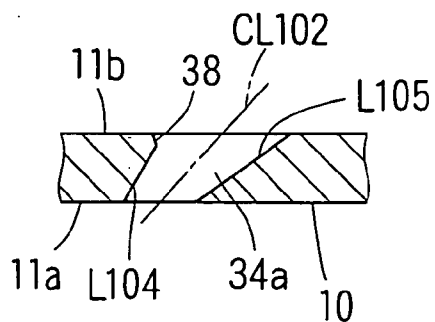


FIG. 34

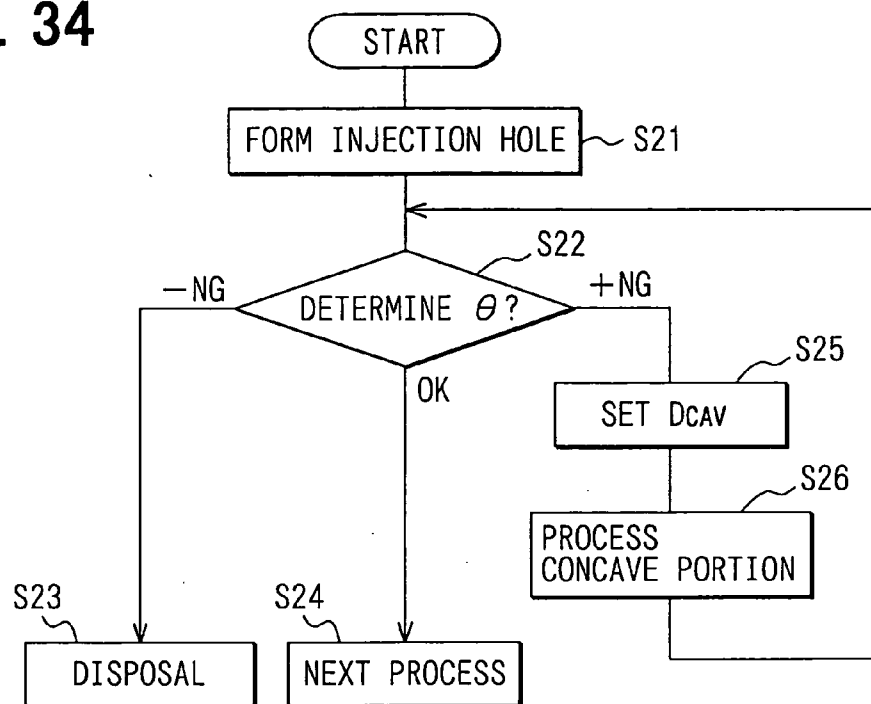


FIG. 35A

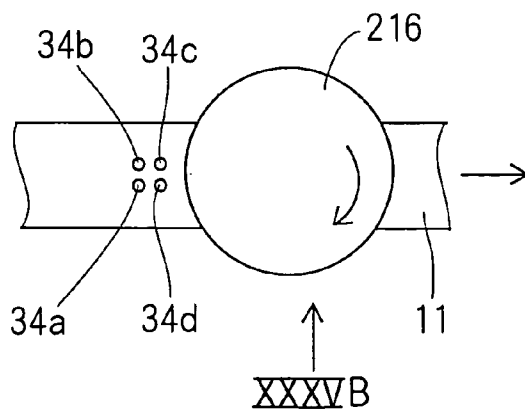


FIG. 35B

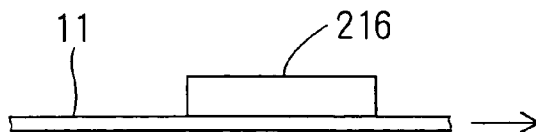


FIG. 36

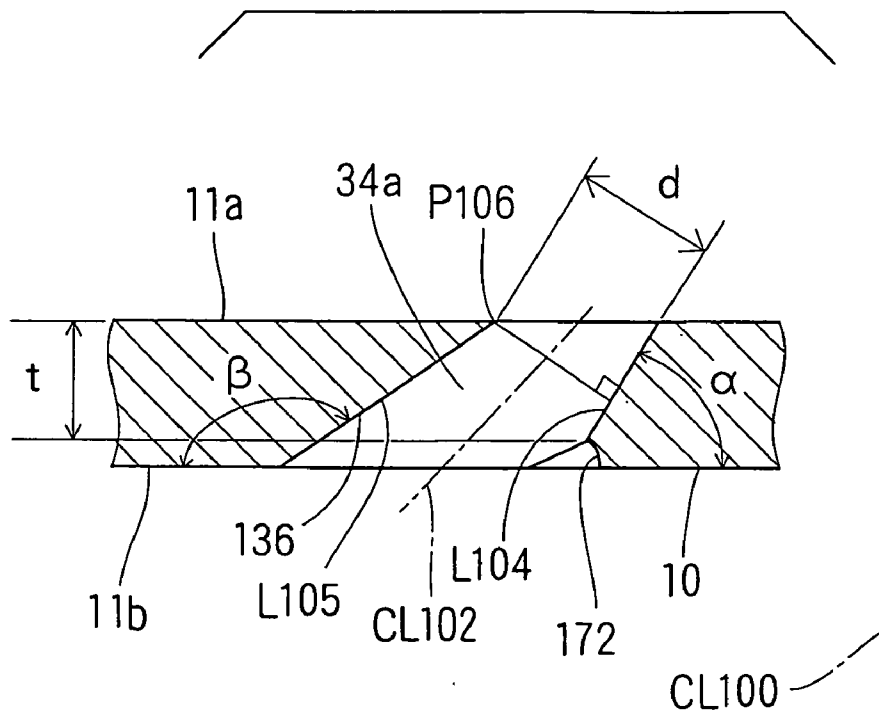


FIG. 37A

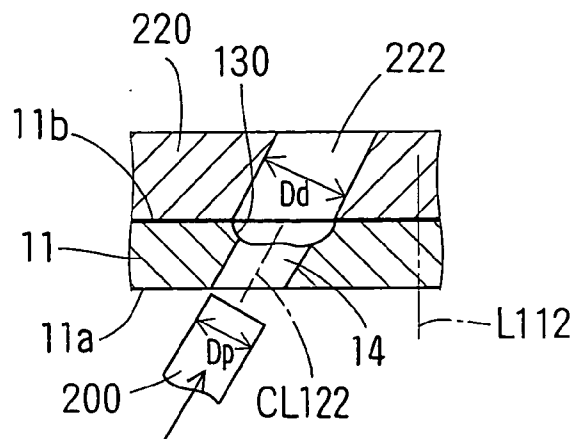


FIG. 37B

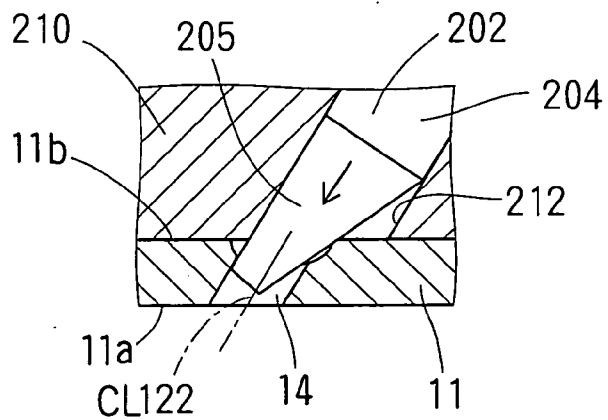


FIG. 37C

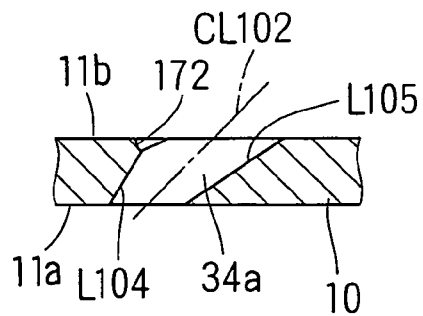


FIG. 38A
RELATED ART

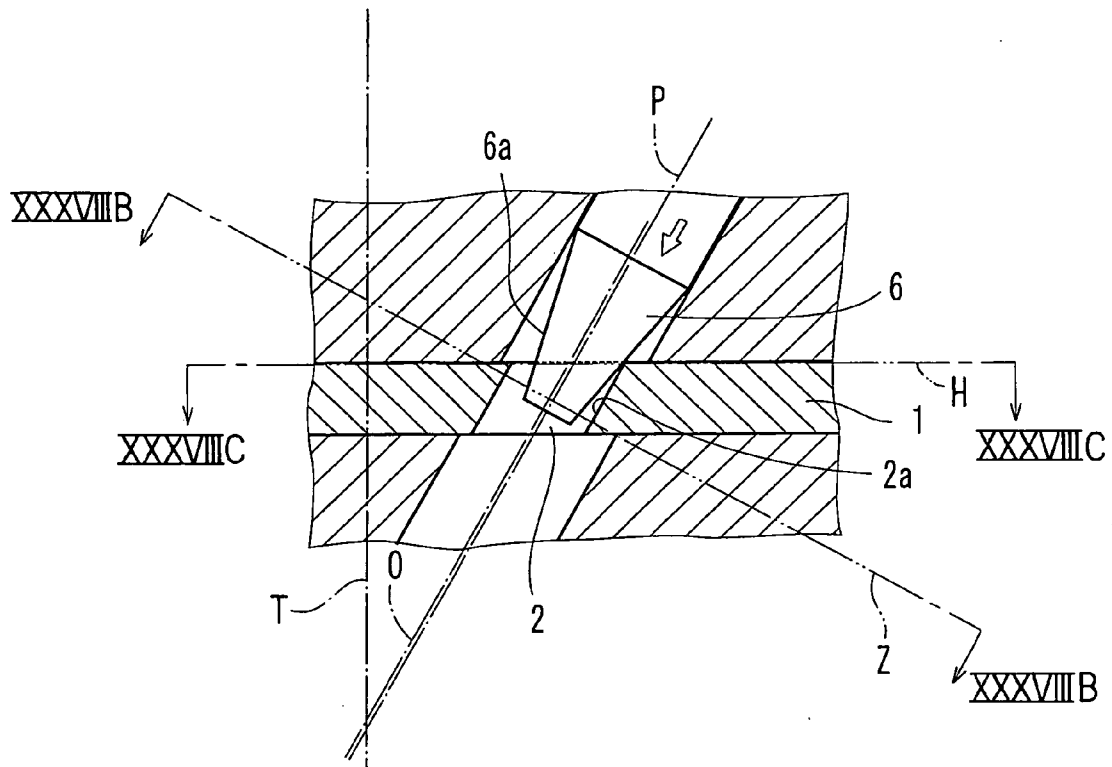


FIG. 38B
RELATED ART





FIG. 38C
RELATED ART

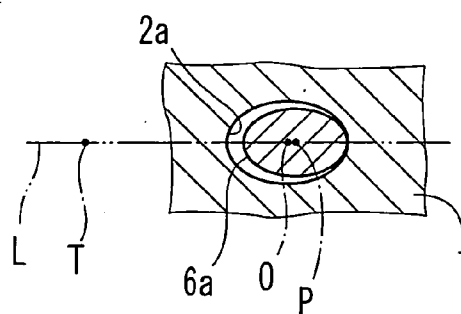

METHOD FOR MANUFACTURING INJECTION HOLE MEMBER

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is based on and incorporates herein by reference Japanese Patent Applications No. 2002-381501 filed on Dec. 27, 2002, No. 2002-381687 filed on Dec. 27, 2002, No. 2002-381753 filed on Dec. 27, 2002 and No. 2003-385684 filed on Nov. 14, 2003.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to an injection hole member formed with an injection hole for injecting fluid and to a method for manufacturing the injection hole member. For instance, the present invention relates to an injection hole member of a fuel injection device and to a suitable method for manufacturing the injection hole member of the fuel injection device.

[0004] 2. Description of Related Art

[0005] Conventionally, as disclosed in Japanese Patent Unexamined Publication No. 2002-102977 (patent document 1), an injection hole member formed with an injection hole provided by a taper hole is known. A central axis of the taper hole is inclined with respect to an axis of the injection hole member in its thickness direction, and the internal diameter of the taper hole increases from an upstream end toward a downstream end of the injection hole member.

[0006] In the patent document 1, the taper hole used as the injection hole is formed through punch press. Specifically, a taper punch, whose diameter decreases toward its tip end, is used. The tip end of the taper punch is driven into a base material of the injection hole member. Thus, the taper hole is formed along an outer peripheral surface of the taper punch.

[0007] The tip end of the taper punch is pressed against an end surface of the base material in order to form the taper hole in one time of the punch press. In this case, a distance between a pressing portion and a held portion of the taper punch is long. As a result, bending moment applied to the taper punch is increased and the taper punch becomes prone to break.

[0008] Therefore, as shown in FIG. 38A, a method of forming the taper hole with the use of a lead hole 2 formed in the base material 1 in advance can be employed. More specifically, the lead hole 2 is formed in the base material 1 in advance so that a central axis O of the lead hole 2 is inclined with respect to an axis T of the base material 1 in its thickness direction and the internal diameter of the taper hole 2 is substantially constant along its central axis O. Then, a taper punch 6 is driven into the base material 1 in a state in which a central axis P of the taper punch 6 is inclined substantially in the same direction as the central axis O of the lead hole 2. At that time, the taper hole is formed by widening the lead hole 2 with the taper punch 6. When the tip end of the taper punch 6 is entered into the lead hole 2, the taper punch 6 can press an edge of the opening of the lead hole 2 at a position closer to the held portion of the taper punch 6 than the tip end of the taper punch 6. Thus,

the distance between the pressing portion and the held portion of the taper punch 6 is contracted. Therefore, the bending moment applied to the taper punch 6 is reduced compared to the case where the taper hole is formed in the one time of the punch press.

[0009] In the method shown in FIG. 38A, a line of intersection between a virtual plane Z, which is perpendicular to the central axis O of the lead hole 2 and the central axis P of the taper punch 6, and an inner peripheral surface 2a of the lead hole 2 is round in shape as shown in FIG. 38B. Meanwhile, another intersection line between the virtual plane Z and an outer peripheral surface 6a of the taper punch 6 is round in shape as shown in FIG. 38B. Therefore, an intersection line between a virtual plane H perpendicular to the axis T of the base material 1 in its thickness direction and the inner peripheral surface 2a of the lead hole 2 is elliptic in shape as shown in FIG. 38C. Meanwhile, another intersection line between the virtual plane H and the outer peripheral surface 6a of the taper punch 6 is elliptic in shape as shown in FIG. 38C. The ratio between a major axis and a minor axis of the former elliptic intersection line is substantially the same as the ratio between a major axis and a minor axis of the latter elliptic intersection line as shown in FIG. 38C. Therefore, in the early stage of the punch press, as shown in FIG. 38C, the taper punch 6 contacts the edge of the opening of the lead hole 2 at one point on a virtual plane L including the central axis O of the lead hole 2, the central axis P of the taper punch 6 and the thickness direction axis T of the base material 1. The contact at the one point inhibits the decrease of the bending moment applied to the taper punch 6. Therefore, the effect of preventing the breakage of the taper punch 6 cannot be improved.

[0010] Moreover, in the case where the taper hole is formed in the base material through the punch press, an area of the opening of the taper hole depends on a stroke of the punch in the pressing direction. A flow rate defined by the injection hole provided by the taper hole depends on the opening area of a smaller diameter opening of the taper hole. Accordingly, the flow rate defined by the injection hole will vary because of the variation in the opening area due to the punch stroke. As a result, injection quantity of the fluid will vary.

[0011] A technology for forming the injection hole in a plate-like injection hole member of a fluid injection valve in order to improve designing flexibility of the shape of the injection hole and the like is disclosed in Japanese Patent Unexamined Publication No. 2000-52157. In this technology, an axis of the injection hole is inclined with respect to a central axis of the injection hole member. A plurality of injection holes is formed in respective injection directions so that the plurality of injection holes is directed away from each other along respective injection directions.

[0012] In the injection hole member formed with the injection holes whose axes are inclined with respect to the central axis of the injection hole member, an injection angle of spray injected from the injection holes can be regulated if necessary. In the case where the spray is injected from the plurality of injection holes in one direction, a widening angle of the entire spray can be regulated by adjusting injection angles of the respective injection holes. In the case where the spray is injected from the plurality of injection holes in two directions, a widening angle between the two directions of

the injected spray can be regulated by adjusting injection angles of the respective injection holes.

[0013] However, the injection angle can vary for each injection hole member because of deviation of an injection angle of the injection hole axis with respect to the central axis of the injection hole member, variation in the thickness of the injection hole member or the like.

SUMMARY OF THE INVENTION

[0014] It is therefore an object of the present invention to prevent breakage of a taper punch when a taper hole, which provides as at least a part of an injection hole, is formed through punch press.

[0015] It is another object of the present invention to provide a method for manufacturing an injection hole member capable of inhibiting product variation in a flow rate defined by an injection hole.

[0016] It is yet another object of the present invention to provide an injection hole member capable of easily regulating a spray angle and a method for manufacturing the injection hole member.

[0017] According to an aspect of the present invention, a virtual plane perpendicular to a central axis of a lead hole is defined as a first reference plane, and another virtual plane perpendicular to a central axis of a taper punch is defined as a second reference plane. An intersection line between a virtual plane, which includes the central axis of the lead hole and an axis of a base material in its thickness direction, is defined as a reference axis. In this case, an intersection line between the first reference plane and an inner peripheral surface of lead hole is an elliptic shape or an oval shape, whose major diameter is directed in an extending direction of the reference axis. An intersection line between the second reference plane and an outer peripheral surface of the taper punch is round in shape. Therefore, in an early stage of punch press in a taper hole forming step, the taper punch can contact an edge of an opening of the lead hole at two points on both sides of a virtual plane, which includes the central axes of the lead hole and the taper punch and the thickness direction axis of the base material. Thus, the bending moment applied to the taper punch can be reduced, so breakage of the taper punch can be prevented.

[0018] According to another aspect of the present invention, a taper hole, whose internal diameter increases from an end surface toward the other end surface of a base material, is formed in the base material through punch press. Then, a straight hole is formed by widening a smaller diameter opening of the taper hole through punch press. An inner peripheral surface of the straight hole connects to an inner peripheral surface of the remaining taper hole. Thus, the smaller diameter opening of the taper hole, whose opening area is prone to vary depending on a punch stroke, can be changed into the straight hole, whose opening area is almost independent of the punch stroke. As a result, variation in a flow rate defined by an injection hole provided by the taper hole and the straight hole or variation among products in injection quantity of fluid injected from the injection hole can be reduced.

[0019] According to yet another aspect of the present invention, a concave portion is formed in an edge of a downstream end opening of an injection hole so that the

concave portion caves in radially outward from an inner peripheral surface, which provides the injection hole. Accordingly, length of a flow of fluid guided by the inner peripheral surface of the injection hole can be regulated. An injection angle of spray injected from the injection hole can be easily regulated by changing the size of the concave portion. The concave portion is formed in the edge of the downstream end opening of the injection hole, not in an edge of an upstream end opening of the injection hole. Therefore, a change in a flow rate of the fluid flowing into the injection hole, or a change in injection quantity of the fluid injected from the injection hole, can be reduced.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] Features and advantages of embodiments will be appreciated, as well as methods of operation and the function of the related parts, from a study of the following detailed description, the appended claims, and the drawings, all of which form a part of this application. In the drawings:

[0021] FIG. 1A is a cross-sectional view showing a taper hole forming machine according to a first embodiment of the present invention;

[0022] FIG. 1B is a cross-sectional view showing the taper hole forming machine of FIG. 1A taken along the line 1B;

[0023] FIG. 1C is a cross-sectional view showing the taper hole forming machine of FIG. 1A taken along the line 1C;

[0024] FIG. 2 is a diagram showing a fuel injection device having an injection hole member manufactured through the method according to the first embodiment;

[0025] FIG. 3A is a cross-sectional view showing an injection hole member manufactured through the method according to the first embodiment of the present invention;

[0026] FIG. 3B is a cross-sectional view showing the injection hole member of FIG. 3A taken along the line IIIB;

[0027] FIG. 4 is a flowchart showing a method for manufacturing the injection hole member according to the first embodiment;

[0028] FIG. 5A is a cross-sectional view showing a base material formed with a lead hole according to the first embodiment;

[0029] FIG. 5B is a cross-sectional view showing the base material of FIG. 5A taken along the line Vb-Vb;

[0030] FIG. 6A is a cross-sectional view showing a lead hole forming machine according to the first embodiment;

[0031] FIG. 6B is a cross-sectional view showing the lead hole forming machine of FIG. 6A taken along the line VIB-VIB;

[0032] FIG. 7A is a cross-sectional view showing a lead hole forming machine according to a second embodiment of the present invention;

[0033] FIG. 7B is a cross-sectional view showing the lead hole forming machine of FIG. 7A taken along the line VIIB-VIIB;

[0034] FIG. 8A is a cross-sectional view showing a base material formed with a lead hole according to the second embodiment;

[0035] FIG. 8B is a cross-sectional view showing the base material of FIG. 8A taken along the line IXB-IXB.

[0036] FIG. 9A is a cross-sectional view showing a taper hole forming machine according to the second embodiment;

[0037] FIG. 9B is a cross-sectional view showing the taper hole forming machine of FIG. 9A taken along the line IXB-IXB;

[0038] FIG. 9C is a cross-sectional view showing the taper hole forming machine of FIG. 9A taken along the line IXC-IXC;

[0039] FIG. 10A is a cross-sectional view showing a lead hole forming machine according to a third embodiment of the present invention;

[0040] FIG. 10B is a cross-sectional view showing the lead hole forming machine of FIG. 10A taken along the line XB-XB.

[0041] FIG. 11A is a cross-sectional view showing a base material formed with a lead hole according to the third embodiment;

[0042] FIG. 11B is a cross-sectional view showing the base material of FIG. 11A taken along the line XIB-XIB;

[0043] FIG. 12A is a cross-sectional view showing a taper hole forming machine according to the third embodiment;

[0044] FIG. 12B is a cross-sectional view showing the taper hole forming machine of FIG. 12A taken along the line XIIB-XIIB;

[0045] FIG. 12C is a cross-sectional view showing the taper hole forming machine of FIG. 12A taken along the line XIIC-XIIC;

[0046] FIG. 13A is a cross-sectional view showing an injection hole member according to the third embodiment;

[0047] FIG. 13B is a cross-sectional view showing the injection hole member of FIG. 13A taken along the line XIIIB-XIIIB;

[0048] FIG. 14A is a cross-sectional view showing a taper hole forming machine according to a modified example of the third embodiment;

[0049] FIG. 14B is a cross-sectional view showing the taper hole forming machine of FIG. 14A taken along the line XIVB-XIVB;

[0050] FIG. 14C is a cross-sectional view showing the taper hole forming machine of FIG. 14A taken along the line XIVC-XIVC;

[0051] FIG. 15A is a cross-sectional view showing a taper hole forming machine according to another modified example of the third embodiment;

[0052] FIG. 15B is a cross-sectional view showing the taper hole forming machine of FIG. 15A taken along the line XVB-XVB;

[0053] FIG. 15C is a cross-sectional view showing the taper hole forming machine of FIG. 15A taken along the line XVC-XVC;

[0054] FIG. 16A is a cross-sectional view showing a taper hole forming machine according to a fourth embodiment of the present invention;

[0055] FIG. 16B is a cross-sectional view showing the taper hole forming machine of FIG. 16A taken along the line XVIB-XVIB;

[0056] FIG. 16C is a cross-sectional view showing the taper hole forming machine of FIG. 16A taken along the line XVIC-XVIC;

[0057] FIG. 17A is a schematic diagram showing a method for forming a lead hole with a lead hole forming machine according to a fifth embodiment of the present invention;

[0058] FIG. 17B is a schematic diagram showing a method for forming a taper hole with a taper hole forming machine according to the fifth embodiment;

[0059] FIG. 17C is a schematic diagram showing a method for forming a straight hole with a straight hole forming machine according to the fifth embodiment;

[0060] FIG. 18 is a cross-sectional view showing an injection hole member according to the fifth embodiment;

[0061] FIG. 19 is a flowchart showing a method for forming the injection hole member according to the fifth embodiment;

[0062] FIG. 20 is a cross-sectional view showing the lead hole forming machine according to the fifth embodiment;

[0063] FIG. 21 is a cross-sectional view showing a base material formed with the lead hole according to the fifth embodiment;

[0064] FIG. 22 is a cross-sectional view showing the taper hole forming machine according to the fifth embodiment;

[0065] FIG. 23 is a cross-sectional view showing the base material formed with the taper hole according to the fifth embodiment;

[0066] FIG. 24A is a cross-sectional view showing the straight hole forming machine according to the fifth embodiment;

[0067] FIG. 24B is a cross-sectional view showing the straight hole forming machine of FIG. 24A taken along the line XXIVB-XXIVB;

[0068] FIG. 25A is a cross-sectional view showing a straight hole forming machine according to a sixth embodiment of the present invention;

[0069] FIG. 25B is a cross-sectional view showing the straight hole forming machine of FIG. 25A taken along the line XXVB-XXVB;

[0070] FIG. 26 is a cross-sectional view showing an injection hole member according to the sixth embodiment;

[0071] FIG. 27A is a cross-sectional view showing a straight hole forming machine according to a modified example of the sixth embodiment;

[0072] FIG. 27B is a cross-sectional view showing the straight hole forming machine of FIG. 27A taken along the line XXVIII-XXVIII;

[0073] FIG. 28 is a cross-sectional view showing an injection hole member according to a seventh embodiment of the present invention;

[0074] FIG. 29 is a diagram showing an upstream end surface of the injection hole member according to the seventh embodiment;

[0075] FIG. 30 is a cross-sectional view showing an injector having the injection hole member according to the seventh embodiment;

[0076] FIG. 31 is a graph showing a relationship between a ratio t/d and a spray angle θ ;

[0077] FIG. 32 is a graph showing a relationship between a processing degree of a concave portion and a decrease in the spray angle θ ;

[0078] FIG. 33A is a schematic diagram showing a method for forming a lead hole with a lead hole forming machine according to the seventh embodiment;

[0079] FIG. 33B is a schematic diagram showing a method for forming a taper hole with a taper hole forming machine according to the seventh embodiment;

[0080] FIG. 33C is a schematic diagram showing a method for forming the concave portion with a brush according to the seventh embodiment;

[0081] FIG. 33D is a cross-sectional view showing an injection hole member according to the seventh embodiment;

[0082] FIG. 34 is a flowchart showing a method for regulating the spray angle according to the seventh embodiment;

[0083] FIG. 35A is a diagram showing a grinding method of the injection hole member according to a modified example of the seventh embodiment;

[0084] FIG. 35B is a diagram showing the injection hole member of FIG. 35A taken in a direction of an arrow mark XXXVB;

[0085] FIG. 36 is a cross-sectional view showing an injection hole member according to an eighth embodiment of the present invention;

[0086] FIG. 37A is a diagram showing a method for forming a straight hole with a straight hole forming machine according to the eighth embodiment;

[0087] FIG. 37B is a diagram showing a method for forming a taper hole with a taper hole forming machine according to the eighth embodiment;

[0088] FIG. 37C is a cross-sectional view showing the injection hole member according to the eighth embodiment; and

[0089] FIG. 38A is a cross-sectional view showing a taper hole forming machine of a related art;

[0090] FIG. 38B is a cross-sectional view showing the taper hole forming machine of FIG. 38A taken along the line XXXVIII B-XXXVIII B; and

[0091] FIG. 38C is a cross-sectional view showing the taper hole forming machine of FIG. 38A taken along the line XXXVIII C-XXXVIII C.

DETAILED DESCRIPTION OF THE REFERRED EMBODIMENTS

[0092] (First Embodiment)

[0093] Referring to FIG. 2, a fuel injection device 100 having an injection hole member manufactured through a method according to the first embodiment of the present invention is illustrated. The fuel injection device 100 shown in FIG. 2 is applied to a gasoline engine.

[0094] A casing 111 is molded resin for covering a magnetic pipe 112, a fixed core 140, a coil 152 wound around a spool 150 and the like. A valve body 114 is connected to the magnetic pipe 112 through laser welding and the like. A nozzle needle 120 as a valve member can be seated on a valve seat 114a formed on an inner peripheral surface of the valve body 114. An injection hole member 10 is fixed to an external wall of a bottom portion of the valve body 114 through the laser welding and the like. A plurality of injection holes 12 is formed in the injection hole member 10. If the nozzle needle 120 separates from the valve seat 114a, the fuel is injected through the respective injection holes 12. If the nozzle needle 120 is seated on the valve seat 114a, the fuel injection from the respective injection holes 12 is stopped. A connecting portion 122 disposed on a side of the nozzle needle 120 opposite from the valve seat 114a is connected with a movable core 142. The nozzle needle 120 reciprocates integrally with the movable core 142. The fixed core 140 is connected with a non-magnetic pipe 144 through the laser welding and the like. The non-magnetic pipe 144 is connected with the magnetic pipe 112 through the laser welding and the like. A spring 148 is disposed on a side of an adjusting pipe 146 on the injection hole 12 side for biasing the movable core 142 and the nozzle needle 120 toward the valve seat 114a. The biasing force of the spring 148 biasing the nozzle needle 120 can be regulated by changing the axial position of the adjusting pipe 146. The coil 152 wound around the spool 150 is disposed in the casing 111 so that the coil 152 surrounds the respective ends of the fixed core 140 and the magnetic pipe 112, which sandwich the non-magnetic pipe 144, and a periphery of the non-magnetic pipe 144. The coil 152 is electrically connected with a terminal 154. Voltage applied to the terminal 154 is applied to the coil 152. If energization to the coil 152 is turned on, the movable core 142 is attracted toward the fixed core 140 by magnetic force, against the biasing force of the spring 148. If the energization to the coil 152 is turned off, the movable core 142 is separated from the fixed core 140 by the biasing force of the spring 148 and the nozzle needle 120 is seated on the valve seat 114a.

[0095] Next, the injection hole member 10 manufactured through the method according to the first embodiment will be explained in detail based on FIGS. 3A and 3B.

[0096] The injection hole member 10 is manufactured by forming the injection holes 12 in a base material 11, which is formed of metallic material such as aluminum in the shape of a flat plate. Each injection hole 12 is provided by a taper hole in the shape of a cone. A central axis O_1 of the taper hole is inclined with respect to the axis T of the base material 11 in its thickness direction, and an inner diameter of the taper hole increases from an upstream end surface 11a toward a downstream end surface 11b of the base material 11 as shown in FIG. 3A. A smaller diameter end of the injection hole 12 opens into the upstream end surface 11a of the base

material **11**. A larger diameter end of the injection hole **12** opens into the downstream end surface **11b** of the base material **11**. Thus, diameters of fuel spray can be minimized. Closed curves among intersection lines between a virtual plane Q_i , which is perpendicular to the central axis O_i , and the inner peripheral surface **12a** of the injection hole **12** are round in shape as shown in **FIG. 3B**. Two intersection lines **C1**, **C2** between a virtual plane **L**, which includes the central axis O_i of the injection hole **12** and the thickness direction axis **T** of the base material **11**, and the inner peripheral surface **12a** of the injection hole **12** are inclined to the same side with respect to the thickness direction axis **T** of the base material **11** as shown in **FIG. 3A**. As shown in **FIG. 3A**, an inclination angle θ_1 provided between the intersection line **C1** and the thickness direction axis **T** of the base material **11** is more acute than another inclination angle θ_2 provided between the intersection line **C2** and the thickness direction axis **T** of the base material **11**.

[0097] Next, the method for manufacturing the injection hole member **10** according to the first embodiment will be explained based on **FIG. 4**.

[0098] First, in Step **S1** of a flowchart shown in **FIG. 4**, a lead hole **14** is formed in the base material **11** in the shape of a flat plate through punch press as shown in **FIGS. 5A and 5B**. Specifically, a lead hole forming machine **20** having a punch **21**, a die **24** and a guide **26** shown in **FIG. 6A** is used to form the lead hole **14**.

[0099] In the lead hole forming machine **20**, the die **24** and the guide **26** hold the base material **11** therebetween. The die **24** contacts the downstream end surface **11b** and the guide **26** contacts the upstream end surface **11a** of the base material **11**. The punch **21** is formed in the shape of a circular cylinder, whose diameter is substantially constant in an extending direction of its central axis P_f . An intersection line between a virtual plane R_f , which is perpendicular to the central axis P_f of the punch **21**, and an outer peripheral surface **22a**, **23a** of the punch **21** is elliptic in shape. The direction of the major axis of the elliptic shape coincides with an extending direction of an intersection line U_f between the virtual plane **L**, which includes the thickness direction axis **T** of the base material **11** and the central axis P_f of the punch **21**, and the virtual plane R_f . A processing portion **22** is formed on a tip end side of the punch **21**. The punch **21** is formed with a held portion **23** on a side opposite from the processing portion **22**. The punch **21** is inserted into a guide hole **27** of the guide **26** and is held by an inner peripheral surface **27a** of the guide hole **27**, which slidably contacts at least the outer peripheral surface **23a** of the held portion **23** throughout the periphery. Thus, the central axis P_f of the punch **21** is inclined with respect to the thickness direction axis **T** of the base material **11**, which is held between the die **24** and the guide **26**. Thus, the punch **21** is guided along the extending direction of the central axis P_f . The punch **21**, which has punched a hole in the base material **11**, is slidably inserted into a pulling cavity **25** of the die **24**.

[0100] In order to form the lead hole **14** by using the lead hole forming machine **20**, the processing portion **22** is driven into the base material **11** by moving the punch **21** in the pressing direction from the upstream end surface **11a** toward the downstream end surface **11b** of the base material **11** along the central axis P_f of the punch **21** as shown by an arrow mark in **FIG. 6A**. Thus, the lead hole **14** is punched

in the base material **11** by the processing portion **22**, so the lead hole **14** is formed in the shape complementing the outer peripheral surface **22a** of the processing portion **22**. More specifically, the lead hole **14** is formed in a cylindrical shape whose diameter is substantially constant in an extending direction of its central axis O_f as shown in **FIG. 5A**. In the thus formed lead hole **14**, closed curves among the intersection lines between a virtual plane Q_f , which is perpendicular to the central axis O_f of the lead hole **14** inclined with respect to the thickness direction axis **T** of the base material **11**, and the inner peripheral surface **14a** of the lead hole **14** are elliptic in shape. The direction of the major axis of the elliptic shape coincides with the extending direction of an intersection line S_f between the virtual plane **L**, which includes the axes O_f , **T**, and the virtual plane Q_f .

[0101] Then, the taper hole **12**, which provides the injection hole **12** shown in **FIGS. 3A and 3B**, is formed in the base material **11** through the punch press in Step **S2** of the flowchart shown in **FIG. 4**. More specifically, a taper hole forming machine **30** having a punch **31**, a die **34** and a guide **36** shown in **FIGS. 1A to 1C** is used to form the taper hole **12**.

[0102] In the taper hole forming machine **30**, the die **34** and the guide **36** contact the upstream end surface **11a** and the downstream end surface **11b** of the base material **11** respectively, so that the die **34** and the guide **36** hold the base material **11** therebetween. The punch **31** is formed with a processing portion **32** on its tip end side and a held portion **33** on a side opposite from the processing portion **32**. The processing portion **32** is formed in the shape of a truncated cone whose diameter decreases toward its tip end along the extending direction of its central axis P_t . An intersection line between a virtual plane R_t , which is perpendicular to the central axis P_t of the processing portion **32**, and an outer peripheral surface **32a** of the processing portion **32** is round in shape. The tip end of the processing portion **32** is formed to be smaller than the opening of the lead hole **14** and the other end of the processing portion **32** on the held portion **33** side is formed to be larger than the opening of the lead hole **14**. The held portion **33** is formed in a cylindrical shape, whose diameter is substantially constant along the extending direction of the same central axis P_t as the processing portion **32**.

[0103] The processing portion **32** and the held portion **33** are inserted into a guide hole **37** of the guide **36**. The held portion **33** is held by an inner peripheral surface **37a** of the guide hole **37**, which slidably contacts an outer peripheral surface **33a** of the held portion **33** throughout the periphery. Thus, the punch **31** is held so that the central axis P_t of the punch **31** is inclined to the same side as the central axis O_f of the lead hole **14** formed in the base material **11**, with respect to the thickness direction axis **T** of the base material **11** held between the die **34** and the guide **36**. Meanwhile, the central axis P_t of the punch **31** is parallel to the central axis O_f of the lead hole **14**. More specifically, the angle of the inclination of the central axis P_t with respect to the axis **T** substantially coincides with the angle of the inclination of the central axis O_f with respect to the axis **T**. Two intersection lines **B1**, **B2** provided by the virtual plane **L**, which includes the thickness direction axis **T** of the base material **11**, the central axis P_t of the punch **31** and the central axis O_f of the lead hole **14**, and the outer peripheral surface **32a** of the processing portion **32** are inclined to the same side with

respect to the thickness direction axis T of the base material **11**. In the present embodiment, the angle of the inclination of the intersection line B1 with respect to the thickness direction axis T is set to the same angle as the above angle θ_1 , and the angle of the inclination of the intersection line B2 with respect to the thickness direction axis T is set to the same angle as the above angle θ_2 . The guide **36** guides the held portion **33** of the punch **31**, so the punch **31** can move in the extending direction of the central axis P_t . The punch **31**, which has punched the taper hole **12** in the base material **11**, is slidably inserted into a pulling cavity **35** of the die **34**.

[0104] In order to form the taper hole **12** by using the taper hole forming machine **30**, the punch **31** is moved in a direction for entering the tip end of the processing portion **32** into the lead hole **14** from the downstream end surface **11b** of the base material **11** along the central axis P_t as shown by an arrow mark in FIG. 1A. More specifically, in the present embodiment, the punch **31** is moved in a pressing direction from the downstream end surface **11b** to the upstream end surface **11a** of the base material **11**, or in a direction opposite to the pressing direction in Step S1. As the punch **31** is moved, the processing portion **32** is driven into the base material **11**. More specifically, the tip end of the processing portion **32** is inserted into the lead hole **14** and the processing portion **32** contacts the edge of the opening of the lead hole **14**. Then, the processing portion **32** widens the lead hole **14** with the outer peripheral surface **32a**. The processing portion **32** of the punch **31** keeps widening the lead hole **14** until the processing portion **32** punches out the base material **11**. Thus, the taper hole **12** is shaped into a shape complementing the shape of the outer peripheral surface **32a** of the processing portion **32**. More specifically, as shown in FIG. 3A, the taper hole **12** is formed in the shape of a conical hole, whose internal diameter increases along the direction from the upstream end surface **11a** toward the downstream end surface **11b** of the base material **11** in the extending direction of the central axis O_t of the taper hole **12**. In the taper hole **12**, closed curves among intersection lines between a virtual plane Q_t which is perpendicular to the central axis O_t , and the inner peripheral surface **12a** of the taper hole **12** are round in shape. In the present embodiment, the pressing direction in Step S2 is set to be opposite from the pressing direction in Step S1. Therefore, even if burrs are formed at the front edge of the opening of the lead hole **14** in the pressing direction in Step S1, the edge of the opening can be formed finely by widening the edge with the larger diameter end portion of the processing portion **32**.

[0105] Next, functions and effects of the method according to the first embodiment will be explained based on FIGS. 1A to 1C.

[0106] In the state where the base material **11** is disposed between the die **34** and the guide **36** of the taper hole forming machine **30** in Step S2, a virtual plane H perpendicular to the thickness direction axis T of the base material **11** is defined as a coordinate plane H. An intersection line X between the virtual plane L, which includes the central axis O_f of the lead hole **14**, the central axis P_t of the processing portion **32** and the thickness direction axis T of the base material **11**, and the coordinate plane H is defined as a first coordinate axis X. A line Y perpendicular to the first coordinate axis X on the coordinate plane H is defined as a second coordinate axis Y.

[0107] In the first embodiment, in the state where the base material **11** is disposed between the die **34** and the guide **36** of the taper hole forming machine **30**, the intersection line between the coordinate plane H and the inner peripheral surface **14a** of the lead hole **14** and the intersection line between the coordinate plane H and the outer peripheral surface **32a** of the processing portion **32** are elliptic in shape as shown in FIG. 1C. The major axis of each elliptic shape is directed in the extending direction of the first coordinate axis X as shown in FIG. 1C. In FIG. 1C, a diameter d1 represents a diameter of the intersection line between the coordinate plane H and the outer peripheral surface **32a** of the processing portion **32** along the first coordinate axis X. A diameter d2 represents a diameter of the intersection line between the coordinate plane H and the outer peripheral surface **32a** of the processing portion **32** along the second coordinate axis Y. A diameter D1 represents a diameter of the intersection line between the coordinate plane H and the inner peripheral surface **14a** of the lead hole **14** along the first coordinate axis X. A diameter D2 represents a diameter of the intersection line between the coordinate plane H and the inner peripheral surface **14a** of the lead hole **14** along the second coordinate axis Y. In the first embodiment, a ratio of the diameter d1 to the diameter d2 (a ratio d1/d2) of the intersection line between the coordinate plane H and the outer peripheral surface **32a** of the processing portion **32** is less than a ratio of the diameter D1 to the diameter D2 (a ratio D1/D2) of the intersection line between the coordinate plane H and the inner peripheral surface **14a** of the lead hole **14**. Therefore, in the early stage of the punch press in Step S2, the processing portion **32** can contact two points of the edge of the opening of the lead hole **14** on both sides of the virtual plane L, which includes the axes O_f , P_t , T. Thus, the bending moment, which is generated by the force applied by the edge of the opening of the lead hole **14** to the processing portion **32** of the punch **31** held at the held portion **33**, can be reduced compared to the case where the punch **31** is held at a point. As a result, the breakage of the punch **31** can be surely prevented.

[0108] (Second Embodiment)

[0109] Next, a method for forming the injection hole by using a lead hole forming machine and a taper hole forming machine according to the second embodiment will be explained based on FIGS. 7A to 9C.

[0110] First, in Step S1 of the second embodiment, the lead hole **14** is formed with a lead hole forming machine **20** having a punch **41** as shown in FIGS. 7A and 7B, instead of the punch **21** of the first embodiment. The punch **41** is formed in the shape of a cylinder, whose diameter is substantially constant along the extending direction of its central axis P_f . An intersection line between the virtual plane R_f , which is perpendicular to the central axis P_f , and the outer peripheral surface **42a**, **43a** of the punch **41** is formed in an oval shape as shown in FIG. 7B. The direction of the major axis of the oval shape coincides with the direction of the intersection line U_f between the virtual plane L, which includes the thickness direction axis T of the base material **11** sandwiched by the die **24** and the guide **26** and the central axis P_f of the punch **41**, and the virtual plane R_f . The punch **41** is formed with a processing portion **42** and a held portion **43**, which correspond to the processing portion **22** and the held portion **23** of the first embodiment, respectively.

[0111] The punch 41 is moved to punch the lead hole 14 in the base material 11 with the processing portion 42, like the punch 21 of the first embodiment. Thus, the lead hole 14 is formed in the shape complementing the shape of the outer peripheral surface 42a of the processing portion 42. More specifically, as shown in FIG. 8A, the lead hole 14 is formed in the shape of a cylindrical hole whose internal diameter is substantially constant along the extending direction of its central axis O_f . The closed curves among the intersection lines between the inner peripheral surface 14a of the lead hole 14 and the virtual plane Q_f perpendicular to the central axis O_f are oval in shape. The direction of the major axis of each oval shape is directed along the extending direction of the intersection line S_f between the virtual plane L, which includes the central axis O_f of the lead hole 14 and the thickness direction axis T of the base material 11, and the virtual plane Q_f .

[0112] In the second embodiment, the shape of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14 is the oval shape, whose major axis is directed in the extending direction of the first coordinate axis X in the state where the base material 11 is disposed between the die 34 and the guide 36 as shown in FIG. 9A. The direction of the major axis of the intersection line between the coordinate plane H and the outer peripheral surface 32a of the processing portion 32 coincides with the extending direction of the first coordinate axis X. The ratio of the diameter d1 to the diameter d2 (the ratio $d1/d2$) of the intersection line between the coordinate plane H and the outer peripheral surface 32a of the processing portion 32 is less than the ratio of the diameter D1 to the diameter D2 (the ratio $D1/D2$) of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14. Therefore, in the early stage of the punch press in Step S2, the processing portion 32 can contact the edge of the opening of the lead hole 14 at two points on both sides of the virtual plane L, which includes the central axis O_f of the lead hole 14, the central axis P_t of the processing portion 32 and the thickness direction axis T of the base material 11. As a result, the bending moment applied to the processing portion 32 can be reduced, so as to prevent the breakage of the punch 31.

[0113] (Third Embodiment)

[0114] Next, a method for forming the injection hole by using a lead hole forming machine and a taper hole forming machine according to the third embodiment will be explained based on FIGS. 10A to 12C.

[0115] In Step S1 of the third embodiment, the lead hole 14 is formed with a lead hole forming machine 20 having a punch 51 as shown in FIGS. 10A and 10B, instead of the punch 21 of the first embodiment. The punch 51 is formed in the shape of a cylinder, whose diameter is substantially constant along the extending direction of its central axis P_f . The intersection line between the virtual plane R_p , which is perpendicular to the central axis P_f , and an outer peripheral surface 52a, 53a of the punch 51 is round in shape as shown in FIG. 10B. The punch 51 is formed with a processing portion 52 and a held portion 53, which respectively correspond to the processing portion 22 and the held portion 23 of the first embodiment.

[0116] The punch 51 is moved to punch the lead hole 14 in the base material 11 with the processing portion 52, like

the punch 21 of the first embodiment. Thus, the lead hole 14 is formed in the shape complementing the shape of the outer peripheral surface 52a of the processing portion 52. More specifically, as shown in FIG. 11A, the lead hole 14 is formed in the shape of a cylinder whose diameter is substantially constant along the extending direction of its central axis O_f . The closed curves among the intersection lines between the inner peripheral surface 14a of the lead hole 14 and the virtual plane Q_p , which is perpendicular to the central axis O_p , are round in shape as shown in FIG. 11B.

[0117] In Step S2 of the third embodiment, the taper hole 12 is formed with a taper hole forming machine 30 having a punch 61 as shown in FIG. 12A, instead of the punch 31 of the first embodiment. The punch 61 is formed with a processing portion 62 and a held portion 63, which correspond to the processing portion 32 and the held portion 33 of the first embodiment, respectively. The processing portion 62 is formed in the shape of a truncated cone whose diameter decreases toward its tip end along the extending direction of its central axis P_t as shown in FIG. 12A. The shape of the intersection line between the virtual plane R_t , which is perpendicular to the central axis P_t , and the outer peripheral surface 62a of the processing portion 62 is the elliptic shape. In FIG. 12B, a line U_t is an intersection line between the virtual plane L, which includes the thickness direction axis T of the base material 11 held between the die 34 and the guide 36 and the central axis P_t of the punch 61, and the virtual plane R_t . The direction of the major axis of the elliptic shape of the intersection line between the virtual plane R_t and the outer peripheral surface 62a of the processing portion 62 coincides with the direction of a perpendicular line V_t perpendicular to the intersection line U_t . The diameter of the tip end of the processing portion 62 on the smaller diameter side is formed to be smaller than the opening of the lead hole 14.

[0118] Like the first embodiment, the punch 61 is moved to punch the taper hole 12 in the base material 11 with the processing portion 62. Thus, the taper hole 12 is formed in the shape complementing the shape of the outer peripheral surface 62a of the processing portion 62. More specifically, the taper hole 12 is formed in the shape of a cone whose diameter increases in the direction from the upstream end surface 11a toward the downstream end surface 11b of the base material 11 as shown in FIG. 13A. The closed curves among the intersection lines between the inner peripheral surface 12a of the taper hole 12 and the virtual plane Q_t perpendicular to the central axis O_t are elliptic in shape as shown in FIG. 13B. In FIG. 13B, a line St represents an intersection line between the virtual plane L, which includes the central axis O_t of the taper hole 12 and the thickness direction axis T of the base material 11, and the virtual plane Q_t . The direction of the major axis of the elliptic shape of the intersection line between the inner peripheral surface 12a of the taper hole 12 and the virtual plane Q_t coincides with an extending direction of a line T_t , which is perpendicular to the intersection line St on the virtual plane Q_t .

[0119] In the third embodiment, the shape of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14 in the state where the base material 11 is held between the die 34 and the guide 36 as shown in FIG. 12A is the elliptic shape whose major axis is directed in the extending direction of the first coordinate axis X as shown in FIG. 12C. In FIG. 12C, the

diameter d1 represents the diameter of the intersection line between the coordinate plane H and the outer peripheral surface 62a of the processing portion 62 along the first coordinate axis X. The diameter d2 represents the diameter of the intersection line between the coordinate plane H and the outer peripheral surface 62a of the processing portion 62 along the second coordinate axis Y. The diameter D1 represents the diameter of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14 along the first coordinate axis X. The diameter D2 represents the diameter of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14 along the second coordinate axis Y. The ratio of the diameter d1 to the diameter d2 (the ratio d1/d2) of the intersection line between the coordinate plane H and the outer peripheral surface 62a of the processing portion 62 is less than the ratio of the diameter D1 to the diameter D2 (the ratio D1/D2) of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14. Therefore, in the early stage of the punch press in Step S2, the processing portion 32 can contact the edge of the opening of the lead hole 14 at two points on the both sides of the virtual plane L, which includes the central axis O_f of the lead hole 14, the central axis P_t of the processing portion 62 and the thickness direction axis T of the base material 11. As a result, the bending moment applied to the processing portion 62 can be reduced, so as to prevent the breakage of the punch 61.

[0120] As shown in FIGS. 14B and 14C, the shape of the intersection line between the outer peripheral surface 62a of the processing portion 62 and the virtual plane R_t may be the oval shape so that the major axis of the oval shape is directed in the extending direction of a perpendicular line V_t , which is perpendicular to the intersection line U_t between the virtual plane L and the virtual plane R_t .

[0121] Alternatively, as shown in FIGS. 15A to 15C, the taper hole 12 may be formed with the use of the taper hole forming machine 30, which has the punch 61 of the third embodiment shown in FIGS. 12A to 12C or of the modified example of the third embodiment shown in FIGS. 14A to 14C, in the base material 11, in which the lead hole 14 is formed with the lead hole forming machine 20 having the punch 21 of the first embodiment or the punch 41 of the second embodiment.

[0122] (Fourth Embodiment)

[0123] Next, a method for forming the injection hole 12 by using a taper hole forming machine according to the fourth embodiment will be explained based on FIGS. 16A to 16C.

[0124] In the taper hole forming machine 30 used in the process of Step S2 of the fourth embodiment, the central axis P_t of the punch 31 (the processing portion 32) is inclined to the same side as the central axis O_f of the lead hole 14 formed in the base material 11 with respect to the thickness direction axis T of the base material 11, which is held between the die 34 and the guide 36. However, the angle of the inclination of the central axis P_t of the punch 31 is different from that of the central axis O_f of the lead hole 14 as shown in FIG. 16A. More specifically, in the fourth embodiment, the central axis P_t of the punch 31 is inclined also with respect to the central axis O_f of the lead hole 14. In the fourth embodiment, the central axis P_t of the punch 31 is inclined with respect to the central axis O_f of the lead hole

14 by an angle Ψ so that the central axis P_t of the punch 31 is laid down toward the downstream end surface 11b of the base material 11. More specifically, the central axis P_t of the processing portion 32 is inclined with respect to the central axis O_f of the lead hole 14 by an angle Ψ so that the acute angle provided between the central axis P_t of the punch 31 and the thickness direction axis T of the base material 11 becomes larger than the acute angle provided between the central axis O_f of the lead hole 14 and the thickness direction axis T.

[0125] In the state where the base material 11 is held between the die 34 and the guide 36 of the fourth embodiment, the shape of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14 is an elliptic shape, whose major axis is directed in the extending direction of the first coordinate axis X. Meanwhile, the shape of the intersection line between the coordinate plane H and the outer peripheral surface 32a of the processing portion 32 is an elliptic shape, whose major axis is directed in the extending direction of the first coordinate axis X. In FIG. 16C, the diameter d1 represents the diameter of the intersection line between the coordinate plane H and the outer peripheral surface 32a of the processing portion 32 along the first coordinate axis X. The diameter d2 represents the diameter of the intersection line between the coordinate plane H and the outer peripheral surface 32a of the processing portion 32 along the second coordinate axis Y. The diameter D1 represents the diameter of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14 along the first coordinate axis X. The diameter D2 represents the diameter of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14 along the second coordinate axis Y. The angle Ψ of the inclination of the central axis P_t of the processing portion 32 with respect to the central axis O_f of the lead hole 14 is set so that the ratio of the diameter d1 to the diameter d2 of the intersection line between the coordinate plane H and the outer peripheral surface 32a of the processing portion 32 is less than the ratio of the diameter D1 to the diameter D2 of the intersection line between the coordinate plane H and the inner peripheral surface 14a of the lead hole 14 as shown in FIG. 16C. Therefore, in the early stage of the punch press in Step S2, the processing portion 32 can contact the edge of the opening of the lead hole 14 at two points on both sides of the virtual plane L, which includes the central axis O_f of the lead hole 14, the central axis P_t of the processing portion 32 and the thickness direction axis T of the base material 11. As a result, the bending moment applied to the processing portion 32 can be reduced, so as to prevent the breakage of the punch 31.

[0126] Alternatively, the inclination angle of the central axis P_t of the processing portion 32 with respect to the central axis O_f of the lead hole 14 may be set so that the central axis P_t is raised from the downstream end surface 11b of the base material 11. More specifically, the inclination angle of the central axis P_t of the processing portion 32 with respect to the central axis O_f of the lead hole 14 may be set so that the acute angle provided between the central axis P_t of the processing portion 32 and the thickness direction axis T becomes smaller than the acute angle provided between the central axis O_f of the lead hole 14 and the thickness direction axis T. In this case also, the inclination angle Ψ of the central axis P_t of the processing portion 32 with respect

to the central axis O_f of the lead hole **14** is set so that the ratio of the diameter $d1$ to the diameter $d2$ is less than the ratio of the diameter $D1$ to the diameter $D2$.

[0127] In the above second embodiment, the third embodiment and the modified examples of the third embodiment, the central axis P_t of the processing portion **32**, **62** may be inclined with respect to the central axis O_f of the lead hole **14**.

[0128] In the above embodiments, the present invention is applied to the manufacture of the injection hole member used in the fuel injection device for injecting the fuel. Alternatively, the present invention can be applied to the manufacture of an injection hole member used in an injection device for injecting fluid other than the fuel.

[0129] In the above embodiments, the injection hole is provided only by the taper hole **12**. Alternatively, the taper hole **12** may be partly deformed after the taper hole **12** is formed, and the deformed portion and the other portion of the taper hole **12** may provide the injection hole.

[0130] In the above embodiments, the pressing direction for forming the taper hole is set to be opposite to the pressing direction for forming the lead hole. Alternatively, the pressing direction for forming the taper hole may be set to the same direction as the pressing direction for forming the lead hole.

[0131] (Fifth Embodiment)

[0132] Next, a method for manufacturing the injection hole member **10** according to the fifth embodiment will be explained based on **FIG. 18**.

[0133] The injection hole member **10** is manufactured by forming injection holes **12** in a base material **11**, which is a metallic member formed of stainless steel and the like. An upstream opening of the injection hole **12** is provided by a straight hole **18**, and a major part of the injection hole **12** other than its upstream end opening is provided by a taper hole **16**. More specifically, the injection hole **12** is provided by the straight hole **18**, which opens into an upstream end surface **11a** of the base material **11**, and the taper hole **16**, which opens into a downstream end surface **11b** of the base material **11**.

[0134] The straight hole **18** is a circular cylindrical hole, whose diameter is substantially constant along an extending direction of its central axis O_s . Closed curves among intersection lines between a virtual plane, which is perpendicular to the central axis O_s , and an inner peripheral surface **18a** of the straight hole **18** are round in shape. The central axis O_s of the straight hole **18** is inclined with respect to an axis T of the base material **11** in its thickness direction.

[0135] The taper hole **16** is formed in a conical shape, whose inner diameter increases along the extending direction of its central axis O_t from the upstream side toward the downstream side. Closed curves among the intersection lines between the virtual plane, which is perpendicular to the central axis O_t , and the inner peripheral surface **16a** of the taper hole **16** are round in shape. The central axis O_t of the taper hole **16** is inclined to the same side as the central axis O_s of the straight hole **18** with respect to the thickness direction axis T of the base material **11**. An inclination angle of the central axis O_t of the taper hole **16** is different from that of the central axis O_s of the straight hole **18**. Thus, the

taper hole **16**, whose inner diameter increases from the upstream side toward the downstream side, is employed, so the diameters of droplets of fuel spray are minimized. In the present embodiment, two intersection lines **C1**, **C2** between a cross section defined by a virtual plane, which includes the central axis O_t of the taper hole **16** and is perpendicular to the end surfaces **11a**, **11b** of the base material **11**, and the inner peripheral surface **16a** of the taper hole **16** are inclined to the same side with respect to the thickness direction axis T of the base material **11**. More specifically, two intersection lines **C1**, **C2** provided by a cross section of the base material **11** in its thickness direction shown by a shaded area in **FIG. 18** and the inner peripheral surface **16a** of the taper hole **16** are inclined to the same side with respect to the thickness direction axis T of the base material **11**. As shown in **FIG. 18**, an inclination angle θ_1 provided between the intersection line **C1** and the thickness direction axis T of the base material **11** is more acute than another inclination angle θ_2 provided between the intersection line **C2** and the thickness direction axis T of the base material **11**. The inner peripheral surface **16a** of the taper hole **16** connects to an inner peripheral surface **18a** of the straight hole **18** at a boundary line **B**, which continues circumferentially. The boundary line **B** is formed in a bow shape protruding toward the taper hole **16** between the intersection lines **C1**, **C2** on both sides of the virtual plane, which provides the intersection lines **C1**, **C2** with the inner peripheral surface **16a** of the taper hole **16**.

[0136] Next, a method for manufacturing the injection hole member **10** of the present embodiment will be explained based on **FIGS. 17A**, **17B**, **17C** and **19**.

[0137] First, in Step **S11** of a flowchart shown in **FIG. 19**, a lead hole **14** is formed in the base material **11**, which is a flat plate in shape, through the punch press as shown in **FIG. 17A**.

[0138] Specifically, a lead hole forming machine **20** having a punch **71**, a die **24** and a guide **26** as shown in **FIG. 20** is used to form the lead hole **14**.

[0139] In the lead hole forming machine **20**, the die **24** and the guide **26** contact the downstream end surface **11b** and the upstream end surface **11a** of the base material **11** respectively, so that the die **24** and the guide **26** hold the base material **11** therebetween. The punch **71** is formed in the shape of a circular cylinder, whose diameter is substantially constant toward its tip end. An outline of a cross section of the punch **71** defined by a virtual plane perpendicular to its central axis X_f is round in shape. A processing portion **72** is formed on the tip end of the punch **71** and a held portion **73** is formed on the punch **71** on the opposite side from the processing portion **72**. The punch **71** is inserted into a guide hole **27** of the guide **26** and is held by at least the inner peripheral surface **27a** of the guide hole **27**, which slidably contacts an outer peripheral surface **73a** of the held portion **73** throughout the periphery. Accordingly, the central axis X_f of the punch **71** is inclined with respect to the thickness direction axis T of the base material **11** held between the die **24** and the guide **26**. Thus, the punch **71** is guided in the extending direction of the central axis X_f . The punch **71** guided by the guide **26** is slidably inserted into a pulling cavity **25** of the die **24**.

[0140] When the lead hole **14** is formed by using the lead hole forming machine **20**, the punch **71** is moved in the pressing direction from the upstream end surface **11a** toward

the downstream end surface **11b** of the base material **11** along the central axis X_f of the punch **71** as shown by an arrow mark in **FIG. 17A** or in **FIG. 20**. Thus, the lead hole **14** is punched in the base material **11** with the processing portion **72**. The lead hole **14** is formed in the shape complementing the shape of the outer peripheral surface **72a** of the processing portion **72**. More specifically, the lead hole **14** is formed in the shape of a cylinder whose diameter is substantially constant in the extending direction of its central axis O_f as shown in **FIG. 21**. Closed curves among intersection lines between a virtual plane, which is perpendicular to the central axis O_f inclined with respect to the thickness direction axis T of the base material **11**, and the inner peripheral surface **14a** of the lead hole **14** are round in shape.

[0141] Then, the taper hole **16** is formed in the base material **11** through the punch press as shown in **FIG. 17B** in Step **S12** of the flowchart shown in **FIG. 19**.

[0142] Specifically, a taper hole forming machine **30** having a punch **81**, a die **34** and a guide **36** as shown in **FIG. 22** is used to form the taper hole **16**.

[0143] In the taper hole forming machine **30**, the die **34** and the guide **36** contact the upstream end surface **11a** and the downstream end surface **11b** of the base material **11** respectively, so the die **34** and the guide **36** hold the base material **11** therebetween. A processing portion **82** is formed on a tip end of the punch **81**, and a held portion **83** is formed on the punch **81** on an opposite side from the processing portion **82**. The processing portion **82** is formed in the shape of a truncated cone whose diameter decreases toward its tip end. An outline of the cross section of the processing portion **82** defined by a virtual plane perpendicular to its central axis X_t is round in shape. On the cross section perpendicular to the central axis X_t of the processing portion **82**, the external diameter of the tip end of the processing portion **82** is formed to be smaller than the internal diameter of the opening of the lead hole **14**. Meanwhile, on the cross section perpendicular to the central axis X_t of the processing portion **82**, the external diameter of the end of the processing portion **82** on the held portion **83** side is formed to be larger than the internal diameter of the opening of the lead hole **14**. The held portion **83** is formed in the shape of a cylinder whose diameter is substantially constant along the extending direction of the central axis Y_t of the held portion **83**.

[0144] The processing portion **82** and the held portion **83** are inserted into the guide hole **37** of the guide **36**. The held portion **83** is held by the inner peripheral surface **37a** of the guide hole **37**, which slidably contacts an outer peripheral surface **83a** of the held portion **83** throughout the periphery. The central axis Y_t of the held portion **83** is inclined with respect to the thickness direction axis T of the base material **11** held between the die **34** and the guide **36**. Meanwhile, the central axis Y_t of the held portion **83** is parallel to the central axis O_f of the lead hole **14** formed in the base material **11**. The central axis X_t of the processing portion **82** is inclined with respect to the thickness direction axis T of the base material **11** to the same side as the central axis Y_t of the held portion **83**. An inclination angle of central axis X_t of the processing portion **82** is different from that of the central axis Y_t of the held portion **83**. Thus, the processing portion **82** slidably contacts the inner peripheral surface **37a** of the guide hole **37** at the inner peripheral surface **82a** on the opposite side from the base material **11** as shown in **FIG. 22**.

The outer peripheral surface **82a** of the processing portion **82** extends in parallel with the central axis Y_t of the held portion **83** at the position where the processing portion **82** slidably contacts the inner peripheral surface **37a**. Meanwhile, the outer peripheral surface **82a** of the processing portion **82** smoothly connects to the outer peripheral surface **83a** of the held portion **83** at the position where the processing portion **82** slidably contacts the inner peripheral surface **37a**. Therefore, the punch **81** is guided by the guide **36** in the extending direction of the central axis Y_t of the held portion **83**. In the present embodiment, two intersection lines $D1, D2$ between a cross section provided between a virtual plane, which is perpendicular to the end surfaces **11a, 11b** of the base material **11** and includes the central axis X_t of the processing portion **82**, and the outer peripheral surface **82a** of the processing portion **82** are inclined to the same side with respect to the thickness direction axis T of the base material **11**. More specifically, two intersection lines $D1, D2$ between a cross section of the base material **11** in its thickness direction shown by a shaded area in **FIG. 22** and the inner peripheral surface **82a** of the processing portion **82** are inclined to the same side with respect to the thickness direction axis T of the base material **11**. The intersection line $D1$ running through the contacting position, where the outer peripheral surface **82a** of the processing portion **82** slidably contacts the inner peripheral surface **37a** of the guide hole **37**, and the thickness direction axis T of the base material **11** provide an inclination angle $\theta1$ therebetween. The intersection line $D2$ on the opposite side from the intersection line $D1$ across the central axis X_t of the processing portion **82** and the thickness direction axis T provide an inclination angle $\theta2$ therebetween. The punch **81** guided by the guide **36** is inserted into a pulling cavity **35** of the die **34** so that the punch **81** can move in a sliding manner.

[0145] In order to form the taper hole **16** by using the taper hole forming machine **30**, the punch **81** is moved in a direction toward the tip end of the processing portion **82** along the central axis Y_t of the held portion **83** as shown in **FIG. 17B** and **FIG. 22**. More specifically, in the present embodiment, the punch **81** is moved in a direction from the downstream end surface **11b** toward the upstream end surface **11a** of the base material **11**, or a direction opposite to the pressing direction in Step **S11**. As the punch **81** is moved, the processing portion **82** is driven into the base material **11**. More specifically, the tip end of the processing portion **82** is inserted into the lead hole **14**. Meanwhile, the processing portion **82** slidably contacts the inner peripheral surface **14a** of the lead hole **14** at the outer peripheral surface **82a** near the intersection line $D1$, at which the outer peripheral surface **82a** slidably contacts the guide hole **37**. Thus, the processing portion **82** widens the lead hole **14** with the outer peripheral surface **82a** other than the portion slidably contacting the guide hole **37**. At that time, as the tip end of the processing portion **82** is inserted into the lead hole **14**, a portion of the processing portion **82** pressing the base material **11** approaches the held portion **83**, which is held by the guide **36**. Meanwhile, a reaction force applied to the processing portion **82** by the base material **11** on a side opposite from a portion slidably contacting the lead hole **14** is offset by a reaction force applied to the processing portion **82** by the guide **36** at the portion slidably contacting the guide hole **37**. Thus, the bending moment applied to the punch **81** is reduced, so the breakage of the punch **81** can be prevented.

[0146] As the lead hole 14 is widened until the processing portion 82 of the punch 81 punches out the base material 11, the taper hole 16 is formed in the shape complementing the shape of the outer peripheral surface 82a of the processing portion 82. More specifically, as shown in FIG. 23, the taper hole 16 is formed in a conical shape so that closed curves among intersection lines between a virtual plane, which is perpendicular to the central axis O_t of the taper hole 16 inclined with respect to the thickness direction axis T of the base material 11, and the inner peripheral surface 16a are round in shape. Meanwhile, the taper hole 16 is formed in the conical shape, whose diameter increases in the direction from the upstream end surface 11a toward the downstream end surface 11b of the base material 11 along the extending direction of the central axis O_t of the taper hole 16. In the present embodiment, two intersection lines C1, C2 between a cross section defined by a virtual plane, which includes the central axis O_t of the taper hole 16 and is perpendicular to the end surfaces 11a, 11b of the base material 11, and the inner peripheral surface 16a of the taper hole 16 are inclined to the same side with respect to the thickness direction axis T of the base material 11. More specifically, two intersection lines C1, C2 between a cross section of the base material 11 in its thickness direction shown by a shaded area in FIG. 23 and the inner peripheral surface 16a of the taper hole 16 are inclined to the same side with respect to the thickness direction axis T of the base material 11. An inclination angle θ_1 is provided between the intersection line C1 and the thickness direction axis T of the base material 11 therebetween as shown in FIG. 23. Another inclination angle θ_2 is provided between the intersection line C2 and the thickness direction axis T of the base material 11 therebetween as shown in FIG. 23.

[0147] Then, in Step S13 of the flowchart shown in FIG. 19, the straight hole 18 is formed in the base material 11 through the punch press.

[0148] Specifically, the straight hole 18 is formed by using a straight hole forming machine 40 having a punch 91, a die 44 and a guide 46 as shown in FIGS. 24A and 24B.

[0149] In the straight hole forming machine 40, the die 44 and the guide 46 respectively contact the upstream end surface 11a and the downstream end surface 11b of the base material 11 so that the die 44 and the guide 46 hold the base material 11 therebetween. The punch 91 is formed in the shape of a circular cylinder, whose diameter is substantially constant toward its tip end. An outline of a cross section (for instance, a cross section shown in FIG. 24B) perpendicular to a central axis X_s of the punch 91 is round in shape. The external diameter of the punch 91 on the cross section perpendicular to the central axis X_s of the punch 91 is set to be smaller than the internal diameter of the larger diameter opening of the taper hole 16 formed in Step S12. Meanwhile, the external diameter of the punch 91 on the cross section perpendicular to the central axis X_s of the punch 91 is set to be larger than the internal diameter of the smaller diameter opening of the taper hole 16. A processing portion 92 is formed at a tip end of the punch 91 and a held portion 93 is formed on a portion of the punch 91 on the opposite side from the processing portion 92. The punch 91 is inserted into a guide hole 47 of the guide 46 and is held by at least an inner peripheral surface 47a of the guide 47, which slidably contacts an outer peripheral surface 93a of the held portion 93 throughout the periphery. Thus, the central axis X_s of the

punch 91 is inclined with respect to the thickness direction axis T of the base material 11 to the same side as the central axis O_t of the taper hole 16 formed in the base material 11. An inclination angle of the central axis X_s of the punch 91 is different from an inclination angle of the central axis O_t of the taper hole 16. The punch 91 is guided in the extending direction of the central axis X_s . The punch 91 guided by the guide 46 is inserted into a pulling cavity 45 of the die 44 so that the punch 91 can move in a sliding manner.

[0150] In order to form the straight hole 18 by using the straight hole forming machine 40, the punch 91 is moved in the pressing direction from the larger diameter opening toward the smaller diameter opening of the taper hole 16 along the central axis X_s of the punch 91 as shown in FIGS. 17C and 24A. As the punch 91 is moved, the processing portion 92 is inserted into the taper hole 16 from the large diameter opening of the taper hole 16. The outer peripheral surface 92a of the processing portion 92 slidably contacts the inner peripheral surface 16a of the taper hole 16 near the intersection line C1 so that the outer peripheral surface 92a except the contacting portion widens the smaller diameter opening of the taper hole 16. The smaller diameter opening of the taper hole 16 is widened until the processing portion 92 of the punch 91 punches out the base material 11. Thus, the straight hole 18 is formed in the shape complementing the shape of the outer peripheral surface 92a of the processing portion 92. More specifically, the straight hole 18 is formed in the shape of a cylinder, whose diameter is substantially constant in the extending direction of the central axis O_s . Meanwhile, closed curves among the intersection lines between a virtual plane, which is perpendicular to the central axis O_s of the straight hole 18 inclined with respect to the thickness direction axis T of the base material 11, and the inner peripheral surface 18a are round in shape. The inner peripheral surface 18a of the thus formed straight hole 18 connects to the remaining portion of the inner peripheral surface 16a of the taper hole 16, where the straight hole 18 is not formed, on the boundary line B. Thus, the injection hole 12 is formed by the straight hole 18 and the taper hole 16.

[0151] An opening area of the smaller diameter opening 17 of the taper hole 16, which opens into the upstream end surface 11a of the base material 11 as shown in FIG. 23 before the process in Step S13, is prone to vary due to variation in the stroke of the processing portion 82 as the taper punch. However, in the present embodiment, by performing the process in Step S13, the small diameter side opening 17 can be changed into the straight hole 18 as shown in FIG. 18. The opening area of the straight hole 18 is almost independent of the stroke of the processing portion 92 as the straight punch. Therefore, variation in fuel injection quantity injected from the injection hole 12 provided by the straight hole 18 and the taper hole 16 can be reduced, and variation among products in the fuel injection quantity injected from the injection hole 12 can be reduced.

[0152] In Step S11, the lead hole 14 is formed in the base material 11. Therefore, the burrs can be formed in a portion 19 of the opening of the lead hole 14 on a forward side with respect to the pressing direction in FIG. 21. However, in the present embodiment, the pressing direction in Step S12 is set to be opposite from the pressing direction in Step S11. Therefore, even if the burrs are formed at the portion 19 of the opening of the lead hole 14, the portion 19 of the opening

of lead hole **14** can be finely formed by a larger diameter end of the processing portion **82** as the taper punch.

[0153] In Step S13, the pressing direction is set to be the direction from the large diameter opening toward the smaller diameter opening of the taper hole **16**. Therefore, even if excess material forms the burrs in the punch press, the burrs will protrude to the outside from the straight hole **18**. The protruding burrs can be easily eliminated through grinding and the like after Step S13.

[0154] (Sixth Embodiment)

[0155] Next, a method for forming a straight hole **18** with a straight hole forming machine **40** according to the sixth embodiment will be explained based on FIGS. 25A and 25B.

[0156] In the method according to the sixth embodiment, the straight hole **18** is formed with the straight hole forming machine **40** having a punch **101** instead of the punch **91** of the fifth embodiment in a step corresponding to Step S13 of the fifth embodiment. The punch **101** is formed in the shape of a cylinder, whose diameter is substantially constant toward its tip end like the punch **91** of the fifth embodiment as shown in FIG. 25A. However, an outline of the punch **101** on a cross section perpendicular to its central axis X_s (for instance, a cross section shown in FIG. 25B) is elliptic in shape unlike the punch **91** of the fifth embodiment. On the cross section perpendicular to the central axis X_s , the major axis of the outline of the punch **101** is provided on a virtual plane, which includes the central axis X_s and is perpendicular to the end surfaces **11a**, **11b** of the base material **11**. More specifically, the major axis of the outline of the punch **101** on the cross section perpendicular to the central axis X_s is provided on a virtual plane shown by a shaded area in FIG. 25A. The external diameters of the major axis and the minor axis of the punch **101** on the cross section perpendicular to the central axis X_s are set to be smaller than the larger diameter opening of the taper hole **16** formed in a step corresponding to Step S12 of the fifth embodiment. Meanwhile, the external diameters of the major axis and the minor axis of the punch **101** on the cross section perpendicular to the central axis X_s are set to be larger than the smaller diameter opening of the taper hole **16**.

[0157] The punch **101** is formed with a processing portion **102** and a held portion **103**, which correspond to the processing portion **92** and the held portion **93** of the fifth embodiment respectively. The punch **101** is inserted into the guide hole **47** and is held at least by the inner peripheral surface **47a** of the guide hole **47**, which slidably contacts an outer peripheral surface **103a** of the held portion **103** throughout the periphery. Thus, the central axis X_s of the punch **101** is inclined to the same side as the central axis O_t of the taper hole **16** formed in the base material **11** held between the die **44** and the guide **46**. An inclination angle of the central axis X_s of the punch **101** is different from that of the central axis O_t of the taper hole **16**. The punch **101** is guided along the extending direction of the central axis X_s . The punch **101** guided by the guide **46** is inserted into the pulling cavity **45** of the die **44** so that the punch **101** can move in a sliding manner.

[0158] In order to form the straight hole **18** with the straight hole forming machine **40** having the punch **101**, the

punch **101** is moved in the pressing direction from the larger diameter opening to the smaller diameter opening of the taper hole **16** along the central axis X_s of the punch **101** as shown in FIG. 25A. As the punch **101** is moved, the processing portion **102** is inserted into the taper hole **16** from the larger diameter opening of the taper hole **16**. The outer peripheral surface **102a** of the processing portion **102** slidably contacts the inner peripheral surface **16a** of the taper hole **16** near the intersection line C1 like the fifth embodiment as shown in FIG. 25A. The other portion of the outer peripheral surface **102a** of the processing portion **102** than the slidably contacting portion widens the taper hole **16** until the processing portion **102** of the punch **101** punches out the base material **11**. Thus, the straight hole **18** is formed in the shape complementing the shape of the outer peripheral surface **102a** of the processing portion **102**. More specifically, the straight hole **18** is formed in the shape of a cylindrical hole whose inner diameter is substantially constant in the extending direction of the central axis O_s of the straight hole **18** as shown in FIG. 26. Meanwhile, closed curves among the intersection lines between a virtual plane, which is perpendicular to the central axis O_s inclined with respect to the thickness direction axis T of the base material **11**, and the inner peripheral surface **18a** of the straight hole **18** are elliptic in shape. The inner peripheral surface **18a** of the straight hole **18** connects to the inner peripheral surface **16a** of the remaining taper hole **16** on the boundary line B. Thus, the injection hole **12** is provided by the straight hole **18** and the taper hole **16**.

[0159] Next, comparison between the fifth embodiment and the sixth embodiment will be given.

[0160] The punch **101** having the cross section in the elliptic shape is used in the sixth embodiment. Therefore, the protruding degree of the boundary line B provided by the inner peripheral surfaces **18a**, **16a** toward the taper hole **16** as shown in FIG. 26 can be reduced compared to the protruding degree provided in the case where the punch **91** of the fifth embodiment having the cross section in the round shape is used as shown in FIG. 18. More specifically, the length of the straight hole **18** can be contracted in the extending direction of the central axis O_s . It is because the central axis X_s of the punch **101**, which coincides with the axis of the pressing direction, is inclined with respect to the central axis O_t of the taper hole **16**, so an area E widened through the punch press is contracted in the case of the punch **101** having the elliptic cross section as shown in FIG. 25B, compared to the case of the punch **91** having the round cross section as shown in FIG. 24B. As the length of the straight hole **18** is contracted, the length of the taper hole **16** is extended. As a result, the decrease in the effect of minimizing the diameters of the droplets of the spray due to the formation of the straight hole **18** can be inhibited sufficiently.

[0161] In FIGS. 27A and 27B, a modified example of the straight hole forming machine **40** of the sixth embodiment is shown. The straight hole forming machine **40** shown in FIGS. 27A and 27B has a cylindrical punch **101'**, whose diameter is substantially constant toward its tip end. An outline of the cylindrical punch **101'** on the cross section perpendicular to the central axis X_s takes the shape defined by two parallel lines joined by semi-circular ends as shown in FIG. 27B. In the case where the straight hole **18** is formed with the punch **101'**, the major axis of the outline of the

punch **101'** on the cross section perpendicular to the central axis X_s is provided on a virtual plane, which includes the central axis X_s and is perpendicular to the end surfaces **11a**, **11b** of the base material **11** held between the die **44** and the guide **46**. More specifically, the major axis of the outline of the punch **101'** on the cross section perpendicular to the central axis X_s is provided on a virtual plane defining the cross section shown by a shaded area in **FIG. 27A**.

[0162] In the fifth and sixth embodiments, the pressing direction for forming the taper hole **16** is set to be opposite to the pressing direction for forming the lead hole **14**. Alternatively, the pressing direction for forming the taper hole **16** may be set to the same direction as the pressing direction for forming the lead hole **14**. In the fifth and sixth embodiments, the central axis Y_t of the held portion **83**, which coincides with the axis of the pressing direction, is inclined with respect to the thickness direction axis T of the base material **11**. The central axis X_t of the processing portion **82** as the taper punch is inclined with respect to the central axis Y_t toward an opposite side from the base material **11**. Alternatively, the axis Y_t of the pressing direction may be inclined with respect to the thickness direction axis T of the base material **11** so that the pressing direction axis Y_t coincides with the central axis X_t of the processing portion **82** or is parallel to the central axis X_t . Alternatively, the pressing direction axis Y_t may be parallel to the thickness direction axis T of the base material **11** and the central axis X_t of the processing portion **82** may be inclined with respect to the pressing direction axis Y_t . In these cases, the central axis O_t of the taper hole **16** becomes inclined with respect to the thickness direction axis T of the base material. Both the pressing direction axis Y_t and the central axis X_t of the processing portion **82** may be parallel to the thickness direction axis T of the base material **11**. In this case, the central axis O_t of the taper hole **16** becomes parallel to the thickness direction axis T of the base material **11**, too.

[0163] In the fifth and sixth embodiments, the central axis X_s of the processing portion **92**, **102** as the straight punch is inclined with respect to the central axis O_t of the taper hole **16**. The pressing direction for forming the straight hole is set along the central axis X_s . Alternatively, the central axis X_s of the processing portion **92**, **102** may coincide with the central axis O_t of the taper hole **16** or may be parallel to the central axis O_t . In this case, the central axis O_t of the taper hole **16** and the central axis O_s of the straight hole **18** coincide with each other or are parallel to each other. The pressing direction for forming the straight hole is set to the direction from the larger diameter opening toward the smaller diameter opening of the taper hole **16**. Alternatively, the pressing direction for forming the straight hole may be set to an opposite direction, or the direction from the smaller diameter opening toward the larger diameter opening of the taper hole **16**.

[0164] (Seventh Embodiment)

[0165] Next, a method for manufacturing an injection hole member **10** according to the seventh embodiment will be explained based on **FIGS. 28 to 34**. As shown in **FIG. 29**, the injection hole member **10** of the seventh embodiment is a circular plate formed of metallic material such as stainless steel with four injection holes **34a**, **43b**, **34c**, **34d**. The spray injected from the injection holes **34a**, **34b** flows in a direction opposite to a direction of a flow of the spray injected

from the other injection holes **34c**, **34d**. Thus, the injector **100** performs the injection in two directions as shown in **FIG. 30**. As the entire injection holes **34a**, **34b**, **34c**, **34d** are formed in the same shape, a following explanation of one injection hole **34a** also apply to the other injection holes **34b**, **34c**, **34d**.

[0166] As shown in **FIG. 28**, the injection hole **34a** is a taper hole whose internal diameter increases along a direction from its upstream opening (an inlet) toward its downstream opening (an outlet). An injection hole axis $CL102$, or a central axis, of the injection hole **34a** is inclined with respect to a central axis $CL100$ of the injection hole member **10**. The injection hole axis $CL102$ is directed along the injection direction in which the injection hole axis $CL102$ separates from the central axis $CL100$.

[0167] In two intersection lines between a virtual plane, which includes the injection hole axis $CL102$ and is perpendicular to the injection hole member **10**, and an inner peripheral surface **136** providing the injection hole **34a**, a first injection hole intersection line $L104$, which is closer to the central axis $CL100$, and a downstream end surface **11b** of the base material **11** provide an acute angle α therebetween as shown in **FIG. 28**. To the contrary, a second injection hole intersection line $L105$ and the downstream end surface **11b** of the base material **11** provide a blunt angle β therebetween as shown in **FIG. 28**. A concave portion **38** is formed in an edge of the downstream opening of the injection hole **34a** on the first injection hole intersection line $L104$ side. The concave portion **38** caves in radially outward from the inner peripheral surface **136** of the injection hole **34a** as shown in **FIG. 28**. More specifically, the concave portion **38** is formed on a radially inner side of the edge of the downstream end of the injection hole **34a** with respect to the central axis $CL100$.

[0168] The fuel flowing into the injection hole **34a** from the upstream end surface **11a** side is mainly introduced to the inner peripheral surface **136** on the first injection hole intersection line $L104$ side, which provides the acute angle α with the downstream end surface **11b**. Then, the fuel flows while spreading along the inner peripheral surface **136**. Since the concave portion **38** caves in radially outward from the inner peripheral surface **136**, little or no fuel flows along the concave portion **38**. The direction of the spray injected from the injection hole **34a** changes in accordance with the length of the inner peripheral surface **136** except the concave portion **38**. Therefore, the thickness of the inner peripheral surface **136** on the first injection hole intersection line $L104$ side except the concave portion **38** serves as an effective thickness t , which is a substantial thickness of the injection hole member **10** for changing the injection direction of the spray. An injection hole diameter d of the injection hole **34a** is represented by a distance between an intersection point $P106$, which is provided between the second injection hole intersection line $L105$ and the upstream end surface **11a**, and the first injection hole intersection line $L104$.

[0169] If the effective thickness t is changed by changing the size of the concave portions **38**, the injection directions of the respective injection holes **34a**, **34b**, **34c**, **34d** are changed. Accordingly, the injection angle of the spray injected from the injection holes **34a**, **34b** and the injection angle of the spray injected from the other injection holes **34c**, **34d** are changed. Meanwhile, the spray angle θ pro-

vided between the spray injected from the injection holes **34a**, **34b** and the spray injected from the other injection holes **34c**, **34d** is changed. If the inclination angle of the injection hole axis **CL102** of each injection hole is constant with respect to the central axis **CL100**, the spray angle θ changes substantially in proportion to a ratio of the effective thickness t of the injection hole member **10** to the injection hole diameter d (t/d) as shown in **FIG. 31**. If the injection hole diameter d is constant, the injection angle of the spray injected from each injection hole increases as the effective thickness t of the injection hole member **10** is increased. Therefore, the spray angle θ increases as the effective thickness t of the injection hole member **10** is increased. If the injection hole diameter d is constant, the injection angle of the spray injected from each injection hole decreases as the effective thickness t is decreased. Therefore, the spray angle θ also decreases as the effective thickness t is decreased. The effective thickness t can be regulated with the size of the concave portion **38**. The effective thickness t is substantially reduced if the concave portion **38**, which caves in radially outward from the inner peripheral surface **136**, is formed on the edge of the downstream end opening of each injection hole on the first injection hole intersection line **L104** side. The effective thickness t is reduced as a processing degree D_{cav} of the concave portion **38** is increased and the concave portion **38** is deepened. As a result, as shown in **FIG. 32**, as the processing degree D_{cav} of the concave portion **38** is increased, a decrease $\Delta\theta$ in the spray angle θ is increased. More specifically, as the processing degree D_{cav} of the concave portion **38** is increased, the spray angle θ is decreased.

[0170] Next, a method for manufacturing the injection hole member **10** according to the seventh embodiment will be explained based on **FIGS. 33A** to **33D**. In **FIGS. 33A** to **33D**, the base material **11** is shown so that the upstream end surface **11a** faces downward and the downstream end surface **11b** faces upward.

[0171] First, in a lead hole forming step, a lead hole **14** is punched in the base material **11** with a lead hole punch **200** so that a central axis **CL122** of the lead hole **14** is inclined with respect to an axis **L112** of the base material **11** in its thickness direction as shown in **FIG. 33A**. The lead hole punch **200** is a straight punch, whose punch diameter is constant.

[0172] Then, in an injection hole forming step, a guide **210** of a taper punch **202** is set on the downstream end surface **11b** side of the base material **11** as shown in **FIG. 33B**. A guide surface **212** of the guide **210** guides a large diameter portion **204** of the taper punch **202**. The taper punch **202** has the large diameter portion **204** in the shape of a cylinder, whose diameter is constant, and a taper portion **205** formed on an end of the large diameter portion **204**. The diameter of the taper portion **205** decreases toward its tip end.

[0173] As shown in **FIG. 33B**, the taper punch **202** is inserted into the lead hole **14** from the downstream end side of the lead hole **14** along the central axis **CL122** of the lead hole **14** in a direction opposite to the punching direction of the lead hole punch **200**. Thus, the taper punch **202** punches out the base material **11** in a direction opposite to the punching direction of the lead hole punch **200**. Thus, the taper punch **202** widens the lead hole **14**, so the injection hole **34a** as the taper hole whose diameter increases in a

direction from the upstream end opening toward the downstream end opening is formed.

[0174] Then, in a concave portion forming step, as shown in **FIG. 33C**, the edge of the downstream end opening of the injection hole **34a** on the first injection hole intersection line **L104** side is ground with a circular brush **214**, which includes abrasive grains.

[0175] Thus, as shown in **FIG. 33D**, the concave portion **38** caving in radially outward from the inner peripheral surface **136** is formed in the edge of the downstream end opening of the injection hole **34a** on the first injection hole intersection line **L104** side. More specifically, the concave portion **38** is formed on a radially inner side of the edge of the downstream end of the injection hole **34a** with respect to the central axis **CL100** of the base material **11**.

[0176] Through the grinding process with the brush **214**, the size of the concave portion **38** can be regulated highly accurately without deforming the injection hole **34a**. Therefore, the spray angle θ can be regulated highly accurately and easily by regulating a grinding degree with the brush **214**.

[0177] The lead hole **14** is formed with the lead hole punch **200** before the injection hole **34a** is formed with the taper punch **202**. The taper punch **202** widens the lead hole **14** after the tip end of the taper punch **202** is inserted into the lead hole **14**. Therefore, a distance between a holding point where the guide **210** holds the taper punch **202** and a pressing point where the taper punch **202** widens the lead hole **14** is contracted. Accordingly, bending moment applied to the taper punch **202** is reduced, so the breakage of the taper punch **202** can be prevented.

[0178] The taper punch **202** is inserted into the lead hole **14** in a direction opposite to the inserting direction of the lead hole punch **200**. Therefore, even if the burrs are formed on the edge of the downstream end opening of the lead hole **14** when the base material is pressed with the lead hole punch **200**, the burrs can be eliminated with the taper punch **202**.

[0179] In the seventh embodiment, the lead hole **14** is formed with the lead hole punch **200**. Alternatively, the lead hole **14** may be formed through an electric discharging process, for instance. In the seventh embodiment, the injection holes **34a**, **34b**, **34c**, **34d** are formed with the taper hole **202** after the lead holes **14** are formed. Alternatively, the injection holes **34a**, **34b**, **34c**, **34d** may be formed with the taper punch **202** directly without forming the lead holes **14**. The concave portion **38** may be formed with a punch, instead of the brush **214**.

[0180] There is a possibility that the injection angle of the fuel spray injected from the injection hole formed in the processes shown in **FIGS. 33A** and **33B** has been already smaller than a target range before the concave portion **38** is formed in the concave portion forming step shown in **FIG. 33C** because of the deviation in a setting value of the inclination angle of the injection hole, variation in the thickness of the base material **11** or processing errors. If the injection angle is smaller than the target range, the injection angle cannot be regulated within the target range by forming the concave portion **38**. In the case where the injector **100** performs the two direction spray as shown in **FIG. 30**, the spray angle θ cannot be regulated within the target range by

forming the concave portion **38** if the spray angle θ is smaller than the target range before the concave portion **38** is formed.

[0181] Therefore, the injection angle or the spray angle of the injection hole should be preferably regulated based on a flowchart shown in **FIG. 34**. In an explanation below, a regulating method of the spray angle θ is explained. The method can be applied to the regulation of the injection angle of the injection hole. In this case, the spray angle θ is replaced with the injection angle.

[0182] First, in an injection hole forming step of Step S21 of the flowchart shown in **FIG. 34**, the inclination angle of the injection hole **34a** is set and the injection hole **34a** is formed in the processes shown in **FIGS. 33A and 33B** so that the spray angle θ becomes larger than the target range before the concave portion **38** is formed in the concave portion forming step shown in **FIG. 33C**. More specifically, the setting angle of the injection hole **34a** at the time when the concave portion **38** is formed is set to be larger than the inclination angle capable of providing the target spray angle range, before the concave portion **38** is formed.

[0183] Then, in a measuring step of Step S22 of the flowchart shown in **FIG. 34**, the spray angle θ is measured by injecting experimental fluid from the respective injection holes **34a, 34b, 34c, 34d**. If the spray angle θ is smaller than the target range (-NG), the injection hole member is disposed of as a defective product in Step S23. If the spray angle θ is within the target range (OK), the process shown in **FIGS. 33A to 33D** is ended and the next process is performed in Step S24.

[0184] If the spray angle θ is larger than the target range (+NG), a processing step (Step S25 and Step S26) is performed. In the processing step, processing conditions such as pressing force of the brush **214** are set in accordance with a difference between the measured spray angle θ and the target range in Step S25. Thus, the processing degree D_{cav} of the concave portion **38** is regulated in Step S25. The concave portion **38** is formed based on the regulated processing degree D_{cav} in Step S26. Then, operation returns to Step S22. Also in the case where the punch is used to form the concave portion **38** instead of the brush **214**, the processing degree D_{cav} of the concave portion **38** is regulated by setting the processing conditions such as a pressing force of the punch.

[0185] The above measuring step and the processing step are included in a concave portion forming step. Thus, the spray angle θ is regulated into the target range by repeating the measuring step and the processing step, while giving a feedback from the measured spray angle θ to the processing degree D_{cav} of the concave portion **38**. Thus, the possibility that the spray angle θ may become less than the target range and the injection hole member **10** may become defective can be reduced. Moreover, the injection hole can be processed highly accurately so that the target spray angle θ is achieved.

[0186] In the seventh embodiment, the concave portion **38** is formed only in the edge of the downstream end opening on the first injection hole intersection line **L104** side of each injection hole with the use of the circular brush **214**. Alternatively, as shown in **FIGS. 35A and 35B**, the concave portion may be formed in the entire portion of the edge of the downstream end opening of each injection hole by

rotating a brush **216** in the shape of a circular plate and by grinding the base material **11** formed with the injection holes **34a, 34b, 34c, 34d** with a flat surface of the brush **216**.

[0187] (Eighth Embodiment)

[0188] Next, an injection hole member **10** according to the eighth embodiment will be explained based on **FIGS. 36 to 37C**. A concave portion **172** of the injection hole member **10** of the eighth embodiment is formed in a method different from the method for forming the concave portion **38** of the seventh embodiment.

[0189] A method for manufacturing the injection hole member **10** according to the eighth embodiment will be explained based on **FIGS. 37A to 37C**. In **FIGS. 37A to 37C**, the base material **11** is positioned so that the upstream end surface **11a** faces downward and the downstream end surface **11b** faces upward.

[0190] First, in a lead hole forming step, a die **220** is set on the downstream end surface **11b** of the base material **11**, as shown in **FIG. 37A**. The die **220** is formed with a receiving hole **222** in the same inclination angle as the central axis **CL122** of the lead hole **14**, which is formed by a lead hole punch **200**. A hole diameter D_d of the receiving hole **222** is larger than a punch diameter D_p of the lead hole punch **200**.

[0191] The lead hole **14** is formed by punching out the base material **11** with the lead hole punch **200** so that the central axis **CL122** of the lead hole **14** is inclined with respect to the axis **L112** of the base material **11** in its thickness direction. The downstream end surface **11b** of the base material **11** is pressed by the die **220**, and the hole diameter D_d of the receiving hole **222** of the die **220** is larger than the punch diameter D_p of the lead hole punch **200**. Therefore, the periphery of the downstream end opening of the lead hole **14** is broken, so an enlarged diameter portion **130** is formed.

[0192] Then, in an injection hole forming step, a taper punch **202** is inserted into the lead hole **14** from the downstream end side of the lead hole **14** while the taper punch **202** is guided with a guide **210** along the central axis **CL122** of the lead hole **14** as shown in **FIG. 37B**. Thus, the taper punch **202** punches out the base material **11** in a direction opposite to the punching direction of the lead hole punch **200**. Thus, the taper punch **202** widens the lead hole **14** and forms the injection hole **34a**. As shown in **FIG. 37C**, the taper punch **202** forms the concave portion **172** by remaining the enlarged diameter portion **130** on the first injection hole intersection line **L104** side.

[0193] In the eighth embodiment, a clearance between the lead hole punch **200** and an internal surface of the receiving cavity **222** is regulated by regulating the hole diameter D_d of the receiving cavity **222**. Thus, the size of the enlarged diameter portion **130**, or the size of the concave portion **172**, can be regulated easily. In the eighth embodiment, a step only for forming the concave portion **172** is unnecessary. Therefore, the production man-hour can be reduced.

[0194] In the seventh and eighth embodiments, even if the inclination angle of the central axis **CL102** of the injection hole **34a** varies with respect to the central axis **CL100** of the injection hole member **10** or even if the thickness of the injection hole member **10** varies, the spray angle θ can be

easily adjusted by regulating the size of the concave portion **38, 172**, without changing the injection quantity. In accordance with required performance, the spray angle θ can be easily regulated without changing the inclination angle of the central axis **CL102** of the injection hole **34a**, the thickness of the injection hole member **10** or the injection quantity.

[0195] (Modifications)

[0196] In the seventh and eighth embodiments, the injection hole member for performing the two-direction injection is explained. Alternatively, the injection hole member for performing one-direction injection may be employed. In the case of the one-direction injection, the injection angles of the respective injection holes can be adjusted by forming the concave portions. Thus, the spreading angle of the entire spray injected from the plurality of injection holes can be regulated easily.

[0197] Instead of the taper hole whose diameter increases toward the downstream end opening, a straight hole whose diameter is constant from its upstream end opening to its downstream end opening may be employed. Also in the case of the straight hole, the concave portion is formed on a radially inner side of the edge of the downstream end opening of the injection hole **34a** with respect to the central axis **CL100** of the injection hole member **10**. If the central axis **CL102** of the injection hole **34a** is inclined with respect to the central axis **CL100** of the injection hole member **10**, the inner peripheral surface of the injection hole **34a** may be formed in any inclination angle with respect to the downstream end surface **11b** of the injection hole member **10**. The number of the injection holes is not limited to four.

[0198] The concave portion **38, 172** caving in radially outward from the inner peripheral surface **136** may be formed in any position if the position is in the edge of the downstream end opening of the injection hole **34a**. The injection direction of the spray can be changed by forming the concave portion in the edge of the downstream end opening of the injection hole **34a**.

[0199] In the above embodiments, the injection hole member **10** of the present invention is used in the injector **100** for the gasoline engine. The injection hole member **10** of the present invention may be used in any application if the fluid is injected from the injection holes **12, 34a-34d**.

[0200] The present invention should not be limited to the disclosed embodiments, but may be implemented in many other ways without departing from the spirit of the invention.

What is claimed is:

1. A method for manufacturing an injection hole member formed with a taper hole, which serves as at least a part of an injection hole, the taper hole being formed so that a central axis of the taper hole is inclined with respect to an axis of a base material of the injection hole member in a thickness direction of the base material and a diameter of the taper hole increases in a direction from an end surface of the base material to the other end surface of the base material, the method comprising the steps of:

forming a lead hole in the base material through punch press with a punch, the lead hole being formed so that a central axis of the lead hole is inclined with respect

to the axis of the base material in the thickness direction thereof and a diameter of the lead hole is substantially constant along an extending direction of the central axis of the lead hole; and

forming a taper hole in the base material by widening the lead hole with a taper punch, whose tip end is inserted into the lead hole in a state where a central axis of the taper punch is inclined to the same side as the central axis of the lead hole with respect to the axis of the base material in the thickness direction thereof, the taper punch being formed so that a diameter of the taper punch decreases toward the tip end thereof, wherein

the injection hole member is formed so that an intersection line between a first reference plane, which is a virtual plane perpendicular to the central axis of the lead hole, and an inner peripheral surface of the lead hole is in an elliptic shape or a oval shape, whose major axis is directed in an extending direction of a reference axis, which is an intersection line between the first reference plane and a virtual plane including the central axis of the lead hole and the axis of the base material in the thickness direction thereof, and

the injection hole member is formed so that an intersection line between a second reference plane, which is perpendicular to the central axis of the taper punch, and an outer peripheral surface of the taper punch is round in shape.

2. A method for manufacturing an injection hole member formed with a taper hole, which serves as at least a part of an injection hole, the taper hole being formed so that a central axis of the taper hole is inclined with respect to an axis of a base material of the injection hole member in a thickness direction of the base material and a diameter of the taper hole increases in a direction from an end surface of the base material to the other end surface of the base material, the method comprising the steps of:

forming a lead hole in the base material through punch press with a punch, the lead hole being formed so that a central axis of the lead hole is inclined with respect to the axis of the base material in the thickness direction thereof and a diameter of the lead hole is substantially constant along an extending direction of the central axis of the lead hole; and

forming a taper hole in the base material by widening the lead hole with a taper punch, whose tip end is inserted into the lead hole in a state where a central axis of the taper punch is inclined to the same side as the central axis of the lead hole with respect to the axis of the base material in the thickness direction thereof, the taper punch being formed so that a diameter of the taper punch decreases toward the tip end thereof, wherein

the injection hole member is formed so that an intersection line between a first reference plane, which is a virtual plane perpendicular to the central axis of the lead hole, and an inner peripheral surface of the lead hole is round in shape, and

the injection hole member is formed so that an intersection line between a second reference plane, which is perpendicular to the central axis of the taper punch, and an outer peripheral surface of the taper punch is in an elliptic shape or an oval shape, whose major axis is

directed in an extending direction of a reference axis, which is a line perpendicularly crossing an intersection line between a virtual plane, which includes the central axis of the taper punch and the axis of the base material in the thickness direction thereof, and the second reference plane on the second reference plane.

3. A method for manufacturing an injection hole member formed with a taper hole, which serves as at least a part of an injection hole, the taper hole being formed so that a central axis of the taper hole is inclined with respect to an axis of a base material of the injection hole member in a thickness direction of the base material and a diameter of the taper hole increases in a direction from an end surface of the base material to the other end surface of the base material, the method comprising the steps of:

forming a lead hole in the base material through punch press with a punch, the lead hole being formed so that a central axis of the lead hole is inclined with respect to the axis of the base material in the thickness direction thereof and a diameter of the lead hole is substantially constant along an extending direction of the central axis of the lead hole; and

forming a taper hole in the base material by widening the lead hole with a taper punch, whose tip end is inserted into the lead hole in a state where a central axis of the taper punch is inclined to the same side as the central axis of the lead hole with respect to the axis of the base material in the thickness direction thereof, the taper punch being formed so that a diameter of the taper punch decreases toward the tip end thereof, wherein

the injection hole member is formed so that an intersection line between a first reference plane, which is perpendicular to the central axis of the lead hole, and an inner peripheral surface of the lead hole is in an elliptic shape or an oval shape, whose major axis is directed in an extending direction of a first reference axis, which is an intersection line between the first reference plane and a virtual plane including the central axis of the lead hole and the axis of the base material in the thickness direction thereof, and

the injection hole member is formed so that an intersection line between a second reference plane, which is perpendicular to the central axis of the taper punch, and an outer peripheral surface of the taper punch is in an elliptic shape or an oval shape, whose major axis is directed in an extending direction of a second reference axis, which perpendicularly crosses an intersection line between a virtual plane, which includes the central axis of the taper punch and the axis of the base material in the thickness direction thereof, and the second reference plane on the second reference plane.

4. The method for manufacturing the injection hole member as in any one of claims 1 to 3, wherein

the punch for forming the lead hole and the taper punch are driven into the base material in the state where the central axes thereof are inclined in substantially the same inclination angle with respect to the axis of the base material in the thickness direction thereof.

5. The method for manufacturing the injection hole member as in any one of claims 1 to 3, wherein

the punch for forming the lead hole and the taper punch are driven into the base material in a state where the

central axes thereof are inclined in different inclination angles with respect to the axis of the base material in the thickness direction thereof.

6. The method for manufacturing the injection hole member as in any one of claims 1 to 3, wherein

a ratio of a first diameter of the taper punch on a first coordinate axis to a second diameter of the taper punch on a second coordinate axis is smaller than a ratio of a first diameter of the lead hole on the first coordinate axis to a second diameter of the lead hole on the second coordinate axis, wherein the first coordinate axis is an intersection line between a virtual plane, which includes the central axes of the lead hole and the taper punch and the axis of the base material in the thickness direction thereof, and a coordinate plane provided by another virtual plane perpendicular to the axis of the base material in the thickness direction thereof, and the second coordinate axis perpendicularly crosses the first coordinate axis on the coordinate plane.

7. The method for manufacturing the injection hole member as in any one of claims 1 to 3, wherein

the taper punch is inserted into the lead hole in a direction opposite to a pressing direction for forming the lead hole, when the taper hole is formed.

8. The method for manufacturing the injection hole member as in any one of claims 1 to 3, wherein

the taper hole provides a portion whose internal diameter increases along a direction from the upstream end toward the downstream end of the injection hole.

9. A method for manufacturing an injection hole member formed with an injection hole for injecting fluid, the method comprising the steps of:

forming a taper hole in a base material of the injection hole member through punch press so that a diameter of the taper hole increases along a direction from an end surface of the base material to the other end surface of the base material; and

forming a straight hole in the base material by widening a smaller diameter opening of the taper hole through punch press so that an inner peripheral surface of the straight hole connects to an inner peripheral surface of the remaining taper hole, wherein

the injection hole is provided by the taper hole and the straight hole.

10. The method for manufacturing the injection hole member as in claim 9, wherein

the straight hole is formed through the punch press with a straight punch, whose diameter is substantially constant toward its tip end, along a direction of a central axis of the straight punch.

11. The method for manufacturing the injection hole member as in claim 10, wherein

the straight hole is formed through the punch press with the straight punch, whose diameter is smaller than a diameter of a larger diameter opening of the taper hole, along a direction from the larger diameter opening toward the smaller diameter opening of the taper hole.

12. The method for manufacturing the injection hole member as in claim 10 or **11**, wherein

the straight hole provides an upstream end opening of the injection hole.

13. The method for manufacturing the injection hole member as in claim 12, wherein

the straight hole is formed with the straight punch, whose outline on a cross section perpendicular to the central axis thereof is in an elliptic shape or a shape defined by two parallel lines joined with semi-circular ends, and is formed through the punch press along a direction of the central axis of the straight punch inclined with respect to the central axis of the taper hole.

14. The method for manufacturing the injection hole member as in claim 9, wherein

the taper hole is formed through the punch press with a taper punch, whose diameter decreases toward its tip end, along a direction toward the tip end of the taper punch, and

the taper hole is formed by driving the taper punch into the base material in a state where the taper punch is inclined with respect to an axis of the base material in its thickness direction.

15. The method for manufacturing the injection hole member as in claim 14, wherein

the taper hole is formed with the taper punch whose central axis is inclined with respect to the axis of the base material in its thickness direction and with a guide for guiding the taper punch in a pressing direction by contacting an outer peripheral surface of the taper punch on an opposite side from the base material.

16. The method for manufacturing the injection hole member as in claim 9, further comprising the step of:

forming a lead hole in the base material through punch press before the taper hole is formed, wherein

the taper hole is formed with a taper punch, whose diameter decreases toward its tip end,

the taper punch is driven in a pressing direction toward its tip end, and

the taper hole is formed by widening the lead hole with the taper punch.

17. The method for manufacturing the injection hole as in claim 16, wherein

the taper hole is formed through the punch press in a direction opposite to a pressing direction for forming the lead hole.

18. The method for manufacturing the injection hole as in claim 9, wherein

the injection hole member is formed so that two intersection lines provided between a cross section of the base material in its thickness direction and an inner peripheral surface of the taper hole are inclined to the same side with respect to the axis of the base material in its thickness direction, and

the injection hole member is formed so that an inclination angle provided by one of the two intersection lines and the axis of the base material in its thickness direction is

smaller than another inclination angle provided by the other intersection line and the axis of the base material in its thickness direction.

19. A method for manufacturing an injection hole member formed with an injection hole for injecting fluid, the method comprising:

an injection hole forming step of forming the injection hole so that an axis of the injection hole in an injection direction is inclined with respect to an axis of a base material of the injection hole member in its thickness direction, and

a concave portion forming step of forming a concave portion caving in radially outward from an inner peripheral surface providing the injection hole in an edge of a downstream end opening of the injection hole.

20. The method for manufacturing the injection hole member as in claim 19, wherein

the injection hole is a taper hole whose diameter increases toward its downstream end.

21. The method for manufacturing the injection hole member as in claim 20, further comprising:

a lead hole forming step of forming a lead hole before the injection hole is formed so that a central axis of the lead hole is inclined with respect to the axis of the base material in its thickness direction and the lead hole penetrates the base material, wherein

the injection hole is formed by inserting a taper punch, whose diameter decreases toward its tip end, into the lead hole from the downstream end of the injection hole and by widening the lead hole in the injection hole forming step.

22. The method for manufacturing the injection hole member as in claim 19, wherein

the concave portion is formed through a grinding process.

23. The method for manufacturing the injection hole member as in claim 19, wherein

the injection hole is formed while setting an inclination angle of the axis of the injection hole with respect to the axis of the base material in its thickness direction in the injection hole forming step so that an injection angle of fluid spray injected from the injection hole is larger than a target range in a state before the concave portion is formed, and

the injection angle is regulated into the target range by forming the concave portion and decreasing the injection angle in the concave portion forming step.

24. The method for manufacturing the injection hole member as in claim 23, wherein

the concave portion forming step includes a measuring step of measuring the injection angle and a processing step of processing the concave portion based on the measured injection angle if the measured injection angle is larger than the target range, and

the injection angle is regulated into the target range by repeating the measuring step and the processing step.

25. A method for manufacturing an injection hole member formed with an injection hole for injecting fluid, the method comprising:

a lead hole forming step of forming a lead hole by punching out a base material of the injection hole member with a lead hole punch along a direction from an upstream end surface toward a downstream end surface of the base material so that a central axis of the lead hole is inclined with respect to an axis of the base material in its thickness direction, and of forming an enlarged diameter portion in an edge of a downstream end opening of the lead hole by breaking the edge of the downstream end opening of the lead hole with the lead hole punch, and

an injection hole forming step of forming the injection hole so that a diameter of the injection hole increases along a direction from the upstream end surface to the downstream end surface of the base material and an axis of the injection hole in an injection direction is inclined with respect to the axis of the base material in its thickness direction by inserting a taper punch, whose diameter decreases toward its tip end, into the lead hole from a downstream end of the lead hole and by widening the lead hole, and of forming a concave portion, which caves in radially outward from an inner peripheral surface providing the injection hole, in an edge of a downstream end opening of the injection hole by remaining at least a part of the enlarged diameter portion when the injection hole is formed.

26. The method for manufacturing the injection hole member as in claim 25, wherein

the lead hole is formed by positioning a die formed with a receiving cavity, whose diameter is larger than a diameter of the lead hole punch, on the downstream end surface of the base material and by punching out the base material with the lead hole punch in a direction toward the receiving cavity in the lead hole forming step.

27. The method for manufacturing the injection hole member as in claim 19 or **25**, wherein

the injection hole is formed so that one of two injection hole intersection lines between a virtual plane, which includes the axis of the injection hole and is perpendicular to the base material, and the inner peripheral surface of the injection hole provides an acute angle with a downstream end plane of the injection hole and the other injection hole intersection line provides a blunt angle with the downstream end plane of the injection hole.

28. The method for manufacturing the injection hole member as in claim 27, wherein

the concave portion is formed in the edge of the downstream end opening of the injection hole at least on a side where the acute angle is provided between the injection hole intersection line and the downstream end plane of the injection hole.

29. The method for manufacturing the injection hole member as in claim 19 or **25**, wherein

the injection hole member is formed with a plurality of injection holes in the injection hole forming step so that the axes of the injection holes separate from the central axis of the injection hole member, along the injection directions.

30. The method for manufacturing the injection hole member as in claim 29, wherein

the spray is injected from the plurality of injection holes in two directions opposite from each other.

31. An injection hole member formed with an injection hole for injecting fluid, wherein

the injection hole member is formed so that an axis of the injection hole in an injection direction is inclined with respect to a central axis of the injection hole member, and

the injection hole member is formed with a concave portion in an edge of a downstream end opening of the injection hole, the concave portion caving in radially outward from an inner peripheral surface of the injection hole.

32. The injection hole member as in claim 31, wherein

the injection hole is a taper hole, whose diameter increases toward a downstream side.

33. The injection hole member as in claim 31 or **32**, wherein

the injection hole member is formed so that one of two intersection lines between a virtual plane, which includes the axis of the injection hole and is perpendicular to the injection hole member, and the inner peripheral surface of the injection hole provides an acute angle with a downstream end surface of the injection hole member, and the other intersection line provides a blunt angle with the downstream end surface of the injection hole member.

34. The injection hole member as in claim 33, wherein

the concave portion is formed in the edge of the downstream end opening of the injection hole at least on a side where the injection hole intersection line and the downstream end surface of the injection hole member provide the acute angle.

35. The injection hole member as in claim 31, wherein

the injection hole member is formed with a plurality of injection holes so that the axes of the injection holes separate from the central axis of the injection hole member along the injection directions.

36. The injection hole member as in claim 35, wherein

the spray is injected from the plurality of injection holes in two directions opposite from each other.

* * * * *