

(19)



(11) Publication number:

SG 184536 A1

(43) Publication date:

29.11.2012

(51) Int. Cl:

G08G 5/00;

(12)

Patent Application

(21) Application number: **2012075180**

(71) Applicant:

THE BOEING COMPANY 100 NORTH RIVERSIDE PLAZA CHICAGO, IL 60606-2016 IN US

(22) Date of filing: **17.03.2011**

(30) Priority: **US 12/764,797 21.04.2010**

(72) Inventor:

**SPINELLI, CHARLES, B. 10424 BRACKENWOOD LANE BAINBRIDGE ISLAND, WA 98110 US
OFFER, BRADLEY, W. 816 SW 125TH STREET BURIEN, WA 98146 US
BRUCE, ALAN, E. 20328 102ND PLACE, S.E. KENT, WA 98031 US
LUSARDI, ROBERT 5605 IBEX STREET, N.E. SALEM, OR 97305 US
CUSPARD, STEVEN, F. 17515 110TH LANE, S.E. RENTON, WA 98055-6480 US**

(54) **Title:**

DETERMINING EMERGENCY LANDING SITES FOR AIRCRAFT

(57) **Abstract:**

A routing tool is disclosed. The routing tool is configured to determine a landing site for an aircraft by receiving flight data. The routing tool identifies at least one landing site proximate to a flight path and generates a spanning tree between the landing site and the flight path. According to some embodiments, the landing sites are determined in real-time during flight. Additionally, the landing sites may be determined at the aircraft or at a remote system or device in communication with the aircraft. In some embodiments, the routing tool generates one or more spanning trees before flight. The spanning trees may be based upon a flight plan, and may be stored in a data storage device. Methods and computer readable media are also disclosed.

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 December 2011 (08.12.2011)

(10) International Publication Number
WO 2011/152917 A2

(51) International Patent Classification:
G08G 5/00 (2006.01)

(74) Agents: **COUSINS, Clifford, G** et al.; The Boeing Company, P.O. Box 2515 MC 110-SD54, Seal Beach, CA 90740-1515 (US).

(21) International Application Number:
PCT/US2011/028795

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
17 March 2011 (17.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/764,797 21 April 2010 (21.04.2010) US

(71) Applicant (for all designated States except US): **THE BOEING COMPANY** [US/US]; 100 North Riverside Plaza, Chicago, IL 60606-2016 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SPINELLI, Charles, B.** [US/US]; 10424 Brackenwood Lane, Bainbridge Island, WA 98110 (US). **OFFER, Bradley, W.** [US/US]; 816 SW 125th Street, Burien, WA 98146 (US). **BRUCE, Alan, E.** [US/US]; 20328 102nd Place, S.E., Kent, WA 98031 (US). **LUSARDI, Robert** [US/US]; 5605 Ibx Street, N.E., Salem, OR 97305 (US). **CUSPARD, Steven, F.** [US/US]; 17515 110th Lane, S.E., Renton, WA 98055-6480 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DETERMINING LANDING SITES FOR AIRCRAFT

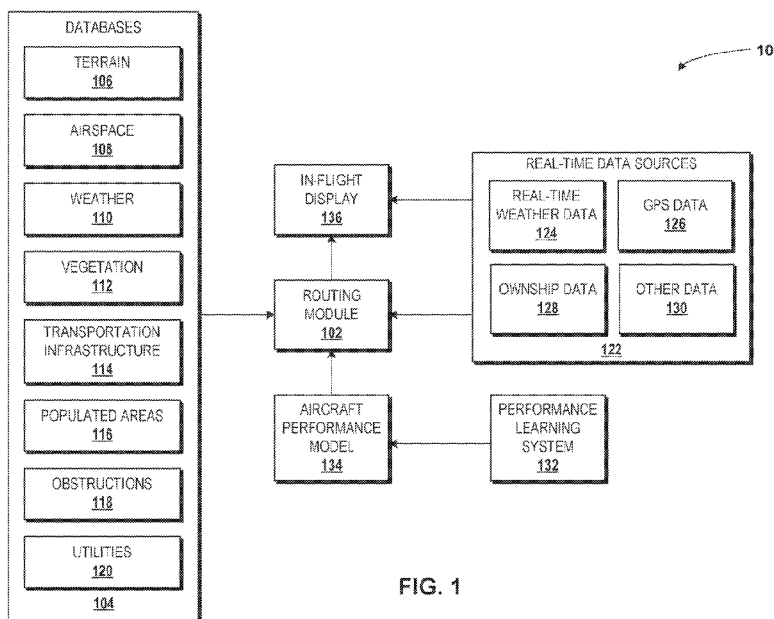


FIG. 1

(57) Abstract: A routing tool is disclosed. The routing tool is configured to determine a landing site for an aircraft by receiving flight data. The routing tool identifies at least one landing site proximate to a flight path and generates a spanning tree between the landing site and the flight path. According to some embodiments, the landing sites are determined in real-time during flight. Additionally, the landing sites may be determined at the aircraft or at a remote system or device in communication with the aircraft. In some embodiments, the routing tool generates one or more spanning trees before flight. The spanning trees may be based upon a flight plan, and may be stored in a data storage device. Methods and computer readable media are also disclosed.

WO 2011/152917 A2

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

5

DETERMINING LANDING SITES FOR AIRCRAFT**BACKGROUND**

[0001] The present disclosure relates generally to aviation of aircraft and, more particularly, to systems and methods for determining landing sites for aircraft.

10 [0002] In-flight emergencies that result in off-airport landings can result in the loss of life and property. The problem of selecting a suitable emergency landing site is a complex problem that has been exacerbated by the continued development of previously undeveloped, underdeveloped, and/or unoccupied areas. During an in-flight emergency, pilots have been limited to using their planning, experience, vision, and
15 familiarity with a given area to select an emergency landing site.

[0003] During an emergency condition, a pilot may have little time to determine that an emergency landing needs to be executed, to find or select a suitable landing site, to execute other aircraft emergency procedures, to prepare passengers, and to then pilot the aircraft to the selected landing site. Thus, management of an in-flight emergency
20 requires timely and accurate decision making processes to protect not only lives onboard the aircraft, but also to protect lives and property on the ground and to prevent a complete loss of the aircraft.

[0004] It is with respect to these and other considerations that the disclosure made herein is presented.

25

SUMMARY

[0005] It should be appreciated that this Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to be used to limit the scope of the claimed subject matter.

30 [0006] According to an embodiment of the present disclosure, a method for determining a landing site for an aircraft includes receiving flight data corresponding to a flight path. The method further can include identifying at least one landing site proximate to the flight path, generating a spanning tree between the at least one landing site and the flight path, and storing the spanning tree in a data storage device. According to some
35 embodiments, the landing sites are determined in real-time. Additionally, the landing sites may be determined at the aircraft or at a remote system or device in communication with the aircraft.

5 [0007] According to another embodiment, a routing tool for determining a landing site for an aircraft includes a database configured to store flight data corresponding to a flight path for the aircraft, and a routing module. The routing module is configured to receive the flight data, identify at least one landing site proximate to the flight path, generate a spanning tree between the at least one landing site and the flight path, and store the
10 spanning tree in a data storage device.

[0008] According to another embodiment, a computer readable storage medium is disclosed. The computer readable medium has computer executable instructions stored thereon, the execution of which by a processor make a routing tool operative to receive flight data corresponding to a flight path, identify at least one landing site
15 proximate to the flight path, generate a spanning tree between the at least one landing site and the flight path, store the spanning tree in a data storage device, detect an emergency at the aircraft during a flight of the aircraft, and in response to detecting the emergency, display the spanning tree for selection of a landing site.

[0009] The features, functions, and advantages discussed herein can be achieved
20 independently in various embodiments of the present invention or may be combined in yet other embodiments, further details of which can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

25 [0010] FIGURE 1 schematically illustrates a block diagram of a routing tool, according to an exemplary embodiment.

[0011] FIGURE 2A illustrates an exemplary landing site display, according to an exemplary embodiment.

30 [0012] FIGURE 2B illustrates an exemplary glide profile view display, according to an exemplary embodiment.

[0013] FIGURE 3A illustrates a screen display for an exemplary embodiment of the moving map display.

[0014] FIGURE 3B illustrates an exemplary glide profile view display, according to an exemplary embodiment

35 [0015] FIGURE 4 illustrates a map display generated by the routing tool, according to an exemplary embodiment.

5 [0016] FIGURES 5A-5B illustrate landing site maps, according to exemplary embodiments.

[0017] FIGURES 6A-6B schematically illustrate flight path planning methods, according to exemplary embodiments.

10 [0018] FIGURES 7A-7B illustrate additional details of the routing tool, according to exemplary embodiments.

[0019] FIGURE 8 illustrates the application of turn constraints in an update phase of the path planning algorithm, according to an exemplary embodiment.

[0020] FIGURE 9 shows a routine for determining landing sites for aircraft, according to an exemplary embodiment.

15 [0021] FIGURES 10A-10B illustrate screen displays provided by a graphical user interface (GUI) for the routing tool, according to exemplary embodiments.

[0022] FIGURE 11 shows an illustrative computer architecture of a routing tool, according to an exemplary embodiment.

20

DETAILED DESCRIPTION

[0023] The following detailed description is directed to systems, methods, and computer readable media for determining landing sites for aircraft. Utilizing the concepts and technologies described herein, routing methodologies and a routing tool may be implemented for identifying attainable landing sites within a dead stick or glide footprint for the aircraft. The identified attainable landing sites may include airport landing sites and off-airport landing sites.

25 [0024] According to embodiments described herein, the attainable landing sites are evaluated to allow identification and/or selection of a recommended or preferred landing site. In particular, the evaluation of the landing sites may begin with a data collection operation, wherein landing site data relating to the attainable landing sites and/or aircraft data relating to aircraft position and performance are collected. The landing site data may include, but is not limited to, obstacle data, terrain data, weather data, traffic data, population data, and other data, all of which may be used to determine a safe ingress flight path for each identified landing site. The aircraft data may include, but is not limited to, global positioning system (GPS) data, altitude, orientation, and airspeed data, glide profile data, aircraft performance data, and other information.

30
35

5 [0025] In some embodiments, a flight path spanning tree is generated for safe ingress
flight paths to the determined attainable landing sites. The flight path spanning tree is
generated from the landing site and is backed into the flight path. In some
embodiments, the spanning trees are generated before or during flight, and can take
10 into account a planned or current flight path, a known or anticipated glide footprint for
the aircraft, banking opportunities, and detailed flight-time information. In some
embodiments, the spanning trees can be accompanied by an optional countdown timer
for each displayed branch of the spanning tree, *i.e.*, each flight path to a landing site,
the countdown timer being configured to provide a user with an indication as to how
15 long the associated flight path remains available as a safe ingress option for the
associated landing site.

[0026] According to various embodiments, collecting data, analyzing the data,
identifying possible landing sites, generating spanning trees for each identified landing
site, and selecting a landing site may be performed during a flight planning process, in-
flight, and/or in real-time aboard the aircraft or off-board. Thus, in some embodiments
20 aircraft personnel are able to involve Air Traffic Control (ATC), Airborne Operations
Centers (AOCs), and/or Air Route Traffic Control Centers (ARTCCs) in the
identification, analysis, and/or selection of suitable landing sites. The ATC, AOCs,
and/or ARTCCs may be configured to monitor and/or control an aircraft involved in an
emergency situation, if desired. These and other advantages and features will become
25 apparent from the description of the various embodiments below.

[0027] Throughout this disclosure, embodiments are described with respect to manned
aircraft and ground-based landing sites. While manned aircraft and ground-based
landing sites provide useful examples for embodiments described herein, these
examples should not be construed as being limiting in any way. Rather, it should be
30 understood that some concepts and technologies presented herein also may be
employed by unmanned aircraft as well as other vehicles including spacecraft,
helicopters, gliders, boats, and other vehicles. Furthermore, the concepts and
technologies presented herein may be used to identify non-ground-based landing sites
such as, for example, a landing deck of an aircraft carrier.

35 [0028] In the following detailed description, references are made to the accompanying
drawings that form a part hereof and that show, by way of illustration, specific

5 embodiments or examples. In referring to the drawings, like numerals represent like elements throughout the several figures.

[0029] FIGURE 1 schematically illustrates a block diagram of a routing tool **100**, according to an exemplary embodiment. The routing tool **100** can be embodied in a computer system such as an electronic flight bag (EFB); a personal computer (PC); a
10 portable computing device such as a notepad, netbook or tablet computing device; and/or across one or more computing devices, for example, one or more servers and/or web-based systems. As mentioned above, some, none, or all of the functionality and/or components of the routing tool **100** can be provided by onboard systems of the aircraft or by systems located off-board.

15 [0030] The routing tool **100** includes a routing module **102** configured to provide the functionality described herein including, but not limited to, identifying, analyzing, and selecting a safe landing site. It should be understood that the functionality of the routing module **102** may be provided by other hardware and/or software instead of, or in addition to, the routing module **102**. Thus, while the functionality described herein
20 primarily is described as being provided by the routing module **102**, it should be understood that some or all of the functionality described herein may be performed by one or more devices other than, or in addition to, the routing module **102**.

[0031] The routing tool **100** further includes one or more databases **104**. While the databases **104** are illustrated as a unitary element, it should be understood that the
25 routing tool **100** can include a number of databases. Similarly, the databases **104** can include a memory or other storage device associated with or in communication with the routing tool **100**, and can be configured to store a variety of data used by the routing tool **100**. In the illustrated embodiment, the databases **104** store terrain data **106**, airspace data **108**, weather data **110**, vegetation data **112**, transportation infrastructure
30 data **114**, populated areas data **116**, obstructions data **118**, utilities data **120**, and/or other data (not illustrated).

[0032] The terrain data **106** represents terrain at a landing site, as well as along a flight path to the landing site. As will be explained herein in more detail, the terrain data **106** can be used to identify a safe ingress path to a landing site, taking into account terrain,
35 e.g., mountains, hills, canyons, rivers, and the like. The airspace data **108** can indicate airspace that is available for generating one or more flight paths to the landing sites.

5 The airspace data **108** could indicate, for example, a military installation or other sensitive area over which the aircraft cannot legally fly.

[0033] The weather data **110** can include data indicating weather information, particularly historical weather information, trends, and the like at the landing site, as well as along a flight path to the landing site. The vegetation data **112** can include data
10 indicating the location, height, density, and other aspects of vegetation at the landing site, as well as along a flight path to the landing site, and can relate to various natural obstructions including, but not limited to, trees, bushes, vines, and the like, as well as the absence thereof. For example, a large field may appear to be a safe landing site, but the vegetation data **112** may indicate that the field is an orchard, which may
15 preclude usage of the field for a safe landing.

[0034] The transportation infrastructure data **114** indicates locations of roads, waterways, rails, airports, and other transportation and transportation infrastructure information. The transportation infrastructure data **114** can be used to identify a nearest airport, for example. This example is illustrative, and should not be construed as being
20 limiting in any way. The populated areas data **116** indicates population information associated with various locations, for example, a landing site and/or areas along a flight path to the landing site. The populated areas data **116** may be important when considering a landing site as lives on the ground can be taken into account during the decision process.

25 [0035] The obstructions data **118** can indicate obstructions at or around the landing site, as well as obstructions along a flight path to the landing site. In some embodiments, the obstructions data include data indicating manmade obstructions such as power lines, cellular telephone towers, television transmitter towers, radio towers, power plants, stadiums, buildings, and other structures that could obstruct a flight path to the landing
30 site. The utilities data **120** can include data indicating any utilities at the landing site, as well as along a flight path to the landing site. The utilities data **120** can indicate, for example, the locations, size, and height of gas pipelines, power lines, high-tension wires, power stations, and the like.

[0036] The other data can include data relating to pedestrian, vehicle, and aircraft traffic
35 at the landing sites and along a flight path to the landing sites; ground access to and from the landing sites; distance from medical resources; combinations thereof; and the like. Furthermore, in some embodiments, the other data stores flight plans submitted by

5 a pilot or other aircraft personnel. It should be understood that the flight plans may be submitted to other entities, and therefore may be stored at other locations instead of, or in addition to, the databases **104**.

[0037] The routing tool **100** also can include one or more real-time data sources **122**. The real-time data sources **122** can include data generated in real-time or near-real-time by various sensors and systems of or in communication with the aircraft. In the
10 illustrated embodiment, the real-time data sources include real-time weather data **124**, GPS data **126**, ownship data **128**, and other data **130**.

[0038] The real-time weather data **124** includes real-time or near-real-time data indicating weather conditions at the aircraft, at one or more landing sites, and along
15 flight paths terminating at the one or more landing sites. The GPS data **126** provides real-time or near-real-time positioning information for the aircraft, as is generally known. The ownship data **128** includes real-time navigational data such as heading, speed, altitude, trajectory, pitch, yaw, roll, and the like. The ownship data **128** may be updated almost constantly such that in the event of an engine or other system failure, the routing
20 module **102** can determine and/or analyze the aircraft trajectory. The ownship data **128** further can include real-time or near-real-time data collected from various sensors and/or systems of the aircraft and can indicate airspeed, altitude, attitude, flaps and gear indications, fuel level and flow, heading, system status, warnings and indicators, and the like, some, all, or none of which may be relevant to identifying, analyzing,
25 and/or selecting a landing site as described herein. The other data **130** can include, for example, data indicating aircraft traffic at or near a landing site, as well as along a flight path to the landing site, real-time airport traffic information, and the like.

[0039] The routing tool **100** also can include a performance learning system **132** (PLS). The PLS **132** also may include a processor (not illustrated) for executing software to
30 provide the functionality of the PLS **132**. In operation, the processor uses aircraft-performance algorithms to generate an aircraft performance model **134** from flight maneuvers. In some embodiments, the PLS **132** is configured to execute a model generation cycle during which the performance model **134** is determined and stored. The model generation cycle can begin with execution of one or more maneuvers, during
35 which data from one or more sensors on or in communication with the aircraft can be recorded. The recorded data may be evaluated to generate the aircraft performance model **134**, which can then represent, for example, glide paths of the aircraft under

5 particular circumstances, fuel consumption during maneuvers, change in speed or altitude during maneuvers, other performance characteristics, combinations thereof, and the like. In some embodiments, the performance model **134** is continually or periodically updated. As will be explained in more detail below, the performance model **134** may be used to allow a more accurate evaluation of landing sites as the evaluation
10 can be based upon actual aircraft performance data, as opposed to assumptions based upon current operating parameters and the like.

[0040] During operation of the aircraft, data retrieved from the databases **104**, data retrieved from the real-time data sources **122**, and/or the aircraft performance model **134** can be used by the routing tool **100** to provide multiple layers of data on an in-flight
15 display **136** of the aircraft. The in-flight display **136** may include any suitable display of the aircraft such as, for example, a display of the EFB, an NAV, a primary flight display (PFD), a heads up display (HUD), or a multifunction display unit (MDU), an in-flight display **136** for use by aircraft personnel. Additionally, or alternatively, the data can be passed to the routing module **102** and/or to off-board personnel and systems, to identify
20 safe landing sites, to analyze the safe landing sites, and to select a landing site and a flight path to the safe landing sites. In some embodiments, the landing site and flight path information can be passed to the in-flight display **136** or another display. As will be described below, the in-flight display **136** or another display can provide a moving map display for mapping the landing sites and flight paths thereto, displaying glide profile
25 views, weather, obstructions, time remaining to follow a desired flight path, and/or other data to allow determinations to be made by aircraft personnel. Additionally, as mentioned above, the data can be transmitted to off-board personnel and/or systems.

[0041] Turning now to FIGURE **2A**, additional details of the routing tool **100** are provided, according to an exemplary embodiment. FIGURE **2A** illustrates an exemplary
30 landing site display **200**, which can be generated by the routing tool **100**. The landing site display **200** includes a landing site **202**, and an area surrounding the landing site **202**. The size of the landing site display **200** can be adjusted based upon data included in the display **200** and/or preferences. The landing site **202** can include an airport runway, a field, a highway, and/or another suitable airport or off-airport site. In the
35 illustrated embodiment, the landing site **202** is illustrated within a landing zone grid **204**, which graphically represents the distance needed on the ground to safely land the aircraft.

5 [0042] The illustrated landing site **202** is bordered on at least three sides with obstructions that prevent a safe ingress by the aircraft. In particular, an area of tall vegetation **206**, e.g., trees, borders the landing site **202** on the south and east sides, preventing the aircraft from approaching the landing site **202** from the south or east. Additionally, buildings **208** and power lines **210** border the landing site **202** along the
10 west side and northwest sides. These manmade and naturally occurring features limit the possible approach paths for the aircraft. As illustrated, a spanning tree showing allowed ingress flight paths **212A-Q** are shown. In the illustrated embodiment, the aircraft can land at the landing site **202** only by approaching via flight paths **212A-G**, while flight paths **212H-Q** are obstructed. The generation and use of spanning trees
15 such as the spanning tree illustrated in FIGURE **2A** will be described in more detail below.

[0043] FIGURE **2B** illustrates an exemplary glide profile view display **220**, according to an exemplary embodiment. In some embodiments, the glide profile view display **220** is generated by the routing tool **100** and displayed with the landing site display **200** to
20 indicate a glide profile **222** required to be met or exceeded by an aircraft in order to successfully and safely land at the landing site **202**. The glide path **222** is plotted as an altitude versus horizontal distance traveled along the path. The glide profile view display **220** includes an indication **224** of the current aircraft position. As illustrated in
25 FIGURE **2B**, the aircraft currently has more than sufficient altitude to reach the landing site **202**. In fact, in the illustrated embodiment, the aircraft is illustrated as being about nine hundred feet above the minimum altitude glide profile. Thus, the pilot of the aircraft will need to descend relatively quickly to successfully execute the landing. This example is illustrative, and is provided for purposes of illustrating the concepts disclosed herein.

30 [0044] Turning now to FIGURES **3A-3B**, exemplary screen displays are illustrated according to exemplary embodiments. In particular, FIGURE **3A** illustrates a screen display **300** for an exemplary embodiment of the moving map display. The screen display **300** can be displayed on the in-flight display **136**, a computer display of an onboard computer system, a display of an off-board computer system, or another
35 display. The screen display **300** illustrates a current position **302** of an aircraft that is about to make an unplanned landing, e.g., an emergency landing. The routing tool **100** identifies two candidate landing sites **304A**, **304B**. Additionally, the routing tool **100**

5 determines, based upon any of the data described above, ingress paths **306A**, **306B** for the landing sites **304A-B**. In the illustrated embodiment, the ingress path **306A** is a preferred ingress path as it leads to the preferred landing site **304A**, and the ingress pat **306B** is a secondary ingress path as it leads to the secondary landing site **304B**. This embodiment is exemplary.

10 [0045] The ingress paths **306A-B** take into account any of the data described herein including, but not limited to, the data stored at the database **104**. Additionally, the routing tool **100** is configured to access the real-time data sources **122**, and can display time indications **308A**, **308B**, which indicate a time remaining by which the aircraft must commit to the respective ingress path **306A**, **306B** in order to safely follow the proposed
15 route. In FIGURE **3A**, the time indications **308A**, **308B** are displayed as numbers over respective landing sites. In the illustrated embodiment, the numbers correspond to numbers of seconds remaining for the aircraft to commit to the associated landing sites **304A**, **304B** and ingress paths **306A**, **306B** and still make a safe landing. Thus, the numbers represent a number of seconds left before the ingress paths **306A-B** are
20 invalid, assuming the aircraft remains on a course substantially equivalent to its current course. In FIGURE **3A**, the recommended route **306A** remains available for 85 seconds, while the second route **306B** remains available for 62 seconds, i.e., 23 seconds less than the recommended route **306A**.

[0046] Additionally displayed on the screen display **300** are weather indications **310A**,
25 **310B**, corresponding to weather at the landing sites **304A**, **304B**, respectively. The weather indications **310A-B** correspond to overcast skies at the landing site **304A**, and clear skies at the landing site **304B**. These indications are exemplary, and should not be construed as being limiting in any way. The weather at prospective landing sites **304A-B** may be important information, as good visibility is often vital in an emergency
30 landing situation. Similarly, certain weather conditions such as high winds, turbulence, thunderstorms, hail, and the like can put additional stress on the aircraft and/or the pilot, thereby complicating landing of what may be an already crippled aircraft.

[0047] Turning now to FIGURE **3B**, a glide profile view display **320** is illustrated, according to an exemplary embodiment. As explained above with reference to FIGURE
35 **2B**, the routing tool **100** can be configured to provide the glide profile view display **320** with the moving map display **300** to provide aircraft or other personnel with a better understanding of the available options. The glide profile view display **320** includes a

5 current aircraft position indicator **322**. Also illustrated on the glide profile view display **320** are representations **324A**, **324B** of glide paths needed to successfully ingress to the landing sites **304A**, **304B** of FIGURE **3A**. The representations **324A**, **324B** ("glide paths") correspond, respectively, to the ingress paths **306A**, **306B** of FIGURE **3A**, and show the altitude needed to arrive safely at the landing sites **304A**, **304B**, respectively.
10 As shown in FIGURE **3B**, the aircraft currently has sufficient altitude to approach both landing sites **304A-B**.

[0048] The glide profile view display **320** allows the pilot to instantaneously visualize where the aircraft is with respect to the available landing sites **304A-B** and/or ingress paths **306A-B** in the vertical (altitude) plane. Thus, the routing module **102** allows the
15 pilot to more quickly evaluate the potential landing sites **306A-B** by continuously displaying the aircraft's vertical position above or below the approach path to each site. This allows at-a-glance analysis of landing site feasibility and relative merit.

[0049] The glide profile view display **320** can be an active or dynamic display. For example, the glide profile view display **320** can be frequently updated, for example,
20 every second, 5 seconds, 10 seconds, 1 minute, 5 minutes, or the like. Potential landing sites **304A-B** that are available given the aircraft's position and altitude can be added to and/or removed from the glide profile view display **320** as the aircraft proceeds along its flight path. Thus, if an emergency situation or other need to land arises, the pilot can evaluate nearby landing sites **306A-B** and choose from the currently available
25 glide paths **324A-B**, which are continuously calculated and updated. In some embodiments, the descent glide **324A-B** are updated and/or calculated from a database loaded during a flight planning exercise.

[0050] The aircraft's current flight path can be connected to the best available ingress path **306A-B** by propagating the aircraft to align in position and heading to the best
30 ingress path **306A** or **306B**. In the illustrated embodiment, the secondary or alternate route **306B** requires more energy than the energy required for the preferred route **306A**. In the case of an aircraft that is gliding dead stick, the alternate route **306B** requires that the aircraft must start at a higher altitude than the altitude required for aircraft to glide along the preferred route **306A**.

35 [0051] Turning now to FIGURE **4**, additional details of the routing tool are illustrated, according to an exemplary embodiment. FIGURE **4** shows map display **400** generated by the routing tool **100**, according to an exemplary embodiment. The map display **400**

5 includes three possible landing sites **402A**, **402B**, **402C** that may be chosen during an emergency situation, such as, for example, an in-flight fire, an engine failure, a critical systems failure, a medical emergency, a hijacking, or any other situation in which an expeditious landing is warranted.

[0052] The map display **400** graphically illustrates obstructions and features that may be
10 important when considering an emergency landing at a potential landing site **402A-C**. The illustrated map display **400** shows golf courses **404A**, **404B**, bodies of water **406A**, **406B**, fields **408A**, **408B**, and other obstructions **410** such as power lines, bridges, ferry routes, buildings, towers, population centers, and the like. In the illustrated embodiment, the potential landing sites **402A-C** are airports. As is generally known, a
15 landing zone for an airport has constraints on how and where touchdown can occur. In particular, if an aircraft needs a distance D after touchdown to come to a complete stop, the aircraft needs to touchdown at a point on the runway, and heading in a direction along the runway, such that there is at least the distance D between the touchdown point and the end of the runway or another obstruction. Therefore, a pilot or other
20 aircraft personnel may need this information to arrive at the landing site **402A-C** in a configuration that makes a safe landing possible. Typically, however, the pilot or other aircraft personnel do not have time during an emergency situation to determine this information. Additionally, the level of detail needed to determine this information may not be available from a typical aviation map.

25 [0053] FIGURES **5A-5B** illustrate this problem. FIGURE **5A** illustrates a landing site map **500A**, according to an exemplary embodiment. The landing site map **500A** includes a touchdown point **502**. The touchdown point **502** is surrounded by a circle **504** with a radius D . The radius D corresponds to the distance needed from touchdown to bring the aircraft to a complete stop, and therefore represents a distance needed
30 form the touchdown point **502** to a stopping point to safely land the aircraft. Thus, the circle **504** illustrates the possible points at which the aircraft could stop if the aircraft lands at the touchdown point **502**. As can be seen in FIGURE **5A**, only a small number headings **506** are safe to execute a landing at the touchdown point **502**.

[0054] Turning now to FIGURE **5B**, another landing site map **500B** is illustrated,
35 according to an exemplary embodiment. FIGURE **5B** illustrates two subarcs **506A**, **506B**, corresponding to headings **508** along the circle **504** at which the aircraft can land safely at the illustrated touchdown point **502**. The illustrated subarcs **506A-B** and circle

5 **504** are exemplary. In accordance with concepts and technologies described herein, the orientation of the subarcs **506A-B** are determined and stored at the routing tool **100**, for example, during flight planning or during ingress to the landing site during an emergency condition.

[0055] The routing module **102** is configured to determine the subarcs **506A-B** by
10 beginning at the touchdown point **502** and working backwards toward the current location. Based upon a knowledge of constraints on the landing area, e.g., terrain, obstacles, power lines, buildings, vegetation, and the like, the routing module **102** limits the touchdown points to the subarcs **506A-B**. The routing module **102** determines these subarcs **506A-B** based upon the known aircraft performance model **134** and/or
15 knowledge of parameters relating to aircraft performance in engine-out conditions. In particular, the routing module **102** executes a function based upon the zero-lift drag coefficient and the induced drag coefficient. With knowledge of these coefficients, the weight of the aircraft, and the present altitude, the routing module **102** can determine a speed at which the aircraft should be flown during ingress to the landing site and/or the
20 touchdown point **502**.

[0056] Additionally, the routing module **102** determines how the aircraft needs to turn to arrive at the landing site with the correct heading for a safe landing. The routing module **102** is configured to use standard rate turns of three-degrees per second to determine how to turn the aircraft and to verify that the aircraft can arrive safely at the landing site
25 with the correct heading, speed, and within a time constraint. It should be understood that any turn rate including variable rates can be used, and that the performance model **134** can be used to tailor these calculations to known values for the aircraft. The routing module **102** outputs bank angle, which is displayed in the cockpit, to instruct the pilot as to how to execute turns to arrive at the landing site safely. In practice, the aircraft flies
30 along the ingress path at the maximum lift over drag (L/D) ratio. Meanwhile, the routing module **102** supplies the pilot with the bank angle required to approach the landing site along the correct heading for the known subarcs **506A-B**. The bank angles are displayed in the cockpit so the pilot can accurately fly to the landing site without overshooting or undershooting the ideal flight path.

35 [0057] Turning now to FIGURES **6A-6B**, the logic employed by the routing module **102** will be described in more detail. Some routing algorithms build spanning trees rooted at the origin of the path. Locations in space are added to the spanning tree when the

5 algorithm knows the minimal cost route to that point in space. Most applications of the algorithm stop when a destination is added to the spanning tree. The routing module **102** of the routing tool **100**, on the other hand, is configured to build spanning trees that are rooted at one or more touchdown points **502**. The spanning trees grow from the touchdown points **502** outward. An example of such a spanning tree is illustrated above
10 in FIGURE **2A**. In building the spanning trees, the routing module **102** minimizes altitude changes while moving away from the touchdown points **502**.

[0058] Once the spanning tree is built, the routing tool **100** or the routing module **102** can query the spanning tree from any location and know what minimum altitude is needed to reach the associated touchdown point **502** from that location. Additionally, by
15 following a branch of the spanning tree, the routing module **102** instantly ascertains the route that will minimize altitude loss during ingress to the landing site.

[0059] In some embodiments of the routing tool **100** and/or the routing module **102** disclosed herein, the spanning trees for each landing site along a flight path may be generated in real-time, and can be pre-calculated during a flight planning stage and/or
20 computed in real-time or near-real-time during an emergency situation. With the spanning tree, the routing module **102** can determine the minimal cost path to the origin, wherein cost may be a function of time, energy, and/or fuel.

[0060] FIGURES **6A-6B** schematically illustrate flight path planning methods, according to exemplary embodiments. Referring first to FIGURE **6A**, a map **600A** schematically
25 illustrates a first method for planning a flight path. On the map **600A**, an ownship indicator **602A** shows the current position and heading of an aircraft. The map **600A** also indicates terrain **604** that is too high for the aircraft to fly over in the illustrated embodiment. For purposes of illustration, it is assumed herein that the aircraft needs to turn into the canyon **606**, the beginning of which is represented by the indication **608**.
30 Using a standard path planning algorithm, a flight path **610A** is generated from the current position and heading **602A**. The algorithm essentially searches for the minimal cost route to the entrance point indicated by the indication **608**. The algorithm will seek to extend the route for the aircraft from that location. Unfortunately, from the entrance point indicated by the indication **608**, the aircraft will not be able to complete the turn
35 without hitting the terrain **604**.

[0061] Turning now to FIGURE **6B**, a map **600B** schematically illustrates a second method for planning a flight path. More particularly, the map **600B** schematically

5 illustrates a method used by the routing module **102**, according to an exemplary embodiment. The algorithm used in FIGURE **6B** begins at the entrance point indicated by the indication **608**, and works back to the current position and heading indicated by the ownship indicator **602B**. Thus, the algorithm determines that in order to enter the canyon **606**, the aircraft must fly along the flight path **610B**. In particular, the aircraft
10 must first incur cost making a left turn **612**, and then make a long costly right turn **614** to line up with the canyon **606**. It should be understood that the scenarios illustrated in FIGURES **6A-6B** are exemplary.

[0062] Turning now to FIGURE **7A**, additional details of the routing tool **100** are described in more detail. In FIGURE **7A**, an aircraft **700** is flying south and is
15 attempting to land on an east-west landing zone **702**. The proximity of the aircraft **700** to the landing zone **702** makes a safe ingress by way of a direct 90° turn at point **A** unsafe and/or impossible. In accordance with the concepts and technologies disclosed herein, the routing module **102** begins at the landing zone **702** and works back to the aircraft **700**. In so doing, the routing module could determine in the illustrated
20 embodiment, that the aircraft **700** must make a 270° turn beginning at point **A** and continuing along the flight path **704** to arrive at the landing zone **702** in the correct orientation. Thus, the aircraft **700** could cross point **A** twice during the approach, though this is exemplary. As is generally known, standard path planning algorithms are designed to accommodate only one path, and a path that traverses any particular point
25 in space only once. Thus, the flight path **704** would not be generated using a standard path planning algorithm.

[0063] According to exemplary embodiments, the routing module **102** includes path planning functionality that adds an angular dimension to the space. Therefore, instead of searching over a two-dimensional space, the algorithm works in three dimensions,
30 wherein the third dimension is aircraft heading. For the flight path **704** illustrated in FIGURE **7A**, the flight paths **704** can cross over themselves as long as the multiple routes over a point are at different headings. The functionality of the three dimensional approach is illustrated generally in FIGURE **7B**.

[0064] Turning now to FIGURE **8**, additional details of the routing tool **100** are described in detail. FIGURE **8** generally illustrates the application of turn constraints in an update
35 phase of the path planning algorithm. When a point in space is added to the spanning tree, the algorithm attempts to extend the path to neighboring points in the space. For

5 turn constrained situations, the reachable neighbors are constrained as shown in FIGURE 8. A current position and heading **800** of an aircraft at a point **802** that was just added to the spanning tree is illustrated in FIGURE 8. The points **806** represent neighboring points that the algorithm will attempt to reach when extending the path.

[0065] The turn constraints are not limited to any particular turn radius. The turn radius **808A** can be different than the turn radius **808B**. The algorithm can try different turn radii in an attempt to minimize altitude loss. For example, if the aircraft is trying to reach a point behind its current position. It could use a controlled turn that has less altitude loss per degree of turn. It could also make a tighter turn with more altitude loss per degree of turn. The longer distance of the controlled turn could result in more total altitude loss than the shorter tighter turn. If the tighter turn produces less total altitude loss, the algorithm will use the tighter turn.

[0066] While relatively computationally expensive, generation of the spanning trees can be performed pre-departure. A database of spanning trees rooted at various landing locations and under various conditions can be loaded into the aircraft for use during flight. At any point during the flight the current aircraft position and heading can be compared with spanning trees rooted in the local area. Because the altitude for points along the spanning tree are pre-calculated in the spanning tree, the routing tool **100** can instantly know at what altitude the aircraft needs to be in order to make it to the given landing location. It also will instantly know the path to take for minimal altitude loss.

25 [0067] If the aircraft is higher than the maximum altitude of the spanning tree, the on-board computer needs to connect up the aircraft's current location and heading with the spanning tree. Starting with the point on the spanning tree that is nearest the aircraft position, the routing module **102** searches the points in the spanning tree to find the first point that is still feasible after considering the altitude losses incurred flying to that point and an associated heading. Computationally, this only involves a simple spatial sort and a two turn calculation.

[0068] Turning now to FIGURE 9, additional details will be provided regarding embodiments presented herein for determining landing sites for aircraft. It should be appreciated that the logical operations described herein are implemented (1) as a sequence of computer implemented acts or program modules running on a computing system and/or (2) as interconnected machine logic circuits or circuit modules within the computing system. The implementation is a matter of choice dependent on the

5 performance and other operating parameters of the computing system. Accordingly, the logical operations described herein are referred to variously as operations, structural devices, acts, or modules. These operations, structural devices, acts, and modules may be implemented in software, in firmware, hardware, in special purpose digital logic, and any combination thereof. It should also be appreciated that more or fewer
10 operations may be performed than shown in the figures and described herein. These operations may also be performed in parallel, or in a different order than those described herein.

[0069] FIGURE 9 shows a routine 900 for determining landing sites for an aircraft, according to an exemplary embodiment. In one embodiment, the routine 900 is
15 performed by the routing module 102 described above with reference to FIGURE 1. It should be understood that this embodiment is exemplary, and that the routine 900 may be performed by another module or component of an avionics system of the aircraft; by an off-board system, module, and/or component; and/or by combinations of onboard and off-board modules, systems, and components. The routine 900 begins at
20 operation 902, wherein flight data is received. The flight data can include flight plans indicating a path for a planned flight. The flight path can be analyzed by the routing module 102 to identify landing sites such as airports, and alternative landing sites such as fields, golf courses, roadways, and the like. The routing module 102 can access one or more of the databases 104 to search for, recognize, and identify possible alternative
25 landing sites for the anticipated flight path.

[0070] The routine 900 proceeds from operation 902 to operation 904, wherein spanning trees can be generated for each identified landing site and/or alternative landing site. As explained above, the spanning trees can be generated from the landing sites, back into the airspace along which the flight path travels. In some embodiments, a spanning
30 tree is generated for each landing site along the flight path or within a specified range of the flight path. The specified range may be determined based upon intended cruising altitude and/or speed, and therefore the anticipated glide profile that the aircraft may have in the event of an emergency condition. It should be understood that this embodiment is exemplary, and that other factors may be used to determine the landing
35 sites for which spanning trees should be generated.

[0071] The routine 900 proceeds from operation 904 to operation 906, wherein the generated spanning trees are loaded into a data storage location. The data storage

5 location can be onboard the aircraft, or at the ATC, ARTCC, AOC, or another location. At some point in time, the aircraft begins the flight. The routine **900** proceeds from operation **906** to operation **908**, wherein in response to an emergency condition, the spanning databases are retrieved from the data storage device. The routine **900** proceeds from operation **908** to operation **910**, wherein the spanning trees are analyzed
10 to identify one or more attainable landing sites, and to prompt retrieval of landing site information such as distance from a current position, weather at the landing sites, a time in which the route to the landing site may be selected, and the like. The routine **900** proceeds from operation **910** to operation **912**, wherein the information indicating the landing sites and information relating to the landing sites such as distance from a
15 current location, weather at the landing sites, a time in which the route to the landing site must be selected, and the like, are displayed for aircraft personnel. In addition to displaying a moving map display with the attainable landing sites and information relating to those landing sites, the routing tool **100** can obtain additional real-time data such as, for example, weather data between the current position and the landing sites,
20 traffic data at or near the landing sites, and the like, and can display these data to the aircraft personnel.

[0072] The routine **900** proceeds from operation **910** to operation **912**, wherein a landing site is selected, and the aircraft begins flying to the selected landing site. In selecting the landing site, the weather conditions at the landing site, near the landing site, or on a
25 path to the landing site may be considered as visibility can be a vital component of a successful and safe ingress to a landing site. The routine **900** proceeds to operation **914**, whereat the routine **900** ends.

[0073] Referring now to FIGURES **10A-10B**, screen displays **1000A**, **1000B** provided by a graphical user interface (GUI) for the routing tool **100** are illustrated, according to
30 exemplary embodiments. The screen displays **1000A-B** can be displayed on the pilot's primary flight display (PFD), if the aircraft is so equipped, or upon other displays and/or display devices, if desired. FIGURE **10A** illustrates a three-dimensional screen display **1000A** provided by the routing tool **100**, according to an exemplary embodiment. The line **1002** represents a flight path required to safely ingress into the landing site, and to
35 touchdown at the touchdown point **1004**. The view of FIGURE **10A** is shown from the perspective of the cockpit. From the illustrated perspective, it is evident that the aircraft currently is above the minimum altitude required for a safe landing, as indicated by the

5 line **1002**. Therefore, the aircraft has sufficient energy to reach the touchdown point **1004**.

[0074] FIGURE **10B** illustrates another three-dimensional screen display **1000B** provided by the routing tool **100**, according to another exemplary embodiment. In particular, FIGURE **10B** illustrates a flight path **1010** for ingress to a landing site. The
10 flight path includes targets **1012**. During an approach, the pilot attempts to pass the aircraft through the targets **1012**. Upon passing through all of the targets **1012**, the aircraft is in position to land at the landing site. Thus, the GUI provided by the routing tool **100** can be configured to provide guidance for a pilot to navigate an aircraft to a landing site in an emergency. These embodiments are exemplary, and should not be
15 construed as being limiting in any way.

[0075] According to various embodiments, the routing tool **100** interfaces with an ATC, ARTCC, or AOC to exchange information on potential landing sites as the flight progresses, or for allowing the ATC or AOC to monitor or control an aircraft in distress, or to potentially reroute other aircraft in the area to enhance ingress safety. According
20 to other embodiments, the routing tool **100** is configured to report aircraft status according to a predetermined schedule or upon occurrence of trigger events such as, for example, sudden changes in altitude, disengaging an autopilot functionality, arriving within 100 miles or another distance of an intended landing site, or other events. According to yet other embodiments, the routing tool **100** determines, in real-time,
25 potential landing sites with the assistance of an off-board computer system such as, for example, a system associated with an ATC, ARTCC, or AOC. The routing module can transmit or receive the information over the current flight operations bulletin (FOB) messaging system, or another system.

[0076] The ATC, ARTCC, and/or AOC have the capability to uplink information on
30 potential emergency landing sites as the aircraft progresses on its flight path. For example, the ATC, ARTCC, and/or AOC can use data in the databases **104** and data from the real-time data sources **122** to determine a landing site for the aircraft. Information relating to the landing sites may be uplinked by any number of uplink means to the aircraft. The ATC, ARTCC, and/or AOC broadcast the information at regular
35 intervals, when an emergency is reported, and/or when a request from authorized aircraft personnel is originated.

5 [0077] In another embodiment the aircraft broadcasts potential landing sites to the ATC, ARTCC, or AOC as the aircraft progresses on its flight. Alternatively, the aircraft broadcasts only when there is an emergency or when a request for information is made from the ATC, ARTCC, or AOC. Thus, the ATC, ARTCC, or AOC can identify, in real-time or near-real-time, the chosen landing site of an aircraft posting an emergency. If
10 appropriate, other traffic may be re-routed to ensure a safe ingress to the chosen landing site. It should be understood that the aircraft and the ATC, ARTCC, or AOC can have continuous, autonomous, and instantaneous information on the choices of landing sites, thereby adding an extra layer of safety to the routing tool **100**.

[0078] FIGURE 11 shows an illustrative computer architecture **1100** of a routing tool **100**
15 capable of executing the software components described herein for determining landing sites for aircraft, as presented herein. As explained above, the routing tool **100** may be embodied in a single computing device or in a combination of one or more processing units, storage units, and/or other computing devices implemented in the avionics systems of the aircraft and/or a computing system of an ATC, AOC, or other off-board
20 computing system. The computer architecture **1100** includes one or more central processing units **1102** ("CPUs"), a system memory **1108**, including a random access memory **1114** ("RAM") and a read-only memory **1116** ("ROM"), and a system bus **1104** that couples the memory to the CPUs **1102**.

[0079] The CPUs **1102** may be standard programmable processors that perform
25 arithmetic and logical operations necessary for the operation of the computer architecture **1100**. The CPUs **1102** may perform the necessary operations by transitioning from one discrete, physical state to the next through the manipulation of switching elements that differentiate between and change these states. Switching elements may generally include electronic circuits that maintain one of two binary
30 states, such as flip-flops, and electronic circuits that provide an output state based on the logical combination of the states of one or more other switching elements, such as logic gates. These basic switching elements may be combined to create more complex logic circuits, including registers, adders-subtractors, arithmetic logic units, floating-point units, and the like.

35 [0080] The computer architecture **1100** also includes a mass storage device **1110**. The mass storage device **1110** may be connected to the CPUs **1102** through a mass storage controller (not shown) further connected to the bus **1104**. The mass storage

5 device **1110** and its associated computer-readable media provide non-volatile storage for the computer architecture **1100**. The mass storage device **1110** may store various avionics systems and control systems, as well as specific application modules or other program modules, such as the routing module **102** and the databases **104** described above with reference to FIGURE 1. The mass storage device **1110** also may store data
10 collected or utilized by the various systems and modules.

[0081] The computer architecture **1100** may store programs and data on the mass storage device **1110** by transforming the physical state of the mass storage device to reflect the information being stored. The specific transformation of physical state may depend on various factors, in different implementations of this disclosure. Examples of
15 such factors may include, but are not limited to, the technology used to implement the mass storage device **1110**, whether the mass storage device is characterized as primary or secondary storage, and the like. For example, the computer architecture **1100** may store information to the mass storage device **1110** by issuing instructions through the storage controller to alter the magnetic characteristics of a
20 particular location within a magnetic disk drive device, the reflective or refractive characteristics of a particular location in an optical storage device, or the electrical characteristics of a particular capacitor, transistor, or other discrete component in a solid-state storage device. Other transformations of physical media are possible without departing from the scope and spirit of the present description, with the foregoing
25 examples provided only to facilitate this description. The computer architecture **1100** may further read information from the mass storage device **1110** by detecting the physical states or characteristics of one or more particular locations within the mass storage device.

[0082] Although the description of computer-readable media contained herein refers to
30 a mass storage device, such as a hard disk or CD-ROM drive, it should be appreciated by those skilled in the art that computer-readable media can be any available computer storage media that can be accessed by the computer architecture **1100**. By way of example, and not limitation, computer-readable media may include volatile and non-volatile, removable and non-removable media implemented in any method or
35 technology for storage of information such as computer-readable instructions, data structures, program modules, or other data. For example, computer-readable media includes, but is not limited to, RAM, ROM, EPROM, EEPROM, flash memory or other

5 solid state memory technology, CD-ROM, digital versatile disks ("DVD"), HD-DVD, BLU-RAY, or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by the computer architecture **1100**.

10 [0083] According to various embodiments, the computer architecture **1100** may operate in a networked environment using logical connections to other avionics in the aircraft and/or to systems off-board the aircraft, which may be accessed through a network **1120**. The computer architecture **1100** may connect to the network **1120** through a network interface unit **1106** connected to the bus **1104**. It should be appreciated that
15 the network interface unit **1106** may also be utilized to connect to other types of networks and remote computer systems. The computer architecture **1100** also may include an input-output controller **1122** for receiving input and providing output to aircraft terminals and displays, such as the in-flight display **136** described above with reference to FIGURE 1. The input-output controller **1122** may receive input from other devices as
20 well, including a PFD, an EFB, a NAV, an HUD, MDU, a DSP, a keyboard, mouse, electronic stylus, or touch screen associated with the in-flight display **136**. Similarly, the input-output controller **1122** may provide output to other displays, a printer, or other type of output device.

[0084] Based on the foregoing, it should be appreciated that technologies for
25 determining landing sites for aircraft are provided herein. Although the subject matter presented herein has been described in language specific to computer structural features, methodological acts, and computer-readable media, it is to be understood that the invention defined in the appended claims is not necessarily limited to the specific features, acts, or media described herein. Rather, the specific features, acts, and
30 mediums are disclosed as example forms of implementing the claims.

[0085] The subject matter described above is provided by way of illustration only and should not be construed as limiting. Various modifications and changes may be made to the subject matter described herein without following the example embodiments and applications illustrated and described, and without departing from the true spirit and
35 scope of the present invention, which is set forth in the following claims.

5

CLAIMS

We Claim:

1. A method for determining a landing site for an aircraft (900), the method comprising:
 - receiving flight data corresponding to a flight path;
 - 10 identifying (902) at least one landing site proximate to the flight path;
 - generating (904) a spanning tree between the at least one landing site and the flight path; and
 - storing (906) the spanning tree in a data storage device.
- 15 2. The method of claim 1, wherein receiving the flight data comprises receiving the flight data at a routing tool (100) associated with the aircraft during planning of a flight.
- 20 3. The method of claim 1, wherein receiving the flight data comprise receiving the flight data at a routing tool (100) associated with the aircraft during a flight.
4. The method of claim 1, wherein receiving the flight data comprises receiving the flight data at an off-board routing tool associated with an air traffic control system before a flight is commenced.
- 25 5. The method of claim 4, further comprising:
 - detecting an emergency condition during a flight of the aircraft.
 - in response to detecting the emergency, transmitting data to the air traffic control system indicating occurrence of the emergency; and
 - 30 receiving the spanning tree from the air traffic control system.
6. The method of claim 1, wherein receiving the flight data comprises receiving the flight data at an off-board routing tool associated with an air traffic control system during a flight.
- 35 7. The method of claim 1, further comprising detecting an emergency condition during a flight of the aircraft.

- 5
8. The method of claim 7, further comprising:
in response to detecting the emergency, retrieving (908) the spanning tree from
the data storage device; and
passing the spanning tree to a display system of the aircraft.
- 10
9. The method of claim 8, further comprising:
displaying the spanning tree; and
receiving a selection of a displayed landing site (202) associated with the
spanning tree.
- 15
10. The method of claim 9, further comprising displaying a countdown timer
with the spanning tree, the countdown timer indicating an amount of time for which the
landing site (202) may be selected.
- 20
11. The method of claim 9, further comprising:
obtaining real-time weather data (124) for the landing site (202), wherein the real-
time weather data (124) is evaluated before selecting the landing site (202).
- 25
12. The method of claim 9, further comprising displaying a vertical profile view
(320) of a glide path (324A, 324B) for ingress to the selected landing site (202, 304A,
304B).
- 30
13. A routing tool (100) for determining a landing site for an aircraft, the
routing tool comprising a database (104) configured to store flight data corresponding to
a flight path for the aircraft, and a routing module (102) configured to:
receive the flight data;
identify (902) at least one landing site proximate to the flight path;
generate (904) a spanning tree between the at least one landing site and the
flight path; and
35 store (906) the spanning tree in a data storage device.

5 14. The routing tool (100) of claim 13, wherein the routing tool comprises a component of the aircraft.

 15. The routing tool (100) of claim 13, wherein the routing tool comprises a component of an air traffic control system.

10 16. The routing tool (100) of claim 13, wherein the spanning trees are generated before a flight is commenced.

 17. The routing tool (100) of claim 11, wherein the spanning trees are
15 generated in real-time, in response to detecting an emergency during a flight of the aircraft.

 18. The routing tool (100) of claim 13, further comprising a performance
learning system for generating an aircraft performance model, wherein the aircraft
20 performance model is used to generate the spanning tree.

 19. A computer readable storage medium having computer executable
instructions stored thereon, the execution of which by a processor cause a routing tool
to:
25 receive flight data corresponding to a flight path;
 identify (902) at least one landing site proximate to the flight path;
 generate (904) a spanning tree between the at least one landing site and the
flight path;
 store (906) the spanning tree in a data storage device;
30 detect an emergency at the aircraft during a flight of the aircraft; and
 in response to detecting the emergency, display the spanning tree for selection of
a landing site.

 20. The computer readable storage medium of claim 19, further comprising
35 computer executable instructions, the execution of which make the routing tool further
operative to:

- 5 transmit data indicating the emergency on board the aircraft, the data being transmitted to an air traffic control system; and
receive instructions for selecting the landing site from the air traffic control system.