



(51) International Patent Classification:

D04H 5/03 (2012.01) D04H 1/498 (2012.01)
D04H 1/4374 (2012.01) D21H 13/10 (2006.01)
D04H 1/492 (2012.01) D21H 15/06 (2006.01)

(21) International Application Number:

PCT/SE2012/050461

(22) International Filing Date:

3 May 2012 (03.05.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/482,249 4 May 2011 (04.05.2011) US

(71) Applicant (for all designated States except US): **SCA HYGIENE PRODUCTS AB** [SE/SE]; S-405 03 Göteborg (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STRANDQVIST, Mikael** [SE/SE]; Dälavägen 87, S-437 36 Lindome (SE). **JONSSON, Agneta** [SE/SE]; Furuvägen 5, S-438 36 Landvetter (SE). **VENEMA, Arie** [NL/NL]; SCA Hygiene Products B.V., Solcamastraat 24, NL-9262 ND Suameer (NL). **WIJBENGA, Gaatze** [NL/NL]; SCA Hygiene Products B.V., Solcamastraat 24, NL-9262 ND Suameer (NL).

(74) Agent: **Valea AB**; Lindholmospiren 5, S-417 56 Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD OF PRODUCING A HYDROENTANGLED NONWOVEN MATERIAL

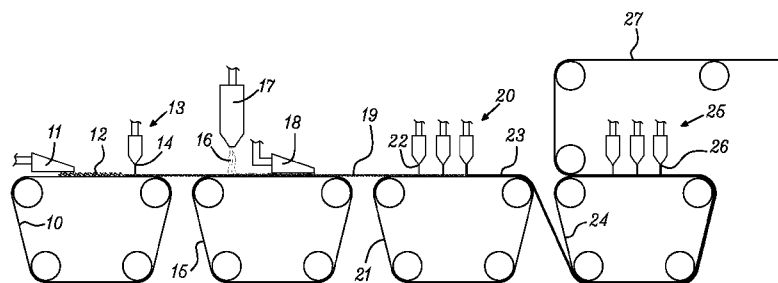


Fig. 1

(57) Abstract: A method of producing a nonwoven material by hydroentangling a fiber mixture containing spunlaid filaments, natural fibers and synthetic staple fibers, wherein a first fibrous web (12) of natural fibers and at least 10% by fiber weight manmade staple fibers is wetlaid and hydroentangled in a first hydroentangling station (13), spunlaid filaments (16) are laid on top of the hydroentangled first fibrous web (12) and a second fibrous web (19) comprising natural fibers is wetlaid on top of said spunlaid filaments (16). The second fibrous web (19) is hydroentangled together with the spunlaid filaments (16) in a second hydroentangling station (20) and the combined webs are reversed and the first fibrous web (12) of natural fibers and manmade staple fiber is hydroentangled together with the spunlaid filaments (16) in a third hydroentangling station (25).



METHOD OF PRODUCING A HYDROENTANGLED NONWOVEN MATERIAL

TECHNICAL FIELD

The present invention refers to a method for manufacturing a hydroentangled nonwoven material, said nonwoven material comprising a mixture of natural fibers, manmade staple
5 fibers and spunlaid filaments.

BACKGROUND OF THE INVENTION

Absorbing nonwoven materials are often used for wiping spills and leakages of all kinds in industrial, service, office and home locations. There are great demands on the properties
10 of nonwoven materials made for wiping purposes. An ideal wiper should be strong, absorbent, abrasion resistant and exhibit low linting. It should further be soft and have a textile touch. Hydroentangled nonwoven materials are often used as wipes because of their absorbent and textile-like properties.

15 Hydroentangling or spunlacing is a technique introduced during the 1970'ies, see e g CA patent no. 841 938. The method involves forming a fibre web which is either drylaid or wetlaid, after which the fibres are entangled by means of very fine water jets under high pressure. Several rows of water jets are directed against the fibre web which is supported by a movable fabric. The entangled fibre web is then dried. The fibres that are used in the
20 material can be synthetic or regenerated staple fibres, e g polyester, polyamide, polypropylene, rayon or the like, pulp fibres or mixtures of pulp fibres and staple fibres. Spunlace materials can be produced in high quality to a reasonable cost and have a high absorption capacity. They can e g be used as wiping material for household or industrial use, as disposable materials in medical care and for hygiene purposes etc.

25

Through e g EP-B-0 333 211 and EP-B-0 333 228 it is known to hydroentangle a fibre mixture in which one of the fibre components consists of continuous filaments in the form of meltblown fibres. The base material, i e the fibrous material which is exerted to hydroentangling, either consists of at least two combined preformed fibrous layers where
30 at least one of the layers is composed of meltblown fibres, or of a "coform material" where an essentially homogeneous mixture of meltblown fibres and other fibres is airlaid on a forming fabric.

Through EP-A-0 308 320 it is known to bring together a prebonded web of continuous filaments with a separately prebonded wetlaid fibrous web containing pulp fibres and staple fibres and hydroentangle together the separately formed fibrous webs to a laminate. In such a material the fibres of the different fibrous webs will not be integrated with each other since the fibres already prior to the hydroentangling are bonded to each other and only have a very limited mobility. The material will show a marked twosidedness.

WO 99/22059 discloses a method of producing a nonwoven material by hydroentangling a mixture of continuous filaments, natural fibers and/or synthetic staple fibers. A fibrous web of natural fibers and/or synthetic staple fibers is foamformed and hydroentangled and integrated with the continuous filaments, for example meltblown fibers.

WO 2005/042819 discloses a method of producing a nonwoven material by forming a web of continuous filaments on a forming fabric and applying a wet-formed fibre dispersion containing synthetic staple fibres having a length between 3 and 7 mm, and natural fibres on top of said continuous filaments. The fibrous web is subsequently hydroentangled to form a nonwoven material.

One problem is clearly seen in hydroentangled materials – they will very often be markedly twosided, i.e. it can clearly be discerned a difference between the side facing the fabric and the side facing the water jets in the entangling step. In some cases this has been used as a favourable pattern, but in most cases it is seen as a disadvantage. When two separate layers are combined and fed into an entangling process, normally this process step cannot thoroughly mix the layers, but they will still exist, albeit bonded to each other. With pulp in the composite there will be a pulp-rich side and a pulp-poor side, which will result in differing properties of the two sides. This is pronounced when spunlaid filaments are used as they tend to form a flat two-dimensional layer when created, which will mix poorly.

30

It is further known to make a material having the same fiber composition on both sides, wherein in a first step a hydroentangled nonwoven material is produced comprising a mixture of pulp fibers and synthetic staple fibers, said mixture being wetlaid on top of a web of spunlaid filaments. In a second step said hydroentangled nonwoven material is fed back into the process and a second mixture of pulp fibers and synthetic staple fibers is

35

wetlaid on top of the hydroentangled nonwoven. The combined fibrous layers are then hydroentangled. This is a costly, time consuming and energy demanding process which does not fully solve the problem.

5 SUMMARY OF THE INVENTION

The object of the invention is to provide an in-line process for manufacturing a hydroentangled nonwoven material, said nonwoven material comprising a mixture of natural fibers, manmade staple fibers and spunlaid filaments, wherein the nonwoven material has reduced twosidedness, i e both sides should have appearances and
10 properties that are similar. This has been achieved by a process comprising the steps of: wetlaying a first fibrous web of natural fibers and at least 10% by weight of manmade staple fibers, hydroentangling said first fibrous web in a first hydroentangling station, laying spunlaid filaments on top of said hydroentangled first fibrous web, wetlaying a second fibrous web comprising natural fibers on top of said spunlaid filaments and
15 hydroentangling together said second fibrous web with the spunlaid filaments in a second hydroentangling station, thus forming a combined web comprising said first and second fibrous webs and said spunlaid filaments, reversing said combined web and hydroentangling together the first fibrous web of natural fibers and manmade staple fiber with the spunlaid filaments in a third hydroentangling station.

20

The fluid pressure used in the first hydroentangling station may be between 10 and 50 bars.

The fluid pressure used in the second and third hydroentangling stations may be between
25 70 and 200 bars.

The first fibrous web of natural fibers and manmade staple fibers may contain between 10 and 40% by fibre weight manmade staple fibers and between 60 and 90% by fiber weight natural fibers.

30

The second fibrous web of natural fibers and manmade staple fibers may may contain between 10 and 40% by fibre weight manmade staple fibers and between 60 and 90% by fiber weight natural fibers.

35 The natural fibers may be wood pulp fibers.

The manmade staple fibers may have a length between 3 and 25 mm.

There may be no thermal bonding points between the spunlaid filaments.

5

The first fibrous web of natural fibers and manmade staple fibers may be wetformed by wetlaying an aqueous dispersion of said fibers.

The second fibrous web of natural fibers and optionally manmade staple fibers may be
10 foamformed by wetlaying a foamed dispersion of said fibers.

The hydroentangled wetlaid first fibrous web may be dewatered to a dry content of between 30 and 50 weight% before laying spunlaid filaments on top of said hydroentangled wetlaid first fibrous web.

15

DEFINITIONS

Spunlaid filaments

Filaments are fibres that in proportion to their diameter are very long, in principle endless.
20 They can be produced by melting and extruding a thermoplastic polymer through fine nozzles, whereafter the polymer will be cooled, preferably by the action of an air flow blown at and along the polymer streams, and solidified into strands that can be treated by drawing, stretching or crimping. Chemicals for additional functions can be added to the surface. Filaments can also be produced by chemical reaction of a solution of fibre-
25 forming reactants entering a reagent medium, e.g. by spinning of viscose fibres from a cellulose xanthate solution into sulphuric acid.

Spunlaid filaments are produced by extruding molten thermoplastic polymer through fine nozzles in very fine streams. The filaments are stretched by air to get an appropriate
30 diameter. The fibre diameter is usually above 10 μm , often in the interval 10-100 μm . Production of spunbond is e.g. described in US patents 4,813,864 or 5,545,371.

Any thermoplastic polymer, that has enough coherent properties to be drawn out in this way in the molten state, can in principle be used for producing spunlaid filaments.

35 Examples of useful polymers are polyolefins, such as polyethylene and polypropylene,

polyamides, polyesters and polylactides. Copolymers of these polymers may of course also be used, as well as natural polymers with thermoplastic properties.

Natural fibres

5 There are many types of natural fibres that can be used in hydroentangled nonwoven material, especially those that have a capacity to absorb water and tendency to aid in creating a coherent sheet. Among the natural fibres possible to use there are primarily cellulosic fibres such as seed hair fibres, e g cotton, kapok, and milkweed; leaf fibres e g
10 sisal, abaca, pineapple, and New Zealand hamp; or bast fibres e g flax, hemp, jute, kenaf, and pulp. Wood pulp fibres are especially well suited to use, and both softwood fibres and hardwood fibres are suitable. Recycled fibres can also be used.

The pulp fibre lengths will vary from around 3 mm for softwood fibres and around 1,2 mm for hardwood fibres and a mix of these lengths, and even shorter, for recycled fibres.

15

Staple fibres

Manmade staple fibres used can be produced from the same polymeric substances as described for spunlaid filaments above. Other usable manmade staple fibres are those made from regenerated cellulose such as viscose and lyocell. Staple fibers are cut
20 lengths from filaments. They can be treated with spin finish and crimped, but this is not necessary for the type of processes preferably used to produce the material described in the present invention. The cutting of the fibre bundle normally is done so as to result in a single cut length, which is determined by the distance between the knives of the cutting wheel. Depending on the planned use different fibre lengths are used. Wetlaid
25 hydroentangled nonwovens can use lengths between 3 and 25 mm.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will below be described with reference to an embodiment shown in the
30 accompanying drawing.

Fig. 1 illustrates schematically a process for manufacturing a hydroentangled nonwoven material according to the invention.

Fig. 2 is a picture taken by scanning electron microscope (SEM) of a cross-section through a nonwoven material produced according to the method.

35

DETAILED DESCRIPTION OF AN EMBODIMENT

One example of a method according to the invention for producing a hydroentangled nonwoven material is shown in Figure 1. A slurry comprising a mixture of natural fibers and manmade staple fibers is wetlaid on a forming fabric 10 by a headbox 11. The slurry
5 may besides water contain conventional papermaking additives such as wet and/or dry strength agents, retention aids and dispersing agents. A special variant of wetlaying or wetforming is foamforming, wherein the natural fibers and staple fibers are dispersed in a foamed liquid containing water and a surfactant. The liquid or foam is sucked through the forming fabric 10 by means of suction boxes (not shown) arranged under the forming
10 fabric, so that a first fibrous web 12 comprising natural fibers and manmade staple fibers is formed on the forming fabric 10. Foamforming is described in for example WO 96/02702 A1. An advantage of foamforming is that it requires less liquid to be pumped and sucked through the forming fabric as compared to traditional wetforming without foam.

15

The proportion of natural fibers and manmade staple fibers used for forming the first fibrous web is between 60 and 90% by weight natural fibers and between 10 and 40% by weight manmade staple fibers. The natural fibers and manmade staple fibers may be of the kind referred to above.

20

The first fibrous web 12 is hydroentangled in a first hydroentangling station 13 while it is still supported by the forming fabric 10. The first hydroentangling station 13 can include a transverse bar with a row of nozzles 14 from which very fine water jets under pressure are directed against the first fibrous web to provide an entangling of the fibres. Suction boxes
25 (not shown) are arranged under the forming fabric 10 just opposite the nozzles 14. The entangling pressure used in nozzles of the first hydroentangling station may be relatively low, between 10 and 50 bars, to provide only a slight bonding of the first fibrous web 12. The bonding of the first fibrous web 12 may only be sufficient for making the web 12 self-supporting, for example so that it may be transferred from the first forming fabric 10 to a
30 second forming fabric 15. The first forming fabric 10 should have a relatively high count (low open area) in order to retain the fibers in the wetlaid web, while the second forming fabric 15 may have a relatively lower count (relatively higher open area), which will be described below.

The tensile strength in MD (machine direction) of the first fibrous web 12 should be at least 50 N/m in order to be self-supporting, however preferably not more than 100 N/m. Further dewatering of the wetlaid first fibrous web 12 may, if necessary, take place by means of suction boxes (not shown) after transfer to the second forming fabric 16 in order
5 to achieve a suitable dry content of the first fibrous web. Since air is drawn through the web in the subsequent spunlaying step (described below) a suitable dry content of the wetlaid first fibrous web is between 30 and 50 weight%.

Preferably only one row of nozzles 14 is used in the first hydroentangling station. The
10 basis weight of the first fibrous web 12 may be between 10 and 100 g/m².

Spunlaid filaments 16 of spunbond type are laid on top of the hydroentangled first fibrous web 12. The spunlaid filaments 16 are made from extruded molten thermoplastic pellets and are laid down directly on the first fibrous web 12 from nozzles 17. Air is drawn through
15 the web in the spunlaying station by suction boxes (not shown) arranged under the forming fabric 15. In order to allow air to be drawn through the second forming fabric 15, this should have a relatively low count (relatively high open area). The spunlaid filaments are allowed to form a web, which may be slightly bonded or alternatively unbonded, wherein the spunlaid filaments can move relatively freely from each other. The degree of
20 bonding due to stickiness of the spunlaid filaments is controlled by the distance between the nozzles 17 and the forming fabric 15. If this distance is relatively large, the spunlaid filaments are allowed to cool down before they land on top of the first fibrous web 12, so that their stickiness is largely reduced. Alternatively cooling of the filaments is achieved in some other way, e.g. by means of using multiple air sources where air is used to cool the
25 filaments when they have been drawn out or stretched to the preferred degree.

Since the spunlaid filaments 16 are laid on top of the moist wetlaid fibrous web 12 the filaments will adhere and stay as they land on the moist web 12, thus keeping the formation which otherwise may be hard to preserve on a forming wire. In order to further
30 improve formation of the spunlaid filaments they may be charged to repel each other, or be laid in sequence by two or more spunlaying stations.

The speed of the spunlaid 16 filaments as they are laid down on the first fibrous web 12 is much higher than the speed of the forming fabric 15, so the spunlaid filaments will form
35 irregular loops and bends as they are collected on the forming fabric on top of the first

fibrous web 12 to form a very randomized precursor web. The basis weight of the formed filament precursor web may be between 10 and 50 g/m².

A slurry comprising natural fibers and optionally manmade staple fibers is wetlaid on top
5 of the web of spunlaid filaments 16 from a headbox 18 to form a second fibrous web 19 of natural fibers and optionally manmade staple fibers. The basis weight of the second fibrous web 19 may be in the same range as the first fibrous web 12. The second fibrous web may also contain manmade staple fibers and the proportion of natural fibers and manmade staple fibers as well as type of fibers may be the same as for the first fibrous
10 web 12. Foamforming may be used for forming the second fibrous web 19 of natural fibers and optionally manmade staple fibers. The liquid or foam is sucked through the forming fabric 15 by means of suction boxes (not shown) arranged under the forming fabric.

According to one embodiment the first fibrous web 12 of natural fibers and manmade
15 staple fibers is formed by wetlaying an aqueous dispersion of said fibers and the second fibrous web 19 of natural fibers and manmade staple fibers is foamformed by wetlaying a foamed dispersion of said fibers.

The second fibrous web 19 of natural fibers and manmade staple fibers is hydroentangled
20 together with the web of continuous filaments 16 in a second hydroentangling station 20 while supported on a hydroentangling fabric 21. In the embodiment shown in Fig. 1 the second hydroentangling station 20 comprises three rows of hydroentangling nozzles 22. Any appropriate number of rows of nozzles 22 may be used. The entangling pressure used in the nozzles 22 of the second hydroentangling station 20 is higher than in the first
25 hydroentangling station 13 and is preferably in the range between 70 and 200 bars. The hydroentangling water is drained off through the fabric 21 by means of suction boxes (not shown). An intense mixing of the staple fibres and pulp fibres (or other natural fibers) in the second fibrous web 19 and the continuous filaments 16 is achieved in the second hydroentangling station 20. By having the continuous filaments 16 unbonded with no
30 thermal bonding points between them or only slightly bonded, the continuous filaments can twist around and entangle with themselves and with the staple fibers and pulp fibers, which gives a good integration between the different types of fibers and filaments. The first fibrous web 12 of manmade staple fibers and natural fibers is more or less unaffected by the water jets from the first hydroentangling station 20. However the pressure from the

water jets will press the first fibrous web 12 closer against the hydroentangling fabric 21 to conform to the structure of the fabric 21.

The thus formed web 23, which has been hydroentangled from one side, is transferred to
5 another hydroentangling fabric 24, wherein it is traversed at the transfer so that the first
fibrous web 12 will be on the top side and the second fibrous web 19 will be facing the
hydroentangling fabric 24. A third hydroentangling station 25 comprising three rows of
hydroentangling nozzles 26 is arranged to hydroentangle together the first fibrous web 12
10 of natural fibers and manmade staple fibers with the web of continuous filaments 16. Any
appropriate number of rows of nozzles 26 may be used. The entangling pressure used in
the nozzles 26 of the third hydroentangling station 25 may be in the same range as in the
second hydroentangling station 13, i.e. preferably in the range between 70 and 200 bars.
The hydroentangling water is drained off through the fabric 24 by means of suction boxes
(not shown). An intense mixing and integration of the staple fibres and pulp fibres (or
15 other natural fibers) in the first fibrous web 12 and the continuous filaments 16 is achieved
in the third hydroentangling station 25 to produce a fibrous web 27 that has been
hydroentangled from both sides. The pressure from the water jets will further press to
second fibrous web 19 closer against the hydroentangling fabric 24 to conform to the
structure of the fabric 24. If the patterns in the hydroentangling fabrics 21 and 24 are the
20 same or at least similar the opposite surfaces of the web 27 will have a similar structure.

The water jet pressure in the hydroentangling stations having two or more rows of nozzles
may be adapted to have a certain pressure profile with different pressures in the different
rows of nozzles.

25

The three forming and hydroentangling fabrics 10, 15 and 21 may in an alternative
embodiment be replaced by a single forming and hydroentangling fabric. In a further
alternative embodiment two forming and hydroentangling fabrics are used instead of the
three fabrics 10, 15 and 21 shown in Fig. 1.

30

The hydroentangled web 27 is then dried, which can be done on a conventional web
drying equipment, preferably of the type used for tissue drying, such as a through-air
drying or a Yankee drying equipment. The material is after drying normally wound to form
mother rolls before converting. The material is then converted in known ways to suitable
35 formats and packed.

The structure of the material can be changed by further processing such as microcreping, hot calendering, embossing, etc. Different additives such as wet strength agents, binder chemicals, latexes, debonders, etc. may further be added to the web 27 before or after
5 drying.

The hydroentangled nonwoven material produced according to the method described above has an appearance and properties that are very similar on both sides of the material. Thus it has a reduced twosidedness as compared to conventional
10 hydroentangled nonwoven materials. The two outer fibrous webs 12 and 19 are well integrated with the inner layer of spunbond filaments 16. This is illustrated by Fig. 2 which is a microscope picture at magnification of 150 times of a cross-section through a hydroentangled nonwoven material produced by the method according to the invention.

15 A further important advantage of the method described is that it is an in-line process in which all layers of the nonwoven material are formed in-line. This is more economical than a two step process in which one or more of the layers are pre-formed.

CLAIMS

1. A method of producing a nonwoven material by hydroentangling a fiber mixture containing spunlaid filaments, natural fibers and synthetic staple fibers, *characterized in* wetlaying a first fibrous web (12) of natural fibers and at least 10% by
5 fiber weight of manmade staple fibers, hydroentangling said first fibrous web in a first hydroentangling station (13), laying spunlaid filaments (16) on top of said hydroentangled first fibrous web (12), wetlaying a second fibrous web (19) comprising natural fibers on top of said spunlaid filaments (16) and hydroentangling together said second fibrous web (19) with the spunlaid filaments (16) in a second hydroentangling station (20), thus
10 forming a combined web (23) comprising said first and second fibrous webs (12, 19) and said spunlaid filaments (16), reversing said combined web (23) and hydroentangling together the first fibrous web (12) of natural fibers and manmade staple fiber with the spunlaid filaments (16) in a third hydroentangling station (25).
- 15 2. The method as claimed in claim 1, *characterized in* that the fluid pressure used in the first hydroentangling station (13) is between 10 and 50 bars.
3. The method as claimed in claim 1 or 2, *characterized in* that the fluid pressure used in the second and third hydroentangling stations (20, 25) is between 70 and 200 bars.
20
4. The method as claimed in any of the preceding claims, *characterized in* that said first fibrous web (12) of natural fibers and manmade staple fibers contain between 10 and 40% by fibre weight staple fibers and between 60 and 90% by fiber weight natural fibers.
- 25 5. The method as claimed in any of the preceding claims, *characterized in* that said second fibrous web comprises between 10 and 40% by fibre weight staple fibers and between 60 and 90% by fiber weight natural fibers.
6. The method as claimed in any of the preceding claims, *characterized in* that the natural
30 fibers are wood pulp fibers.
7. The method as claimed in any of the preceding claims, *characterized in* that the manmade staple fibers have a length between 3 and 25 mm.

8. The method as claimed in any of the preceding claims, *characterized in* that there are no thermal bonding points between the spunlaid filaments (16).
9. The method as claimed in any of the preceding claims, *characterized in* that the second
5 fibrous web (19) comprising natural fibers and optionally manmade staple fibers is foamformed by wetlaying of a foamed dispersion of said fibers.
10. The method as claimed in any of the preceding claims, *characterized in* that the first
10 fibrous web (12) of natural fibers and manmade staple fibers is wetformed by wetlaying an aqueous dispersion of said fibers.
11. The method as claimed in any of the preceding claims, *characterized in* dewatering the hydroentangled wetlaid first fibrous web (12) to a dry content of between 30 and 50 weight% before laying spunlaid filaments (16) on top of said hydroentangled wetlaid first
15 fibrous web (12).
12. A nonwoven material produced according to the method in any of claims 1-11.

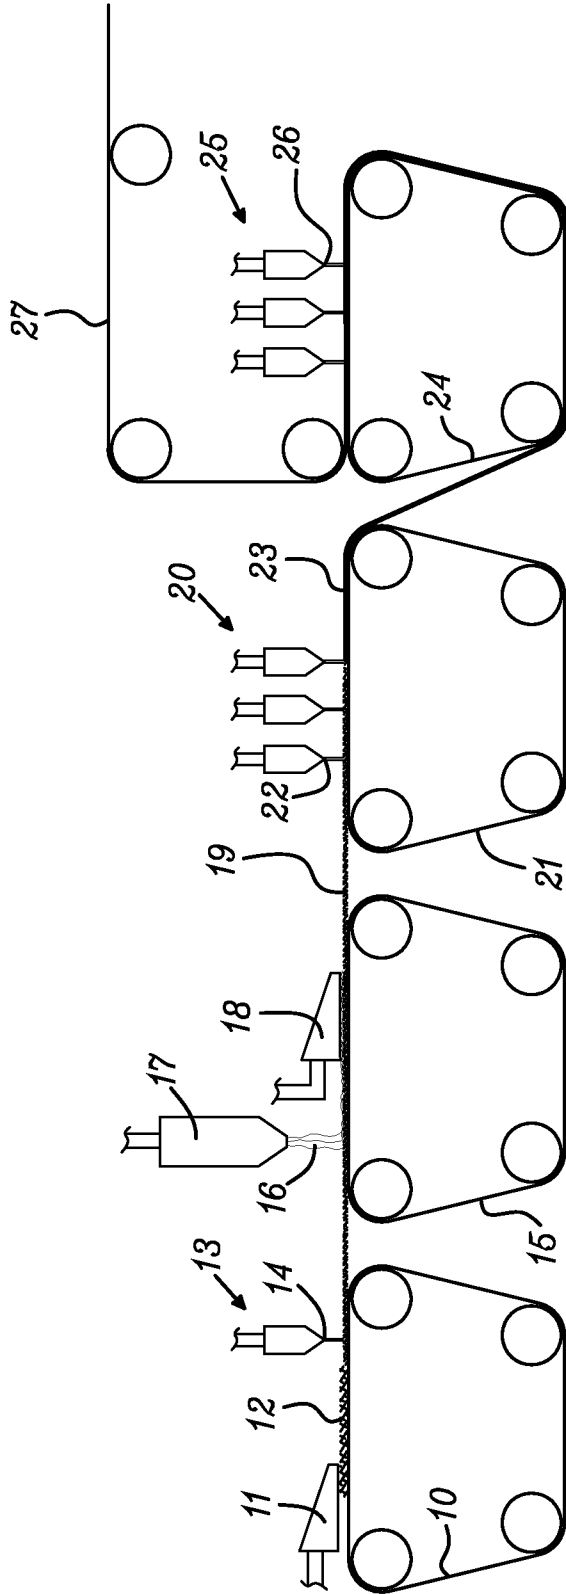


Fig. 1

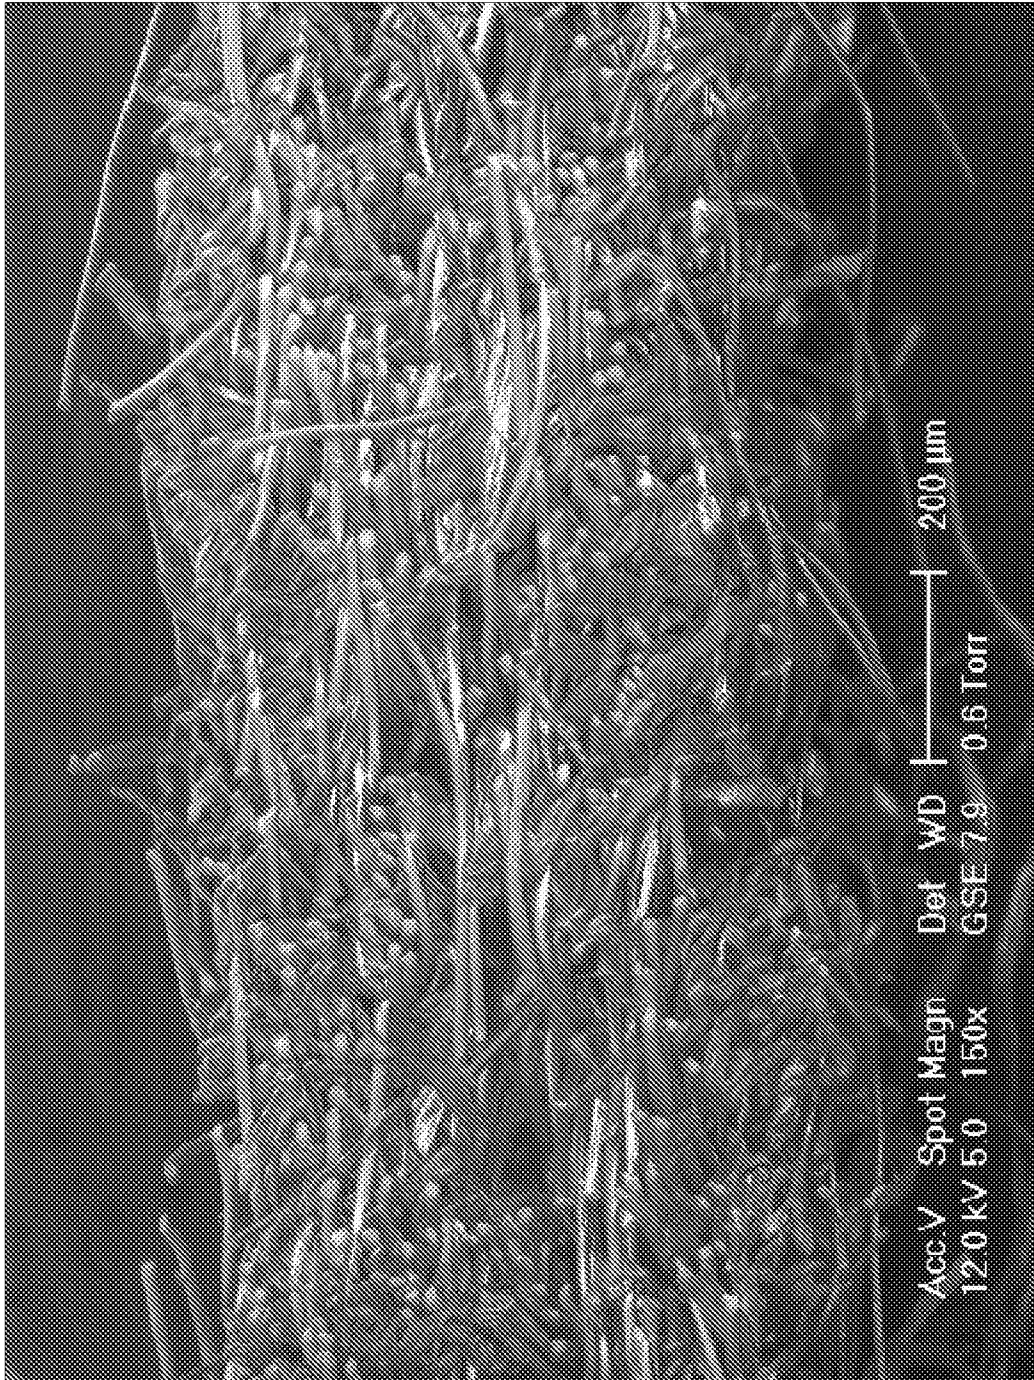


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2012/050461

A. CLASSIFICATION OF SUBJECT MATTER		
IPC: see extra sheet		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC: D04H, D21H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE, DK, FI, NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
EPO-Internal, PAJ, WPI data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 20020157766 A1 (VUILLAUME ANDRE ET AL), 31 October 2002 (2002-10-31); abstract; figures 1-2; [0020], [0029], [0031]-[0032], [0051]-[0055] --	1-12
Y	EP 0534863 A1 (FIBERWEB NORTH AMERICA INC), 31 March 1993 (1993-03-31); abstract; column 2, line 55 - column 3, line 10; column 6, line 4 - column 7, line 45; column 8, line 49 - column 9, line 11; figure 1 --	1-12
A	WO 2005042819 A2 (SCA HYGIENE PROD AB), 12 May 2005 (2005-05-12); abstract; page 9, line 17 - page 10, line 9; figure 1 --	1-12
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
23-07-2012		26-07-2012
Name and mailing address of the ISA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. + 46 8 666 02 86		Authorized officer Monika Bohlin Telephone No. + 46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2012/050461

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 03083197 A1 (SCA HYGIENE PROD AB), 9 October 2003 (2003-10-09); abstract; figure 1 --	1-12
A	WO 02055778 A1 (POLYMER GROUP INC), 18 July 2002 (2002-07-18); abstract; page 21, line 12 - line 18; figure 5A --	1-12
A	WO 9411557 A1 (DU PONT), 26 May 1994 (1994-05-26); abstract; page 9, line 10 - line 33; figures 1-2 --	1-12
A	EP 2116645 A1 (BC NONWOVENS S L), 11 November 2009 (2009-11-11); abstract; figure 1; [0016]-[0019] --	1-12
A	US 6063717 A (ISHIYAMA SADAYUKI ET AL), 16 May 2000 (2000-05-16) --	1-12
A	US 4939016 A (RADWANSKI FRED R ET AL), 3 July 1990 (1990-07-03); abstract; column 9, line 1 - line 10; figure 1 --	1-12
A	EP 0992338 A2 (FORT JAMES CORP; GEORGIA PACIFIC CONSUMER OPERA [US]), 12 April 2000 (2000-04-12); abstract; figures 1-9; [0027]-[0042] -- -----	1-12

Continuation of: second sheet

International Patent Classification (IPC)

D04H 5/03 (2012.01)
D04H 1/4374 (2012.01)
D04H 1/492 (2012.01)
D04H 1/498 (2012.01)
D21H 13/10 (2006.01)
D21H 15/06 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se
(English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se
(Swedish version)

Use the application number as username. The password is **FONSERSKAL**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE2012/050461

US	20020157766 A1	31/10/2002	AT	336611 T	15/09/2006
			AU	4932000 A	02/01/2001
			CN	1355864 A	26/06/2002
			DE	60030120 T2	15/02/2007
			DK	1192306 T3	11/12/2006
			ES	2270833 T3	16/04/2007
			FR	2794776 B1	05/10/2001
			JP	2003502515 A	21/01/2003
			JP	4546010 B2	15/09/2010
			PL	352192 A1	11/08/2003
			TR	200103471 T2	22/07/2002
			WO	0077286 A1	21/12/2000
EP	0534863 A1	31/03/1993	AU	2600292 A	01/04/1993
			BR	9203820 A	20/04/1993
			CA	2079246 A1	31/03/1993
			JP	6294060 A	21/10/1994
			MX	9205621 A	01/05/1993
			US	5324580 A	28/06/1994
WO	2005042819 A2	12/05/2005	AU	2004286185 A1	12/05/2005
			BR	PI0416078 A	02/01/2007
			CN	1871392 A	29/11/2006
			EP	1689923 A2	16/08/2006
			MX	PA06003848 A	03/07/2006
			RU	2364668 C2	20/08/2009
			RU	2006118807 A	20/12/2007
WO	03083197 A1	09/10/2003	AU	2003214749 A1	13/10/2003
			EP	1497489 A1	19/01/2005
			PL	370919 A1	13/06/2005
WO	02055778 A1	18/07/2002	AU	2001229480 B2	24/08/2006
			CA	2434432 A1	18/07/2002
			EP	1360357 A1	12/11/2003
			IL	156862 A	22/09/2009
			JP	2004518029 A	17/06/2004
WO	9411557 A1	26/05/1994	CA	2148460 A1	26/05/1994
			DE	69319611 T2	11/03/1999
			EP	0669994 B1	08/07/1998
			ES	2119909 T3	16/10/1998
			JP	3289908 B2	10/06/2002
			JP	H08503271 A	09/04/1996
			KR	100250893 B1	01/05/2000
			US	5290628 A	01/03/1994

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE2012/050461

EP	2116645 A1	11/11/2009	AT	529556 T	15/11/2011
			ES	2373349 T3	02/02/2012
US	6063717 A	16/05/2000	DE	69529768 D1	03/04/2003
			EP	0796940 A1	24/09/1997
			WO	9713020 A1	10/04/1997
US	4939016 A	03/07/1990	AT	114747 T	15/12/1994
			AU	3146589 A	21/09/1989
			AU	611270 B2	06/06/1991
			CA	1308242 C	06/10/1992
			DE	68919492 D1	12/01/1995
			EP	0333212 A2	20/09/1989
			ES	2064376 T3	01/02/1995
			JP	2026973 A	29/01/1990
			JP	3014051 B2	28/02/2000
			KR	970005851 B1	21/04/1997
			MX	169382 B	30/06/1993
EP	0992338 A2	12/04/2000	AT	371535 T	15/09/2007
			CA	2285113 A1	09/04/2000
			DE	69936962 T2	15/05/2008
			EP	1775116 A2	18/04/2007
			ES	2291009 T3	16/02/2008
			US	6110848 A	29/08/2000