


- (21) Application No 7937420
- (22) Date of filing 29 Oct 1979
- (30) Priority data
- (31) 53/154386
- (32) 8 Nov 1978
- (33) Japan (JP)
- (43) Application published 4 Jun 1980
- (51) INT CL³ B65B 59/00//11/04 41/00
- (52) Domestic classification B8C 40A3 G14 B8R 8F4 RW9
- (56) Documents cited GB 1490010 GB 1467198 GB 1361369 GB 487868 US 4047361A
- (58) Field of search B8C B8R
- (71) Applicant Laurel Bank Machine Co., Ltd., No. 1—2, 1-chome, Toranomom, Minato-ku, Tokyo, Japan

(72) Inventor Yorizo Miyazaki
(74) Agent Boulton, Wade & Tennant

(54) A Coin Wrapping Machine Having Means for Guiding Wrapping Paper from a Cutter to Wrapping Rollers

(57) A coin wrapping machine has a set of rollers (22, 23, 24) for wrapping a stack of coins (A) in a sheet of wrapping paper (20), a cutter (6) whose position is adjustable with respect to the rollers for cutting different lengths of wrapping paper sheets, and means for guiding the

wrapping paper from the cutter to the rollers. The guiding means comprises an extensible guide member (7, 7') extending along a stationary guide member (13). This extensible guide member comprises an elongate leaf spring (7) which has its forward end (7'a) secured to a fixed support rod (25) near the rollers, and has its other end portion fixed with respect to the cutter and formed into a spiral (7) which can resiliently wind and unwind with the adjustment of the cutter (6). The wrapping paper (20) is guided by passing between these two guide members and can enter between the rollers (22, 23, 24) regardless of the tendency of the paper to curl.

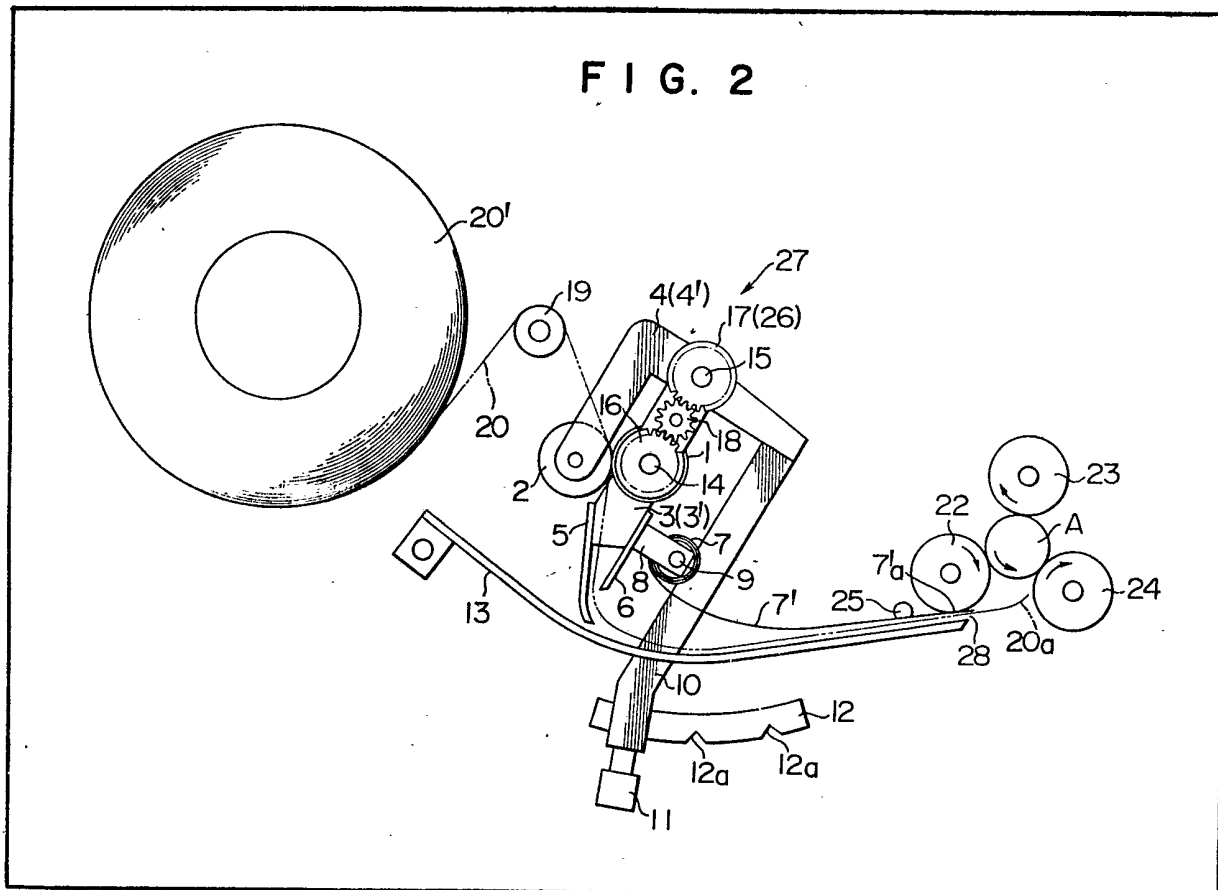

GB2 034 273 A

FIG. 1


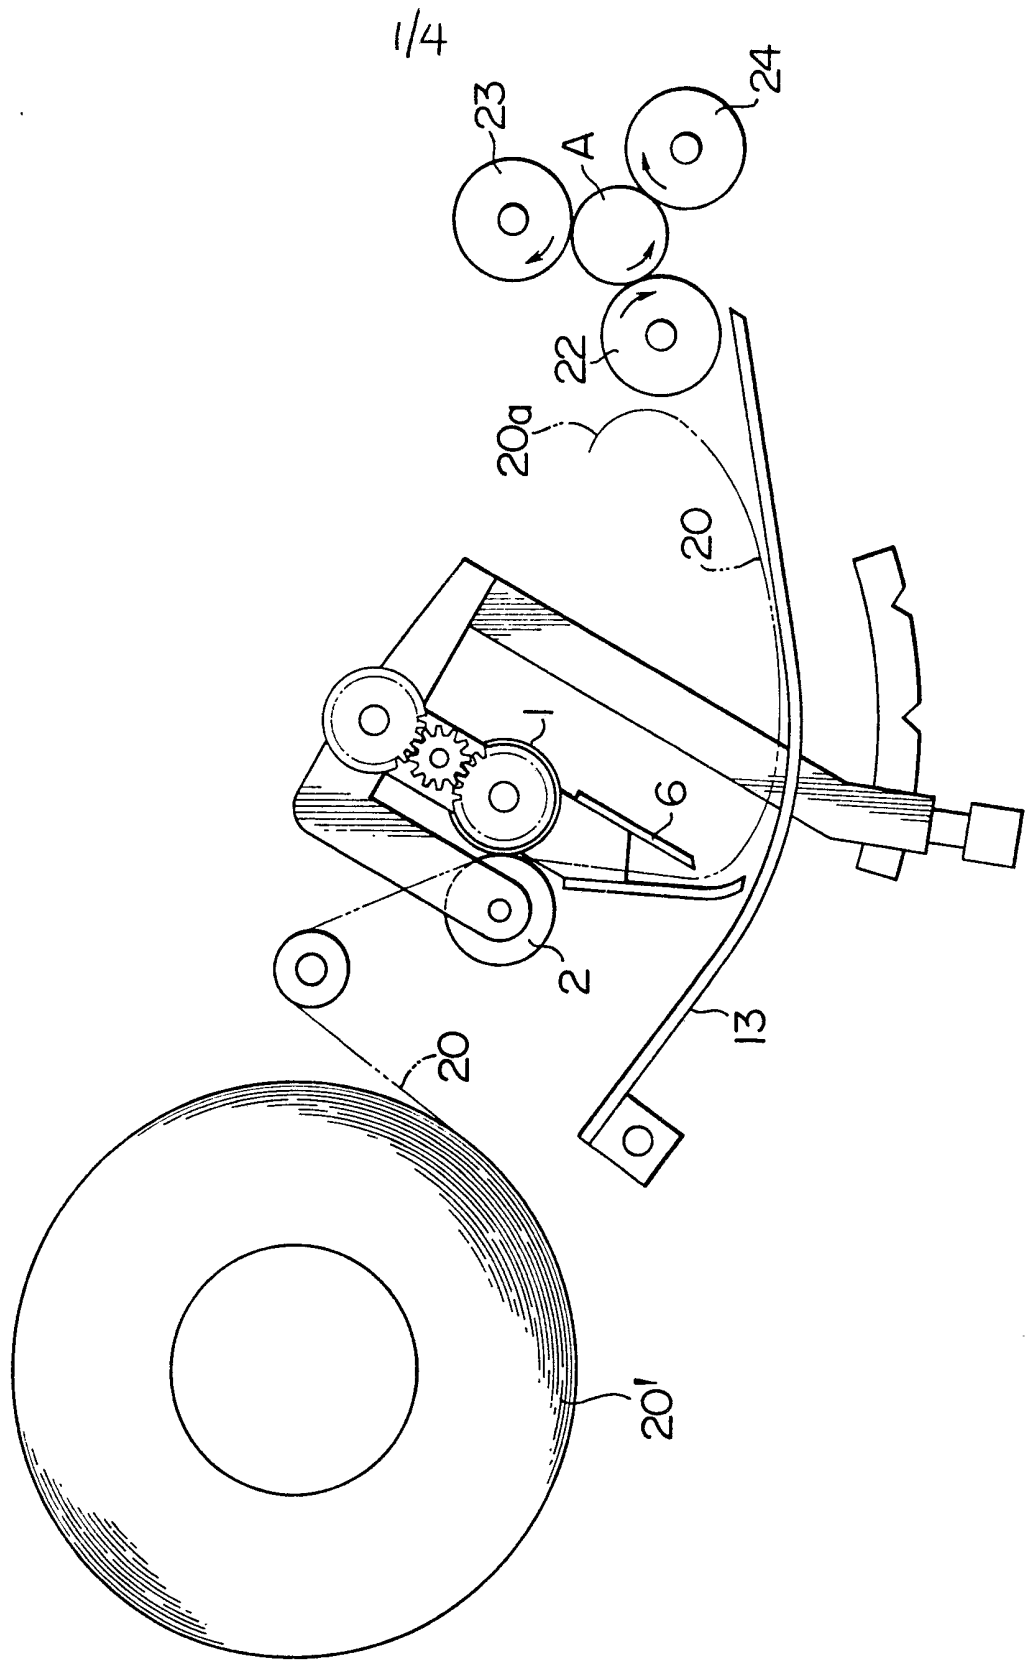


FIG. 2

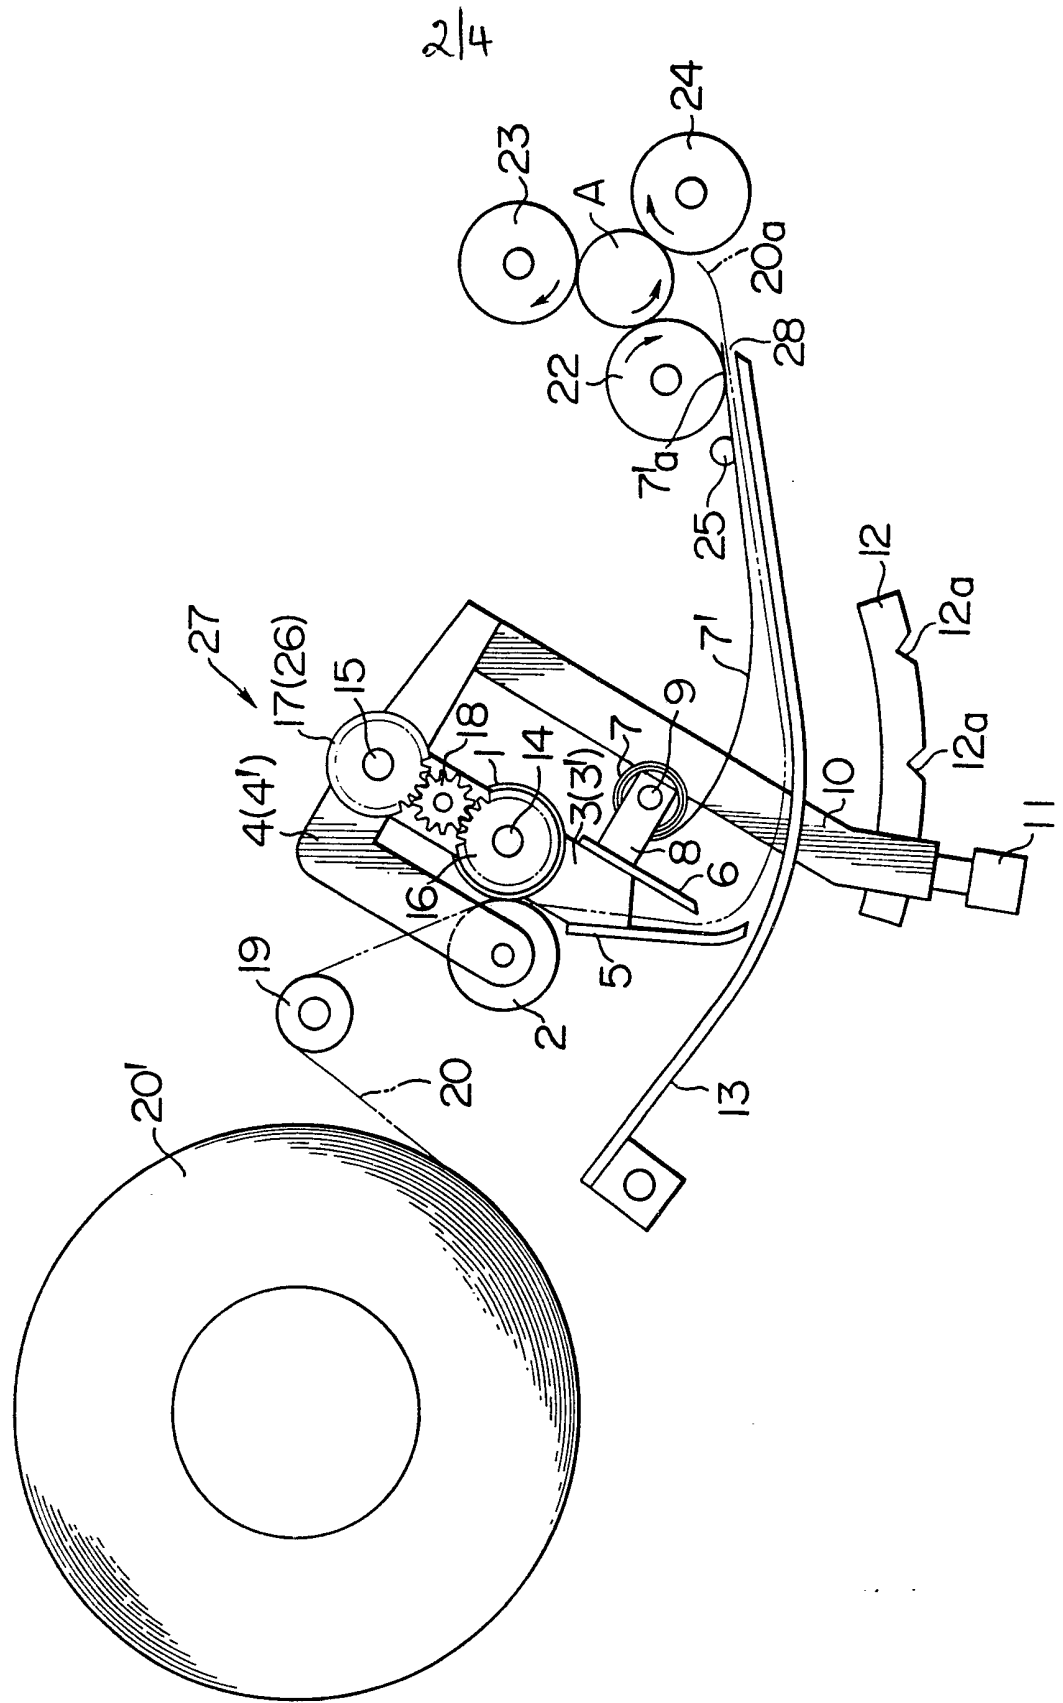

2/4

FIG. 3


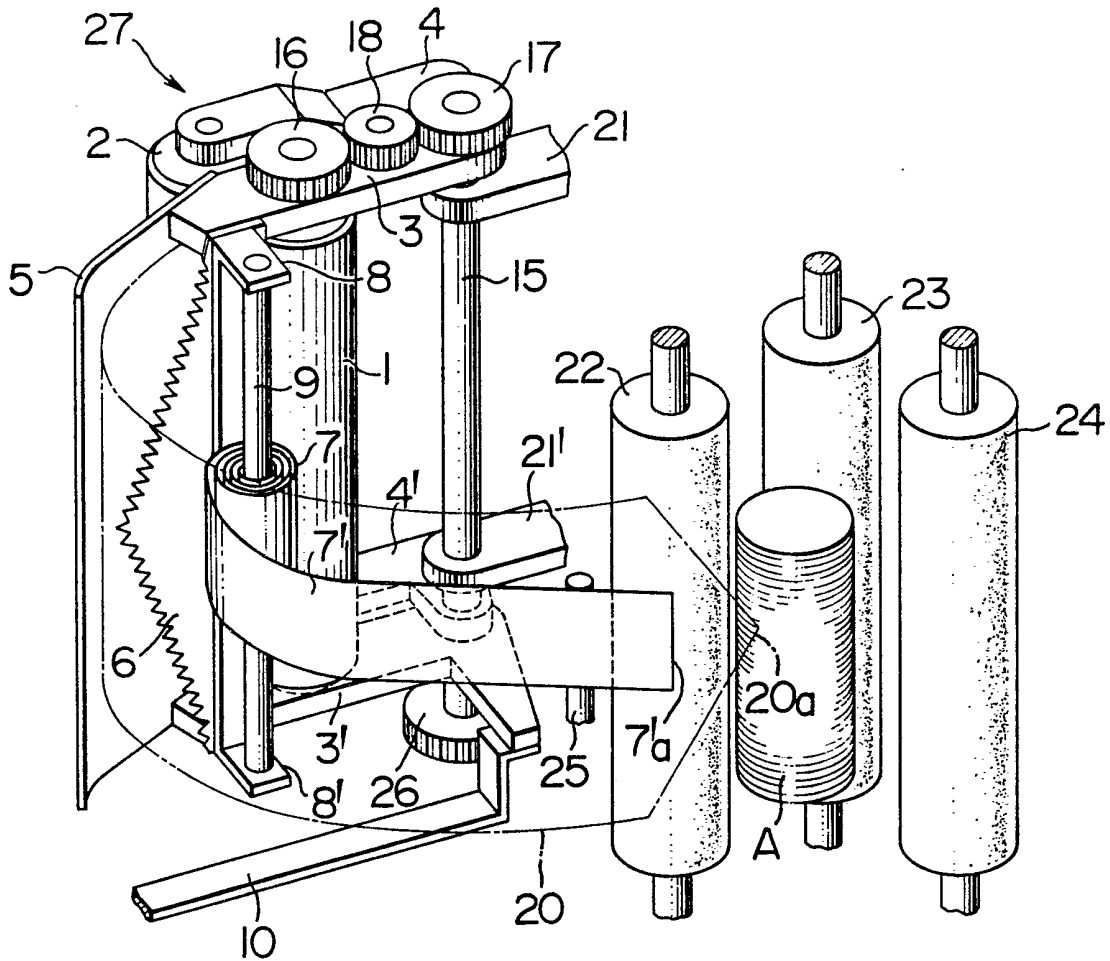


FIG. 4

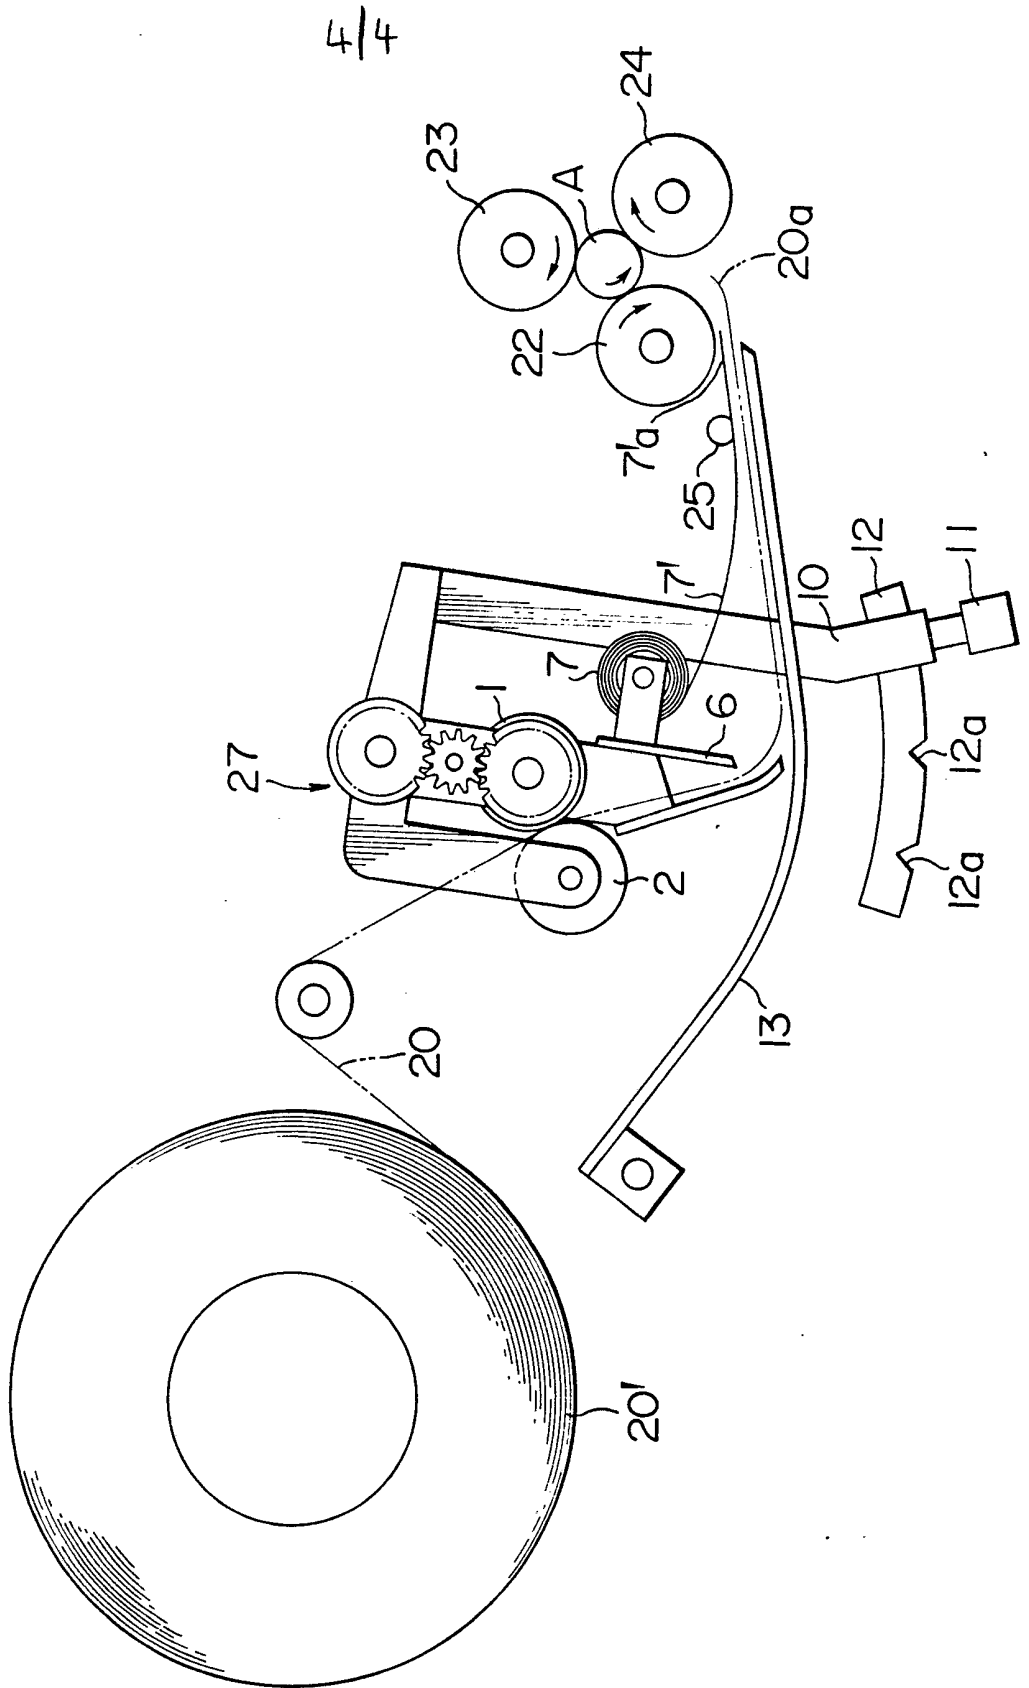

SPECIFICATION

A Coin Wrapping Machine Having Means for Guiding the Wrapping Paper From the Cutter to the Rollers

5 This invention relates to a coin wrapping machine having means for guiding the wrapping paper from the cutter to the rollers.

In a coin wrapping machine of the type designed to wrap stacks of coins of different diameters, as a rule, wrapping paper is drawn out from a roll of wrapping paper, is forwarded along a guide to a set of coin-wrapping rollers, which are adapted to wind wrapping paper around a stack of coins, so that the leading end portion of the wrapping paper may enter between the rollers, and is cut by a movable cutter into a selected length of sheet determined according to the diameter of a stack of coins to be wrapped. In the prior art coin wrapping machines of this type, however, there has been a problem that the leading end of wrapping paper forwarded along the guide has often failed in entering between the rollers, thus causing wrapping of coins to be uneffected. Such failure of wrapping paper in entering between the coin-wrapping rollers is due to self-turning tendency of the wrapping paper which has been drawn out from the roll, and happens especially when the wrapping paper is cut into a large length of sheet, or when the roll of wrapping paper has been reduced in outer diameter.

The invention provides a coin wrapping machine including a set of rollers for wrapping a stack of coins in a selected length of sheet of wrapping paper which is drawn out from a roll of wrapping paper and is forwarded to the rollers a cutter capable of moving its position with respect to the roller for cutting the forwarded wrapping paper into a selected length of sheet, and means for guiding the wrapping paper from the cutter to the rollers comprising: a first guide member extending between a position near said cutter and a position near said rollers for guiding the wrapping paper from said cutter to said rollers and a second guide member extending along first guide member for guiding in cooperation with said first guide member the wrapping paper, said second guide member having one end thereof fixed near said roller and having the other end portion made expansible/contractible by the movement of said cutter.

An embodiment of the invention will now be described by way of example and with reference to the accompanying drawings, in which:

55 Figure 1 is a plane view showing a prior art apparatus;

Figure 2 is a plan view showing an embodiment of the invention, with the cutter being moved in the direction of departing away from the coin-wrapping rollers;

60 Figure 3 is a perspective view showing in detail the essential portion of the embodiment of Figure 2; and

Figure 4 is a plan view similar to Figure 2, with

65 the cutter being moved in the direction of coming near to the coin-wrapping rollers.

One embodiment of the present invention will now be described in detail with the reference to the accompanying drawings.

70 For better understanding of the invention, first, description will be made about a typical example of the conventional art apparatus for guiding wrapping paper in a coin wrapping machine in connection with Figure 1. As seen in Figure 1, wrapping paper 20 is drawn out from a roll 20' of wrapping paper by a pair of paper-forwarding rollers 1, 2 and is passed over a movable cutter 6 onto a guide member 13. The wrapper 20 is further forwarded along the surface of the guide 13 toward a set of coin-wrapping rollers 22, 23, 24 so that the leading end portion of the wrapping paper may enter between the coin-wrapping rollers. The rollers 22, 23, 24 are adapted to rotatably hold therebetween a stack of coins A and to catch the leading end portion of the forwarded wrapping paper 20 between the stack of coins A and the roller 24, thereby to wind the wrapping paper 20 around the stack of coins A. The forwarded wrapping paper 20 is cut by the movable cutter 6 into a selected length of sheet determined according to the diameter of the stack of coins A. Thus, stacks of coins of different diameters can be wrapped in a constant number of turns or layers of wrapping paper by moving the cutter 6 to a suitable position with respect to the coin-wrapping rollers, that is, by changing the cut length of wrapping paper according to the diameter of a stack of coins to be wrapped. The roll 20' of wrapping paper includes a core of relatively small diameter around which the wrapping paper 20 is wound in large number of turns or layers. Accordingly, the roll 20', as initially set in the coin wrapping machine, has a relatively large outer diameter. The wrapping paper 20, which has just been drawn out from the circular roll 20' and forwarded onto the guide 13, has more or less a self-turning tendency due to the curvature in the roll 20'. As a result, especially when the cut length of the wrapping paper 20 is large, or when a large amount of paper of the roll 20' has been consumed and the wrapping paper 20 is drawn out from near the core of the roll 20', the leading end portion 20a of the wrapping paper 20 may often largely turn away from the guide 13, as shown in Figure 1, and fails in entering between the wrapping rollers, causing wrapping of coins to be uneffected.

The above-described problem in the prior art has been effectively solved by the present invention with a simple construction. The invention will now be described in detail in connection with a preferred embodiment thereof, reference being made to Figures 2 to 4 wherein similar parts as those in Figure 1 will be indicated by the like numerals.

Referring to Figures 2 and 3, reference numeral 27 generally indicates a device which is adapted to forward and cut wrapping paper. The device 27 has a vertical shaft 15 supported for rotation by a

pair of support members 21, 21' which are secured to the frame of a coin wrapping machine. Supported for rotation on the upper and lower end portions of the shaft 15 are a pair of horizontal swing arms 3, 3' which rotatably support on their free end portions a vertical paper-forwarding roller 1, and also are a pair of horizontal swing arms 4, 4' which rotatably support on their free ends another vertical paper-forwarding roller 2 which is urged by suitable means into contact with the roller 1. Fixed on the lower end of the shaft 15 is a gear 26 which is driven by a suitable motor (not shown). Fixed on the upper end of the shaft 15 is a gear 17 for transmitting rotary motion of the shaft 15, which is driven through the gear 26, via an intermediate gear 18 to a gear 16 which is fixed on the upper end of a rotating shaft 14 of the paper-forwarding roller 1 thereby to rotate the roller 1. The roller 2 is driven by the roller 1 through frictional engagement therebetween secured on side edges of the free end portions of the swing arms 3, 3' are a guide plate 5 and a cutter 6 having its triangular cutting edge disposed in opposition to the surface of the guide plate 5. From the other side edges of the free end portions of the swing arms 3, 3' project a pair of support members 8, 8' which rotatably support a vertical shaft 9 which is disposed near the base of the triangular cutter 6. The shaft 9 is provided around its intermediate portion with a constant-loaded spiral leaf spring member 7 to be described later. From the base portion of the lower swing arm 3' extends a horizontal lever 10 which has on its top a knob 11. Thus, movement of the lever 10 to the right or left causes the device 27 including the above described various parts to be rotated about the shaft 15 to the right or left.

An arcuate plate 12 having a plurality of notches 12a formed in its outer side edge is provided in a manner that the top of the lever 10 may move along the plate 12 and the knob 11 can come into engagement with a desired one of the notches 12a for locking the lever 10 thereat.

There is provided an elongated guide member 13 which extends horizontally passing over the top of the guide plate 5 with a gap therebetween. Provided near the forward end of the guide member 13 is a set of vertical coin-wrapping rollers 22, 23 and 24 which are arranged at generally equal angular intervals in an adjustable relationship with respect to one another. The rollers 22, 23 and 24 rotate about their central axes in the directions shown by the arrows thereby to rotatably hold therebetween a stack of coins A to be wrapped.

The constant-loaded spiral leaf spring member 7 mentioned hereinabove has its inner end secured to the shaft 9, and has its outer end portion 7' extended along the guide member 13 up to a point close to the peripheral surface of the coin-wrapping roller 22 which is near the forward end of the guide member 13. The extended portion 7' is secured at a point near its forward end to a fixed support rod 25. Thus, the extended

portion 7' of the leaf spring member 7 serves as a second guide member which cooperates with the first mentioned guide member 13 to form therebetween a passageway for wrapping paper 20, the forward ends of the members 13 and 7' forming therebetween an outlet 28 for the wrapping paper.

In operation, wrapper paper 20 is drawn out in succession, passing around a guide roller 19, by being held between the rotating paper-forwarding rollers 1 and 2 from a roll 20' of wrapping paper which is rotatably set in the coin wrapping machine in a known manner, and is forwarded along the guide plate 5 and passing over the cutter 6 into the passageway between the guide members 13 and 7'. This wrapping paper 20 is forwarded until the leading end portion 20a thereof protrudes from the outlet 28 and is caught between the coin-wrapping roller 24 and a stack of coins A which is held among and rotated by the rotating coin-wrapping rollers 22, 23, 24. Upon this, the wrapping paper 20 is rapidly pulled forwardly by the coin-wrapping roller and the stack of coins, and accordingly the forwarded wrapper paper 20 is pressed against and cut by the cutter 6 into a selected length of sheet determined by the position of the cutter 6. This cut sheet is wound around the stack of coins A by the coin-wrapping rollers 22, 23, 24, and then the upper and lower margins of the sheet are crimped inwardly, by means of the conventional crimping claws, to complete wrapping.

Figure 2 shows a case of wrapping a stack of coins A by the coin-wrapping rollers 22, 23, 24, and then the upper and lower margins of the sheet are crimped inwardly, by means of the conventional crimping claws, to complete wrapping.

Figure 2 shows a case of wrapping a stack of coins A of a large diameter, wherein the lever 10 is moved to the left-hand position on the lock plate 12 to move the device 27 leftward for moving the cutter 6 away from the coin-wrapping roller, thereby to cut the wrapper paper 20 into a large length of sheet for winding the stack of coins A in a predetermined number of turns or layers of the wrapping paper. In case of wrapping a stack of coins A of a small diameter, the lever 10 is moved to the right-hand position on the lock plate 12 to move the cutter 6 toward the coin-wrapping roller, as shown in Figure 4, thereby to cut the wrapping paper 20 into a short length of sheet for winding the stack of coins A in the same number of turns or layers as in the first mentioned case.

As the lever 10 and accordingly the cutter 6 move for changing cut length of the wrapping paper, the second guide member 7', with its forward end portion fixed near the coin-wrapping roller, can expand or contract its extended length following the movement of the cutter 6 by virtue of the resilient winding/unwinding action of the spiral end portion of the member 7 which is resiliently wound around the shaft 9, thus there being no inconvenience to the wrapping paper 20

to be guided to the coin-wrapping roller. Of course, the lever 10 can be moved to and locked at any desired position or notch 12a on the lock plate 12 to cut wrapping paper into any selected length of sheet.

5 As will be apparent from the above, according to the invention, in a coin wrapping machine having a cutter capable of moving for changing cut length of wrapping paper which is drawn out
10 from a roll of wrapping paper and forwarded to coin-wrapping rollers, the wrapping paper can be guided to enter between the coin-wrapping rollers without fail, regardless of cut length of the wrapping paper or of outer diameter of the roll of
15 wrapping paper.

Claims

1. A coin wrapping machine including a set of rollers for wrapping a stack of coins in a selected length of sheet of wrapping paper which is drawn
20 out from a roll of wrapping paper and is forwarded to the rollers, a cutter capable of moving its position with respect to the roller for cutting the forwarded wrapping paper into a selected length of sheet, and means for guiding the wrapping
25 paper from the cutter to the rollers comprising: a first guide member extending between a position near said cutter and a position near said rollers for

guiding the wrapping paper from said cutter to said rollers and a second guide member extending
30 along said first guide member for guiding in cooperation with said first guide member the wrapping paper, said second guide member having one end thereof fixed near said roller and having the other end portion made
35 expansible/contractible by the movement of said cutter.

2. A machine according to claim 1, wherein said other portion of the second guide member which is made expansible/contractible comprises
40 a resilient spiral.

3. A machine according to claim 1, wherein said second guide member comprises an elongate leaf spring having one end portion thereof
45 extended along said first guide member and having the other end portion resiliently wound into a spiral.

4. A machine according to claim 1, wherein said second guide member is so arranged that it may make contact with a surface of wrapper
50 paper which has a tendency to be concaved due to the curvature in the roll of wrapper paper.

5. A coin wrapping machine substantially as herein described with reference to and as shown in Figures 2 to 4 of the accompanying drawings.