


- (21) Application No **8002957**
(22) Date of filing **29 Jan 1980**
(43) Application published
12 Aug 1981
(51) **INT CL³**
F15D 1/12 1/06
(52) Domestic classification
F2R
(56) Documents cited
GB 2032048A
GB 1483133
GB 1179049
GB 922199
GB 718498
GB 357637
GB 291659
GB 255653
US 4180290A
(58) Field of search
B7A
F1T
F1V
F2R
(71) Applicant
George Applegate,
"Sunnyside", Hilperton
Road, Trowbridge,
Wiltshire
(72) Inventor
George Applegate
(74) Agents
Wynne-Jones, Lainé &
James, 22, Rodney Road,
Cheltenham, GL50 1JJ

(54) **Fan pump and turbine blades**

(57) A blade or vane for a fluid machine or duct, such as a fan, pump, or turbine, provided with large numbers of small uni-directional projections on its external surfaces. The projections may be rigid or flexible, but essentially they are

directed downstream in relation to the direction of flow. In one form, Fig. 3, the projections 14 are displaced from the general plane of the surface with smooth sloping upstream areas 15 and abrupt transverse downstream surfaces 16. In another form, Fig. 4, the projections 20 are in the form of small flexible fibres.

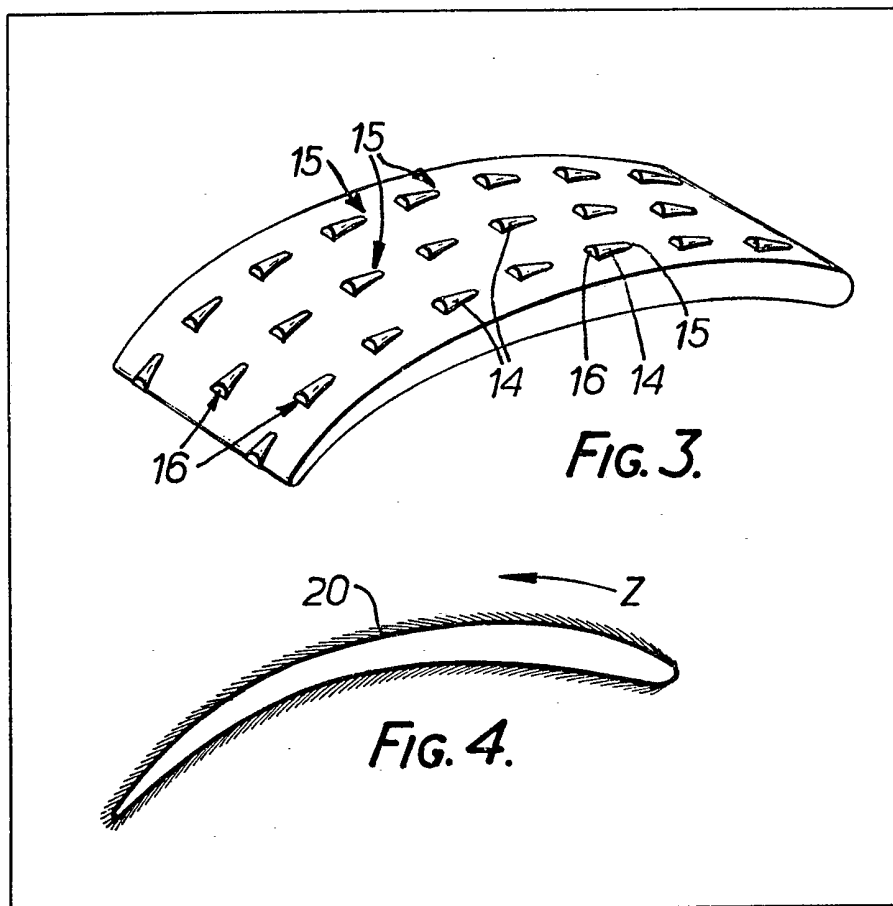

1/1

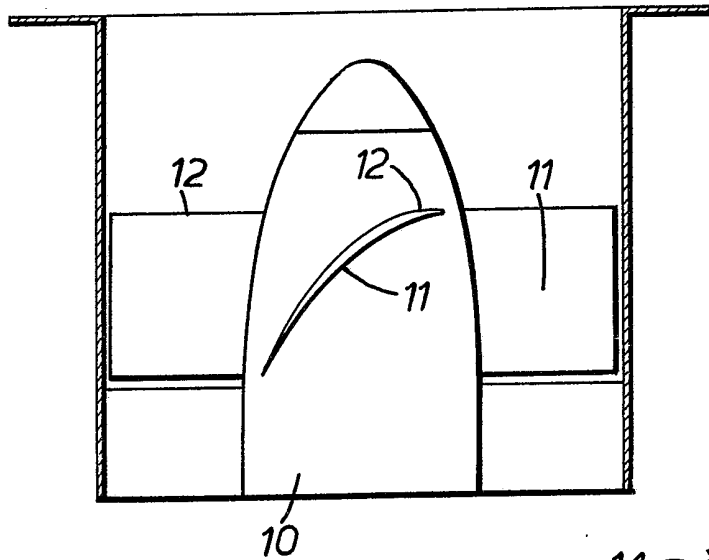


FIG. 1.

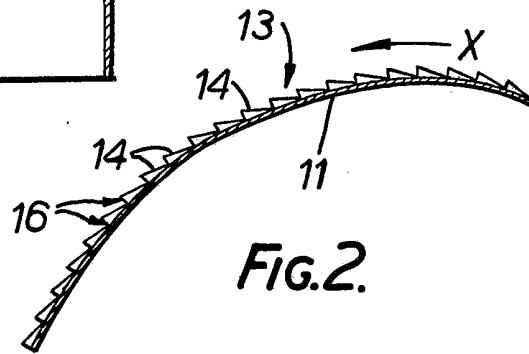


FIG. 2.

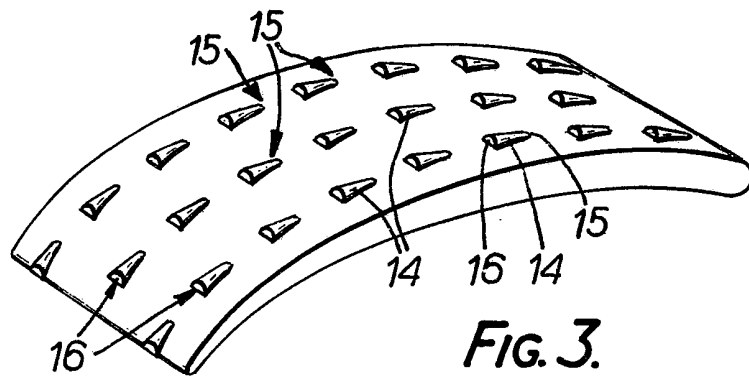


FIG. 3.

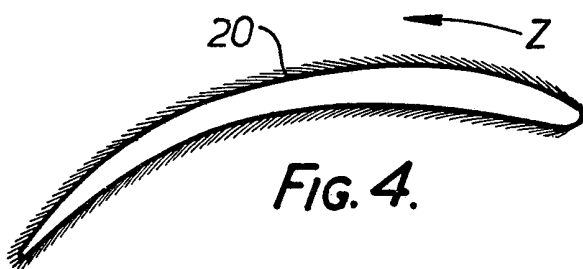


FIG. 4.



FIG. 5.

SPECIFICATION

Fan pump and turbine blades

This invention relates to so-called "fluid flow elements" such as fan pump and turbine blades.

5 The invention is, however, applicable to any element whether moving or fixed, which in use is in contact with a relatively moving fluid stream. The stream may be a liquid or a gas and the element may be a blade as mentioned, or it may
10 be some other moving part such as the hub of a fan or pump. The element may also be the wall of a pipe or any other body over which fluid flows.

It is an object of the invention to improve the fluid flow characteristics of such an element.

15 Preferred forms of the invention may reduce the frictional drag between the element and the fluid stream, improve the aero-dynamic streamline properties, and consequently increase the efficiency of the fluid flow.

20 Broadly stated the invention consists in a fluid flow element having a surface formed or provided with projections and/or indentations having a unidirectional characteristic. In one form of the invention the projections are rigid and have
25 inclined, smooth, or aerofoil profiles at their leading ends and relatively blunt, sharp or barbed surfaces at their trailing ends. Alternatively the projections may be flexible or movable and they may, for example, consist of short fibres or bristles
30 of any suitable material.

In some forms of the invention the surface is a rigid metallic structure. The surface may be separately formed and made attachable to the basic element.

35 The invention also consists in a blade for a fan pump impeller or turbine having a fluid flow element as defined above.

The invention may be performed in various ways and one specific embodiment with some
40 possible modifications will now be described by way of example with reference to the accompanying drawings, in which:—

Figure 1 is a diagrammatic side view of the hub of an air fan,

45 Figure 2 is a diagrammatic sectional view through a blade of the fan,

Figure 3 is a perspective view on a further enlarged scale illustrating some of the rigid projections formed on the blade surface,

50 Figure 4 is a similar sectional view illustrating another embodiment, including short splines or bristles, and

Figure 5 is a cross-section through an aircraft wing incorporating a surface according to the
55 invention.

The fan hub illustrated in Figure 1 is of the usual rounded or pointed shape 10 and has a number of fan blades 11, which are in this case formed of thin sheet material curved to provide a
60 shallow entry angle at the leading edge 12. On one or both surfaces of each blade there are

formed a number of small "uni-directional" projections 13. Each of these has a smooth inclined flank 14 running up to the leading edge
65 15 of the projection and the trailing edge 16 is a blunt transverse shoulder. Large numbers of these projections are provided over the surface of the blade and the effect is to encourage movement of the air in the direction of the arrow X and to cause
70 resistance to flow in the opposite direction. It is believed that this improves the efficiency of the interaction between the air and the blade by improving the streamline flow in the direction of the arrow X and reducing the tendency for
75 turbulence.

As a result it may be possible to increase the pitch of portions of the blade, so as to improve the impeller effect of the fan, without causing turbulence.

80 The projections may be formed by punching out lugs from the sheet metal blade, or the projections may be formed separately and attached to the blade itself.

In the second example illustrated in Figure 4
85 the blade is provided with large numbers of short splines or bristles 20 distributed over its surface, and particularly the cambered convex surface. These "bristles" may be rigid such as short metal wires or fibres, or they may be relatively flexible or
90 movable, for example short plastics fibres. In the latter case the whole surface may be provided by a piece of fabric material having an appropriate nap in the direction of the arrow Z. Other possible uses and applications of the invention are to ships
95 propellers or boat hulls, helicopter blades, external aircraft surfaces, windmills, centrifugal pump impellers and casings, rocket components, jet nozzles, stator and rotar turbine and compressor blades.

100 CLAIMS

1. A fluid flow element having a surface formed or provided with projections and/or indentations having a uni-directional characteristic.

105 2. An element according to Claim 1, in which the projections are rigid and have inclined, smooth, or aerofoil profiles at their leading ends and relatively blunt, sharp or barbed surfaces at their trailing ends.

110 3. An element according to Claim 1, in which the projections are flexible or movable.

4. An element according to any of the preceding claims, in which the surface is a rigid metallic structure.

115 5. An element according to any of the preceding claims, in which the surface is separately formed and is attachable to the basic element.

120 6. A blade or vane for a fluid fan, pump, impeller, motor or turbine, having a fluid flow element as defined in any of the preceding claims.

7. A fluid flow element, or a fluid fan, pump,

impeller, motor or turbine, including such an element, substantially in any of the forms

described herein with reference to the accompanying drawings.

Printed for Her Majesty's Stationery Office by the Courier Press, Leamington Spa, 1981. Published by the Patent Office, 25 Southampton Buildings, London, WC2A 1AY, from which copies may be obtained.