

(12) UK Patent Application (19) GB (11) 2482061 (13) A

(43) Date of A Publication

18.01.2012

(21) Application No: 1112074.8  
(22) Date of Filing: 13.07.2011  
(30) Priority Data:  
(31) 61399663 (32) 15.07.2010 (33) US  
(31) 61461410 (32) 18.01.2011 (33) US

(51) INT CL:  
**B60N 2/28** (2006.01)  
(56) Documents Cited:  
**GB 2444833 A EP 1110807 A1**  
**EP 0822115 A2 EP 0164909 A2**  
**FR 002741847 A1 US 20100007187 A1**

(71) Applicant(s):  
**Wonderland Nurserygoods Company Limited**  
**(Incorporated in Hong Kong)**  
**Flat F, 7/F, Shing Lee Commercial Building,**  
**8 Wing Kut Street, Central, Hong Kong**

(58) Field of Search:  
INT CL **A47D, B60N, B62B**  
Other: **WPI, EPODOC, TXTE**

(72) Inventor(s):  
**Bruce L Williams**  
**Gregory S Sellers**  
**Curtis M Hartenstine**  
**Nathanael Saint**

(74) Agent and/or Address for Service:  
**Dehns**  
**St. Bride's House, 10 Salisbury Square, LONDON,**  
**EC4Y 8JD, United Kingdom**

(54) Title of the Invention: **Child safety seat assembly**  
Abstract Title: **Child safety seat assembly**

(57) A child safety seat assembly includes a child seat 102 and a base 104. The base 104 includes a first portion 140A having a bottom adapted to provide stable resting support, and a second portion 140B extending upward from the first portion. The child seat 102 is installed on the base 104 and has a seat portion 112 and a seatback 114. The seat is movable to adjust a distance between the seat portion 112 and a region of the second portion 140B in front of the seat portion 112. Also claimed is a base 104 suitable for use with a child seat 102. The base 104 comprises a shell body 140, and an adjustable platform movably assembled on an upper guide surface 140C of the shell body 140. The adjustable platform 142 is adapted to attach with the child seat 102.


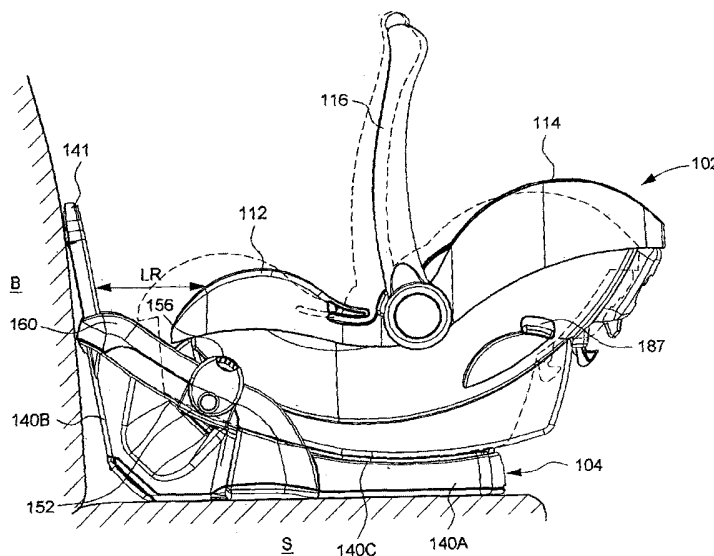


FIG. 9

GB 2482061 A

100 →

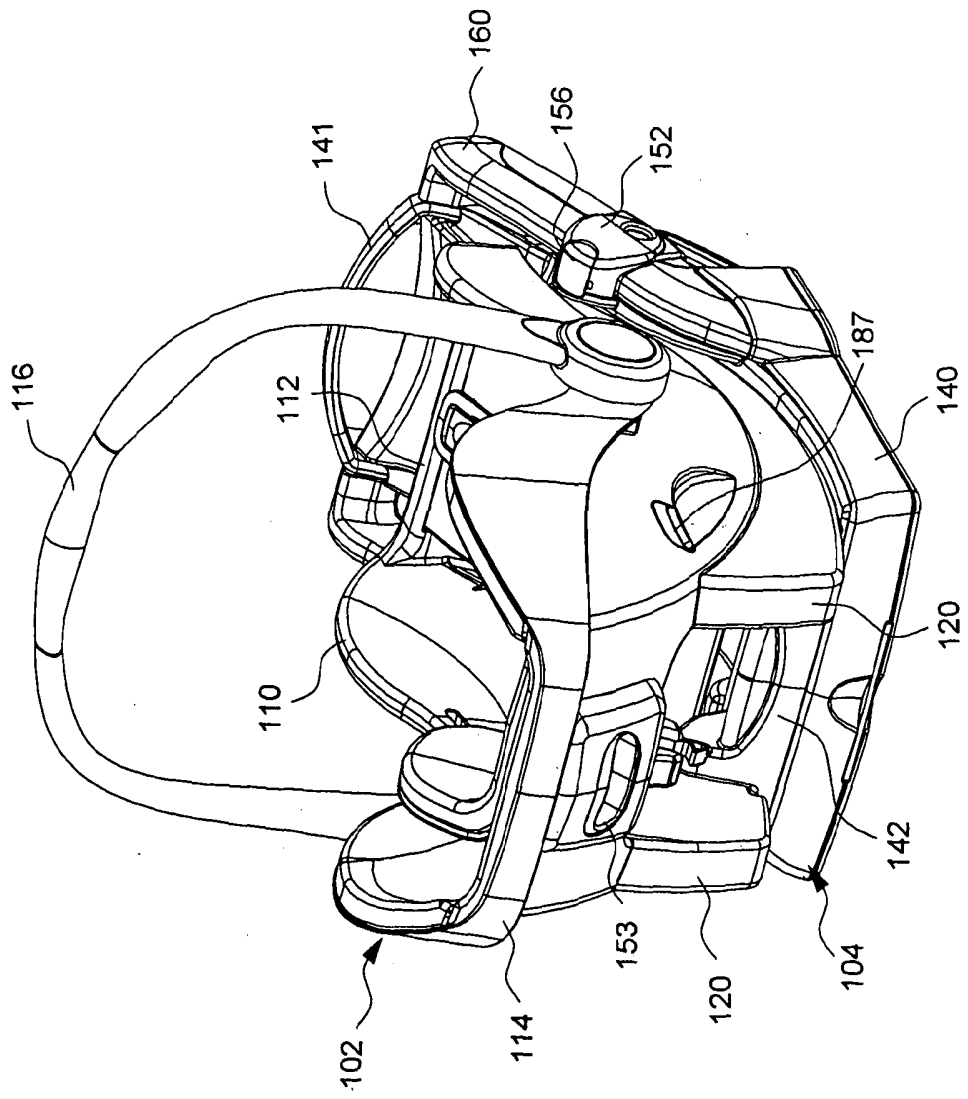

|||

FIG. 1

2/11

2/11

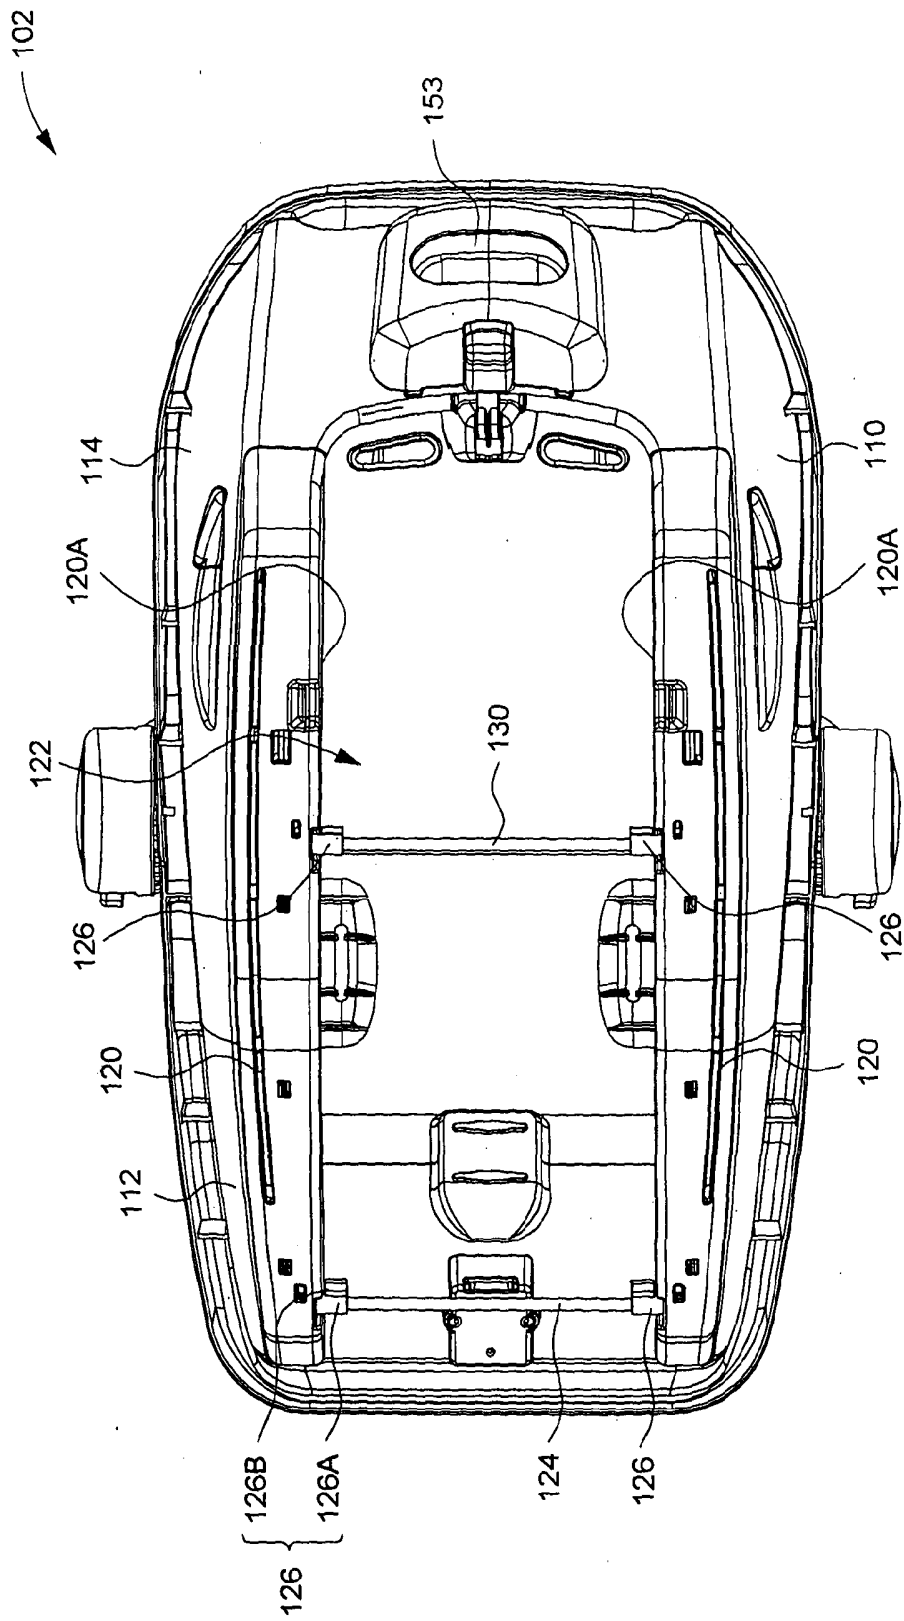


FIG. 2

3/11

3/11

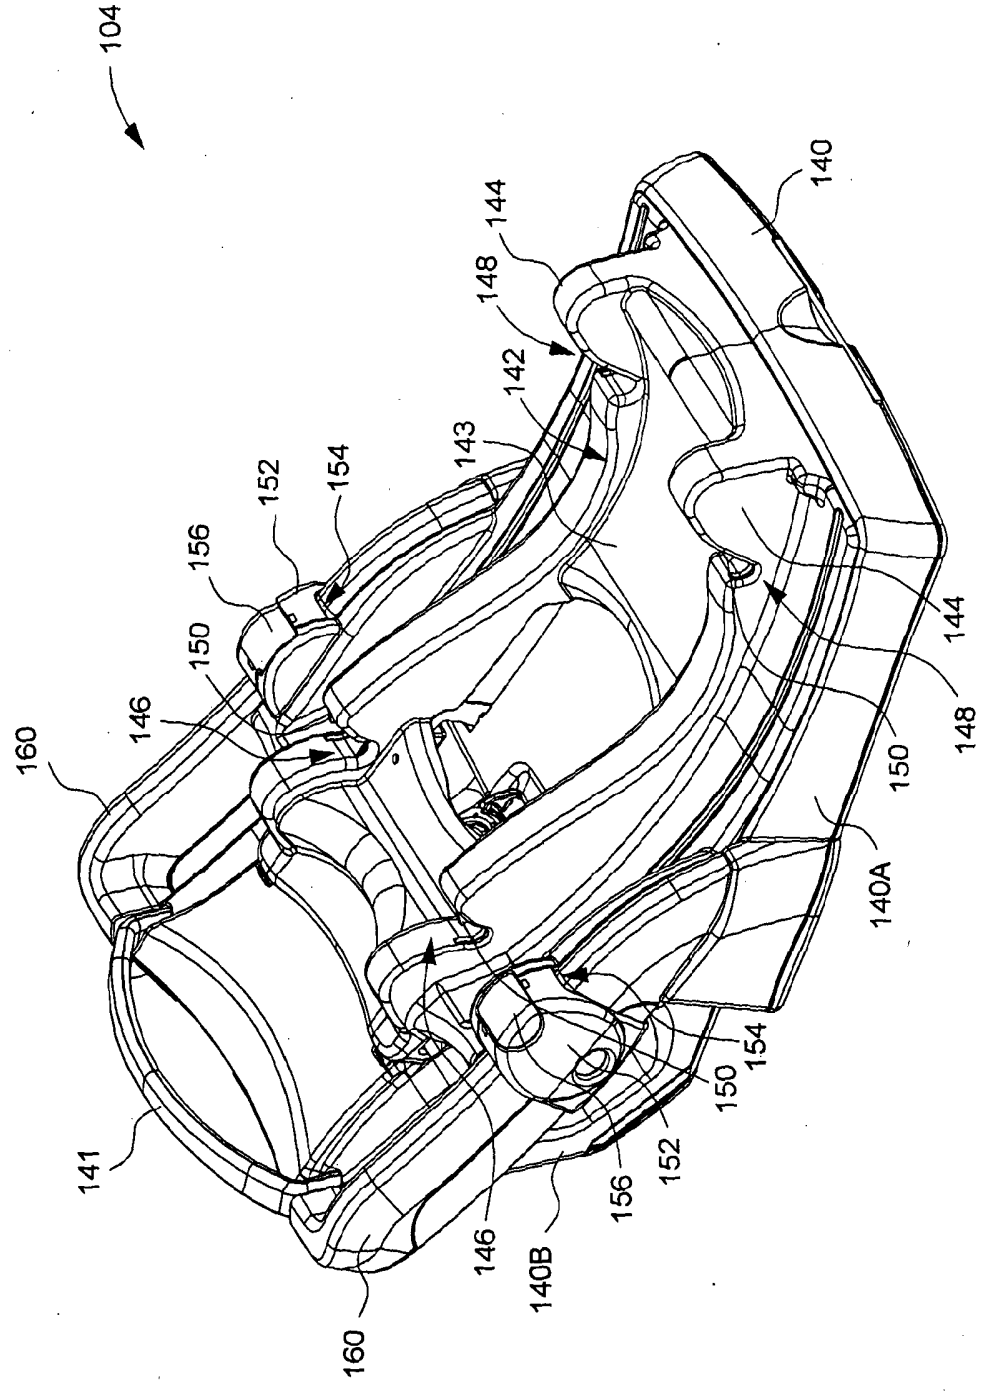


FIG. 3

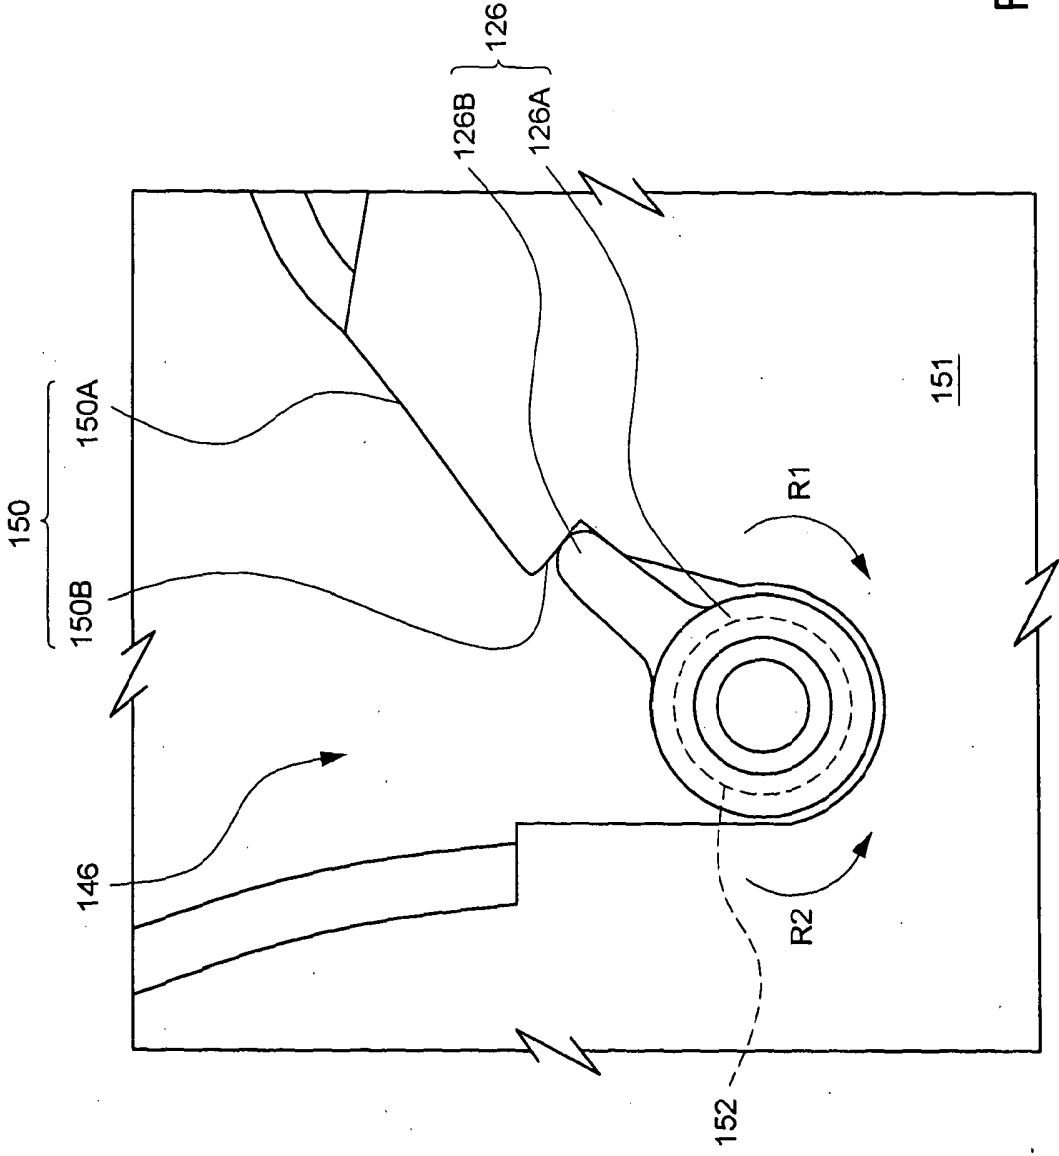


FIG. 4

5/11

5/11

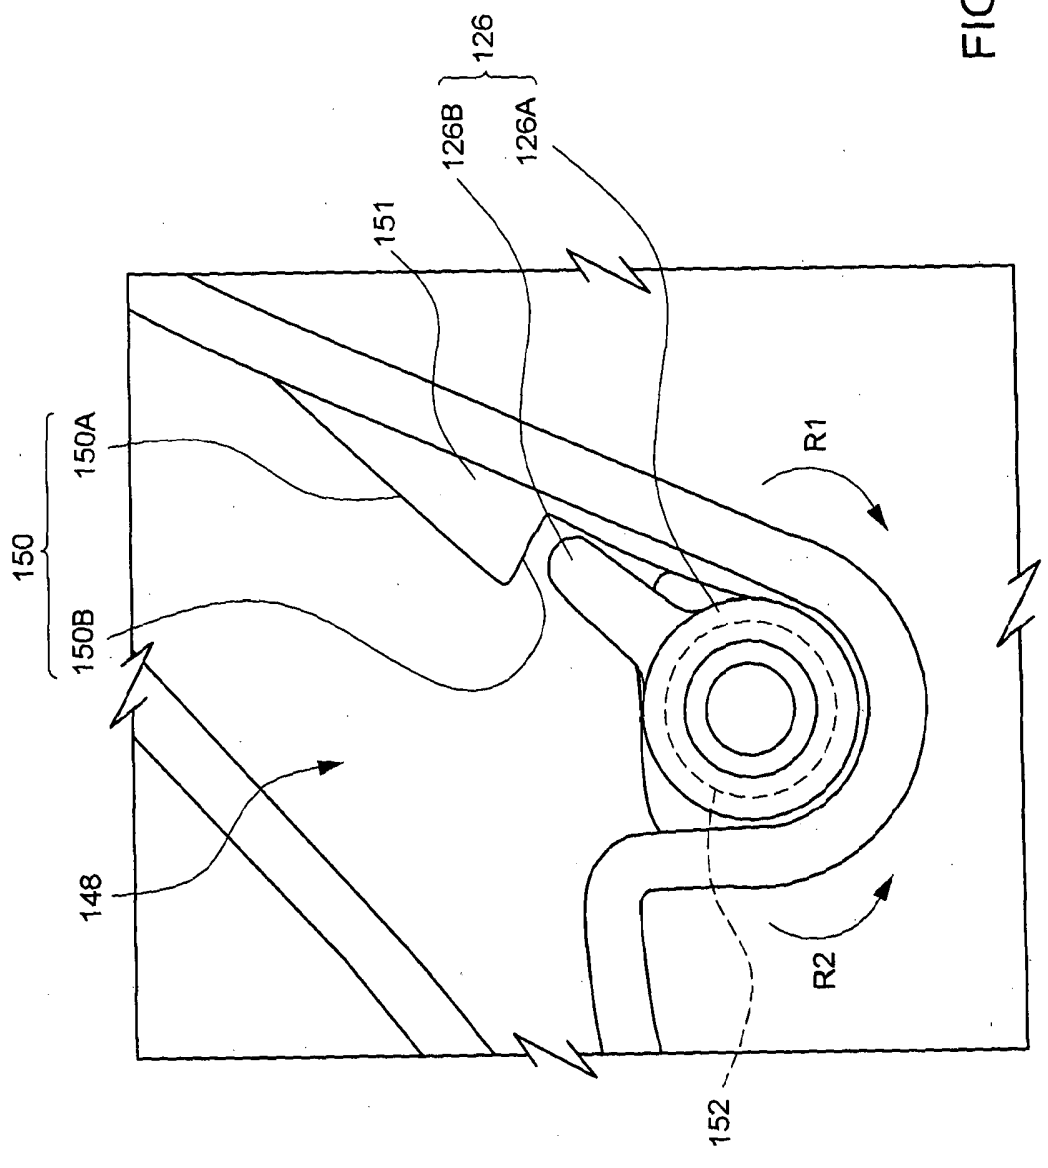


FIG. 5

6/11

6/11

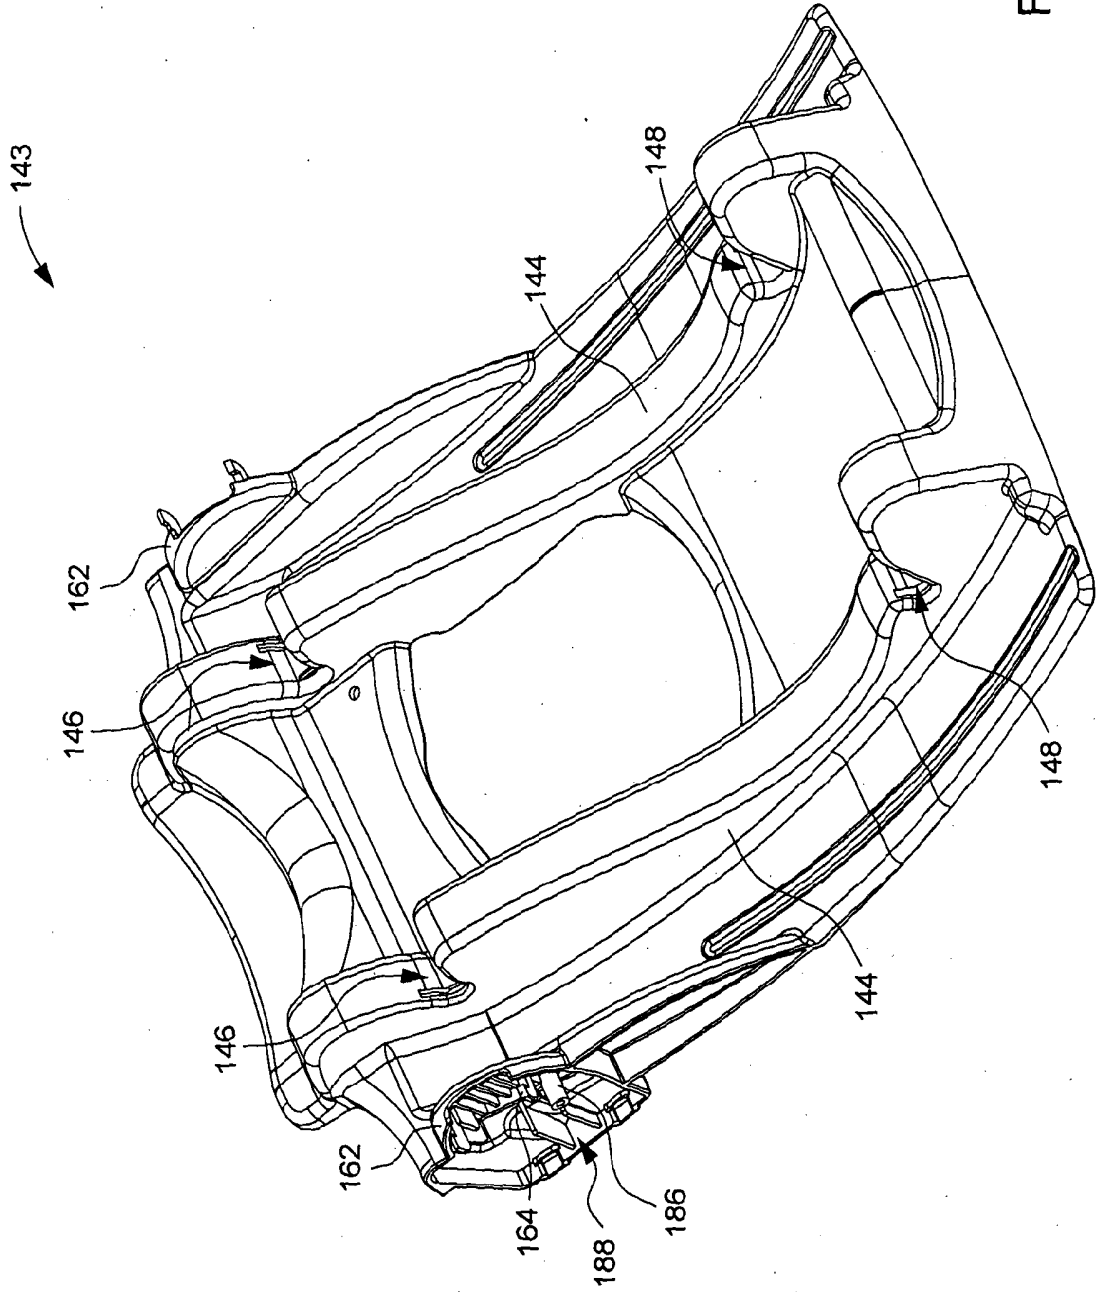


FIG. 6

7/11

7/11

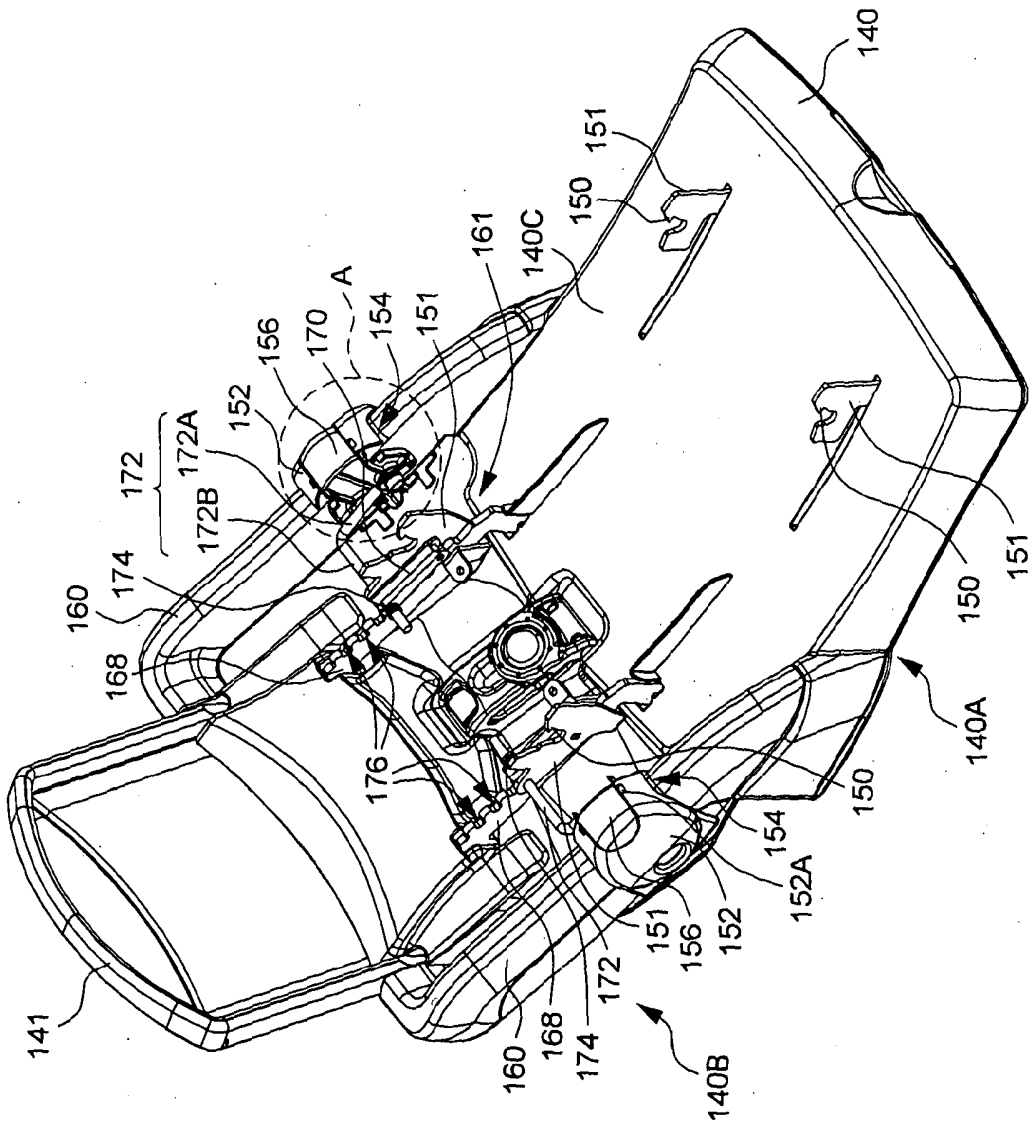


FIG. 7



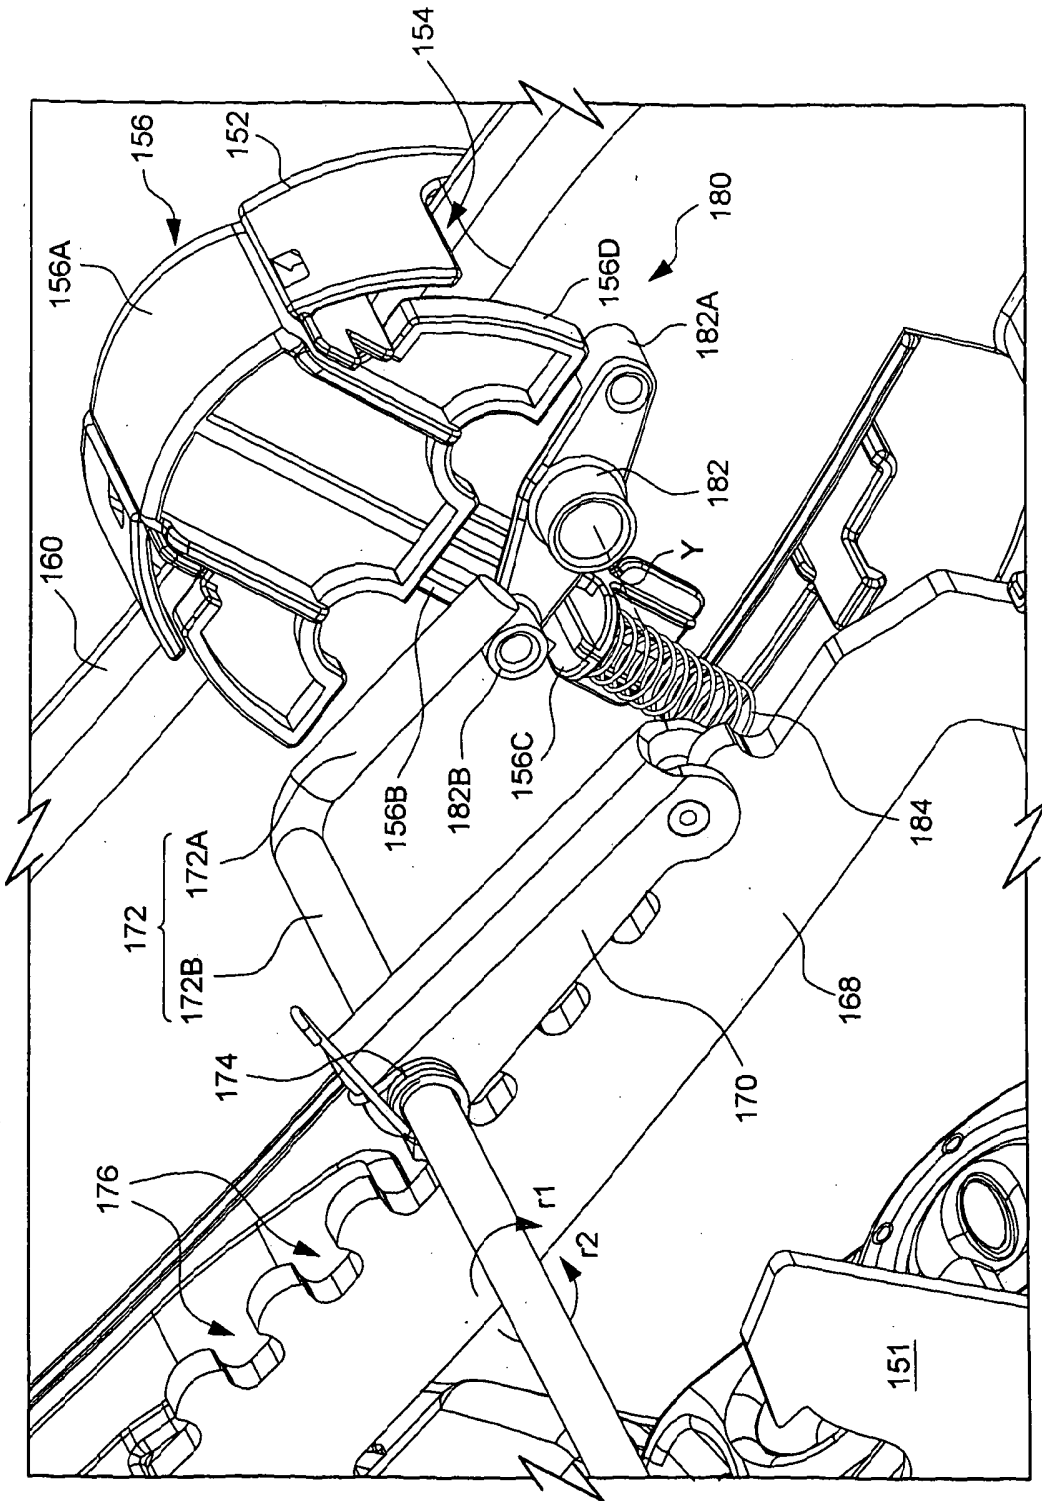


FIG. 8

9/11

9/11

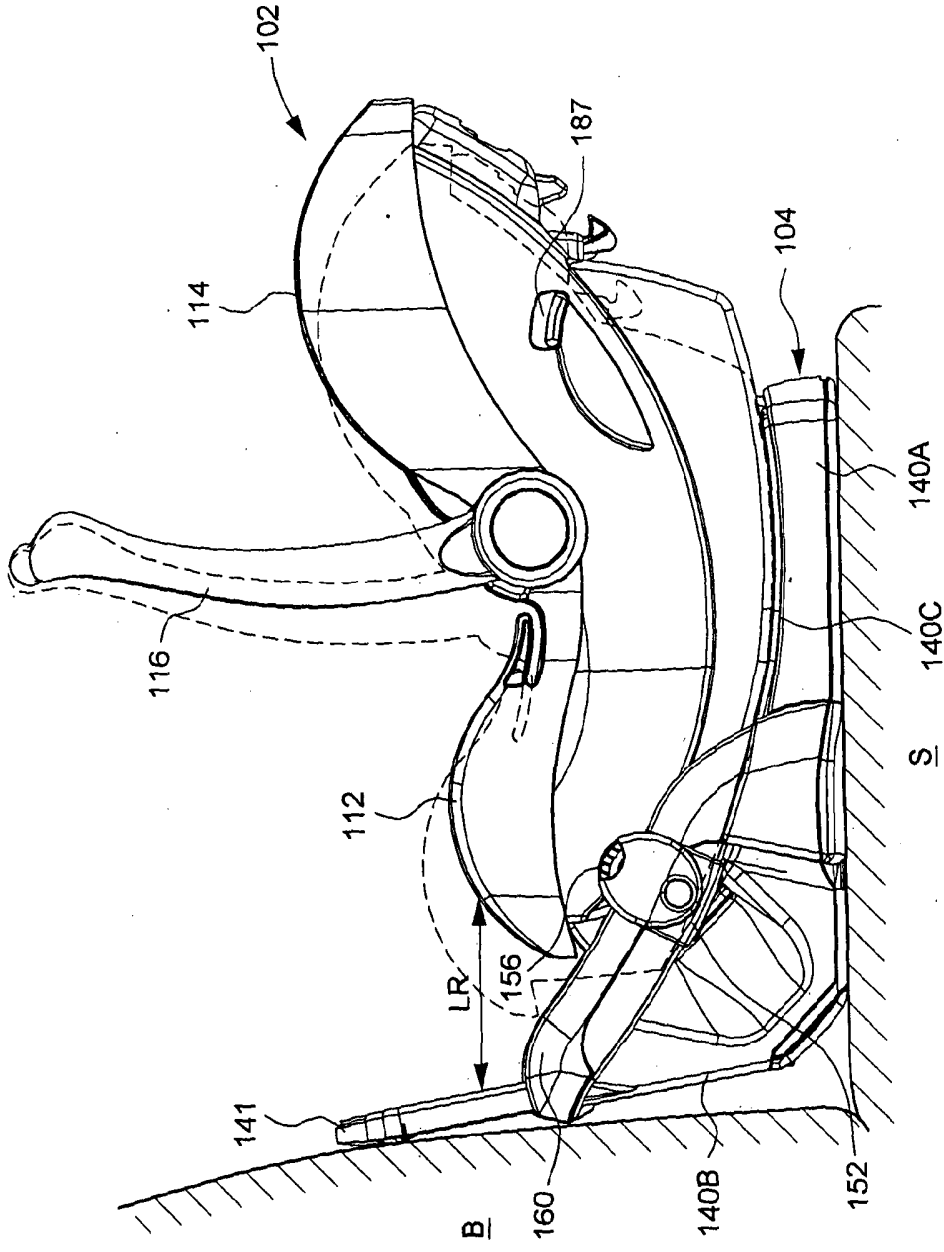


FIG. 9

10/11

10/11


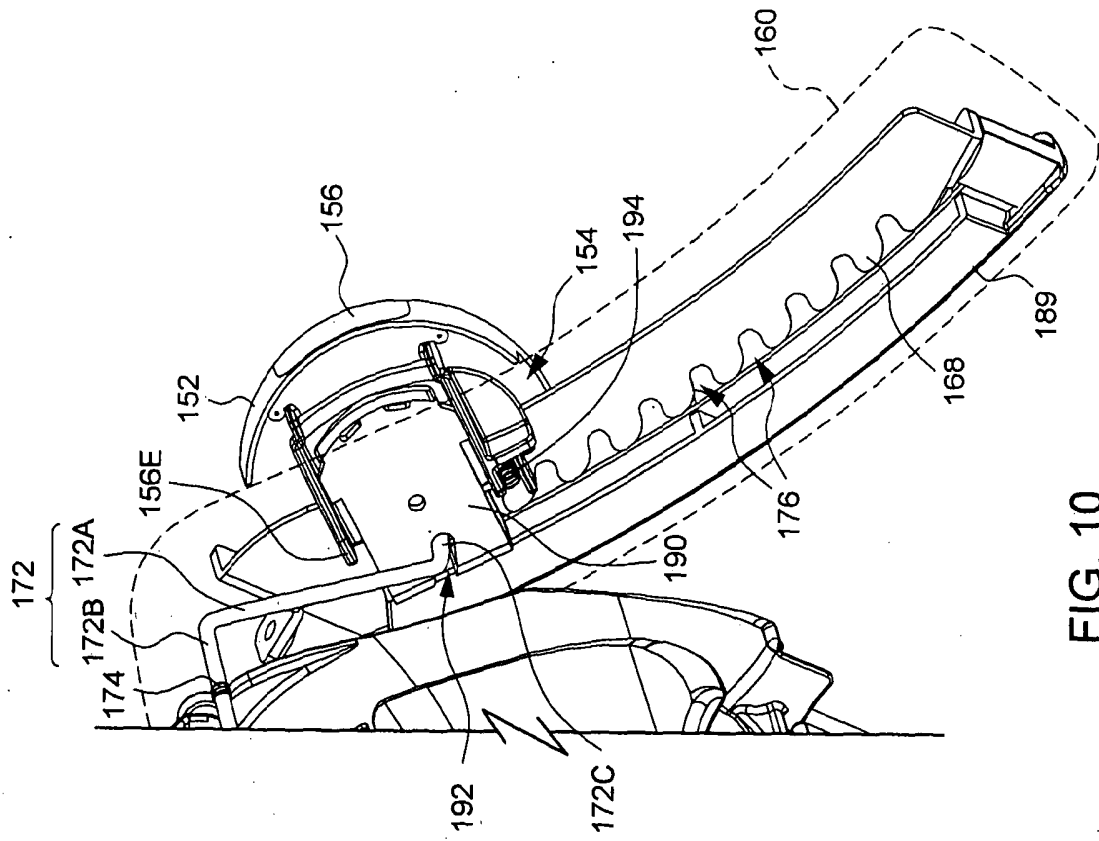


FIG. 10

11/11

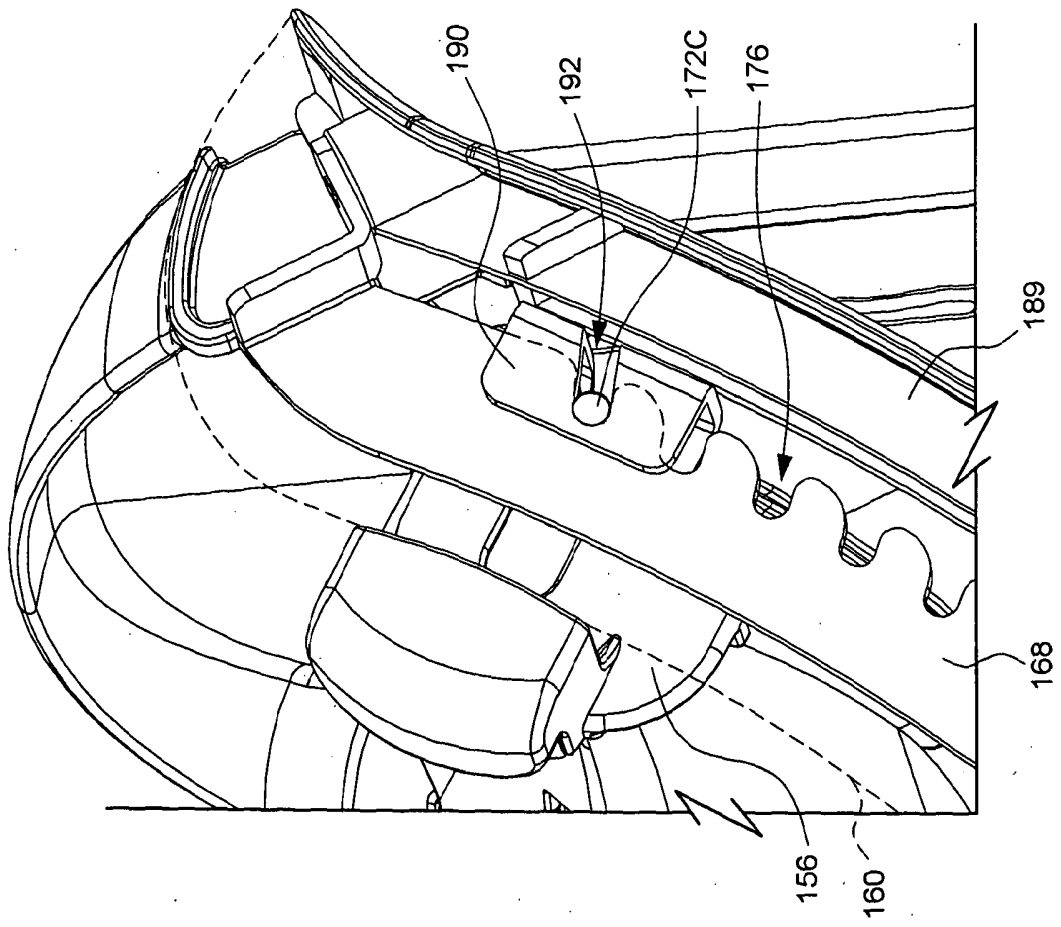

|||

FIG. 11

## CHILD SAFETY SEAT ASSEMBLY

5 [0001] This application claims priority of U.S. provisional application  
no.61/399,663 filed on July 15, 2010, U.S. provisional application no. 61/461,410 filed  
on January 18, 2011, and U.S. provisional application no. 61/518,426 filed on May 5,  
2011.

[0002] The present invention relates to child seat assemblies that include a child  
10 seat and a base.

[0003] Conventionally, an automobile vehicle has seatbelts provided at the front  
and rear seats. The seatbelt generally includes shoulder and lap straps that may be  
fastened with an anchor point of the vehicle to restrain and protect the occupant in case  
of collision or sudden stop of the vehicle. However, the use of the vehicle seatbelt is  
15 not adapted for a young child who has a smaller body and may not be able to sustain the  
pressure applied by the seatbelt. Therefore, safety legislations require the use of a  
child safety seat for seating a young child in a vehicle. The seatbelt of the vehicle can  
be used to secure the child safety seat which has a harness more adapted to restrain the  
young child.

20 [0004] The child safety seat can include a child seat and a base connected  
underneath the child seat. To facilitate the use of the child seat, attachment structures  
may be provided to allow the child seat to attach with and be removed from the base as  
desired. While the conventional attachment structure can effectively fasten the seat  
with the base, it may also be desirable to permit adjustment of the child seat relative to  
25 the base to suit the age and size of the child. For example, infant child safety seats

currently on the market are designed to accommodate infants from birth to 12 months, and lack the adjustments needed to comfortably and conveniently secure a 24-month old child. One of the biggest problems with current rearward facing seats is the lack of leg room provided as the child grows. Many parents may contribute the lack of leg room  
5 as the main reason for changing their child to a forward facing seat.

[0005] Therefore, there is a need for a child safety seat assembly that can permit more adequate adjustment of the leg room, and address at least the foregoing issues.

[0006] The present application describes a child safety seat assembly including a child seat and a base. In one embodiment, the base can include a first portion having  
10 a bottom adapted to provide stable resting support, and a second portion extending upward from the first portion. The child seat can be installed on the base, wherein the child seat has a seat portion and a seatback, and is movable to adjust a distance between the seat portion and a region of the second portion in front of the seat portion.

[0007] Viewed from one aspect the present invention provides a child seat  
15 assembly comprising: a base including a first portion having a bottom adapted to provide stable resting support surface, and a second portion extending upward from the first portion; and a child seat installed on the base and having a seat portion and a seatback, wherein the child seat is movable to adjust a distance between the seat portion and a region of the second portion in front of the seat portion.

20 [0008] The present application also describes a base suitable for use with a child seat. The base can comprise a shell body, and an adjustable platform movably assembled on an upper surface of the shell body, wherein the adjustable platform is adapted to attach with the child seat.

[0009] Viewed from another aspect the present invention provides a base suitable for use with a child seat, comprising: a shell body defining a guide surface; and an adjustable platform assembled with the shell body for movements along the guide surface of the shell body, wherein the adjustable platform is adapted to detachably  
5 fasten with a child seat.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, wherein:

[0010] Figure 1 is a perspective view illustrating an embodiment of a child safety seat assembly;

10 [0011] Figure 2 is a bottom view of the child seat shown in Figure 1;

[0012] Figure 3 is a schematic view of the base shown in Figure 1;

[0013] Figures 4 and 5 are enlarged views illustrating how a plurality of latches provided on the child seat respectively engage with catches provided on an adjustable platform of the base;

15 [0014] Figure 6 is a schematic view illustrating the adjustable platform of the base;

[0015] Figure 7 is a schematic view illustrating a latch mechanism provided in the base;

[0016] Figure 8 is an enlarged view of portion A shown in Figure 7;

20 [0017] Figure 9 is a side view illustrating the base installed with the child seat ;

[0018] Figures 10 and 11 are schematic views illustrating a variant construction of the aforementioned latch and release mechanisms.

[0019] Figure 1 is a perspective view illustrating an embodiment of a child safety seat assembly 100. The child safety seat assembly 100 includes a child seat 102 and a base 104. The child seat 102 can include a seat shell 110 having a seat portion 112 and a seatback 114. The seat shell 110, including the seat portion 112 and the seatback 114, can be formed in a single body by plastic molding. A handle 116 can be pivotally connected with two sides of the seat shell 110 to facilitate its carrying. In use, the child seat 102 can be either removed from the base 104, or attached therewith as shown in Figure 1.

[0020] Figure 2 is a bottom view of the child seat 102. A bottom of the child seat 102 can include two protruding rails 120, and a central recessed region 122 delimited between the two rails 120. The rails 120 can be formed at the underside of the seat portion 112, and extend to the rear of the seatback 114. A first transverse shaft 124 can be pivotally mounted between the rails 120 across the recessed region 122 at a first position adjacent to a front of the child seat 102. Two latches 126 can be respectively provided at two opposite end portions of the first transverse shaft 124, adjacent to the opposite inner sidewalls 120A of the rails 120. Each of the latches 126 can be formed as a sleeve 126A that can be affixed around the transverse shaft 124 and is provided with a radial engagement extension 126B oriented upward. A second transverse shaft 130 can be pivotally mounted between the rails 120 across the recessed region 122 at a second position behind the first transverse shaft 124. The second transverse shaft 130 is parallel to the first transverse shaft 124, and can have two



opposite end portions mounted with latch elements 126 similar to those provided on the first transverse shaft 124. While the latches 126 have been described as parts assembled on the transverse shafts 124 and 130, alternate embodiments can also have the latches respectively formed integral with the first and second transverse shafts 124 and 130. The latches 126 exposed downward in the recessed region 122 can thereby form four attachment points disposed in two symmetrical pairs adjacent to the inner sidewalls 120A of the left and right side rails 120.

[0021] Figure 3 is a schematic view of the base 104. The base 104 can include a shell body 140, and an adjustable platform 142 mounted with an upper side of the shell body 140. The shell body 140 can have a first portion 140A having an enlarged bottom to provide stable resting support, and a second portion 140B extending upward at an angle from the first portion 140A at an end of the shell body 140. The second portion 140B can include an adjustable extension 141, which may be formed as a retractable plate. The adjustable extension 141 can be operable to retract inside a receiving region in the second portion 140B, or deploy outward to upwardly extend the length of the second portion 140B. When the child seat 102 is installed on the base 104, this adjustable extension 141 may be deployed to be conveniently used as footrest for the child.

[0022] The adjustable platform 142 can include a support body 143 movably assembled at an upper side of the shell body 140. The support body 143 can have two protruding guide rails 144 that extend parallel in an axial direction of the base 104 and are adapted to receive the placement of the child seat 102. The guide rails 144 are symmetric in construction, including first grooves 146, and second grooves 148 axially

spaced apart from the first grooves 146. The first and second grooves 146 and 148 can be formed as recesses from the upper surfaces of the guide rails 144, and are sized to receive and hold the end portions of the transverse shafts 124 and 130 provided with the latches 126. Moreover, each of the first and second grooves 146 and 148 can include catches 150 with which the latches 126 can engage to lock the child seat 102 with the adjustable platform 142. In one embodiment, the catches 150 may be formed at a same side in each of the grooves 146 and 148, for example on the left side surface as shown in Figure 3.

**[0023]** Figures 4 and 5 are enlarged views illustrating how the latches 126 of the child seat 102 can respectively engage with the catches 150 in the first and second grooves 146 and 148 of the adjustable platform 142. Each of the catches 150 can be formed on a holder plate 151 having a hook-shaped portion comprised of an upper angled surface 150A and a lower surface 150B. When the child seat 102 is disposed on the adjustable platform 142, the upper angled surface 150A can respectively push away the engagement extension 126B so that each of the latches 126 can be received in the associated first and second grooves 146 and 148. Once each latch 126 is held in the associated groove, forward and backward movements as well as lateral displacements of the child seat 102 relative to the base 104 can be blocked. A torsion spring 152 mounted with the latch 126 (shown with phantom lines) can then bias the latch 126 to rotate about the transverse axis defined by the transverse shaft 130 in a first direction R1 to place the engagement extension 126B in locking engagement against the lower surface 150B of the catch 150, whereby upward removal of the child seat 102 is also blocked. The child seat 102 can be thereby locked in position with the base 104. To unlock the child seat 102, a release button 153 (better shown in Figures 1 and 2) can

be operated to drive rotation of the latches 126 in the direction R2 to disengage the engagement extensions 126B from the lower surface 150B of the catches 150. The child seat 102 then can be upwardly removed from the base 104.

[0024] Referring again to Figure 3, the adjustable platform 142 can be movably  
5 mounted with the shell body 140 for back and forth movements along a lengthwise axis of the base 104. This allows to desirably adjust the child seat 102 back and forth to suit the child's needs. For this purpose, the shell body 140 can include two elongated arms 160 that extend lengthwise symmetrically at the left and right sides of the second portion 140B. Left and right sides of the adjustable platform 142 can be provided with  
10 two sockets 152 that include guide slots 154 through which the arms 160 are respectively mounted. The sockets 152 can be movable along the arms 160 as the adjustable platform 142 is adjusted back and forth relative to the shell body 140. In addition, each of the sockets 152 can be provided with a release button 156 that is connected with a latch mechanism operable to securely hold the adjustable platform 142  
15 at multiple positions. One or both of the two release buttons 156 can be operated to unlock the latch mechanism and permit movements of the adjustable platform 142 relative to the shell body 140. One embodiment of the latch mechanism is described hereafter with reference to Figures 6 through 8.

[0025] Figure 6 is a schematic view illustrating a construction of the support  
20 body 143, Figure 7 is a schematic view illustrating a latch mechanism 161 provided between the shell body 140 and the adjustable platform 142 (for clarity, the support body 143 of the adjustable platform 142 is omitted in Figure 7), and Figure 8 is an enlarged view of portion A in Figure 7 to illustrate a release mechanism 180 operable to

unlock the latch mechanism 161. Referring to Figures 6 and 7, the support body 143 can be movably mounted on a guide surface 140C of the shell body 140. The support body 143 can be integrally formed by plastic molding having an upper side provided with the guide rails 144, and left and right sides provided with coupling shells 162.

5 Each of the coupling shells 162 can have an inner side provided with one or more snap fingers 164. When the adjustable platform 142 is assembled with the shell body 140, the support body 143 can be placed between the arms 160 of the shell body 140, and the sockets 152 can be respectively affixed with the coupling shells 162 from the outer side of the arms 160 by engagement of the snap fingers 164 with associated openings 152A

10 on the sockets 152.

**[0026]** As better shown in Figure 7, the holder plates 151 can be respectively affixed with the support body 143 at an inner side of the guide rails 144 to provide the catches 150 in the recessed grooves 146 and 148. Some of these holder plates 151 can be used to connect certain parts of the latch mechanism 161 as described hereafter.

15 **[0027]** Referring to Figures 7 and 8, the latch mechanism 161 can include one or more elongated racks 168 (two racks are shown), one or more latching elements 170 adapted to engage with the racks 168, one or more bar linkages 172 respectively coupled with the latching elements 170, and one or more springs 174. The racks 168 can be affixed on the guide surface 140C of the shell body 140 at two parallel positions

20 below the support body 143. Each of the racks 168 can have an elongated shape, and include a plurality of locking positions distributed lengthwise and adapted to engage with one associated latching element 170. In one embodiment, the locking positions can be formed by grooves 176 formed oriented upward in the rack 168. However,

other structures may be possible. For example, the locking positions may also be formed as protrusions adapted to receive the engagement of the latching element 170.

[0028] The latching elements 170 can be pivotally assembled with the support body 143 of the adjustable platform 142, and are operable to engage with any of the grooves 176 to lock the adjustable platform 142 in position. In this embodiment, the latching elements 170 can be pivotally connected with the support body 143 via the bar linkages 172, respectively. In one embodiment, each bar linkage 172 can have a generally L-shape including a side segment 172A, and a transverse segment 172B that can extend generally parallel to the width direction of the base 104. Each latching element 170 can be affixed with the transverse segment 172B of one bar linkage 172 at a position proximate to one associated rack 168. The transverse segment 172B can be pivotally connected with one holder plate 151 that is affixed adjacent to the recessed groove 146. Each bar linkage 172 can be thereby operable independently to rotate about a transverse axis relative to the support body 143 so as to drive locking and unlocking rotations of the associated latching element 170. It is worth noting that alternate embodiments may also have the transverse segments 172B of the two bar linkages 172 joined with each other so as to form a unitary bar linkage. With this construction, the two latching elements 170 can be driven in a concurrent manner via the unitary bar linkage for locking and unlocking operations.

[0029] The spring 174 can be a torsion spring mounted around the transverse segment 172B of each bar linkage 172 and having a first end anchored with the support body 143, and a second end anchored with the transverse segment 172B or the latching element 170. The biasing action of the spring 174 can urge the latching element 170 to

engage with a corresponding groove 176. To disengage the latching elements 170 from the grooves 176, the two release buttons 156 can be respectively operated to drive reverse rotation of the linkages 172 via two release mechanisms 180 (better shown in Figure 8) interacting with the latching elements 170.

5 [0030] Referring to Figure 8, the release mechanism 180 can include the release button 156, a lever 182, and a spring 184. This same release mechanism 180 can be respectively assembled between the socket 152 and the coupling shell 162 of the support body 143 (better shown in Figure 6) at the left and right sides of the adjustable platform 142. The release button 156 is assembled with the socket 152 for upward and  
10 downward movements. The release button 156 can have a shape that partially wraps around the associated arm 160, including an actuator portion 156A positioned above the arm 160, and an extension 156B lying at an inner side of the arm 160 adjacent to one side segment 172A of the bar linkage 172. The extension 156B can have a protruding lip 156C to which the spring 184 is connected along the direction of displacement of the  
15 release button 156, and a side shoulder portion 156D.

[0031] Referring to Figures 6 and 8, the lever 182 can be pivotally connected with a pin 186 protruding from an inner side of the coupling shell 162. The lever 182 can have a first end 182A located below the shoulder portion 156D, and a second end 182B that can come into contact against one side segment 172A of the bar linkage  
20 172 at a side opposite to the first end 182A. The lever 182 can be thereby driven by either of the release button 156 and the bar linkage 172 in rotation about a pivot axis Y defined by the pin 186.

[0032] The spring 184 can be restrainedly positioned in a guide slot 188 formed in the coupling shell 162. The spring 184 can have a first end anchored against a bottom surface of the coupling shell 162, and a second end anchored with the lip 156C of the release button 156. The spring 184 can be operable to bias the release button 5 156 upward.

[0033] With the above construction, the release mechanisms 180 can be movable with the support body 143 when the platform 142 is adjusted in position. Each of the release mechanisms 180 can be independently operated to unlock the associated latching element 170. In case the two latching elements 170 are coupled 10 with each other via a unitary bar linkage, only one release mechanism 180 can be actuated to unlock the latch mechanism 161.

[0034] Exemplary operation of the adjustable platform 142 is described hereafter with reference to Figures 3, 7 and 8. The springs 174 can respectively bias the latching elements 170 to rotate in a first direction  $r_1$  so that end portions of the 15 latching elements 170 can engage with a corresponding pair of the grooves 176 on the racks 168. The adjustable platform 142 can be thereby locked in place with the shell body 140.

[0035] To modify the position of the adjustable platform 142, the two release buttons 156 can be simultaneously pressed downward. As the release buttons 156 20 move downward, the springs 184 are compressed, and the shoulder portions 156D of the release buttons 156 can respectively press against the first ends 182A to drive rotation of the levers 182 about their respective pivot axes Y. Each rotating lever 182 in turn causes the associated bar linkage 172 to rotate in a second direction  $r_2$  owing to the

contact between the second end 182B of the lever 182 and the side segment 172A of the bar linkage 172, which in turn can cause each latching element 170 to rotate in the same direction r2 and disengage from the associated rack 168. Being unlocked, the adjustable platform 142 then can be moved forward or rearward along the guide surface 140C of the shell body 140. It is worth noting that in case the two latching elements 170 are coupled with each other (e.g., by joining the two bar linkage 172 to form a unitary linkage), only one of the two release buttons 156 can be pressed downward to drive concurrent disengagement of the two latching elements 170 and unlocking of the adjustable platform 142.

10 **[0036]** In one embodiment, the guide surface 140C on which the support body 143 rests can extend substantially along the lengthwise axis of the shell body 140. Accordingly, the adjustable platform 142 can be moved along the guide surface 140C to effectively increase or reduce a distance between the adjustable platform 142 and the second portion 140B. The guide surface 140C can also have a curved profile to form  
15 an arc-shaped slope that rises gently and continuously from the first portion 140A in a direction toward the second portion 140B. The profile of the elongated arms 160 can also be curved to generally match with the slope of the guide surface 140C. Accordingly, the general inclination of the adjustable platform 142 can be changed as it slides along the guide surface 140C.

20 **[0037]** Once the platform 142 is adjusted to a desired position, the springs 174 can bias the latching elements 170 to rotate in the first direction r1 to engage with a corresponding pair of the grooves 176 on the racks 168. In the meantime, the springs 184 can push the release buttons 156 upward to recover their initial state.



[0038] In conjunction with Figure 1, Figure 9 is a side view illustrating the base 104 installed with the child seat 102. When the child seat 102 is installed oriented toward the second portion 140B (i.e., the front of the child seat 102 is oriented toward the second portion 140B), a leg room LR for placement of the child's legs can be defined between the front edge of the seat portion 112 and the second portion 140B of the shell body 140 visible in front of the seat portion 112. This assembly of the child seat 102 with the base 104 can be installed on a vehicle seat S in a rearward facing configuration, i.e., the second portion 140B is placed adjacent to the seatback B of the vehicle seat S and the front of the child seat 102 is facing rearward. To adjust the leg room LR in accordance with the size of the child's legs, the child seat 102 can be axially moved along a path substantially parallel to the guide surface 140C of the base 104 via the adjustable platform 142 for modifying the distance between the seat portion 112 and a region of the second portion 140B in front of the seat portion 112. For example, the adjustable platform 142 and the child seat 102 can be moved toward the second portion 140B to reduce the leg room LR (as shown with phantom lines), and away from the second portion 140B to increase the leg room LR. Owing to the configuration of the guide surface 140C, the adjustable platform 142 and the entire child seat 102 can be effectively displaced along the support surface of the vehicle seat S on which the base 104 rests, which allows to substantially increase the leg room LR if needed. Owing to the curved shape of the guide surface 140C, the general inclination of the child seat 102 can also be modified when the leg room LR is adjusted: the rearward inclination of the child seat 102 can increase as the child seat 102 is adjusted toward the second portion 140B of the shell body 140, and reduced when the child seat 102 is displaced away from the second portion 140B. Dual-zone recline indicators 187

can also be provided on both sides of the child seat 102 to indicate developmentally-appropriate ranges of use. The use of the child seat assembly can be therefore facilitated.

[0039] It will be understood that many variations or modifications to the  
5 aforementioned constructions can be possible. Figures 10 and 11 are schematic views illustrating a variant construction of the aforementioned latch and release mechanisms. For clarity, the representation of the support body 143 is omitted and the arm is shown with dotted lines in Figures 10 and 11. Moreover, the socket 152 is omitted in Figure 11. In this embodiment, each of the arms 160 of the shell body 140 can have an inner  
10 cavity. Each rack 168 can be respectively affixed in the inner cavity of one arm 160 via a bracket 189 with the grooves 176 oriented downward. In this embodiment, the side segment 172A of each bar linkage 172 (which is pivotally connected with the support body 143 like described previously) can include an outer lateral extension that forms a latching element 172C adapted to engage with any of the grooves 176 from the  
15 underside of the rack 168. The latching element 172C can be guided in movement through a slot 192 of a guide plate 190 affixed with the support body 143 at a location adjacent to the release button 156. In this embodiment, no lever 182 (as shown in Figure 8) is provided. When the release button 156 is pressed downward, a side edge 156E of the release button 156 can directly contact with the side segment 172A and  
20 drive rotation of the bar linkage 172 to disengage the latching element 172C from the rack 168. When the pressure on the release button 156 is removed, the spring 174 can bias the bar linkage 172 to rotate in a reverse direction to engage the latching element 172C with the rack 168 for locking the adjustable platform 142 in position. A spring

194 may also be connected with the release button 156 to bias it upward when the latching element 172C engages with the rack 168.

[0040] At least one advantage of the structures described herein is the ability to provide a base that allows to conveniently adjust the recline angle of the child seat and the leg room at the same time without changing the attachment to the vehicle. This can be achieved by providing a base that can have an adjustable platform adapted to hold the child seat, and operable to modify the axial position of the child seat relative to the base to adjust the leg room in accordance with the size of the child's legs. The adjustable platform can be operated with a simple push-button mechanism conveniently provided on both sides of the base.

[0041] Realizations in accordance with the present invention therefore have been described only in the context of particular embodiments. These embodiments are meant to be illustrative and not limiting. Many variations, modifications, additions, and improvements are possible. Accordingly, plural instances may be provided for components described herein as a single instance. Structures and functionality presented as discrete components in the exemplary configurations may be implemented as a combined structure or component. These and other variations, modifications, additions, and improvements may fall within the scope of the invention as defined in the claims that follow.

**CLAIMS:**

1. A child seat assembly comprising:  
a base including a first portion having a bottom adapted to provide stable resting support surface, and a second portion extending upward from the first portion; and  
5 a child seat installed on the base and having a seat portion and a seatback, wherein the child seat is movable to adjust a distance between the seat portion and a region of the second portion in front of the seat portion.
2. The child seat assembly according to claim 1, wherein the base includes:  
10 a shell body defining a guide surface; and  
an adjustable platform movably assembled with the shell body and adapted to attach with the child seat.
3. The child seat assembly according to claim 2, wherein the guide surface forms an arc-shaped slope that extends along a lengthwise axis of the shell body and  
15 continuously rises in a direction toward the second portion.
4. The child seat assembly according to claim 2 or 3, wherein the adjustable platform is movable with the child seat relative to the shell body to adjust the distance between the seat portion and the region of the second portion in front of the seat portion.
5. The child seat assembly according to any preceding claim, wherein the seat  
20 portion has an underside provided with a plurality of latches operable to lock with the base.

6. The child seat assembly according to claim 2 or any claim dependent from claim 2, wherein the adjustable platform is locked with the shell body via a latch mechanism including:

an elongated rack including a plurality of lock positions, wherein the rack is

5 affixed with the shell body; and

a latching element pivotally connected with the adjustable platform;

wherein the latching element is adapted to engage with one of the lock positions to lock the adjustable platform in position relative to the shell body.

10 7. The child seat assembly according to claim 6, wherein the latch mechanism further includes:

a torsion spring configured to bias the latching element into engagement with the rack.

8. The child seat assembly according to claim 6 or 7, wherein the latch mechanism  
15 further includes a bar linkage having a transverse segment extending generally parallel to a width direction of the base and pivotally connected with the adjustable platform, the latching element being affixed with the transverse segment of the bar linkage.

9. The child seat assembly according to claim 8, wherein the bar linkage further includes a side segment connected with the transverse segment, and the base includes a  
20 release mechanism comprising:

a release button assembled with the adjustable platform at a position adjacent to the side segment, wherein the release button is operable to drive rotation of the bar linkage to disengage the latching element from the rack.

10. The child seat assembly according to claim 9, wherein the release mechanism  
5 further includes:

a lever pivotally connected with the adjustable platform, wherein the lever has a first end adapted to contact with the release button, and a second end adapted to contact with the side segment;

wherein the release button is operable to drive the bar linkage in rotation via the  
10 lever to disengage the latching element from the rack.

11. The child seat assembly according to claim 9 or 10, wherein the shell body includes an elongated arm, and the adjustable platform includes a socket to which the release button is mounted, the socket having a slot through which the arm is mounted.

12. The child seat assembly according to claim 2, wherein the shell body includes an  
15 elongated arm, and the adjustable platform includes a socket that is mounted on the arm, the socket is movable along the arm when the adjustable platform is adjusted back and forth relative to the shell body.

13. The child seat assembly according to claim 12, wherein the guide surface forms an arc-shaped slope that extends along a lengthwise axis of the shell body and  
20 continuously rises in a direction toward the second portion, and the elongated arm is curved to generally match with the slope of the guide surface.

14. The child seat assembly according to claim 12 or 13, wherein the base further includes:
- a latch mechanism mounted between the shell body and the adjustable platform and operable to lock the adjustable platform with the shell body; and
  - 5 a release mechanism mounted adjacent to the socket and operable to unlock the latch mechanism.
15. The child seat assembly according to any preceding claim, being adapted for installation on a vehicle seat with the second portion positioned adjacent to a backrest of the vehicle seat.
- 10 16. A base suitable for use with a child seat, comprising:
- a shell body defining a guide surface; and
  - an adjustable platform assembled with the shell body for movements along the guide surface of the shell body, wherein the adjustable platform is adapted to detachably fasten with a child seat.
- 15 17. The base according to claim 16, wherein the shell body further includes a first portion having an enlarged bottom to provide stable resting support, and a second portion extending upward at an angle from the first portion, and the guide surface forms an arc-shaped slope that extends along a lengthwise axis of the shell body and continuously rises in a direction toward the second portion, whereby a movement of the
- 20 adjustable platform relative to the shell body simultaneously adjusts a distance between the adjustable platform and a region of the second portion and an inclination of the adjustable platform relative to the shell body.

18. The base according to claim 16 or 17, further including:

an elongated rack including a plurality of lock positions, wherein the rack is  
affixed with the shell body;

a latching element movably connected with the adjustable platform, wherein the

5 latching element is operable to engage with one of the lock positions to  
lock the adjustable platform with the shell body; and

a release button assembled with the adjustable platform, the release button being  
operable to drive latching element to disengage from the rack.


19. The base according to claim 18, wherein the shell body includes an elongated  
10 arm, and the adjustable platform includes a socket that is mounted on the arm and is  
mounted with the release button, the socket being movable along the arm when the  
adjustable platform is moved along the guide surface.

20. The base according to any of claims 17 to 19, being adapted for installation on a  
vehicle seat with the second portion positioned adjacent to a backrest of the vehicle seat.

15 21. A child seat assembly substantially as hereinbefore described with reference to  
the accompanying drawings.

22. A base suitable for use with a child seat, substantially as hereinbefore described  
with reference to the accompanying drawings.





**Application No:** GB1112074.8

**Examiner:** Melanie Bull

**Claims searched:** 1-15, 21

**Date of search:** 25 October 2011

**Patents Act 1977: Search Report under Section 17**

**Documents considered to be relevant:**

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	1-3, 5, 15	US2010/007187 A1 (WONDERLAND) See especially Figures 9-15.
X	1, 2, 4, 15	EP1110807 A1 (COMBI CO) See especially Figures 1, 3, 4 and 12.
X	1, 5, 15	EP0822115 A2 (BRITAX) See especially Figures 5a-5c.
X	1, 5, 15	GB2444833 A (WONDERLAND) See especially Figure 10.
X	1, 15	EP0164909 A2 (ASE UK LTD) See especially Figures 1-3.
X	1, 15	FR2741847 A1 (BABY RELAX) See especially Figures 5a-5c.

**Categories:**

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

**Field of Search:**


Search of GB, EP, WO & US patent documents classified in the following areas of the UKC<sup>X</sup> :

Worldwide search of patent documents classified in the following areas of the IPC

A47D; B60N; B62B

The following online and other databases have been used in the preparation of this search report

WPI, EPODOC, TXTE



**International Classification:**

<b>Subclass</b>	<b>Subgroup</b>	<b>Valid From</b>
B60N	0002/28	01/01/2006