

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関  
国際事務局

(43) 国際公開日  
2018年4月5日(05.04.2018)



(10) 国際公開番号


WO 2018/062267 A1

- (51) 国際特許分類:  
*C09D 201/00* (2006.01)    *C09D 5/20* (2006.01)  
*B32B 27/00* (2006.01)    *C09D 183/04* (2006.01)  
*C09D 5/00* (2006.01)    *E02B 1/00* (2006.01)  
*C09D 5/16* (2006.01)
- (21) 国際出願番号:                    PCT/JP2017/034951
- (22) 国際出願日:                    2017年9月27日(27.09.2017)
- (25) 国際出願の言語:                    日本語
- (26) 国際公開の言語:                    日本語
- (30) 優先権データ:  
特願 2016-191401    2016年9月29日(29.09.2016) JP
- (71) 出願人: 日東電工株式会社 (NITTO DENKO CORPORATION) [JP/JP]; 〒5678680 大阪府茨木市下穂積1丁目1番2号 Osaka (JP).
- (72) 発明者: 鈴木 聡 (SUZUKI Satoru); 〒5678680 大阪府茨木市下穂積1丁目1番2号 日東電工株式会社内 Osaka (JP). 小川 知哉 (OGAWA Tomoya); 〒5678680 大阪府茨木市下穂積1丁目1番2号 日東電工株式会社内 Osaka (JP). 内藤 友也 (NAITO Tomonari); 〒5678680 大阪府茨木市下穂積1丁目1番2号 日東電工株式会社内 Osaka (JP). 倉田 直記 (KURATA Naoki); 〒5678680 大阪府茨木市下穂積1丁目1番2号 日東電工株式会社内 Osaka (JP). 吉江 里美 (YOSHIE Satomi); 〒5678680 大阪府

(54) Title: COATING FILM FOR STRUCTURE, COATING MATERIAL SET FOR FORMING COATING FILM, COATING MATERIAL FOR UNDERCOAT LAYER, AND COATING METHOD

(54) 発明の名称: 構造物上の塗膜、塗膜を形成するための塗料セット及び下塗層用塗料並びに塗工方法

FIG.1

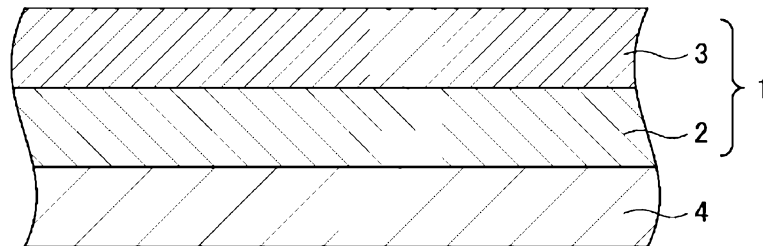

(57) Abstract: The purpose of the present invention is to provide a coating film which is removable in a sheet and makes removing easy, and is not susceptible to peeling even when used for a long period of time on an underwater structure. Provided is a coating film that comprises an undercoat layer that adheres to an underwater structure, and an antifouling layer that adheres to the undercoat layer. The degree of peeling of the coating film underwater at a constant load of 100 grams is less than 5 (mm/20mm), and the ratio of the tensile rupture strength (N/20mm) after submersion for 5 weeks in 60 ° C pure water relative to the adhesive force (N/20mm) with the underwater structure is 1.5 or greater. The degree of stretching and peeling of a 1 mm square crosscut piece of the antifouling layer with respect to the undercoat layer is 0.05 or lower.

(57) 要約: 本発明の目的は、シート剥離可能で、除去作業を容易にすると共に、水中構造物において長時間使用しても剥離しにくい塗膜を提供することにある。水中構造物に接着する下塗層と、下塗層に接着する防汚層とを備え、100グラム水中定荷重剥離度が、5 (mm/20mm) 未満であり、60℃の純水に5週間浸漬した後における引張破断強度 (N/20mm) の、水中構造物との接着力 (N/20mm) に対する比率が、1.5以上であり、防汚層の下塗層に対する1mm四方クロスカット延伸剥離度が、0.05以下であることを特徴とする塗膜を提供する。



WO 2018/062267 A1

茨木市下穂積 1 丁目 1 番 2 号 日東電工株式会社内 Osaka (JP). 長尾 浩平(NAGAO Kohei); 〒5678680 大阪府茨木市下穂積 1 丁目 1 番 2 号 日東電工株式会社内 Osaka (JP).

(74) 代理人: 田中 伸一郎, 外(TANAKA Shinichiro et al.); 〒1008355 東京都千代田区丸の内 3 丁目 3 番 1 号 新東京ビル 中村合同特許法律事務所 Tokyo (JP).

(81) 指定国(表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) 指定国(表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

添付公開書類:

- 一 国際調査報告 (条約第21条(3))

## DESCRIPTION

### TITLE OF INVENTION

Coating film for structure, set of coating materials for forming coating film,  
5 coating material for undercoat layer, and coating method

### TECHNICAL FIELD

[0001]

The present invention relates to a coating film for preventing contaminants  
10 from adhering to a structure to protect the structure, particularly, a coating film for  
preventing the adherence of aquatic organisms to an underwater structure, and to a  
coating material for forming the coating film, and a method for forming the coating  
film. To be more specific, the present invention relates to a coating film, a coating  
material and a method for preventing aquatic organisms from adhering to and  
15 propagating on an underwater structure, for example, a boat/ship, a buoy, a harbor  
facility, a offshore oilfield facility, a water conduit for power plant cooling water, a  
water-floating walkway, a water gate, an underwater sensor, an underwater camera, an  
underwater light, an underwater pump, an underwater pipe, an underwater power  
generation facility (e.g., a tidal current power generation facility, an ocean current  
20 power generation facility, a wave-power generation facility, or a on-sea wind-power  
generation facility), an underwater rotor such as a propeller or screw, or one of various  
underwater anchorage devices such as an underwater wire.

### BACKGROUND ART

25 [0002]

In an underwater structure such as a boat/ship, aquatic organisms such as  
barnacles, oysters, blue mussels, Hydra, serpulas, sea squirts, bryozoans, sea lettuces,  
green lavers and periphytic diatoms, can adhere to and propagate on a portion thereof in  
contact with water. Such aquatic organisms cause poor machine performance of a  
30 facility such as decrease in heat conductivity, and poor aesthetic appearance of a

sightseeing facility or a boat/ship. Particularly, in a boat/ship, they increase a fluid resistance, leading to slowdown in speed or deterioration in fuel economy of the boat/ship. Moreover, aquatic organisms adhering to a boat/ship can be spread over other areas, resulting in becoming a factor leading to disturbance to water environment.

5 [0003]

In the light of such circumstances, in the following Patent Document 1, there is disclosed an antifouling coating material to be coatingly applied onto a surface of an underwater structure to prevent aquatic organisms from adhering onto the underwater structure. Differently from conventional techniques, this antifouling coating material uses a composition having low toxicity, which is enabled by utilizing a photocatalyst. Further, as a measure against a problem that a composition having an antifouling effect is enclosed by a binder, resulting in loss of the effect, the antifouling coating material comprises an antifoulant-containing layer provided on the side of the surface of the underwater structure, and an adhesive provided such that it can be interposed between the antifoulant-containing layer and the surface of the structure to bond them together,

15

[0004]

Further, in the following Patent Document 2, there is disclosed an invention which provides an antifouling composition containing: bis(dimethyldithiocarbamoyl) zinc ethylenebis(dithiocarbamate); (meth) acrylate resin; polyether silicone having a number average molecular weight of 500 to 20,000; and a monobasic acid having a molar weight of 250 or more, or a metal salt thereof. This antifouling composition is intended to improve not only an antifouling property but also storage stability.

20

#### CITATION LIST

25 [Parent Document]

[0005]

Patent Document 1: JP 2001-220524A

Patent Document 2: JP 2002-80778A

30 SUMMARY OF INVENTION

[Technical Problem]

[0006]

However, in the conventional coating materials, it is necessary to remove an old coating film due to degradation in antifouling performance thereof. Work of removing such an old coating film is hard and high in cost, because of the need to remove the coating film by grinding and others. For example, in the antifouling coating material, an old coating film needs to be removed by solving the adhesive using an organic solvent, so that it is necessary to take a lot of time and effort. On the other hand, in the Patent Document 2, there is no disclosure about peeling off the coating film in the shape of sheet, although it makes mention of easiness to remove the antifouling coating material. Therefore, the coating film removal work still involves difficulties. After all, the Patent Document 2 discloses only an invention in which the coating film is removed by grinding, so that the removal work according to this invention can be deemed to be hard and high in cost.

15 [0007]

Further, the invention disclosed in the Patent Document 2 is intended to extend an effective life of the coating film, wherein an approach to extend the effective life is to moderate degradation in the antifouling performance. However, when the underwater structure is used for long periods of time, adhesive force decreases, and thereby the coating film becomes likely to peel. Particularly, in the case where the underwater structure is a structure movable in water, such as a boat/ship, the coating film can peel from the underwater structure because it receives resistance from water.

[0008]

Further, in a general structure other than the underwater structure, e.g., in an on-land structure, such as a roof or an external wall, it is also expected to develop a coating material providing a coating film which is less likely to peel even after being exposed to weather, and is capable to being easily peeled off and replaced to new one when damaged.

[0009]

30 Therefore, the present invention has been made to solve the above problems,

and an object thereof is to provide a coating film which is capable of being peeled off in the shape of sheet to facilitate a coating film removal work, and is less likely to peel even after long periods of use on, e.g., an underwater structure which involves traveling under water, or an underwater structure which remains still and receives a water flow resistance, such as an underwater structure which is used in places where it receives angry waves. It is another object of the present invention to provide a set of coating materials for forming the coating film having the above properties, and a method for forming the coating film. It is yet another object of the present invention to provide an undercoat layer-forming coating material for forming a coating film which is less likely to peel and is capable of facilitating a coating film peel-off work, even when it is used on any structure other than an underwater structure.

[Solution to Technical Problem]

[0010]

According to a first aspect of the present invention, there is provided a coating film on a structure. The coating film comprises an undercoat layer to be bonded to the structure, and an antifouling layer bonded to the undercoat layer, wherein: a 100-gram underwater constant load peeling degree of the coating film is less than 5 (mm/20 mm); a ratio of a tensile breaking strength (N/20 mm) of the coating film to an adhesive force (N/20 mm) of the coating film with respect to an underwater structure, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more; and a 1-mm square cross-cut stretching-caused peeling degree of the antifouling layer with respect to the undercoat layer is 0.05 or less.

[0011]

In the coating film according to the first aspect of the present invention, the undercoat layer preferably comprises an elastomer. More preferably, with a view to improving adhesion with respect to the antifouling layer, the elastomer is modified by a compound containing a polar group. Particularly, from a viewpoint of being resistant to degradation, the antifouling layer comprises a silicone resin.

[0012]

The 100-gram underwater constant load peeling degree is preferably less than 3, more preferably less than 1, still more preferably less than 0.5, further preferably less than 0.2, much further preferably less than 0.1, most preferably 0.0. The ratio is preferably 3.0 or more, more preferably 5.0 or more, still more preferably 15 or more.

5 The 1-mm square cross-cut stretching-caused peeling degree is preferably 0.04 or less, more preferably 0.03 or less, still more preferably 0.01, most preferably 0.00. The adhesive force is preferably from 4.0 to 15.

[0013]

According to a second aspect of the present invention, there is provided a set of  
10 coating materials for forming a coating film which comprises an undercoat layer to be bonded to a structure, and an antifouling layer bonded to the undercoat layer, the set of coating materials comprising an undercoat layer-forming coating material for forming the undercoat layer, and an antifouling layer-forming coating material for forming the antifouling layer, wherein, when the undercoat layer-forming coating material is bonded  
15 as a layer having a thickness of 150  $\mu\text{m}$  to PMMA (poly(methyl methacrylate)), and the antifouling layer-forming coating material is bonded as a layer having a thickness of 100  $\mu\text{m}$  to the layer of the undercoat layer-forming coating material to form the coating film, a 100-gram underwater constant load peeling degree of the coating film is less than 5 (mm/20 mm); a ratio of a tensile breaking strength (N/20mm) of the coating film  
20 to an adhesive force (N/20mm) of the coating film with respect to the PMMA, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more; and a 1-mm square cross-cut stretching-caused peeling degree of the layer of the antifouling layer-forming coating material with respect to the layer of the undercoat layer-forming coating material is 0.05 or less.

25 [0014]

In the set of coating materials according to the second aspect of the present invention, the undercoat layer-forming coating material preferably comprises an elastomer, i.e., a thermoplastic elastomer or a thermosetting elastomer. Particularly preferably, the elastomer is a thermoplastic elastomer. More preferably, with the view  
30 to improving adhesion with respect to the antifouling layer, the elastomer is modified by

a compound containing a polar group. Particularly, from the viewpoint of being resistant to degradation, the antifouling layer-forming coating material comprises a silicone resin.

[0015]

5           The 100-gram underwater constant load peeling degree is preferably less than 3, more preferably less than 1, still more preferably less than 0.5, further preferably less than 0.2, much further preferably less than 0.1, most preferably 0.0. The ratio is preferably 3.0 or more, more preferably 5.0 or more, still more preferably 15 or more. The 1-mm square cross-cut stretching-caused peeling degree is preferably 0.04 or less,  
10 more preferably 0.03 or less, still more preferably 0.01, most preferably 0.00. The adhesive force is preferably from 4.0 to 15.

[0016]

          According to a third aspect of the present invention, there is provided a method for forming a coating film which comprises an undercoat layer to be bonded to a  
15 structure, and an antifouling layer bonded to the undercoat layer, the method comprising the steps of: applying an undercoat layer-forming material to the structure to form the undercoat layer; and applying an antifouling layer-forming material to the undercoat layer to form the antifouling layer,

          wherein, when the undercoat layer-forming coating material is bonded as a  
20 layer having a thickness of 150  $\mu\text{m}$  to PMMA (poly(methyl methacrylate)), and the antifouling layer-forming coating material is bonded as a layer having a thickness of 100  $\mu\text{m}$  to the layer of the undercoat layer-forming coating material to form the coating film,

          a 100-gram underwater constant load peeling degree of the coating film is less  
25 than 5 (mm/20 mm);

          a ratio of a tensile breaking strength (N/20 mm) of the coating film to an adhesive force (N/20 mm) of the coating film with respect to the PMMA, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more; and

          a 1-mm square cross-cut stretching-caused peeling degree of the layer of the  
30 antifouling layer-forming coating material with respect to the layer of the undercoat



layer-forming coating material is 0.05 or less.

[0017]

In the method according to the third aspect of the present invention, the undercoat layer-forming coating material preferably comprises an elastomer, i.e., a thermoplastic elastomer or a thermosetting elastomer. Particularly preferably, the elastomer is a thermoplastic elastomer. More preferably, with the view to improving adhesion with respect to the antifouling layer, the elastomer is modified by a compound containing a polar group. Particularly, from the viewpoint of being resistant to degradation, the antifouling layer-forming coating material comprises a silicone resin.

10 [0018]

The 100-gram underwater constant load peeling degree is preferably less than 3, more preferably less than 1, yet more preferably less than 0.5, still more preferably less than 0.3, further preferably less than 0.2, much further preferably less than 0.1, most preferably 0.0. The ratio is preferably 3.0 or more, more preferably 5.0 or more, still more preferably 15 or more. The 1-mm square cross-cut stretching-caused peeling degree is preferably 0.04 or less, more preferably 0.03 or less, still more preferably 0.01, most preferably 0.00. The adhesive force is preferably from 4.0 to 15.

[0019]

According to a fourth aspect of the present invention, there is provided an undercoat layer-forming coating material for forming an undercoat layer comprised in a coating film, wherein the coating film further comprises an antifouling layer made of a silicone resin and bonded to the undercoat layer, and the undercoat layer is bonded to a structure, and wherein, when the undercoat layer-forming coating material is bonded as a layer having a thickness of 150  $\mu\text{m}$  to PMMA (poly(methyl methacrylate)), and the antifouling layer is bonded as a layer having a thickness of 150  $\mu\text{m}$  to the layer of the undercoat layer-forming coating material to form the coating film, a 100-gram underwater constant load peeling degree of the coating film is less than 5 (mm/20 mm); a ratio of a tensile breaking strength (N/20 mm) of the coating film an adhesive force (N/20 mm) of the coating film with respect to the PMMA, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more; and a 1-mm square

cross-cut stretching-caused peeling degree of the antifouling layer with respect to the layer of the undercoat layer-forming coating material is 0.05 or less.

[0020]

According to a fifth aspect of the present invention, there is provided an undercoat layer-forming coating material for forming an undercoat layer comprised in a coating film, wherein the coating film further comprises an antifouling layer made of a silicone resin and bonded to the undercoat layer, and the undercoat layer is bonded to a structure, and wherein, when the undercoat layer-forming coating material is bonded as a layer having a thickness of 150  $\mu\text{m}$  to PMMA (poly(methyl methacrylate)), and the antifouling layer is bonded to the layer of the undercoat layer-forming coating material to form the coating film, an adhesive force of the coating film with respect to the PMMA is 0.5 (N/20 mm) or more; a ratio of a tensile breaking strength (N/20 mm) of the coating film to the adhesive force (N/20mm) is 1.5 or more; and a 1-mm square cross-cut stretching-caused peeling degree of the antifouling layer with respect to the layer of the undercoat layer-forming coating material is 0.05 or less.

[0021]

In the undercoat layer-forming coating materials according to the fourth and fifth aspect of the present invention, the undercoat layer-forming coating material preferably comprises an elastomer. More preferably, with the view to improving adhesion with respect to the antifouling layer, the elastomer is modified by a compound containing a polar group.

[0022]

The 100-gram underwater constant load peeling degree is preferably less than 3, more preferably less than 1, still more preferably less than 0.5, further preferably less than 0.2, much further preferably less than 0.1, most preferably 0.0. The ratio is preferably 3.0 or more, more preferably 5.0 or more, still more preferably 15 or more. The 1-mm square cross-cut stretching-caused peeling degree is preferably 0.04 or less, more preferably 0.03 or less, still more preferably 0.01, most preferably 0.00. The adhesive force is preferably from 4.0 to 15.

30

## BRIEF DESCRIPTION OF DRAWINGS

[0023]

FIG. 1 is a schematic sectional view depicting a coating film according one embodiment of the present invention.

5 FIG. 2 is a schematic sectional view for explaining the technical meaning of an underwater constant load peeling degree.

FIG. 3 is a schematic sectional view for explaining the technical meaning of a 1-mm square cross-cut stretching-caused peeling degree.

10 FIG. 4 is a schematic sectional view for explaining a 30-knot water flow test for an undercoat layer.

FIG. 5 is a schematic sectional view for explaining a 30-knot water flow test for an antifouling layer.

FIG. 6 is a schematic sectional view for explaining a test for verifying peelability.

15

## DESCRIPTION OF EMBODIMENTS

[0024]

FIG. 1 is a schematic sectional view of a coating film 1 according to one embodiment of the present invention, which is coatingly applied on an underwater structure 4. The coating film is formed as a laminate which comprises an undercoat layer 2 and an antifouling layer 3 which are arranged in this order from the side of the underwater structure. This coating film is formed by: firstly preparing a set of coating materials which comprises a given undercoat layer-forming coating material and a given antifouling layer-forming coating material; applying the undercoat layer-forming coating material onto the underwater structure; drying the applied undercoat layer-forming coating material; applying the antifouling layer-forming coating material onto the dried undercoat layer-forming coating material; and drying the applied antifouling layer-forming coating material. The thickness of the undercoat layer is not particularly limited, but may be set depending on the intended use and the aftermentioned tensile breaking strength. For example, the thickness may be from 50

20

25

30

μm to 500 μm, preferably from 70 μm to 300 μm, more preferably from 100 μm to 200 μm. Further, because the aftermentioned tensile breaking strength mainly depends on the undercoat layer, this tensile breaking strength can be adjusted by changing the thickness of the undercoat layer. The thickness of the antifouling layer normally has almost no influence on the aftermentioned tensile breaking strength. Thus, the thickness of the antifouling layer is also not particularly limited, but may be appropriately set depending on the intended use or the like. For example, the thickness may be from 50 μm to 500 μm, preferably from 70 μm to 300 μm, more preferably from 100 μm to 200 μm.

10 [0025]

The coating film depicted in FIG. 1 has the following properties.

[0026]

< Underwater Constant Load Peeling Degree >

As used in this specification, the term "underwater constant load peeling degree" means the degree of easiness of peeling of the coating film with respect to a target adherend when the coating film receives resistance under water. Further, the term "100-gram underwater constant load peeling degree" means an amount by which the coating film is peeled from the target adherend at a time after the elapse of one hour since a load of 100 grams was imposed on the coating film under water, and more specifically, a value measured in the following manner.

20 [0027]

FIG. 2 is a schematic sectional view illustrating the technical meaning of the 100-gram underwater constant load peeling degree (mm/20 mm). The undercoat layer-forming coating material and the antifouling layer-forming coating material are sequentially applied to the target adherend in a width of 20 mm to form the coating film. In this embodiment, the formed coating film is partially peeled by a certain distance, e.g., 20 mm, and a weight member adjusted to have a weight of 100 g under water is attached to the peeled portion. Then, the coating film is immersed in pure water at 23°C in a tank, in a posture where a peel angle becomes 180 degrees. A distance [mm] over which the peeled portion is peeled from the adherend in one hour is the 100-gram

30

underwater constant load peeling degree (mm/20 mm).

[0028]

The reason that 100 g was adopted as the constant load is as follows. The following formula (1) relates to pressure resistance and is used to calculate a force  
5 arising in a plane having a width of 20 mm and a height of 500  $\mu\text{m}$  by water having a flow speed of 30 knots. In the formula, the height is 500  $\mu\text{m}$ , because a typical coating film has a thickness of 250  $\mu\text{m}$ , and therefore, when the coating film is peeled at a peel angle of 180 degrees, the total thickness becomes 500  $\mu\text{m}$ . That is, in a case where the coating film is peeled at a peel angle of less than 180 degrees, although a water  
10 flow-receiving plane in a peeled portion of the coating film becomes larger, the peeled portion of the coating film is moved backwardly (toward a downstream side of the water flow) so as to release a resistance. Thus, in this case, the water flow has an insignificant influence on peeling of the coating film. From the formula 1, it can be seen that a water pressure loaded on the peeled portion of the coating film at a flow  
15 speed of 30 knots is equivalent to a constant load of 100 gram. Here, the value "30 knots" is greater than a normal traveling speed of a boat/ship. Thus, a situation where peeling of the coating film due to the 100-gram constant load is sufficiently small means that the coating film can be used on a boat/ship and other underwater structure. Further, the underwater constant load peeling degree is roughly inversely proportional  
20 to the thickness of the coating film. Thus, for example, a value of the underwater constant load peeling degree measured when the thickness is 250  $\mu\text{m}$  is twice a value of the underwater constant load peeling degree measured when the thickness is 500  $\mu\text{m}$ . Considering this, even in a coating film having a thickness greater than 250  $\mu\text{m}$  which is a typical thickness, an increase in water pressure load due to an increase in the thickness  
25 is cancelled out by a decrease in the underwater constant load peeling degree. Therefore, a difficulty degree of peeling can be presumed based on the 100-gram underwater constant load peeling degree.

$$D_p = (\rho \times U^2 \times C_p \times A) / 2 \quad \text{---- (1)}$$

where  $D_p$  (load)

30  $\rho$  (density of water): 1000  $\text{kg}/\text{m}^3$

U (flow speed): 30 knots

C<sub>p</sub> (pressure drag coefficient): 1

A (cross-sectional area): 20 mm (width) × 500 μm (height)

[0029]

5            In this present invention, a non-mobile underwater structure such as an ocean sensor or a dike can be selected as the adherend. Tidal flow is substantially slower than 15 knots, and is normally about 10 knots at the highest. Thus, as long as the coating film is not peeled even under the condition that it receives a water flow having a flow speed of 15 knots, it functions as an antifouling coating film for such a non-mobile  
10            underwater structure. From the formula (1), a resistance receiving from a water flow having a flow speed of 15 knots is equivalent to a 30-gram constant load. Then, an underwater constant load peeling degree measured using the 30-gram constant load (30-gram underwater constant load peeling degree) can be converted to the 100-gram underwater constant load peeling degree by the Eyring equation (formula (2)).  
15            Therefore, the 100-gram underwater constant load peeling degree serves as an index of not only durability (difficulty degree of peeling) under the 30-knot water flow but also durability under the 15-knot water flow

$$\ln L = c^2 - n \cdot \ln S \quad \text{---- (2)}$$

, where L: peeling time (effective life)

20            S: load (stress)

c: constant representing section

n: constant representing inclination

[0030]

25            The 100-gram underwater constant load peeling degree (mm/20 mm) of the coating film according to the present invention or the coating film formed by the method according to the present invention, with respect to an underwater structure, is less than 5, and, considering a coating film having a thickness greater than the typical thickness, preferably 4 or less, more preferably 3 or less, yet more preferably less than 1, still more preferably less than 0.5, yet still more preferably 0.3 or less, further  
30            preferably 0.2 or less, much further preferably 0.1 or less, most preferably 0.0. In

regard to the set of coating materials and the undercoat layer-forming coating material for forming the coating film, the 100-gram underwater constant load peeling degree of the resulting coating film with respect to PMMA (poly(methyl methacrylate)) is less than 5, preferably 4 or less, more preferably 3 or less, yet more preferably less than 1, still more preferably less than 0.5, yet still more preferably 0.3 or less, further preferably 0.2 or less, much further preferably 0.1 or less, most preferably 0.0. The reason that, in regard to the set of coating materials and the undercoat layer-forming coating material, the 100-gram underwater constant load peeling degree is determined using PMMA as the adherend is that a typical material for use in forming a surface of an underwater structure or the like includes gel coat (acrylic-based polymer/polystyrene, etc.), epoxy resin, enamel (acrylic-based polymer, etc.), any of various metals (aluminum, aluminum alloy such as aluminum bronze, stainless steel, and titanium), and antifouling paint, wherein PMMA has intermediate properties among these surface-forming materials. Therefore, a coating material exhibiting preferred properties when using PMMA as the adherend can be deemed to bring out preferred properties at least when using any of the typical materials as the adherend. The same reason is also applied to other parameters using PMMA as the adherend. The coating film according to the present invention or the coating film formed using the set of coating materials or the undercoat layer-forming coating material is small in terms of the 100-gram underwater constant load peeling degree, and provides an advantageous effect that it is less likely to peel when used on an underwater structure. Relating to the above, examples of other materials for use in forming a surface of an underwater structure include polyurethane, polyethylene, polypropylene, polycarbonate, polyethylene terephthalate, polyacetal resin, and ABS (acrylonitrile butadiene styrene) resin.

[0031]

< Tensile Breaking Strength/Adhesive Force >

A tensile breaking strength is a strength representing a difficulty degree of breaking of the coating film when applying tension thereto. If the tensile breaking strength is insufficiently low, the coating film broke during peeling from the adherend,

leading to difficulty in continuing the peeling. On the other hand, if the adhesive force is excessively high, a force necessary to peel the coating film from the adherend becomes large, so that the coating film is more likely to break. Thus, in order to easily peel off the coating film without breaking, the ratio of the tensile breaking strength to the adhesive force has to be sufficiently high.

[0032]

Further, peel-off of the coating film is performed after using an underwater structure for a given period of time, e.g., 5 years, so that the tensile breaking strength and the adhesive force after the use of the underwater structure need to have desired values for facilitating the peel-off. Therefore, the coating film according to the present invention is characterized in that the ratio of the tensile breaking strength to the adhesive force, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more. The temperature 60°C is greater than an ordinary temperature of water in the nature such as river, sea or lake, so that a state similar to a state after long periods of use of the underwater structure can be created by an aging effect even if a time period of the immersion is less than the given time period before the peel-off of the coating film. For example, immersing the coating film for 5 weeks in pure water at 60°C is equivalent to immersing the coating film for 5 years in pure water at 23°C. In regard to the coating film according to the present invention or the coating film formed by the method according to the present invention, the ratio of the tensile breaking strength (N/20 mm) of the coating film to the adhesive force (N/20 mm) of the coating film with respect to the underwater structure, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more, preferably 3.0 or more, more preferably 5.0 or more. Here, pure water and seawater are the same in terms of influence on the coating film. Thus, as long as the coating film is practically usable in pure water, it can also be used in seawater. Further, in regard to the set of coating materials according to the present invention, in a case where the set of coating materials is used to form a coating film comprising an undercoat layer and an antifouling layer, wherein, as a typical thickness of the coating film, the thickness of the undercoat layer is set to 150  $\mu\text{m}$ , and the thickness of the antifouling layer is set to 100  $\mu\text{m}$ , the ratio of



the tensile breaking strength (N/20 mm) of the coating film to the adhesive force (N/20 mm) of the coating film with respect to PMMA, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more, preferably 3.0 or more, more preferably 5.0 or more. In regard to the undercoat layer-forming coating material according to the present invention, in a case where the undercoat layer-forming coating material is used to form an undercoat layer comprised in a coating film, wherein the coating film further comprises an antifouling layer made of a silicone resin (and containing silicone oil in an amount of 90 weight parts with respect to 100 weight parts of the silicone resin), and wherein the undercoat layer has a thickness of 150 μm, and the antifouling layer has a thickness of, e.g., 100 μm, the ratio of the tensile breaking strength (N/20 mm) of the coating film to the adhesive force (N/20 mm) of the coating film with respect to PMMA, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more, preferably 3.0 or more, more preferably 5.0 or more. Thus, the coating film according to the present invention or the coating film formed using the set of coating materials or the undercoat layer-forming coating material according to the present invention can be easily peeled off even after long periods of use of the underwater structure in an actual underwater environment.

[0033]

If the adhesive force is excessively low, the coating film is likely to naturally peel. Thus, the adhesive force is preferably set to 3.0 or more, more preferably 4.0 or more. On the other hand, if the adhesive force is excessively high, an excessive force is necessary for peeling the coating film. Thus, the adhesive force is preferably set to 30 or less, more preferably 15 or less.

[0034]

< Cross-Cut Stretching-Caused Peeling Degree >

The 1-mm square cross-cut stretching-caused peeling degree of the antifouling layer with respect to the undercoat layer is measured using a laminate (of the undercoat layer and the antifouling layer) having a plurality of cells formed in only the antifouling layer as 1-mm square cross-cuts, as depicted in FIG. 3, and represents a rate of cells peeled off when stretching the laminate along a diagonal line of the cells (in a direction

indicated by the arrowed line 5 in FIG. 3) at a stretching ratio of 2, i.e., represents a difficulty degree of peeling of the antifouling layer from the undercoat layer.

[0035]

In regard to the coating film according to the present invention or the coating  
5 film formed by the method according to the present invention, the 1-mm square  
cross-cut stretching-caused peeling degree of the antifouling layer with respect to the  
undercoat layer is 0.05 or less, preferably 0.04 or less, more preferably 0.03 or less,  
further preferably 0.01 or less, most preferably 0.00. In regard to the set of coating  
materials according to the present invention, in the case where the set of coating  
10 materials is used to form a coating film comprising an undercoat layer and an  
antifouling layer, wherein, as a typical thickness of the coating film, the thickness of the  
undercoat layer is set to 150  $\mu\text{m}$ , and the thickness of the antifouling layer is set to 100  
 $\mu\text{m}$ , the 1-mm square cross-cut stretching-caused peeling degree in this coating film is  
0.05 or less, preferably 0.04 or less, more preferably 0.03 or less, further preferably 0.01  
15 or less, most preferably 0.00. In regard to the undercoat layer-forming coating  
material according to the present invention, in the case where the undercoat  
layer-forming coating material is used to form an undercoat layer comprised in a  
coating film, wherein the coating film further comprises an antifouling layer made of a  
silicone resin (and containing silicone oil in an amount of 90 weight parts with respect  
20 to 100 weight parts of the silicone resin), and wherein the undercoat layer has a  
thickness of 150  $\mu\text{m}$ , and the antifouling layer has a thickness of, e.g., 100  $\mu\text{m}$ , the  
1-mm square cross-cut stretching-caused peeling degree in this coating film is 0.05 or  
less, preferably 0.04 or less, more preferably 0.03 or less, further preferably 0.01 or less,  
most preferably 0.00. The 1-mm square cross-cut stretching-caused peeling degree of  
25 the antifouling layer with respect to the undercoat layer represents adhesiveness  
(adherence property) of the antifouling layer. Thus, the coating film having such a  
small value of the 1-mm square cross-cut stretching-caused peeling degree brings out an  
advantageous effect that the antifouling layer is less likely to be peeled from the  
undercoat layer.

30 [0036]

< Underwater Structure >

Examples of a typical material for use in forming the surface of the underwater structure include PMMA (poly(methyl methacrylate) resin), gel coat (acrylic-based polymer/polystyrene, etc.), epoxy paint, enamel paint (acrylic-based polymer, etc.), and  
5 aluminum. Alternatively, in the present invention, other material may be used.

[0037]

< Undercoat Layer-Forming Coating Material >

The undercoat layer-forming coating material comprises a resin component and a solvent. As the resin component, it is possible to use an elastomer such as rubber  
10 (thermosetting elastomer) or a thermoplastic elastomer. However, some thermoplastic elastomers which tend to undergo severe strength degradation due to long-term use, such as polyvinyl chloride, are undesirable, because they are likely to e break during peel-off of the coating film.

[0038]

As the rubber, it is possible to use, e.g., acrylic rubber, diene-based rubber, butyl rubber, nitrile rubber, hydrogenated nitrile rubber, fluororubber, silicone rubber, ethylene-propylene rubber, chloroprene rubber, urethane rubber, or epichlorohydrin rubber. Among them, it is particularly preferable to use acrylic rubber or diene-based rubber. As the diene-based rubber, it is possible to use natural rubber, isoprene rubber,  
15 butadiene rubber, styrene-butadiene rubber, chloroprene rubber, or acrylonitrile-butadiene rubber. Among them, it is preferable to use styrene-butadiene rubber.

[0039]

As the thermoplastic elastomer, it is possible to use a monovinyl-substituted  
25 aromatic compound-based thermoplastic elastomer such as an acrylic-based thermoplastic elastomer or a styrene-based thermoplastic elastomer.

[0040]

Examples of the acrylic-based thermoplastic elastomer include a block copolymer of PMMA (poly(methyl methacrylate)) and acrylic acid alkyl ester.  
30 Examples of the acrylic acid alkyl ester include butyl acrylate, 2-ethylhexyl acrylate,

and octyl acrylate. In this block copolymer, the rate of the PMMA as a hard segment can be changed to adjust the constant load peeling degree and the rate of the tensile breaking strength to the adhesive force to fall within the respective ranges defined in the present invention. Specifically, when the content rate of the PMMA is increased, the  
5 tensile breaking strength tends to increase, and each of the adhesive force and the constant load peeling degree tends to decrease.

[0041]

As the styrene-based thermoplastic elastomer, it is possible to use, e.g., SBS (styrene-butadiene-styrene block copolymer), SIS (styrene-isoprene-styrene block  
10 copolymer), SEBS (styrene-ethylene-butylene-styrene block copolymer), SEPS (styrene-ethylene-propylene-styrene block copolymer), or SEEPS (styrene-ethylene-ethylene-propylene-styrene block copolymer).

[0042]

In a case where the resin component is the styrene-based thermoplastic  
15 elastomer, the content rate of styrene in the resin component can be adjusted to adjust the tensile breaking strength and the adhesive force. The styrene content rate is preferably 20 weight% to 40 weight%, more preferably 22 weight% to 35 weight%, further preferably 25 weight% to 33 weight%.

[0043]

Further, for the purpose of improving adhesion with respect to the antifouling  
20 layer, the elastomer may be modified by a compound containing a polar group. Examples of the polar group include a hydroxyl group, a carboxyl group, an alkoxy group, an acid anhydride group such as maleic anhydride, and an amino group. The content of the polar group-containing compound in the elastomer is preferably 0.1  
25 weight% to 20 weight%, more preferably 0.3 weight% to 15 weight%, further preferably 0.5 weight% to 5 weight%.

[0044]

Alternatively, for the same purpose, the undercoat layer-forming coating  
30 material may contain a compound containing a polar group. Examples of this compound include a resin containing the polar group, a silane coupling agent, and

silicone oil. Examples of the polar group-containing resin include an ionomer, a rosin resin, and a silicone resin. The content of this compound with respect to the resin component in the undercoat layer-forming coating material is preferably 5 weight% to 95 weight%, more preferably 10 weight% to 90 weight%, further preferably 15 weight% to 80 weight%, particularly preferably 20 weight% to 70 weight%.

[0045]

The content rate of the resin component in the undercoat layer-forming coating material is preferably 5 weight% to 95 weight%, more preferably 10 weight% to 90 weight%, further preferably 15 weight% to 80 weight%, particularly preferably 20 weight% to 70 weight%, most preferably 25 weight% to 60 weight%.

[0046]

As the solvent, it is possible to use, e.g.; any of various aromatic hydrocarbons such as benzene, toluene, xylene, ethyl benzene, and trimethylbenzene; any of various aliphatic hydrocarbons such as hexane and heptane; any of various esters such as ethyl acetate and vinyl acetate; any of various ethers such as dioxane and diethyl ether; any of various alcohols such as ethanol, isopropanol, and n-butanol; any of various ketones such as acetone, diethyl ketone, and methyl isobutyl ketone; and water.

The above solvents may be used independently or in combination of two or more of them.

[0047]

The content rate of the solvent is preferably 5 weight% to 95 weight%, more preferably 10 weight% to 90 weight%, further preferably 20 weight% to 85 weight%, particularly preferably 30 weight% to 80 weight%, most preferably 40 weight% to 75 weight%.

[0048]

In a case where the antifouling layer is formed of the aftermentioned silicone-based coating material, it is preferable to use, as the undercoat layer-forming coating material, a styrene-based thermoplastic elastomer in which 0.1 weight% to 20 weight% thereof is modified by the polar group-containing compound, in view of improving adhesion between the antifouling layer and the undercoat layer. In this

case, the styrene content may be set in the range of 20 weight% to 40 weight%.

[0049]

As the antifouling layer-forming coating material, it is possible to use a silicone-based coating material, a copper-based coating material, or a zinc-based coating material. Among them, it is preferable to use a coating material designed without assumption of recoating, such as the silicone-based coating material.

[0050]

The silicone-based coating material contains organopolysiloxane as a base polymer. The organopolysiloxane has a curing reactive group, so that an antifouling layer formed using the silicone-based coating material contains a silicone resin as a reaction product of the organopolysiloxane. As the curing reactive group, it is possible to use a hydroxyl group, an alkoxy group having a carbon number of 1 to 8, a vinyl group, or a (meth) acrylic group. Further, as a hydrolyzable group other than the hydroxyl group, it is possible to use, e.g.; an alkoxy group such as a methoxy group, an ethoxy group, or a propoxy group; an alkoxyalkoxy group such as a methoxyethoxy group, an ethoxyethoxy group, or a methoxypropoxy group; an acyloxy group such as an acetoxy group, an octanoyloxy group, or a benzoyloxy group; an alkenyloxy group such as a vinyloxy group, an isopropenyl group, or a 1-ethyl-2-methylvinyl group; a ketoxime group such as a dimethyl ketoxime group, a methyl ethyl ketoxime group, or a diethyl ketoxime group; an amino group such as a dimethylamino group, a diethylamino group, a butylamino group, or a cyclohexylamino group; an aminoxy group such as a dimethylaminoxy group, or a diethylaminoxy group; or an amide group such as an N-methylacetamide group, an N-ethylacetamide group, or an N-methylbenzamide group.

[0051]

Preferably, the silicone-based coating material further comprises silicone oil. As the silicone oil, it is possible to use: dimethyl silicone oil in which all groups are methyl groups; methylphenyl silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a phenyl group; amino-modified silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a monoamine, diamine or aminopolyether group; epoxy-modified silicone oil obtained by

substituting a part of the methyl groups of the dimethyl silicone oil with an epoxy, alicyclic epoxy, epoxy polyether or epoxy aralkyl group; carbinol-modified silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a carbinol group; mercapto-modified silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a mercapto group; carboxyl-modified silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a carboxyl group; methacryl-modified silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a methacryl group; polyether-modified silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a polyether group; long-chain alkyl-modified silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a long-chain alkyl or alkyl aralkyl group; higher fatty acid-modified silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a higher fatty acid ester group; or fluoroalkyl-modified silicone oil obtained by substituting a part of the methyl groups of the dimethyl silicone oil with a fluoroalkyl group. Further, the methylphenyl silicone oil, the polyether-modified silicone oil, or the long-chain alkyl-modified silicone oil may be used. The above silicone oils may be used independently or in combination of two or more of them.

[0052]

An adhesive can be contained in the undercoat layer-forming coating material to adjust the adhesive force. As the adhesive, it is possible to use, e.g., a styrene-based tackifier resin, a terpene-based tackifier resin, a rosin-based tackifier resin, an alicyclic saturated hydrocarbon-based tackifier resin, or an acrylic-based tackifier resin. However, any adhesive other than the above may be mixed depending on properties of the undercoat layer-forming coating material.

[0053]

With regard to the content rate of the silicone resin in the antifouling layer, any suitable content rate may be adopted depending on the content rate of the remaining components such as an antifoulant. For example, it may be set in the range of 30 weight% to 98 weight%, more preferably 35 weight% to 90 weight%, further preferably

40 weight% to 80 weight%.

[0054]

The content of the silicone oil with respect to 100 weight parts of the silicone resin is preferably from 1 weight part to 150 weight parts, more preferably from 40  
5 weight parts to 140 weight parts. By adjusting the content of the silicone oil with respect to 100 weight parts of the silicone resin to fall within the above range, it is possible to more sufficiently develop an antifouling effect of the antifouling layer, and more sufficiently develop appearance properties and mechanical properties of the antifouling layer.

10 [0055]

The copper-based coating material is a coating material containing a copper-based compound. As the copper-based coating material, it is possible to use, e.g.: copper oxide such as cuprous oxide or cupric oxide; a copper alloy such as a copper-nickel alloy; any of various copper salts such as copper thiocyanate or copper  
15 sulfide; or an organic metal compound such as pyrithione copper or copper acetate. As the zinc-based coating material, it is possible to use a coating material containing zinc oxide as an antifoulant.

[0056]

The antifouling layer may contain any suitable additional additive as long as it  
20 does not spoil the advantageous effects of the present invention. Examples of the additional additive include an ultraviolet absorbing agent as anti-weathering agent.

[0057]

Although the coating film according to the above embodiment is formed on the underwater structure, it may be formed on a structure other than the underwater  
25 structure. For example, the coating film may be formed on a surface of any of various exterior members such as a roof and an external wall. In this case, as the index representing the difficulty degree of peeling of the coating film from the adherend during use, an adhesive force of the coating film with respect to PMMA is used, instead of the 100-gram underwater constant load peeling degree. In regard to the coating film  
30 according to the present invention or the coating film formed by the method according



to the present invention, the adhesive force of the coating film with respect to PMMA is preferably 0.5 (N/20 mm) or less, more preferably 0.3 or less, further preferably 0.2 or less, much further preferably 0.1 or less, most preferably 0.0. Further, in this embodiment, other properties, i.e., the ratio of the tensile breaking strength (N/20 mm) to the adhesive force (N/20 mm), and the 1-mm square cross-cut stretching-caused peeling degree of the layer of the antifouling layer-forming coating material with respect to the layer of the undercoat layer-forming coating material, are the same as those of the coating material for forming the coating film on the underwater structure.

## 10 EXAMPLES

[0058]

Coating films formed using respective coating materials in Inventive Examples and Comparative Examples were subjected to the following tests. Table 1 presents a resin component of the undercoat layer in each of Inventive Examples and Comparative Examples. Further, Table 2 presents test results of each of Inventive Examples and Comparative Examples.

[0059]

[Inventive Example 1]

(Production of Undercoat Layer-Forming Coating Material)

20 80 weight parts of amine-modified hydrogenated styrene-based thermoplastic elastomer (trade name "Tuftec MP10", manufacturer: Asahi Kasei Chemicals Corporation, styrene content rate: 30 weight parts) was mixed with 20 weight parts of toluene, and the resulting mixture was steered at room temperature (23°C) for 12 hours to obtain an undercoat layer-forming coating material.

25 [0060]

(Production of Antifouling Layer-Forming Coating Material)

10 weight Parts of silicone resin (trade name "KE445B", , manufacturer: Shin-Etsu Silicone Co. Ltd.) was mixed with 90 weight parts of silicone oil (methyl phenyl silicone oil, product name "KF50-100Cs", manufacturer: Shin-Etsu Silicone Co. Ltd.), and the resulting mixture was steered at room temperature (23°C) for 5 minutes to

obtain an antifouling layer-forming coating material.

[0061]

(Method of Measuring 100-Gram Underwater Constant Load Peeling Degree)

A coating film was produced by the following method, using a set of coating  
5 materials consisting of the above undercoat layer-forming coating material and  
antifouling layer-forming coating material, and subjected to measurement of the  
100-gram underwater constant load peeling degree. The undercoat layer-forming  
coating material was coatingly applied onto a PMMA plate (trade name "Deraglass",  
manufacturer: ASAHIKASEI TECHNOPLUS Corporation, methyl methacrylate  
10 polymer: 96.6% or more) by an applicator, and dried at room temperature for 12 hours  
to form an undercoat layer having a thickness of 150  $\mu\text{m}$ . The antifouling  
layer-forming coating material was coatingly applied onto the formed undercoat layer  
by an applicator, and dried at room temperature for 12 hours to form an antifouling  
layer having a thickness of 100  $\mu\text{m}$ . In this way, a coating film consisting of the  
15 undercoat layer and the antifouling layer was formed on the PMMA plate.

[0062]

Subsequently, the coating film was trimmed to have a size of 20 mm  $\times$  100  
mm. Then, with respect to the PMMA plate, the trimmed coating film was peeled  
from the side of one short side (having a length of 20 mm) thereof by a length of 20  
20 mm, and folded back by 180°, and the short side was attached to an end of a PET film  
(trade name "Lumirror S10", manufacturer: Toray Industries, Inc., thickness: 75  $\mu\text{m}$ ),  
such that a contact area therebetween became 20 mm  $\times$  20 mm. A weight member  
having a weight adjusted to become 100 g under water was attached to the PET film to  
prepare a test sample. A tank filled with pure water at 23°C was prepared. Then, the  
25 sample was immersed in the pure water such that a peel angle of the sample becomes  
180 degrees, and a distance [mm] over which the coating film is peeled from the  
PMMA plate in one hour was measured.

[0063]

(Method of Measuring Adhesive Force)

30 The coating film (laminare) consisting of the 150  $\mu\text{m}$ -thick undercoat layer and

the 100  $\mu\text{m}$ -thick antifouling layer was formed on the PMMA plate (trade name "Deraglass", manufacturer: ASAHIKASEI TECHNOPLUS Corporation, methyl methacrylate polymer: 96.6% or more), through the same operation as that in the above underwater constant load peel test. After immersing the formed coating film in pure water at 60°C for 5 weeks, the resulting coating film was trimmed to have a size of 20 mm  $\times$  100 mm. A force measured when peeling the laminate from the PMMA plate at a peel angle of 180 degrees and at a peel rate of 300 mm/min, using a tensile tester (AUTOGRAPH AGS-X, manufacturer: Shimadzu Corporation) was defined as the adhesive force.

10 [0064]

(Method of Measuring Tensile Breaking Strength)

The undercoat layer-forming coating material was coatingly applied to a surface of a separator (trade name "MRF38", manufacturer: Mitsubishi Plastics, Inc., thickness: 50  $\mu\text{m}$ ) by an applicator, and dried at room temperature for 12 hours to form an undercoat layer having a thickness of 150  $\mu\text{m}$ . The antifouling layer-forming coating material was coatingly applied onto the formed undercoat layer by an applicator, and dried at room temperature for 12 hours to form an antifouling layer having a thickness of 100  $\mu\text{m}$ . In this way, a coating film composed of a laminate of the undercoat layer and the antifouling layer was formed on the separator. After immersing the obtained laminate of the undercoat layer and the antifouling layer in pure water at 60°C for 5 weeks, the resulting laminate was trimmed to have a size of 20 mm  $\times$  100 mm, and the tensile breaking strength of the trimmed laminate was evaluated, using a tensile tester (device name "AUTOGRAPH AGS-X", manufacturer: Shimadzu Corporation).

25 [0065]

(Method of Measuring 1-mm Square Cross-Cut Stretching-Caused Peeling Degree)

The coating film consisting of the undercoat layer and the antifouling layer was formed on a separator (trade name "MRF38", manufacturer: Mitsubishi Plastics, Inc., thickness: 38  $\mu\text{m}$ ) through the same operation as that for the tensile breaking strength. The obtained laminate of the undercoat layer and the antifouling layer was cut into 20

mm × 100 mm, and only the antifouling layer was slit by a cutter, using a cross-cut test cutter guide (trade name "Super Cutter Guide", manufacturer: Taiyu Kizai Ltd.), to form 100 cells (cross-cuts) (each 1 cm □) at intervals of 1mm. Then, the laminate was stretched along a diagonal line of the cells at a stretching ratio of 2, and the number of ones of the cells peeled from the undercoat layer was counted.

[0066]

(15-knot Water Flow Test (Undercoat Layer))

FIG. 4 is a schematic diagram for explaining a 15-knot water flow test for the undercoat layer. The coating film (laminate) consisting of the 150 μm-thick undercoat layer and the 100 μm-thick antifouling layer was formed on the PMMA plate (trade name "Deraglass", manufacturer: ASAHIKASEI TECHNOPLUS Corporation, methyl methacrylate polymer: 96.6% or more), through the same operation as that in the above underwater constant load peel test, and an outer peripheral portion thereof was removed to allow the resulting coating film to have a size of 20 mm × 100 mm. Subsequently, the coating film was peeled from the side of one short side (having a length of 20 mm) thereof by a length of 20 mm. Then, a water flow (flow speed: 15 knots) was supplied in a direction (indicated by the arrowed line 6 in FIG. 4) parallel to a direction along a long side of the coating film for 200 hours, and a time period before peel-off of the undercoat layer from the PMMA plate was evaluated. Here, the direction of the water flow was set such that the peeled short side of the coating film is located on an upstream side of the water flow with respect to the other short side.

[0067]

(15-knot Water Flow Test (Antifouling Layer))

FIG. 5 is a schematic diagram for explaining a 15-knot water flow test for the antifouling layer. The undercoat layer-forming coating material (1) was coatingly applied onto a PMMA plate (trade name "Deraglass", manufacturer: ASAHIKASEI TECHNOPLUS Corporation, methyl methacrylate polymer: 96.6% or more) by an applicator, and dried at room temperature for 12 hours to form an undercoat layer having a thickness of 150 μm. The antifouling layer-forming coating material (1) was coatingly applied onto the formed undercoat layer by an applicator, and dried at room

temperature for 12 hours to form a coating film consisting of the undercoat layer and the antifouling layer on the PMMA plate. A water flow (flow speed: 15 knots) was supplied in a direction (indicated by the arrowed line 6 in FIG. 5) parallel to a direction along a long side of the antifouling layer for 200 hours, and a time period before peel-off of the antifouling layer from the undercoat layer was evaluated.

[0068]

(30-knot Water Flow Test (Undercoat Layer))

Except that the flow speed of the water flow was changed to 30 knots, the same operation as that in the above 15-knot water flow test (undercoat layer) was performed, and the time period before peel-off of the undercoat layer from the PMMA plate was evaluated.

[0069]

(30-knot Water Flow Test (Antifouling Layer))

Except that the flow speed of the water flow was changed to 30 knots, the same operation as that in the above 15-knot water flow test (antifouling layer) was performed, and the time period before peel-off of the antifouling layer from the undercoat layer was evaluated.

[0070]

(Peelability)

FIG. 6 is a schematic diagram for explaining a verification test about peelability. The coating film (laminate) consisting of the 150  $\mu\text{m}$ -thick undercoat layer and the 100  $\mu\text{m}$ -thick antifouling layer was formed on the PMMA plate (trade name "Deraglass", manufacturer: ASAHIKASEI TECHNOPLUS Corporation, methyl methacrylate polymer: 96.6% or more), through the same operation as that in the above underwater constant load peel test. After immersing the obtained laminate of the undercoat layer and the antifouling layer, in pure water at 60°C for 5 weeks, the resulting laminate was trimmed to have a size of 20 mm  $\times$  100 mm. It was evaluated whether the undercoat layer breaks when peeling the coating film from the PMMA plate at a peel angle of 145 to 180° (in a direction indicated by the arrowed line 7 in FIG. 7).

[0071]

(Antifouling Property)

The coating film (laminate) consisting of the 150  $\mu\text{m}$ -thick undercoat layer and the 100  $\mu\text{m}$ -thick antifouling layer was formed on the PMMA plate (trade name "Deraglass", manufacturer: ASAHIKASEI TECHNOPLUS Corporation, methyl methacrylate polymer: 96.6% or more), through the same operation as that in the above  
5 underwater constant load peel test. The formed coating film was immersed in seawater along the coast of Himeji city, Hyogo, Japan, at a depth of 1 m. Then, it was evaluated whether aquatic organisms adhere to the surface of the antifouling layer, after immersion for 36 months. Considering that, in all Inventive Examples, the antifouling  
10 layer is made of the same material, a test about an antifouling property was performed only in Inventive Example.

[0072]

In Inventive Example 1, the 100-gram underwater constant load peeling degree, the ratio of the tensile breaking strength to the adhesive force, and the 1-mm square  
15 cross-cut stretching-caused peeling degree, were, respectively, 0.0, 19.9 and 0.0. Thus, in the 15-knot and 30-knot water flow tests, no peeling occurred in either of the undercoat layer and the antifouling layer, and, in the peelability test, the coating film could be peeled off without breaking. Therefore, the coating film in Inventive  
20 Example 1 brings out an advantageous effect that it is less likely to peel when used on an underwater structure, and is capable of being easily peeled off during maintenance of the underwater structure. Further, with regard to the antifouling property, it was confirmed that no aquatic organism adhered to the surface of the coating film.

[0073]

[Inventive Example 2]

25 Except that the resin composition of the undercoat layer-forming coating material was changed to maleic acid-modified SEBS (trade name "FG1901", manufacturer: Kraton Polymers Japan Ltd., styrene content rate: 30 weight%) which is different from the resin in Inventive Example 1 in terms of modification method, an undercoat layer-forming coating material and an antifouling layer-forming coating  
30 material were produced through the same operation as that in Inventive Example 1.

Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0074]

In Inventive Example 2, the 100-gram underwater constant load peeling degree and the 1-mm square cross-cut stretching-caused peeling degree were, respectively, 0.0, and 0.0, as with Inventive Example 1. Thus, in the 15-knot and 30-knot water flow tests, no peeling occurred in either of the undercoat layer and the antifouling layer. Further, although the ratio of the tensile breaking strength to the adhesive force is 14.0, the coating film could be peeled off from the adherend without breaking of the coating film in the peelability test, i.e., it could be verified that the coating film in Inventive Example 2 brings out the advantageous effect of the present invention. Further, it could be verified that the present invention can be effectively implemented even if the polar group of the compound for use in modification is changed to maleic acid.

[0075]

[Inventive Example 3]

Except that the resin composition of the undercoat layer-forming coating material was changed such that a styrene-based tackifier resin (trade name "Piccolastic A75", manufacturer: NN chemical Ltd.) was added in an amount of 35 weight% to the resin in Inventive Example 2 to provide an improved adhesive force, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of

peelability. Their results are presented in Table 2.

[0076]

In Inventive Example 3, the 100-gram underwater constant load peeling degree and the 1-mm square cross-cut stretching-caused peeling degree were, respectively, 0.0, and 0.0, as with Inventive Example 1, so that, in the 15-knot and 30-knot water flow tests, no peeling occurred in either of the undercoat layer and the antifouling layer. Further, although the coating film in Inventive Example 3 has a relatively high adhesive force, and thereby the ratio of the tensile breaking strength to the adhesive force is 1.9, the coating film could be peeled off from the adherend without breaking of the coating film in the peelability test, i.e., it could be verified that the coating film in Inventive Example 3 brings out the advantageous effect of the present invention. Further, it could be verified that the present invention can be effectively implemented by adjusting the adhesive force when needed in some Inventive Examples.

[0077]

15 [Inventive Example 4]

Except that the resin composition of the undercoat layer-forming coating material was changed to hydroxyl group-modified SEBS (trade name "HG252", manufacturer: KURARAY Co., Ltd., styrene content: 28 weight%) which is different from the resin in Inventive Example 1 in terms of modification method, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0078]

In Inventive Example 4, the 100-gram underwater constant load peeling degree and the 1-mm square cross-cut stretching-caused peeling degree were, respectively, 0.0,



and 0.0, as with Inventive Example 1, so that, in the 15-knot and 30-knot water flow tests, no peeling occurred in either of the undercoat layer and the antifouling layer. Further, in Inventive Example 4, the ratio of the tensile breaking strength to the adhesive force is 21.4, so that the coating film could be peeled off from the adherend  
5 without breaking of the coating film in the peelability test, i.e., it could be verified that the coating film in Inventive Example 4 brings out the advantageous effect of the present invention. Inventive Example 4 shows that the present invention can be effectively implemented even if the resin is changed to a different SEPS, i.e., a different styrene-based thermoplastic elastomer, and the polar group of the compound for use in  
10 modification is changed to hydroxyl group.

[0079]

[Inventive Example 5]

Except that the resin composition of the undercoat layer-forming coating material was changed to modified SEBS (trade name "DYNARON 8660P",  
15 manufacturer: JSR Corporation) whose styrene content is 25 weight% which is less than that of the resin in Inventive Example 1, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials  
20 consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

25 [0080]

In Inventive Example 5, the 100-gram underwater constant load peeling degree and the 1-mm square cross-cut stretching-caused peeling degree were, respectively, 0.0, and 0.0, as with Inventive Example 1, so that, in the 15-knot and 30-knot water flow tests, no peeling occurred in either of the undercoat layer and the antifouling layer.  
30 Further, although the ratio of the tensile breaking strength to the adhesive force in

Inventive Example 5 is 6.0, the coating film could be peeled off from the adherend without breaking of the coating film in the peelability test, i.e., it could be verified that the coating film in Inventive Example 5 brings out the advantageous effect of the present invention. Inventive Example 5 also shows that the present invention can be  
5 effectively implemented by adjusting the styrene content to adjust properties of a coating film.

[0081]

[Inventive Example 6]

Except that the resin composition of the undercoat layer-forming coating  
10 material was changed to an acrylic-based thermoplastic elastomer (PMMA/2-ethylhexyl acrylate-butyl acrylate block copolymer, trade name "KURARITY LK9333", manufacturer: KURARAY Co., Ltd.), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same  
15 operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in  
20 Table 2.

[0082]

In Inventive Example 6, the 100-gram underwater constant load peeling degree and the 1-mm square cross-cut stretching-caused peeling degree were, respectively, 0.0, and 0.0, as with Inventive Example 1, so that, in the 15-knot and 30-knot water flow  
25 tests, no peeling occurred in either of the undercoat layer and the antifouling layer. Further, although the ratio of the tensile breaking strength to the adhesive force in Inventive Example 6 is 1.8, the coating film could be peeled off from the adherend without breaking of the coating film in the peelability test, i.e., it could be verified that the coating film in Inventive Example 6 brings out the advantageous effect of the  
30 present invention. Inventive Example 6 shows that the present invention can be

effectively implemented even if the resin is an acrylic-based thermoplastic elastomer.

[0083]

[Inventive Example 7]

5 Except that the resin composition of the undercoat layer-forming coating material was changed to SEBS obtained by changing the styrene content of the SEBS in Inventive Example 2 from 30 weight% to 13 weight% (trade name "GFG1924", manufacturer: Kraton Polymers Japan Ltd., styrene content: 13 weight%, maleic acid-modified amount: 1 wt%), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0084]

20 In Inventive Example 7, the styrene content of the SEBS of the undercoat layer is as low as 13 weight%, and thereby the tensile breaking strength is as low as 24. However, the adhesive force is also relatively low, and thereby the ratio of the tensile breaking strength to the adhesive force is 4.9, so that, in the peelability test, the coating film could be peeled off from the adherend without breaking of the coating film. Further, the SEBS is subjected to modification treatment to provide relatively high adhesion between the undercoat layer and the antifouling layer, and thereby the 1-mm square cross-cut stretching-caused peeling degree is 0.00, so that no peeling occurred in the antifouling layer. Further, the 100-gram underwater constant load peeling degree is as slightly high as 3, so that, in the 30-knot water flow test, peeling occurred in the undercoat layer. However, in the 15-knot water flow test, no peeling occurred in the undercoat layer. Thus, it could be verified that, even if the undercoat layer is made of SEBS whose styrene content is as low as 13 weight%, a resulting coating film has

25

30

practicality, i.e., the present invention can be effectively implemented.

[0085]

[Inventive Example 8]

5 Except that the resin composition of the undercoat layer-forming coating material was changed to urethane emulsion (trade name "HYDRAN WLS210", manufacturer: DIC Corporation), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of  
10 the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

15 [0086]

In Inventive Example 8, the 100-gram underwater constant load peeling degree and the 1-mm square cross-cut stretching-caused peeling degree were, respectively, 0.0, and 0.0, as with Inventive Example 1, so that, in the 15-knot and 30-knot water flow tests, no peeling occurred in either of the undercoat layer and the antifouling layer.  
20 Further, although the ratio of the tensile breaking strength to the adhesive force in Inventive Example 8 was 3.66, the coating film could be peeled off from the adherend without breaking of the coating film in the peelability test, i.e., it could be verified that the coating film in Inventive Example 8 brings out the advantageous effect of the present invention. Inventive Example 8 shows that the present invention can be  
25 effectively implemented even if the resin is a urethane emulsion resin.

[0087]

[Inventive Example 9]

30 Except that the resin composition of the undercoat layer-forming coating material was changed to a mixture obtained by mixing: PIB (polyisobutylene) (trade name "B100", manufacturer: BASF Corporation); tackifier (trade name "Arkon M135",

manufacturer: Arakawa Chemical Industries, Ltd.); and amine-modified silicone oligomer (trade name "x-40-2651", manufacturer: Shin-Etsu Chemical Co. Ltd.) at a mixing ratio of 72 (weight%) : 21 (weight%) : 7 (weight%), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced  
5 through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the  
10 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0088]

In Inventive Example 9, the ratio of the tensile breaking strength to the adhesive force is 2.9, so that, in the peelability test, the coating film could be peeled off  
15 from the adherend without breaking of the coating film. Further, the coating material contains amine-modified silicone oligomer to provide relatively high adhesion between the undercoat layer and the antifouling layer, and thereby the 1-mm square cross-cut stretching-caused peeling degree is 0.00, so that no peeling occurred in the antifouling layer. Further, the 100-gram underwater constant load peeling degree is as slightly  
20 high as 4, so that, in the 30-knot water flow test, peeling occurred in the undercoat layer. However, in the 15-knot water flow test, no peeling occurred in the undercoat layer. Thus, it could be verified that, even if the undercoat layer is made of the above mixture, a resulting coating film has practicality, i.e., the present invention can be effectively implemented.

25 [0089]

[Inventive Example 10]

Except that the resin composition of the undercoat layer-forming coating material was changed to a mixture obtained by mixing fluororesin (trade name "GL252EA", manufacturer: DAIKIN INDUSTRIES, Ltd, which contains 5 weight parts  
30 of curing agent (GL200RB)), and ionomer (trade name "Chemiparl SA100",

manufacturer: Mitsui Chemicals, Inc.) at a mixing ratio of 91 (weight%) : 9 (weight%), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive  
5 Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

10 [0090]

In Inventive Example 10, the 100-gram underwater constant load peeling degree and the 1-mm square cross-cut stretching-caused peeling degree were, respectively, 0.0, and 0.0, as with Inventive Example 1, so that, in the 15-knot and 30-knot water flow tests, no peeling occurred in either of the undercoat layer and the  
15 antifouling layer. Further, although the ratio of the tensile breaking strength to the adhesive force in Inventive Example 10 is 1.85, the coating film could be peeled off from the adherend without breaking of the coating film in the peelability test, i.e., it could be verified that the coating film in Inventive Example 5 brings out the advantageous effect of the present invention. Inventive Example 10 also shows that  
20 the present invention can be effectively implemented even if even if the undercoat layer is made of the above mixture.

[0091]

The present invention is not limited to the above materials, but may be appropriately implemented by using any other suitable material satisfying the 100-gram  
25 underwater constant load peeling degree, the ratio of the tensile breaking strength to the adhesive force and the 100-gram underwater constant load peeling degree defined in the present invention.

[0092]

[Comparative Example 1]

30 In Comparative Example 1, an undercoat layer-forming coating material and an

antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1, except that the resin composition of the undercoat layer-forming coating material was changed to non-modified SEBS (trade name "Tuftec H1053", manufacturer: Asahi Kasei Chemicals Corporation, styrene content: 29 weight%) which is different from the modified SEBS in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0093]

The styrene content of the SEBS of the undercoat layer in Comparative Example 1 is as high as 29 weight%, and thereby the undercoat layer has a relatively high tensile breaking strength, so that, in the peelability test, the coating film could be peeled off from the adherend without breaking of the coating film. Further, the 100-gram underwater constant load peeling degree is 0.0, so that in the 15-knot and 30-knot water flow tests, no peeling occurred in the undercoat layer. However, the non-modified SEBS has poor adhesion with silicone resin, and thereby the 1-mm square cross-cut stretching-caused peeling degree is 1.00, so that, in the 15-knot and 30-knot water flow tests, peeling occurred in the antifouling layer. The ratio of the tensile breaking strength to the adhesive force is 15.4, so that there was no problem in terms of peelability.

[0094]

[Comparative Example 2]

In Comparative Example 2, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1, except that the resin composition of the undercoat layer-forming coating material was changed to non-modified SEBS (trade name "Tuftec H1062", manufacturer: Asahi Kasei Chemicals Corporation, styrene content: 18

weight%) which is different from the modified SEBS in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0095]

The styrene content of the SEBS of the undercoat layer in Comparative Example 2 is 18 weight% which is less than that in Comparative Example 1, and thereby the tensile breaking strength is less than that in Comparative Example 1. However, the adhesive force is also relatively low, and thereby the ratio of the tensile breaking strength to the adhesive force is 18.3, so that, in the peelability test, the coating film could be peeled off from the adherend without breaking of the coating film. Further, although the 100-gram underwater constant load peeling degree is 0.2, no peeling occurred in the undercoat layer in the 15-knot and 30-knot water flow tests. However, because the SEBS is not subjected to modification as with Comparative Example 1, it has poor adhesion with silicone resin, and thereby the 1-mm square cross-cut stretching-caused peeling degree is 1.00. Thus, in the 30-knot water flow test, peeling occurred in the antifouling layer. Although Comparative Example 2 is not an embodiment of the present invention because the 1-mm square cross-cut stretching-caused peeling degree is excessively large, it shows that, as long as the 100-gram underwater constant load peeling degree is 0.2 or less, the undercoat layer is not peeled from the adherend in the 15-knot and 30-knot water flow tests.

[0096]

[Comparative Example 3]

In Comparative Example 3, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1, except that the resin composition of the undercoat layer-forming coating material was changed to non-modified SEBS (trade name



"G1657", manufacturer: Kraton Polymers Japan Ltd., styrene content: 13 weight%) which is different from the modified SEBS in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the  
5 underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0097]

10 The styrene content of the SEBS of the undercoat layer in Comparative Example 3 is 13 weight% which is less than that in Comparative Example 2, and thereby the tensile breaking strength is less than that in Comparative Example 2. However, the adhesive force is also relatively low, and thereby the ratio of the tensile  
15 breaking strength to the adhesive force is 15.6, so that, in the peelability test, the coating film could be peeled off from the adherend without breaking of the coating film. On the other hand, the 100-gram underwater constant load peeling degree is 8, so that, in the 15-knot and 30-knot water flow tests, peeling occurred in the undercoat layer. Moreover, because the SEBS is not subjected to modification as with Comparative  
20 Example 1, it has poor adhesion with the antifouling layer, and thereby the 1-mm square cross-cut stretching-caused peeling degree is 1.00, so that, in the 15-knot and 30-knot water flow tests, peeling occurred in the antifouling layer.

[0098]

[Comparative Example 4]

25 Except that the resin composition of the undercoat layer-forming coating material was changed to a polyvinyl chloride-polyvinyl acetate copolymer (trade name "Solbin CH", manufacturer: Shin-Etsu Chemical Co., Ltd.), and the solvent was changed to MEK (methyl ethyl ketone), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same  
30 operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials

consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0099]

In Comparative Example 4, the 100-gram underwater constant load peeling degree is 0.0, so that no peeling occurred in the 15-knot and 30-knot water flow tests. However, because the ratio of the tensile breaking strength to the adhesive force is excessively low, the coating film broke before being completely peeled off in the peelability test. However, Comparative example 4 shows that, even when the 1-mm square cross-cut stretching-caused peeling degree is 0.03, no peeling occurs in the antifouling layer in the 15-knot and 30-knot water flow tests.

[0100]

[Comparative Example 5]

Except that the resin composition of the undercoat layer-forming coating material was changed to PVB (polyvinyl butyral) (trade name "B60T", manufacturer: KURARAY Co., Ltd.), and the solvent was changed to ethanol, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0101]

In Comparative Example 5, the 100-gram underwater constant load peeling degree is 0.0, so that no peeling occurred in the 15-knot and 30-knot water flow tests. However, because the ratio of the tensile breaking strength to the adhesive force is

excessively low, the coating film broke before being completely peeled off in the peelability test. However, Comparative example 5 shows that, even when the 1-mm square cross-cut stretching-caused peeling degree is 0.04, no peeling occurs in the antifouling layer in the 15-knot and 30-knot water flow tests.

5 [0102]

[Comparative Example 6]

Except that the undercoat layer-forming coating material was changed to a commercially-available urethane-based coating material (trade name "Masking Color", manufacturer: TAIYO TORYO Co., Ltd.), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0103]

In Comparative Example 6 using the urethane-based coating material, in the peelability test, the coating film could be peeled off from the adherend without breaking of the coating film. However, the 100-gram underwater constant load peeling degree is as high as 50. Moreover, adhesion between the undercoat layer and the antifouling layer is relatively low, and thereby the 1-mm square cross-cut stretching-caused peeling degree is 1.00. Thus, in the 15-knot and 30-knot water flow tests, peeling occurred in both the undercoat layer and the antifouling layer.

[0104]

[Comparative Example 7]

Except that the undercoat layer-forming coating material was changed to a commercially-available SBR (styrene-butadiene rubber)-based coating material (trade name "1034", manufacturer: Plasti Dip International, Inc.), an undercoat layer-forming

coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0105]

10 In Comparative Example 7 using the SBR-based coating material, in the peelability test, the coating film could be peeled off from the adherend without breaking of the coating film. However, adhesion between the undercoat layer and the antifouling layer is relatively low, and thereby the 1-mm square cross-cut stretching-caused peeling degree is 1.00, so that, in the 15-knot and 30-knot water flow tests, peeling occurred in the antifouling layer.

[0106]

[Comparative Example 8]

20 Except that the undercoat layer-forming coating material was changed to a commercially-available SEBS-based coating material (trade name "Liquid Rubber Paint Oil-based", manufacturer: SDesgn), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0107]

30 In Comparative Example 8, the 100-gram underwater constant load peeling

degree and the 1-mm square cross-cut stretching-caused peeling degree are, respectively, 20 and 1.00 which are excessively high, so that, in the 15-knot and 30-knot water flow tests, peeling occurred in both the undercoat layer and the antifouling layer. Moreover, the ratio of the tensile breaking strength to the adhesive force is as low as 1.1, so that, in the peelability test, the coating film could not be peeled off due to breaking.

[0108]

[Comparative Example 9]

Except that the resin composition of the undercoat layer-forming coating material was changed to a mixture obtained by mixing the maleic acid-modified SEBS used in Inventive Example 2, and an acrylic-based thermoplastic elastomer (trade name "KURARITY LA2330", manufacturer: KURARAY Co., Ltd.) at a mixing ratio of 50 (weight%) : 50 (weight%), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in

Table 2.

[0109]

In Comparative Example 9, the coating film containing the acrylic-based thermoplastic elastomer is improved in the adhesive force. On the other hand, the tensile breaking strength is deteriorated and thereby the ratio of the tensile breaking strength to the adhesive force is as low as 1.2, so that, in the peelability test, the coating film broke before being completely peeled off.

[0110]

[Comparative Example 10]

Except that the resin composition of the undercoat layer-forming coating material was changed to a mixture obtained by mixing the maleic acid-modified SEBS

used in Inventive Example 2, and the acrylic-based thermoplastic elastomer described in Comparative Example 9 at a mixing ratio of 25 (weight%) : 75 (weight%), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0111]

In Comparative Example 10, the coating film containing the acrylic-based thermoplastic elastomer at a higher content rate than that in Comparative Example 9 is improved in the tensile breaking strength. However, the adhesive force is also increased and thereby the ratio of the tensile breaking strength to the adhesive force is maintained at 1.2, so that, in the peelability test, the coating film broke before being completely peeled off.

[0112]

[Comparative Example 11]

Except that the resin composition of the undercoat layer-forming coating material was changed to only the acrylic-based thermoplastic elastomer described in Comparative Example 9, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0113]

In Comparative Example 11, the acrylic-based thermoplastic elastomer is different from that in Inventive Example 6. In Comparative Example 11, although the adhesive force becomes higher than that in Inventive Example 6, the tensile breaking strength stays at 24, and thereby the ratio of the tensile breaking strength to the adhesive force is as low as 1.2, so that, in the peelability test, the coating film broke before being completely peeled off.

[0114]

[Comparative Example 12]

Except that the resin composition of the undercoat layer-forming coating material was changed to a mixture obtained by mixing butyl rubber (trade name "065", manufacturer: JSR Corporation) and the amine-modified silicone oligomer described in Inventive Example 9 at a mixing ratio of 77 (weight%) : 23 (weight%), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0115]

In Comparative Example 12, the coating film containing the amine-modified silicone oligomer is improved in the adhesive force. On the other had, the tensile breaking strength is as low as 1, so that, in the peelability test, the coating film broke before being completely peeled off.

[0116]

[Comparative Example 13]

Except that the undercoat layer-forming coating material was changed to a commercially-available primer for silicone (trade name "Primer T", manufacturer: Shin-Etsu Chemical Co. Ltd.), an undercoat layer-forming coating material and an

antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0117]

10 In Comparative Example 13, the commercially-available primer is not designed on the assumption of peeling, so that, in the peelability test, the coating film broke before being completely peeled off.

[0118]

[Comparative Example 14]

15 Except that the undercoat layer-forming coating material was changed to a commercially-available primer for silicone (trade name "Primer No.4", manufacturer: Shin-Etsu Chemical Co. Ltd.), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0119]

In Comparative Example 14, the commercially-available primer is not designed on the assumption of peeling, so that, in the peelability test, the coating film broke before being completely peeled off.

30 [0120]



[Comparative Example 15]

Except that the resin composition of the undercoat layer-forming coating material was changed to only ionomer (trade name "Chemipearl SA100", manufacturer: Mitsui Chemicals, Inc.), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1. Then, a coating film was produced through the same operation as that in Inventive Example 1, using a set of coating materials consisting of the above coating materials, and subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0121]

In Comparative Example 15, although the adhesive force is increased, the tensile breaking strength is deteriorated, so that, in the peelability test, the coating film broke before being completely peeled off.

[0122]

[Inventive Example 16]

An antifouling layer-forming coating material was produced to form a coating film through the same operation as that in Inventive Example 1, except that the undercoat layer-forming coating material was not used. Then, the coating film was subjected to the underwater constant load peel test, the adhesive force, tensile breaking strength and cross-cut stretch tests, the 15-knot and 30-knot water flow tests (undercoat layer), the 15-knot and 30-knot water flow tests (antifouling layer), and the evaluation of peelability. Their results are presented in Table 2.

[0123]

In Comparative Example 16, due to lack of the undercoat layer, the adhesive force is almost not exhibited, so that, in the 15-knot and 30-knot water flow tests, peeling occurred in the undercoat layer.

[0124]

[TABLE 1]

	Resin				Solvent
	Composition	Mixing Ratio (Wt%)	Trade Name	Manufacturer	
Inventive Example 1	Amine-modified SEBS (styrene content: 30 wt%, amine-modified amount: 1.8 wt%)	100	Tuftec MP-10	Asahi Kasei Chemicals	Toluene
Inventive Example 2	Maleic acid-modified SEBS (styrene content: 30 wt%, maleic acid-modified amount: 1 wt%)	100	FG1901	Kraton Polymers Japan	Toluene
Inventive Example 3	Maleic acid-modified SEBS (styrene content: 30 wt%, maleic acid-modified amount: 1 wt%)	65	FG1901	Kraton Polymers Japan	Toluene
	Styrene-based tackifier resin	35	Piccolastic A75	SN Chemical	
Inventive Example 4	Hydroxyl group-modified SEBS (Styrene content: 28 wt%)	100	HG252	KURARAY	Toluene
Inventive Example 5	Amine-modified SEBS (styrene content: 25 wt%)	100	DYNARON 8660P	JSR	Toluene
Inventive Example 6	Acrylic-based thermoplastic elastomer (PMMA/2-ethylhexyl acrylate-butyl acrylate block copolymer)	100	KURARITY LK9333	KURARAY	Toluene
Inventive Example 7	Maleic acid-modified SEBS (styrene content: 13 wt%, maleic acid-modified amount: 1 wt%)	100	GFG1924	Kraton Polymers Japan	Toluene
Inventive Example 8	Urethane emulsion	100	HYDRAN WLS 210	DIC	-
Inventive Example 9	PIB	72	B100	BASF	Toluene
	Tackifier	21	Arkon M135	Arakawa Chemical Industries	
	amine-modified silicone oligomer	7	x-40-2651	Shin-Etsu Silicone	
Inventive Example 10	Fluororesin	91	GL252EA (curing agent GL200RB: 5 parts)	DAIKIN INDUSTRIES	-
	Ionomer	9	Chemipearl SA100	Mitsui Chemicals	
Inventive Example 11	Urethane emulsion	100	SUPERFLEX 470	DKS	-
Inventive Example 12	Ionomer-butyl	100	None	Lanxess	Toluene
Inventive Example 13	SEBC	77	G1652	Kraton Polymers Japan	Toluene
	Rosin resin	23	Pensel D135	Arakawa Chemical Industries	
Inventive Example 14	SEBC	95	G1652	Kraton Polymers Japan	Toluene
	alkoxysilicone oligomer	5	KC-89S	Shin-Etsu Silicone	
Inventive Example 15	SEBC	77	G1652	Kraton Polymers Japan	Toluene
	hydrogen-modified silicone oil	23	KF9901	Shin-Etsu Silicone	
Comparative Example 1	SEBS (styrene content: 29 wt%)	100	Tuftec H1053	Asahi Kasei Chemicals	Toluene
Comparative Example 2	SEBS (styrene content: 18 wt%)	100	Tuftec H1062	Asahi Kasei Chemicals	Toluene
Comparative Example 3	SEBS (styrene content 13 wt%)	100	G1657	Kraton Polymers Japan	Toluene
Comparative Example 4	polyvinyl chloride-polyvinyl acetate	100	Solbin CH	Shin-Etsu Silicone	MEK
Comparative Example 5	PVB	100	B60T	KURARAY	Ethanol
Comparative Example 6	Marketed product (urethane-based)	100	Masking Color	TAIYO TORYO	-
Comparative Example 7	Marketed product (SBR-based)	100	1034	Plasti Dip	-
Comparative Example 8	Marketed product (SEBS-based)	100	Liquid Rubber Paint Oil-Based	SDesign	-
Comparative Example 9	Maleic acid-modified SEBS (styrene content: 30 wt%, maleic acid-modified amount: 1 wt%)	50	FG1901	Kraton Polymers Japan	Toluene
	acrylic-based thermoplastic elastomer	50	KURARITY LA2330	KURARAY	
Comparative Example 10	Maleic acid-modified SEBS (styrene content: 30 wt%, maleic acid-modified amount: 1 wt%)	25	FG1901	Kraton Polymers Japan	Toluene
	Acrylic-based thermoplastic elastomer (PMMA/butyl-acrylate block copolymer block copolymer)	75	KURARITY LA2330	KURARAY	
Comparative Example 11	Acrylic-based thermoplastic elastomer (PMMA/butyl-acrylate block copolymer block copolymer)	100	KURARITY LA2330	KURARAY	Toluene
Comparative Example 12	butyl rubber	77	065	JSR	Toluene
	amine-modified silicone oligomer	23	x-40-2651	Shin-Etsu Silicone	
Comparative Example 13	Primer for Silicone	100	Primer T		-
Comparative Example 14	Primer for Silicone	100	Primer No.4		-
Comparative Example 15	Ionomer	100	Chemipearl SA100	Mitsui Chemicals	-
Comparative Example 16	Without undercoat	-	-	-	-

[0125]

[TABLE 2-1]

	Underwater Constant Load Peeling Degree mm	Adhesive Force N/20mm	Tensile Breaking Strength N/20mm	Tensile Breaking Strength/ Adhesive Force	Cross-Cut Stretch Test
Inventive Example 1	0	8.3	165	19.9	0/100
Inventive Example 2	0	9	126	14.0	0/100
Inventive Example 3	0	22	42	1.9	0/100
Inventive Example 4	0	7	150	21.4	0/100
Inventive Example 5	0	14	84	6.0	0/100
Inventive Example 6	0	13	24	1.8	0/100
Inventive Example 7	3	4.9	24	4.9	0/100
Inventive Example 8	0	150	41	3.66	0/100
Inventive Example 9	4	17.7	6.1	2.9	0/100
Inventive Example 10	0	6	4.92	1.83	0/100
Comparative Example 1	0	7.2	111	15.4	100/100
Comparative Example 2	0.2	4.1	75	18.3	100/100
Comparative Example 3	8	2.7	42	15.6	100/100
Comparative Example 4	0	>25	6	<1	3/100
Comparative Example 5	0	>25	9	<1	4/100
Comparative Example 6	50	1	22.5	22.5	100/100
Comparative Example 7	0	5.7	39	6.8	100/100
Comparative Example 8	20	2.7	3	1.1	100/100
Comparative Example 9	0	15	17.4	1.2	0/100
Comparative Example 10	0	18	21.3	1.2	0/100
Comparative Example 11	0	20	24	1.2	3/100
Comparative Example 12	0	>25	1	<1	0/100
Comparative Example 13	0	>25	inevaluable	-	0/100
Comparative Example 14	0	>25	inevaluable	-	0/100
Comparative Example 15	0	>25	15	<1	0/100
Comparative Example 16	50	<1	6	>1.5	100/100

[0126]

[TABLE 2-2]

	30-knot Water Flow Test		15-knot Water Flow Test		Peelability
	Undercoat Layer	Antifouling Layer	Undercoat Layer	Antifouling Layer	
Inventive Example 1	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 2	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 3	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 4	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 5	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 6	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 7	Complete peel-off within 24h	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 8	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 9	Complete peel-off within 24h	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 10	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Comparative Example 1	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 8h	Peel-off without breaking
Comparative Example 2	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 8h	Peel-off without breaking
Comparative Example 3	Complete peel-off within 10h	Complete peel-off within 1h	Complete peel-off within 200h	Complete peel-off within 8h	Peel-off without breaking
Comparative Example 4	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 5	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 6	Complete peel-off within 1h	Complete peel-off within 1h	Complete peel-off within 24h	Complete peel-off within 8h	Peel-off without breaking
Comparative Example 7	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 8h	Peel-off without breaking
Comparative Example 8	Complete peel-off within 4h	Complete peel-off within 1h	Complete peel-off within 100h	Complete peel-off within 8h	Breaking before peel-off
Comparative Example 9	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 10	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 11	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 12	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 13	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 14	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 15	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 16	-	Complete peel-off within 1h	-	Complete peel-off within 1h	Peel-off without breaking

[0127]

Although the 1-mm square cross-cut stretching-caused peeling degrees in Inventive Example 7 and Inventive Example 9 are, respectively, 3 and 4, no peeling occurs in the 15-knot water flow test. On the other hand, the 1-mm square cross-cut stretching-caused peeling degree in Comparative Example 3 is 8, so that, in the 15-knot water flow test, peeling occurred within 200 hours, although no peeling occurred for relatively long period of time. As mentioned above, an actual water flow is 15 knots or less (normally, no more than about 10 knots). Thus, as long as the 100-gram underwater constant load peeling degree is, e.g., 5 or less, it is possible to ensure durability enough for practical use. A resistance actually receiving from a water flow having a 15-knot flow speed is calculated by the formula 1 as a value equivalent to a constant load of 30 g. Then, considering that, as long as the 100-gram underwater constant load peeling degree is 0.5 mm or less, durability (non-peelability) enough for practical use in an environment receiving a 30-knot water flow is considered to be ensured, it is possible to resist a 15-knot water flow, as long as the 30-gram underwater constant load peeling degree is 0.5 mm or less. Further, using the Eyring equation (see the formula (2)) which represents the relationship between the load (stress) and the peeling time (effective life), it is possible to calculate a condition that the 100-gram

underwater constant load peeling degree is less than 5 mm, based on the condition that the 30-gram underwater constant load peeling degree is 0.5 mm or less. For example, in a case where a laminate of an acrylic-based pressure-sensitive adhesive layer (thickness: 50  $\mu\text{m}$ ) and a polyethylene terephthalate substrate (thickness: 38  $\mu\text{m}$ ), and PPM serving as an adherend, 0.38 (mm/20 mm) as a value of the 30-gram underwater constant load peeling degree of is equivalent to 5.0 (mm/20 mm) as a value of the 100-gram underwater constant load peeling degree (stress). Thus, it is considered that, as long as the 100-gram underwater constant load peeling degree is less than 5.0 (mm/20 mm), the undercoat layer is less likely to peel under water, i.e., an obtained coating film is practicable. Here, the constants c and n in the above Examples are determined based on an experimental result that, in the aforementioned method of measuring the 100-gram underwater constant load peeling degree, the coating film is peeled by 10 mm in a peeling test period of 1.5 hours.

[0128]

The reason that PMMA is adopted as an , adherend in the above experimental test is that it is difficult to conduct experimental tests regarding all of various adherends, and that a typical material for use in forming a surface of an underwater structure includes gel coat (acrylic-based polymer/polystyrene, etc.), epoxy resin, enamel (acrylic-based polymer, etc.), aluminum, and antifouling paint, wherein PMMA has intermediate properties among these surface-forming materials. Therefore, a coating material or a set of coating materials exhibiting preferred properties when using PMMA as the adherend can be deemed to bring out preferred properties with respect to at least one or more materials for use in forming a surface of an underwater structure. In regards to the above Examples, test results in cases of using other adherends present in Tables 3 to 7. Except that a different adherend was used, each experimental test was performed in the same manner as described above. Table 3 presents test results in case of using gel coat (trade name "White Coat", manufacturer: Kohshin Chemical Co., Ltd.) as the adherend. Table 4 presents test results in case of using a coating film formed from epoxy paint (trade name "SEAJET03", manufacturer: CHUGOKU MARINE PAINTS, Ltd.) as the adherend. Table 5 presents test results in case of using a coating

film formed from enamel paint (trade name "SEAJET015", manufacturer: CHUGOKU MARINE PAINTS, Ltd.) as the adherend. Table 6 presents test results in case of using a coating film formed from antifouling paint enamel (trade name "SEAJET003", manufacturer: CHUGOKU MARINE PAINTS, Ltd.) as the adherend. Table 7 presents test results in case of using aluminum (trade name "A1080", manufacturer: NISHIYAMA-SEISAKUSHO Co, Ltd., purity of aluminum: 99.5% or more) as the adherend.

[0129]

[TABLE 3-1]

	Underwater Constant Load Peeling Degree mm	Adhesive Force N/20mm	Tensile Breaking Strength N/20mm	Tensile Breaking Strength/ Adhesive Force	Cross-Cut Stretch Test
Inventive Example 1	0	10	165	16.5	0/100
Inventive Example 2	0	9	126	14.0	0/100
Inventive Example 3	0	18	42	2.3	0/100
Inventive Example 4	0	6	150	25.0	0/100
Inventive Example 5	0	16	84	5.3	0/100
Inventive Example 6	0	10	24	2.4	0/100
Comparative Example 1	0	7.6	111	14.6	100/100
Comparative Example 2	30	2	75	37.5	100/100
Comparative Example 3	50	2	42	21.0	100/100
Comparative Example 4	50	0.6	6	<1	3/100
Comparative Example 5	50	0.5	9	<1	4/100
Comparative Example 6	50	1.5	22.5	15.0	100/100
Comparative Example 7	0	4.9	39	8.0	100/100
Comparative Example 8	20	3	3	1.0	100/100
Comparative Example 9	0	13	17.4	1.3	0/100
Comparative Example 10	0	15	21.3	1.4	0/100
Comparative Example 11	0	17	24	1.4	3/100

10

[0130]

[TABLE 3-2]

	30-knot Water Flow Test		15-knot Water Flow Test		Peel Property
	Undercoat Layer	Antifouling Layer	Undercoat Layer	Antifouling Layer	
Inventive Example 1	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 2	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 3	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 4	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 5	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 6	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Comparative Example 1	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 2	Complete peel-off within 4h	Complete peel-off within 1h	Complete peel-off within 24h	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 3	Complete peel-off within 1h	Complete peel-off within 1h	Complete peel-off within 24h	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 4	Complete peel-off within 1h	No peeling	Complete peel-off within 24h	No peeling	Peel-off without breaking
Comparative Example 5	Complete peel-off within 1h	No peeling	Complete peel-off within 24h	No peeling	Peel-off without breaking
Comparative Example 6	Complete peel-off within 1h	Complete peel-off within 1h	Complete peel-off within 24h	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 7	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 8	Complete peel-off within 4h	Complete peel-off within 1h	Complete peel-off within 100h	Complete peel-off within 1h	Breaking before peel-off
Comparative Example 9	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 10	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 11	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off

[0131]

[TABLE 4]

	Underwater Constant Load Peeling Degree mm	Adhesive Force N/20mm	Tensile Breaking Strength N/20mm	Tensile Breaking Strength/Adhesive Force	Cross-Cut Stretch Test	30-knot Water Flow Test		15-knot Water Flow Test		Peelability
						Undercoat Layer	Antifouling Layer	Undercoat Layer	Antifouling Layer	
Inventive Example 1	0	9.3	165	17.7	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 2	0	16	126	7.9	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 4	0	5	150	30.0	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Comparative Example 1	0	5.5	111	20.2	100/100	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 3	50	1.1	42	38.2	100/100	Complete peel-off within 1h	Complete peel-off within 1h	Complete peel-off within 24h	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 4	7	1.1	8	5.5	3/100	Complete peel-off within 10h	No peeling	Complete peel-off within 100h	No peeling	Peel-off without breaking
Comparative Example 8	0	>25	22.5	<1	100/100	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Breaking before peel-off
Comparative Example 7	50	0.4	39	97.5	100/100	Complete peel-off within 1h	Complete peel-off within 1h	Complete peel-off within 24h	Complete peel-off within 1h	Peel-off without breaking

5

[0132]

[TABLE 5]

	Underwater Constant Load Peeling Degree mm	Adhesive Force N/20mm	Tensile Breaking Strength N/20mm	Tensile Breaking Strength/Adhesive Force	Cross-Cut Stretch Test	30-knot Water Flow Test		15-knot Water Flow Test		Peelability
						Undercoat Layer	Antifouling Layer	Undercoat Layer	Antifouling Layer	
Inventive Example 1	0	8	165	20.6	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 2	0	9	126	14.0	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 4	0	5.6	150	26.8	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 5	0	8.3	84	10.1	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Comparative Example 1	0	8	111	13.9	100/100	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 2	0	4.4	75	17.0	100/100	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 3	3	3.9	42	10.8	100/100	Complete peel-off within 10h	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 4	0	17	6	0.4	3/100	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 5	4	0.5	9	18.0	4/100	Complete peel-off within 10h	No peeling	No peeling	No peeling	Peel-off without breaking
Comparative Example 6	0	2.9	22.5	7.8	100/100	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Peel-off without breaking
Comparative Example 7	0	4.7	39	8.3	100/100	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Peel-off without breaking

[0133]

[TABLE 6]

	Underwater Constant Load Peeling Degree	Adhesive Force N/20mm	Tensile Breaking Strength N/20mm	Tensile Breaking Strength/Adhesive Force	Cross-Cut Stretch Test	30-knot Water Flow Test		15-knot Water Flow Test		Peelability
						Undercoat Layer	Antifouling Layer	Undercoat Layer	Antifouling Layer	
Inventive Example 1	0	10	165	16.5	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 2	0	5	126	25.2	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Comparative Example 4	0	15	6	0.4	3/100	No peeling	No peeling	No peeling	No peeling	Breaking before peel-off
Comparative Example 7	0.1	9.3	39	4.2	100/100	No peeling	Complete peel-off within 1h	No peeling	Complete peel-off within 1h	Peel-off without breaking

10

[0134]

[TABLE 7]

	Underwater Constant Load Peeling Degree	Adhesive Force N/20mm	Tensile Breaking Strength N/20mm	Tensile Breaking Strength/Adhesive Force	Cross-Cut Stretch Test	30-knot Water Flow Test		15-knot Water Flow Test		Peelability
						Undercoat Layer	Antifouling Layer	Undercoat Layer	Antifouling Layer	
Inventive Example 1	0	8	165	20.6	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Inventive Example 2	0	7.3	126	17.3	0/100	No peeling	No peeling	No peeling	No peeling	Peel-off without breaking
Comparative Example 5	50	2.1	9	4.3	4/100	Complete peel-off within 1h	No peeling	Complete peel-off within 24h	No peeling	Breaking before peel-off
Comparative Example 7	50	2	39	19.5	100/100	Complete peel-off within 1h	Complete peel-off within 1h	Complete peel-off within 24h	Complete peel-off within 1h	Peel-off without breaking

[0135]

Referring to Table 3 to Table 7, with regard to Inventive Examples 1 and 2, it was verified that, even in the cases where the adherend was changed from the PMMA plate to any one of the gel coat, the coating film formed from the epoxy paint, the coating film formed from the enamel, the coating film formed from the antifouling paint, and aluminum, no peeling occurred in the 15-knot and 30-knot water flow tests, and the coating film could be peeled off without breaking in the evaluation of peelability.

10 [0136]

Further, with regard to Inventive Example 3, it was verified that, even in the case where the adherend was changed from the PMMA plate to the gel coat (trade name "White Coat", manufacturer: Kohshin Chemical Co., Ltd.), no peeling occurred in the 15-knot and 30-knot water flow tests, and the coating film could be peeled off without breaking in the evaluation of peelability.

[0137]

With regard to Inventive Example 4, it was verified that, even in the cases where the adherend was changed from the PMMA plate to any one of the gel coat (trade name "White Coat", manufacturer: Kohshin Chemical Co., Ltd.), the coating film formed from the epoxy paint (trade name "SEAJET03", manufacturer: CHUGOKU MARINE PAINTS, Ltd.) and the coating film formed from the enamel paint (trade name "SEAJET015", manufacturer: CHUGOKU MARINE PAINTS, Ltd.), no peeling occurred in the 15-knot and 30-knot water flow tests, and the coating film could be peeled off without breaking in the evaluation of peelability.

25 [0138]

With regard to Inventive Example 5, it was verified that, even in the case where the adherend was changed from the PMMA plate to one of the gel coat (trade name "White Coat", manufacturer: Kohshin Chemical Co., Ltd.) and the coating film formed



from the enamel paint (trade name "SEAJET015", manufacturer: CHUGOKU MARINE PAINTS, Ltd.), no peeling occurred in the 15-knot and 30-knot water flow tests, and the coating film could be peeled off without breaking in the evaluation of peelability.

[0139]

5           With regard to Inventive Example 6, it was verified that, even in the case where the adherend was changed from the PMMA plate to the gel coat (trade name "White Coat", manufacturer: Kohshin Chemical Co., Ltd.), no peeling occurred in the 15-knot and 30-knot water flow tests, and the coating film could be peeled off without breaking in the evaluation of peelability.

10 [0140]

          Thus, in a case where a coating film comprising a 150  $\mu\text{m}$ -thick undercoat layer and a 100  $\mu\text{m}$ -thick antifouling layer is formed on PMMA serving as an adherend, wherein the 100-gram underwater constant load peeling degree of the coating film is less than 5 (mm/20 mm); the ratio of the tensile breaking strength (N/20 mm) of the coating film to the adhesive force (N/20 mm) of the coating film with respect to the adherend, as measured after immersing the coating film for 5 weeks in pure water at 60°C, is 1.5 or more; and the 1-mm square cross-cut stretching-caused peeling degree of the antifouling layer with respect to the undercoat layer is 0.05 or less, it is possible to bring out an advantageous effect that the coating film is less likely to peel even during use under water, and it is capable of being easily peeled off after use, when used on at least one or more of the above adherends each serving as an underwater structure. That is, in another aspect, the present invention encompasses a set of coating materials comprising an undercoat layer-forming coating material and an antifouling layer-forming coating material, which have the above properties. In yet another aspect, the present invention encompasses an undercoat layer-forming coating material having the above properties, wherein a coating film comprises a 150  $\mu\text{m}$ -thick undercoat layer, and an antifouling layer typically made of a silicone resin or a copper-based compound and formed to have a thickness of, e.g., 100  $\mu\text{m}$ -thick, and wherein the coating film is bonded on PMMA serving as the adherend.

30 [0141]

[Application to Structure other than Underwater Structure]

A coating film was produced using a set of coating materials comprising one of the undercoat layer-forming coating materials in the above Inventive and Comparative Examples and undercoat layer-forming coating materials in the following Inventive  
5 Examples 11 to 15, and the aforementioned antifouling layer-forming coating material, and subjected to evaluations of the adhesive force, the tensile breaking strength, the 1-mm square cross-cut stretching-caused peeling degree and the peelability. Their results are presented in Table 8. Each of the adhesive force, the tensile breaking strength and the peelability were measured in the following manner, and the 1-mm  
10 square cross-cut stretching-caused peeling degree was measured in the aforementioned manner.

[0142]

[Inventive Example 11]

Except that the resin composition of the undercoat layer-forming coating  
15 material was changed to urethane emulsion (trade name " SUPERFLEX 470", manufacturer: DKS Co. Ltd.), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1.

[0143]

20 [Inventive Example 12]

Except that the resin composition of the undercoat layer-forming coating material was changed to ionomer-butyl (no trade name, manufacturer: Lanxess AG), an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1.

25 [0144]

[Inventive Example 13]

In Inventive Example 13, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1, except that the resin composition of the undercoat  
30 layer-forming coating material was prepared by adding a rosin resin (trade name "Pensel

D135", manufacturer: Arakawa Chemical Industries, Ltd., in an amount of 23 weight%, to non-modified SEBS (styrene content: 30 weight%) which is different from the modified SEBS in Inventive Example 1, to thereby improve the adhesive force.

[0145]

5 [Inventive Example 14]

In Inventive Example 14, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1, except that the resin composition of the undercoat layer-forming coating material was prepared by adding alkoxysilicone oligomer (trade name "KC-89S", manufacturer: Shin-Etsu Chemical Co., Ltd.) in an amount of 5 weight% to non-modified SEBS (styrene content: 30 weight%) which is different from the modified SEBS in Inventive Example 1, to thereby improve the adhesive force.

[0146]

[Inventive Example 15]

15 In Inventive Example 15, an undercoat layer-forming coating material and an antifouling layer-forming coating material were produced through the same operation as that in Inventive Example 1, except that the resin composition of the undercoat layer-forming coating material was prepared by adding hydrogen-modified silicone oil (trade name "KF9901", manufacturer: Shin-Etsu Chemical Co., Ltd.) in an amount of 23 weight% to non-modified SEBS (styrene content: 30 weight%) which is different from the modified SEBS in Inventive Example 1, to thereby improve the adhesive force.

[0147]

(Adhesive force)

25 The coating film (laminare) consisting of the 150  $\mu\text{m}$ -thick undercoat layer and the 100  $\mu\text{m}$ -thick antifouling layer was formed on the PMMA plate (trade name "Deraglass" manufactured by ASAHIKASEI TECHNOPLUS Corporation, methyl methacrylate polymer: 96.6% or more), through the same operation as that in the above underwater constant load peel test. The formed coating film was trimmed to have a size of 20 mm  $\times$  100 mm. A force measured when peeling the laminare from the PMMA plate at a peel angle of 180 degrees and at a peel rate of 300 mm/min, using a

30

tensile tester (AUTOGRAPH AGS-X, manufacturer: Shimadzu Corporation) was defined as the adhesive force.

[0148]

(Tensile Breaking Strength)

5           The undercoat layer-forming coating material was coatingly applied to a surface of a separator (trade name "MRF38", manufacturer: Mitsubishi Plastics, Inc., thickness: 50  $\mu\text{m}$ ) by an applicator, and dried at room temperature for 12 hours to form an undercoat layer having a thickness of 150  $\mu\text{m}$ . The antifouling layer-forming coating material was coatingly applied onto the formed undercoat layer by an applicator,  
10 and dried at room temperature for 12 hours to form an antifouling layer having a thickness of 100  $\mu\text{m}$ . In this way, a coating film composed of a laminate of the undercoat layer and the antifouling layer was formed on the separator. The obtained laminate of the undercoat layer and the antifouling layer was trimmed to have a size of 20 mm  $\times$  100 mm, and the tensile breaking strength of the trimmed laminate was  
15 evaluated, using a tensile tester (device name "AUTOGRAPH AGS-X", manufacturer: Shimadzu Corporation).

[0149]

FIG. 6 is a schematic diagram for explaining a verification test about peelability. The coating film (laminate) consisting of the 150  $\mu\text{m}$ -thick undercoat layer  
20 and the 100  $\mu\text{m}$ -thick antifouling layer was formed on the PMMA plate (trade name "Deraglass", manufacturer: ASAHIKASEI TECHNOPLUS Corporation, methyl methacrylate polymer: 96.6% or more), through the same operation as that in the above underwater constant load peel test. The obtained laminate of the undercoat layer and the antifouling layer was trimmed to have a size of 20 mm  $\times$  100 mm. It was  
25 evaluated whether the undercoat layer breaks when peeling the coating film from the PMMA plate at a peel angle of 145 to 180° (in a direction indicated by the arrowed line 7 in FIG. 7).

[0150]

[TABLE 8]

	Adhesive Force N/20mm	Tensile Breaking Strength N/20mm	Tensile Breaking Strength/Adhesive Force	Cross-Cut Stretch Test	Peelability
Inventive Example 1	7	165	23.6	0/100	Peel-off without breaking
Inventive Example 2	8	126	15.8	0/100	Peel-off without breaking
Inventive Example 3	20	42	2.1	0/100	Peel-off without breaking
Inventive Example 4	5.6	150	26.8	0/100	Peel-off without breaking
Inventive Example 5	14	84	6.0	0/100	Peel-off without breaking
Inventive Example 6	13	24	1.8	0/100	Peel-off without breaking
Inventive Example 7	7.5	54	7.2	0/100	Peel-off without breaking
Inventive Example 8	39.9	150	3.8	0/100	Peel-off without breaking
Inventive Example 9	3.88	7.5	1.9	0/100	Peel-off without breaking
Inventive Example 10	4.92	17.7	3.6	0/100	Peel-off without breaking
Inventive Example 11	9.52	186	19.5	0/100	Peel-off without breaking
Inventive Example 12	2.9	23.7	8.2	0/100	Peel-off without breaking
Inventive Example 13	7.3	135	18.5	0/100	Peel-off without breaking
Inventive Example 14	0.8	126	157.5	0/100	Peel-off without breaking
Inventive Example 15	5.41	111	20.5	0/100	Peel-off without breaking
Comparative Example 1	6.8	111	16.3	100/100	Peel-off without breaking
Comparative Example 2	1.5	84	56.0	100/100	Peel-off without breaking
Comparative Example 3	5	60	12.0	100/100	Peel-off without breaking
Comparative Example 4	>25	150	<1	3/100	Breaking before peel-off
Comparative Example 5	>25	171	<1	4/100	Breaking before peel-off
Comparative Example 6	0.3	22.5	75.0	100/100	Peel-off without breaking
Comparative Example 7	0.7	57	81.4	100/100	Peel-off without breaking
Comparative Example 8	1	57	57.0	100/100	Peel-off without breaking
Comparative Example 9	13.7	17.4	1.3	0/100	Breaking before peel-off
Comparative Example 10	17	21.3	1.3	0/100	Breaking before peel-off
Comparative Example 11	18	24	1.3	3/100	Breaking before peel-off
Comparative Example 12	>25	1	<1	0/100	Breaking before peel-off
Comparative Example 13	>25	inevaluable	-	0/100	Breaking before peel-off
Comparative Example 14	>25	inevaluable	-	0/100	Breaking before peel-off
Comparative Example 15	>25	inevaluable	-	0/100	Breaking before peel-off
Comparative Example 16	<1	6	>1.5	100/100	Peel-off without breaking

[0151]

Referring to Table 8, in Inventive Examples 1 to 15 including Inventive Examples in which the 100-gram underwater constant load peeling degree is 5 or less, the adhesive force is 0.5 (mm/20 mm) or more, i.e., the coating film exhibits a sufficiently high adhesive force with respect to the adherend and never easily peels from the adherend even on land to be exposed to weather. The 1-mm square cross-cut stretching-caused peeling degree is 0.00, and thereby adhesion between the undercoat layer and the silicone resin as the antifouling layer is relatively high, so that the antifouling layer is less likely to peel from the undercoat layer, as with the case where the coating film is used under water. Further, the ratio of the tensile breaking strength to the adhesive force is as sufficiently high as 1.5 or more. Thus, it was verified that the coating film can be peeled off without breaking. Regarding applications to a structure other than the underwater structure, it was also verified that the coating film is usable as a primer for silicone paint, e.g., an antifouling layer to be formed on a surface

of any of various exterior members such as a roof and an external wall.

#### LIST OF REFERENCE SIGNS

[0152]

- 5 1: coating film
- 2: undercoat layer
- 3: antifouling layer
- 4: adherend
- 5: stretching direction
- 10 6: water flow direction
- 7: pulling direction

## CLAIMS

1. A coating film on an underwater structure, comprising an undercoat layer to be bonded to the underwater structure, and an antifouling layer bonded to the undercoat layer, wherein:
- 5 layer, wherein:
- a 100-gram underwater constant load peeling degree of the coating film is less than 5 (mm/20 mm);
  - a ratio of a tensile breaking strength (N/20 mm) of the coating film to an adhesive force (N/20 mm) of the coating film with respect to the underwater structure,
  - 10 as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more; and
  - a 1-mm square cross-cut stretching-caused peeling degree of the antifouling layer with respect to the undercoat layer is 0.05 or less.
- 15 2. The coating film as recited in claim 1, wherein the undercoat layer comprises an elastomer.
3. The coating film as recited in claim 2, wherein the elastomer is modified by a compound containing a polar group.
- 20 4. The coating film as recited in claim 2, wherein the undercoat layer further comprises a compound containing a polar group.
5. The coating film as recited in any one of claims 1 to 4, wherein the antifouling layer
- 25 comprises a silicone resin.
6. The coating film as recited in any one of claims 1 to 5, wherein the underwater constant load peeling degree is less than 0.5.

7. The coating film as recited in claim 6, wherein the underwater constant load peeling degree is less than 0.1.

8. The coating film as recited in any one of claims 1 to 7, wherein the ratio is 5.0 or  
5 more.

9. The coating film as recited in any one of claims 1 to 8, wherein the adhesive force is from 4.0 to 15.

10 10. A set of coating materials for forming a coating film which comprises an undercoat layer to be bonded to an underwater structure, and an antifouling layer bonded to the undercoat layer, the set of coating materials comprising an undercoat layer-forming coating material for forming the undercoat layer, and an antifouling layer-forming coating material for forming the antifouling layer,

15 wherein, when the undercoat layer-forming coating material is bonded as a layer having a thickness of 150  $\mu\text{m}$  to PMMA, and the antifouling layer-forming coating material is bonded to the layer of the undercoat layer-forming coating material,

a 100-gram underwater constant load peeling degree of the coating film is less than 5 (mm/20 mm);

20 a ratio of a tensile breaking strength (N/20mm) of the coating film to an adhesive force (N/20mm) of the coating film with respect to the PMMA, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more; and

a 1-mm square cross-cut stretching-caused peeling degree of a layer of the antifouling layer-forming coating material with respect to the layer of the undercoat  
25 layer-forming coating material is 0.05 or less.

11. The set of coating materials as recited in claim 10, wherein the underwater constant load peeling degree is less than 0.5.

30 12. The set of coating materials as recited in claim 11, wherein the underwater constant



load peeling degree is less than 0.1.

13. A set of coating materials for forming a coating film which comprises an undercoat layer to be bonded to a structure, and an antifouling layer bonded to the undercoat layer,  
5 the set of coating materials comprising an undercoat layer-forming coating material for forming the undercoat layer, and an antifouling layer-forming coating material for forming the antifouling layer,

wherein, when the undercoat layer-forming coating material is bonded as a layer having a thickness of 150  $\mu\text{m}$  to PMMA, and the antifouling layer-forming  
10 coating material is bonded to the layer of the undercoat layer-forming coating material,

an adhesive force of the coating film with respect to the PMMA is 0.5 (N/20 mm) or more;

a ratio of a tensile breaking strength (N/20 mm) of the coating film to the adhesive force (N/20mm) is 1.5 or more; and

15 a 1-mm square cross-cut stretching-caused peeling degree of a layer of the antifouling layer-forming coating material with respect to the layer of the undercoat layer-forming coating material is 0.05 or less.

14. The set of coating materials as recited in any one of claims 10 to 13, wherein the  
20 undercoat layer-forming coating material comprises an elastomer.

15. The set of coating materials as recited in claim 14, wherein the elastomer is modified by a compound containing a polar group.

25 16. The set of coating materials as recited in claim 15, wherein the undercoat layer-forming coating material further comprises a compound containing a polar group.

17. The set of coating materials as recited in any one of claims 10 to 16, wherein the antifouling layer-forming coating material comprises a silicone resin.

30

18. The set of coating materials as recited in any one of claims 10 to 17, wherein the ratio is 5.0 or more.

19. The set of coating materials as recited in any one of claims 10 to 18, wherein the  
5 adhesive force is from 4.0 to 15.

20. A method for forming a coating film which comprises an undercoat layer to be bonded to an underwater structure, and an antifouling layer bonded to the undercoat layer, the method comprising the steps of:

10           applying an undercoat layer-forming material to the underwater structure to form the undercoat layer; and

                  applying an antifouling layer-forming material to the undercoat layer to form the antifouling layer,

                  wherein, when the undercoat layer-forming coating material is bonded as a  
15 layer having a thickness of 150  $\mu\text{m}$  to PMMA, and the antifouling layer-forming coating material is bonded to the layer of the undercoat layer-forming coating material,  
                  a 100-gram underwater constant load peeling degree of the coating film is less than 5 (mm/20 mm);

                  a ratio of a tensile breaking strength (N/20 mm) of the coating film to an  
20 adhesive force (N/20 mm) of the coating film with respect to the PMMA, as measured after immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more; and

                  a 1-mm square cross-cut stretching-caused peeling degree of a layer of the antifouling layer-forming coating material with respect to the layer of the undercoat layer-forming coating material is 0.05 or less.

25

21. The method as recited in claim 20, wherein the undercoat layer-forming coating material comprises an elastomer.

22. The method as recited in claim 21, wherein the elastomer is modified by a  
30 compound containing a polar group.

23. The method as recited in claim 21, wherein the undercoat layer-forming coating material further comprises a compound containing a polar group.

5 24. The method as recited in any one of claims 20 to 23, wherein the antifouling layer-forming coating material comprises a silicone resin.

25. The method as recited in any one of claims 20 to 24, wherein the underwater constant load peeling degree is less than 0.5.

10

26. The method as recited in claim 25, wherein the underwater constant load peeling degree is less than 0.1.

15

27. The method as recited in any one of claims 20 to 26, wherein the ratio is 5.0 or more.

28. The method as recited in any one of claims 20 to 27, wherein the adhesive force is from 4.0 to 15.

20

29. An undercoat layer-forming coating material for forming an undercoat layer comprised in a coating film, wherein the coating film further comprises an antifouling layer made of a silicone resin and bonded to the undercoat layer, and the undercoat layer is to be bonded to an structure,

25

and wherein, when the undercoat layer-forming coating material is bonded as a layer having a thickness of 150  $\mu\text{m}$  to PMMA, and an antifouling layer-forming coating material is bonded to the layer of the undercoat layer-forming coating material,

a 100-gram underwater constant load peeling degree of the coating film is less than 5 (mm/20 mm);

30

a ratio of a tensile breaking strength (N/20 mm) of the coating film an adhesive force (N/20 mm) of the coating film with respect to the PMMA, as measured after

immersing the coating film in pure water at 60°C for 5 weeks, is 1.5 or more; and

a 1-mm square cross-cut stretching-caused peeling degree of the antifouling layer with respect to the layer of the undercoat layer-forming coating material is 0.05 or less.

5

30. The undercoat layer-forming coating material as recited in claim 29, wherein the underwater constant load peeling degree is less than 0.5.

31. The undercoat layer-forming coating material as recited in claim 30, wherein the  
10 underwater constant load peeling degree is less than 0.1.

32. An undercoat layer-forming coating material for forming an undercoat layer  
comprised in a coating film, wherein the coating film further comprises an antifouling  
layer made of a silicone resin and bonded to the undercoat layer, and the undercoat layer  
15 is to be bonded to a structure,

and wherein, when the undercoat layer-forming coating material is bonded as a  
layer having a thickness of 150  $\mu\text{m}$  to PMMA, and an antifouling layer-forming coating  
material is bonded to the layer of the undercoat layer-forming coating material,

an adhesive force of the coating film with respect to the PMMA is 0.5 (mm/20  
20 mm) or more;

a ratio of a tensile breaking strength (N/20 mm) of the coating film to the  
adhesive force (N/20mm) is 1.5 or more; and

a 1-mm square cross-cut stretching-caused peeling degree of the antifouling  
layer with respect to the layer of the undercoat layer-forming coating material is 0.05 or  
25 less.

33. The undercoat layer-forming coating material as recited in any one of claims 29 to  
32, wherein the undercoat layer-forming coating material comprises an elastomer.

30 34. The undercoat layer-forming coating material as recited in claim 33, wherein the

elastomer is modified by a compound containing a polar group.

35. The undercoat layer-forming coating material as recited in claim 33, wherein the undercoat layer-forming coating material further comprises a compound containing a  
5 polar group.

36. The undercoat layer-forming coating material as recited in any one of claims 29 to 35, wherein the ratio is 5.0 or more.

10 37. The undercoat layer-forming coating material as recited in any one of claims 29 to 36, wherein the adhesive force is from 4.0 to 15.

FIG.1

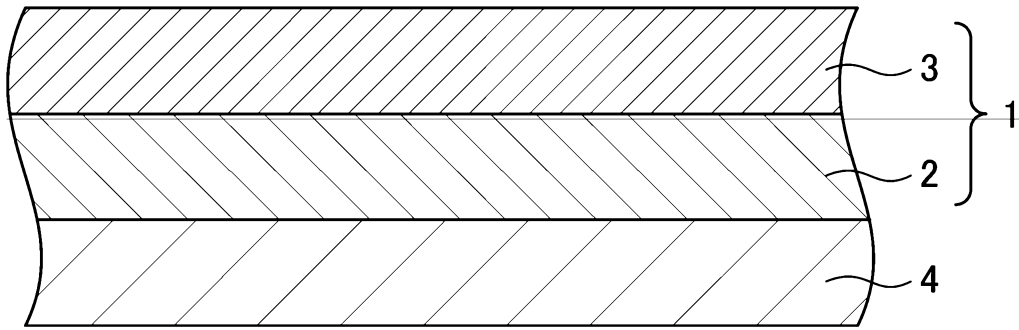


FIG.2

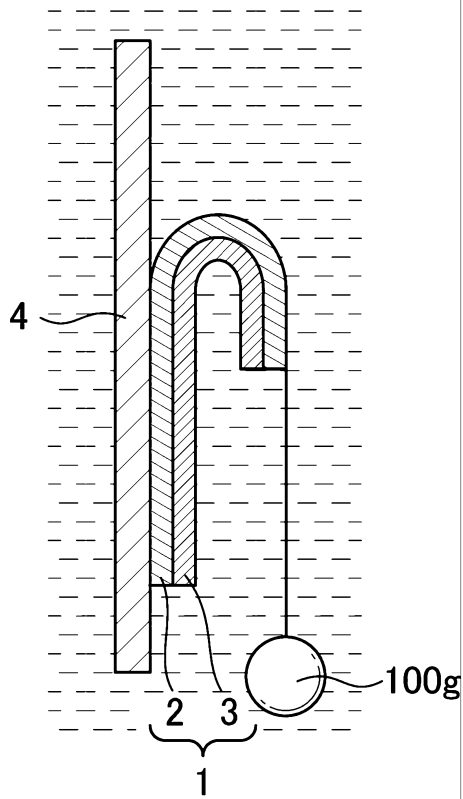


FIG.3

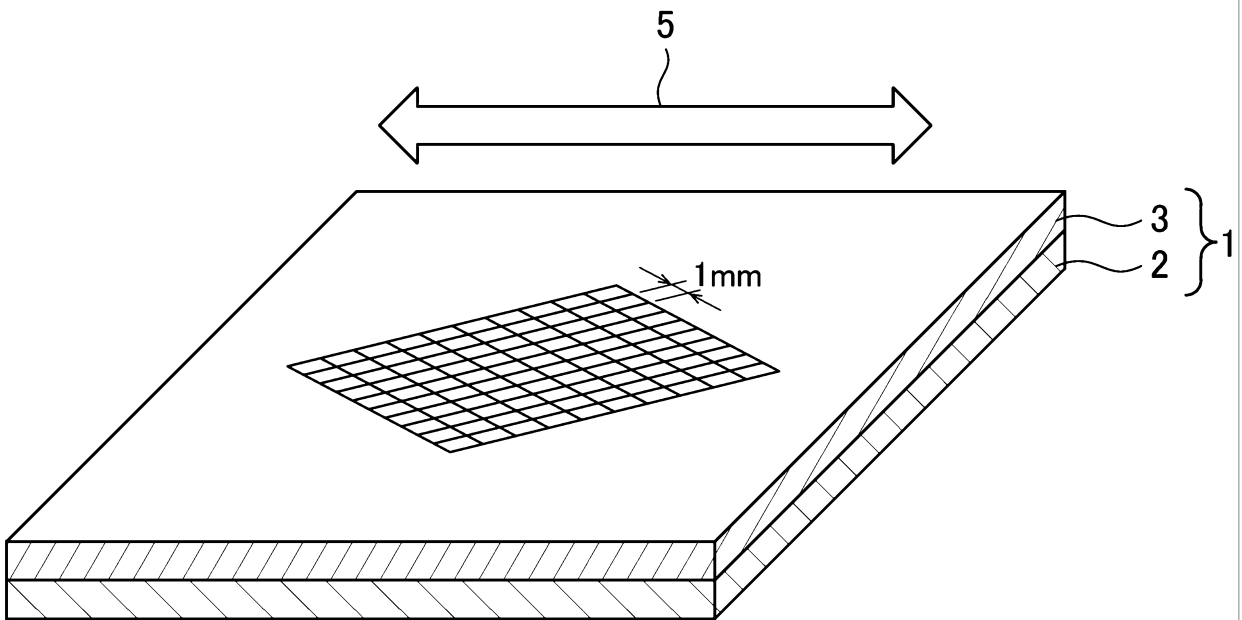


FIG.4

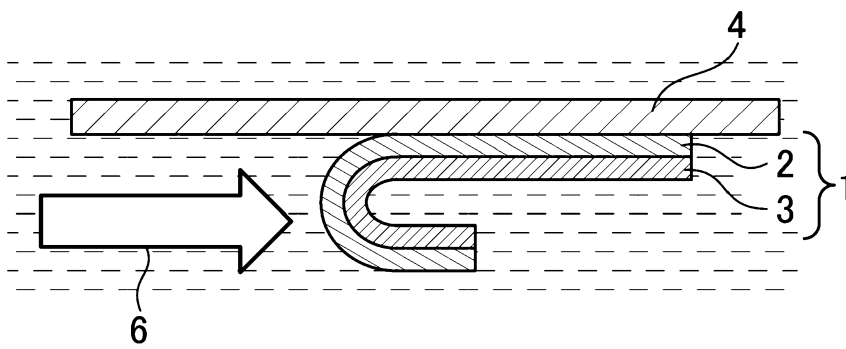


FIG.5

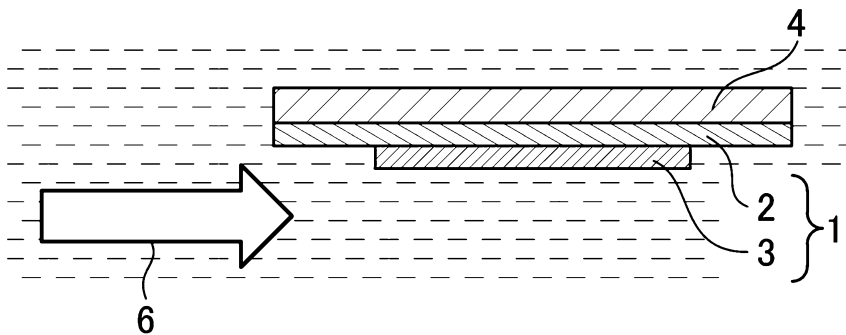


FIG. 6

