



(43) International Publication Date  
21 September 2017 (21.09.2017)

- (51) International Patent Classification:  
*E05D 3/14* (2006.01) *E05D 11/10* (2006.01)
- (21) International Application Number:  
PCT/EP2017/056342
- (22) International Filing Date:  
17 March 2017 (17.03.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
102016000028439 18 March 2016 (18.03.2016) IT
- (71) Applicant: ARTURO SALICE S.P.A. [IT/IT]; VIA PROVINCIALE NOVEDRATESE, 10, 22060 NOVEDRATE (IT).
- (72) Inventor: SALICE, Luciano; VIA RONCO, 30, 22060 CARIMATE (IT).
- (74) Agent: MODIANO, Micaela; MODIANO & PARTNERS, Via Meravigli, 16, 20123 Milano (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HINGE WITH ELASTIC OPENING MEANS FOR DOOR LEAVES OF FURNITURE

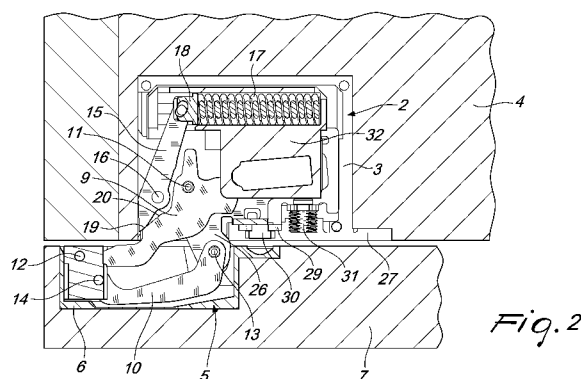

(57) Abstract: A hinge (1) for door leaves of furniture and the like, which comprises a fixed part (2) that can be connected to a body of a piece of furniture and a movable part (5) that can be connected to a door leaf (7) of the piece of furniture, the fixed part (2) and the movable part (5) being mutually connected in an oscillating manner by way of an articulation system that comprises at least one articulation axis (11,12,13,14) and a rocker (9,10), the hinge (1) comprising elastic means (17,23) for opening the hinge which are functionally connected to the at least one rocker (9,10); the fixed part (2) of the hinge is shaped so that it can be inserted into a seat (3) defined within the thickness of an upper or lower wall (4) of a piece of furniture, the fixed part (2) and the at least one rocker (9,10) extending along a plane that is perpendicular to the at least one articulation axis, and further comprising a movable element (15,21) for transmission between the elastic opening means (17,23) and the at least one rocker (9,10), the transmission element (15,21) extending and being movable along the perpendicular plane and having a thrust surface (19,24) that is shaped and arranged in order to act against a lateral contact surface (20,25) of the rocker (9,10).



## HINGE WITH ELASTIC OPENING MEANS FOR DOOR LEAVES OF FURNITURE

The present invention relates to a hinge with elastic opening means for door leaves of furniture or the like, in particular a hinge that has a fixed  
5 part or wing, shaped so that it can be inserted into a seat provided in the thickness of an upper or lower wall of the piece of furniture.

In the furniture sector, furniture is often used that has door leaves with no handles or similar grip means; in such case, the door leaves are conventionally connected in an oscillating manner to the body of the item of  
10 furniture by way of hinges provided with springs adapted to impose a movement on such door leaves in the direction of opening, at least in a neighborhood of the closed position of the door leaf.

Furthermore, adapted coupling devices are provided for releasably locking the door leaves in the closed position, and these devices, following  
15 a light push on the closed door leaf by the user, are released in order to permit the springs of the hinges to generate a movement of the door leaf in the direction of opening at least by a first amount sufficient for the user to grasp it and so open it completely.

In general the hinges used for such application comprise a fixed part  
20 that can be connected to an inner lateral surface of the body of the piece of furniture and a movable part, constituted by a box-like body, that can be connected to the leaf, such parts being mutually articulated in an oscillating manner by way of at least one rotation axis and more preferably by way of an articulation system that comprises a plurality of articulation axes and  
25 connecting rockers.

Furthermore, as mentioned, such hinges comprise a spring acting in the direction of opening, which conventionally, such as for example shown in EP 1 477 628, is in the form of a V-shaped laminar spring or a torsion spring which, by virtue of the fact that the rockers extend along planes that  
30 pass through the articulation axes, is contoured to act directly on one of the

rockers.

However, the known solutions for such opening springs are not suitable for or cannot be applied to a different, completely invisible type of hinge, in which the fixed part or wing has a flat shape structure in order to  
5 be insertable in a seat provided in the thickness of the upper or lower wall of the piece of furniture, and in which the rockers extend along a plane perpendicular to the articulation axes, owing to the shape structure of the fixed part of the hinge and owing to the shape structure and arrangement of the rockers.

10 The aim of the present invention is to provide a hinge for door leaves of furniture or the like, of the type having a fixed part or wing shaped so that it can be inserted into a seat provided in the thickness of the upper or lower wall of the piece of furniture, that has elastic opening means with reduced encumbrance in order to be accommodated in the fixed part of such  
15 type of hinge, and that are configured to provide an effective elastic action to open the door leaves.

Within this aim, an object of the present invention is to provide a hinge for door leaves of furniture or the like, of the type mentioned above, in which the elastic opening means are configured simply and involve as  
20 few construction modifications as possible with respect to a corresponding version of the hinge with a spring that acts in the direction of closing.

Another object of the present invention is to provide a hinge for door leaves of furniture or the like that is highly reliable, easily and practically implemented and low cost.

25 This aim and these and other objects which will become better apparent hereinafter are achievable by a hinge for door leaves of furniture and the like, which comprises a fixed part that can be connected to a body of a piece of furniture and a movable part that can be connected to a door leaf of the piece of furniture, the fixed part and the movable part being mutually  
30 connected in an oscillating manner by way of an articulation system that

comprises at least one articulation axis and a rocker, the hinge comprising elastic means for opening the hinge which are functionally connected to said at least one rocker, characterized in that said fixed part of the hinge is shaped so that it can be inserted into a seat defined within the thickness of an upper or lower wall of a piece of furniture, said fixed part and said at least one rocker extending along a plane that is perpendicular to said at least one articulation axis, and

in that it comprises a movable element for transmission between said elastic opening means and said at least one rocker, said transmission element extending and being movable along said perpendicular plane and having a thrust surface that is shaped and arranged in order to act against a lateral contact surface of said rocker.

Further characteristics and advantages of the invention will become better apparent from the description of some preferred, but not exclusive, embodiments of the hinge according to the present invention, which are illustrated by way of non-limiting example in the accompanying drawings, wherein:

Figure 1 is a perspective view of the hinge according to the invention;

Figure 2 is a cross-sectional view of a first embodiment of the hinge according to the invention, installed in a piece of furniture, with the door leaf in the closed condition;

Figure 3 is a cross-sectional view of the hinge of Figure 2, with the door leaf in the partially open condition; and

Figure 4 is a cross-sectional view of a second embodiment of the hinge according to the present invention.

With reference to the figures, a hinge according to the invention, which is generally designated with the reference numeral 1, comprises a fixed part or wing 2, which is shaped to be inserted into a seat 3 provided in the thickness of an upper or lower wall 4 of a piece of furniture and which opens on a front side of such walls, and a movable part 5 which is shaped to

be inserted in a seat 6 defined in a door leaf 7 of the piece of furniture.

The hinge comprises at least one rocker and an articulation axis and more preferably a first rocker 9 and a second rocker 10 and four articulation axes 11, 12, 13, 14 that are adapted to define a quadrilateral articulation system and to allow the articulation of the movable part 5 with respect to the fixed part 2 of the hinge.

In order to be inserted into the seat 3 provided in the upper or lower wall 4 of the piece of furniture, the fixed part 2 of the hinge conveniently has a flat shape structure that extends along a plane perpendicular to the articulation axes 11-14 of the articulation system; in turn the rockers 9, 10 also have a flat shape structure and extend along a plane perpendicular to the articulation axes 11-14, so as to be accommodatable in the flat fixed part 2.

By virtue of such shape structure, the hinge is completely concealed and the only parts of the hinge that protrude from the seats 3 and 6 for insertion of the parts 2 and 5 of the hinge are the rockers 9 and 10, which are exposed to view when the door leaf of the piece of furniture is open.

The hinge likewise comprises elastic opening means that are functionally connected to one of the rockers 9, 10 of the articulation system.

According to the present invention, the hinge comprises a movable element for transmission between the elastic opening means and the rocker, such element extending and able to move along the aforementioned perpendicular plane; furthermore, the transmission element is provided with a thrust surface that is shaped and arranged in order to act against a lateral contact surface of the rocker 9 pressed by such elastic means, preferably at least in a neighborhood of the closed position of the hinge.

In particular, in the first embodiment illustrated in Figures 2 and 3, the transmission element is constituted by a lever 15 that is supported in an oscillating manner by the fixed part 2 of the hinge, preferably by way of an oscillation axis 16 arranged in an intermediate position along such lever, so

as to be co-planar with the rockers 9, 10.

In this case, the elastic opening means are preferably in the form of a helical spring 17 arranged in a seat of the fixed part 2 so as to act on a first end of the lever 15, for example by way of a tappet 18 connected to such lever in an oscillating manner; at the opposite end of the lever 15 is the thrust surface 19, which extends parallel to the articulation axes 11-14 in order to act against the lateral contact surface 20 of the rocker 9 which also extends parallel to the articulation axes.

Preferably the thrust surface 19 and/or the contact surface 20 are cam-shaped so as to conveniently modulate the opening action imposed by the elastic means.

Preferably the oscillating lever 15 extends in a direction substantially perpendicular to the front surface 2' of the fixed part 2 of the hinge, while the accommodation seat for the spring 17 extends parallel to the front surface 2'; the possibility is not ruled out however for the oscillating lever 15 and the spring to be arranged differently.

In the second embodiment, shown in Figure 4, the transmission element is constituted by a roller 21 that is supported so that it can rotate by a moveable element 22 that in turn is arranged so that it can slide in a seat of the fixed part 2 and is pressed by the elastic opening means, preferably in the form of a helical spring 23.

In particular the roller 21 extends on a plane perpendicular to the articulation axes 11-14 so as to be co-planar with the rocker 9 with which it comes into contact and it can rotate along an axis parallel to such articulation axes.

In such embodiment, the thrust surface according to the invention is constituted by the peripheral surface 24 of the roller 21, which acts on a lateral contact surface 25 of the rocker 9.

Preferably the contact surface 25 is cam-shaped so as to conveniently modulate the opening action imposed by the elastic means.

As an alternative to the helical springs, the elastic opening means can be constituted for example by torsion springs, laminar springs or springs of another type.

Preferably the hinge comprises adjustment means for adjusting the  
5 relative position between the fixed part 2 and the movable part 5 of the hinge in at least one among the lateral, front and vertical directions.

For example, in order to carry out the vertical adjustment of the hinge and therefore of the door leaf 7, preferably the movable part 5 comprises a first box-like part 5' that can be fixed to the leaf 7, a second part 5'' that is  
10 connected to the first part 5' so that it can slide vertically, and an eccentric adjustment element 8 that makes it possible to define the relative position between the parts 5', 5''.

In order to carry out the other adjustments, the rockers 9, 10, as well as the lever 15, are pivoted on a plate-like element 26 by way of the  
15 respective rotation axes 11, 13, 16, such element 26 also bearing a supporting body 32 in which the seat is defined for accommodating the elastic opening means 17, 23.

The plate-like element 26 and the supporting body 32 are supported so that they can move in a lateral direction by a second lower plate-like  
20 element 29 which in turn is accommodated so that it can move in a frontal direction in the fixed part 2, which preferably has a box-like body defined by an upper enclosure 27 and a lower enclosure 28.

In order to define the adjustment positions between the parts described above, there are frontal adjustment means 31, preferably of the  
25 screw type, to define the position of the plate-like element 29 with respect to the upper enclosure 27, and there are also lateral adjustment means 30, preferably of the cam screw type, so as to define the lateral position of the plate-like element 26 with respect to the plate-like element 29.

The adjustment means 8, 30, 31 conveniently comprise actuation  
30 means that can be maneuvered, for example in the form of screw head-type

slots, and are accessible to the user from the frontal side of the piece of furniture within which the hinge is mounted, in order to allow an easy adjustment.

Further embodiments are also possible for the transmission of the elastic opening force from the elastic means to the rocker: it is for example possible to have a plurality of transmission elements between the elastic opening means and the rocker, in the form of a toggle linkage or other set of mutually articulated levers, or indeed another chain of kinematic transmission elements.

In practice it has been found that the hinge according to the present invention fully achieves the set aim and objects, since it is provided with elastic opening means and corresponding transmission means which have reduced encumbrance in order to be accommodated in the flat fixed part of the hinge of the type under consideration, and which are configured to provide an effective elastic action to open the door leaves.

Furthermore, the elastic opening means and the corresponding transmission means are configured simply and involve as few construction modifications as possible with respect to a corresponding version of the hinge with a spring that acts in the direction of closing.

The hinge, thus conceived, is susceptible of numerous modifications and variations, all of which are within the scope of the appended claims.

Moreover, all the details may be substituted by other, technically equivalent elements.

In practice the materials employed, as well as the contingent dimensions and shapes, may be any according to requirements and to the state of the art.

The disclosures in Italian Patent Application No. 102016000028439 (UA2016A001798) from which this application claims priority are incorporated herein by reference.

Where technical features mentioned in any claim are followed by



reference signs, those reference signs have been included for the sole purpose of increasing the intelligibility of the claims and accordingly, such reference signs do not have any limiting effect on the interpretation of each element identified by way of example by such reference signs.

## CLAIMS

1. A hinge (1) for door leaves of furniture and the like, which comprises a fixed part (2) that can be connected to a body of a piece of furniture and a movable part (5) that can be connected to a door leaf (7) of the piece of furniture, the fixed part (2) and the movable part (5) being  
5 mutually connected in an oscillating manner by way of an articulation system that comprises at least one articulation axis (11, 12, 13, 14) and a rocker (9, 10), the hinge comprising elastic means (17; 23) for opening the hinge which are functionally connected to said at least one rocker,  
10 characterized in that said fixed part (2) of the hinge is shaped so that it can be inserted into a seat (3) defined within the thickness of an upper or lower wall (4) of a piece of furniture, said fixed part (2) and said at least one rocker (9, 10) extending along a plane that is perpendicular to said at least one articulation axis (11, 12, 13, 14), and

15 in that it comprises a movable element (15; 21) for transmission between said elastic opening means (17; 23) and said at least one rocker (9, 10), said transmission element extending and being movable along said perpendicular plane and having a thrust surface (19; 24) that is shaped and arranged in order to act against a lateral contact surface (20; 25) of said  
20 rocker (9, 10).

2. The hinge according to claim 1, characterized in that said thrust surface (19; 24) of the transmission element (15; 21) acts on said contact surface (20; 25) of the rocker at least in a neighborhood of the closed position of the hinge.

25 3. The hinge according to claim 1 or 2, characterized in that said thrust surface (19; 24) of the transmission element (15; 21) and said contact surface (20; 25) of the rocker extend parallel to said at least one articulation axis (11, 12, 13, 14).

4. The hinge according to one or more of the preceding claims,  
30 characterized in that said transmission element is constituted by a lever (15)

that is supported in an oscillating manner by said fixed part (2) of the hinge.

5 5. The hinge according to claim 4, characterized in that said lever (15) is supported in an oscillating manner by way of an oscillation axis (16) that is arranged in an intermediate position along said lever, said elastic means (17) acting on a first end of the lever (15), said thrust surface (19) being provided at an end that is opposite with respect to said first end.

10 6. The hinge according to one or more of the preceding claims 1 to 3, characterized in that said transmission element is constituted by a roller (21) that is supported so that it can rotate by a sliding element (22) pressed by said elastic means (23).

7. The hinge according to one or more of the preceding claims, characterized in that said thrust surface (24) of the transmission element (21) and/or said lateral contact surface (25) of said rocker (9, 10) is cam-shaped.

15 8. The hinge according to one or more of the preceding claims, characterized in that said elastic means (17; 23) comprise a helical spring.

20 9. The hinge according to one or more of the preceding claims, characterized in that the articulation system between the fixed part (2) and the movable part (5) of the hinge comprises four articulation axes (11, 12, 13, 14) and two rockers (9, 10), which extend along said plane at right angles to the articulation axes.

25 10. The hinge according to one or more of the preceding claims, characterized in that it comprises adjustment means (8, 30, 31) for adjusting the relative position between said fixed part (2) and said movable part (5) of the hinge in at least one among the lateral, front and vertical directions.

11. The hinge according to claim 10, characterized in that said adjustment means (8, 30, 31) of the hinge are provided with actuation means that can be accessed from the front side of the body of the piece of furniture.

30 12. The hinge according to one or more of the preceding claims, characterized in that said seat (3) for the fixed part (2) of the hinge opens

onto a front side of the body of the piece of furniture.



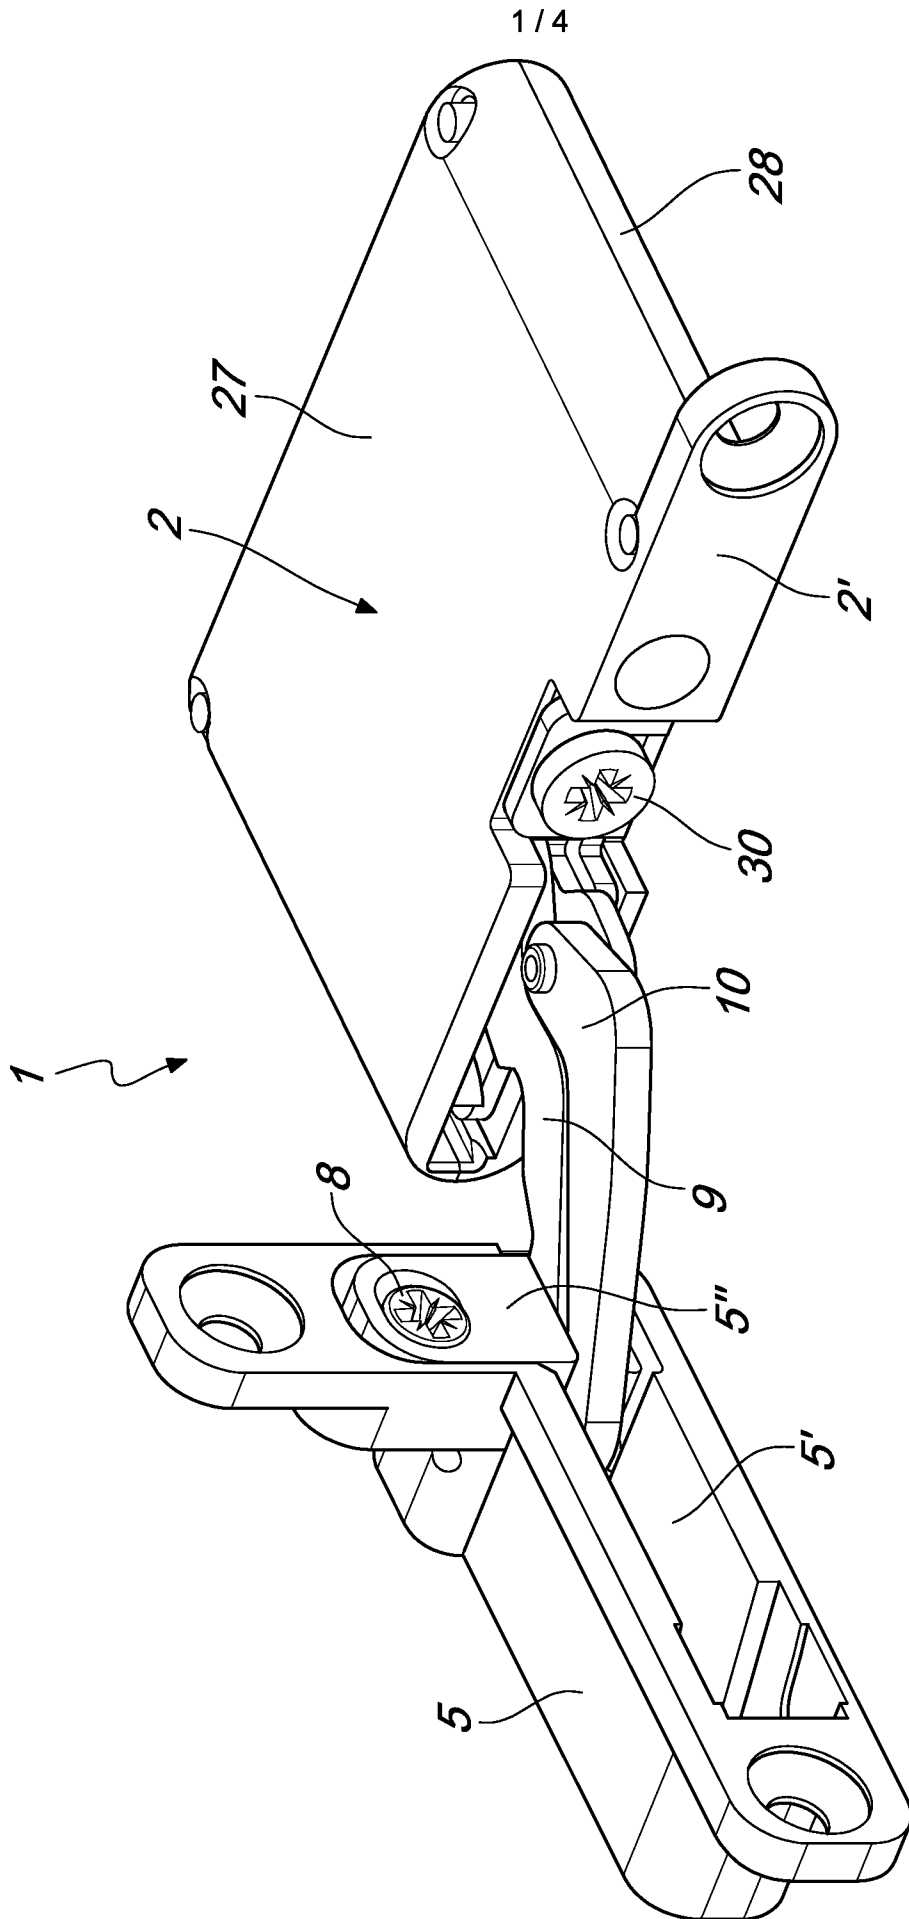


Fig. 1





*Fig. 3*

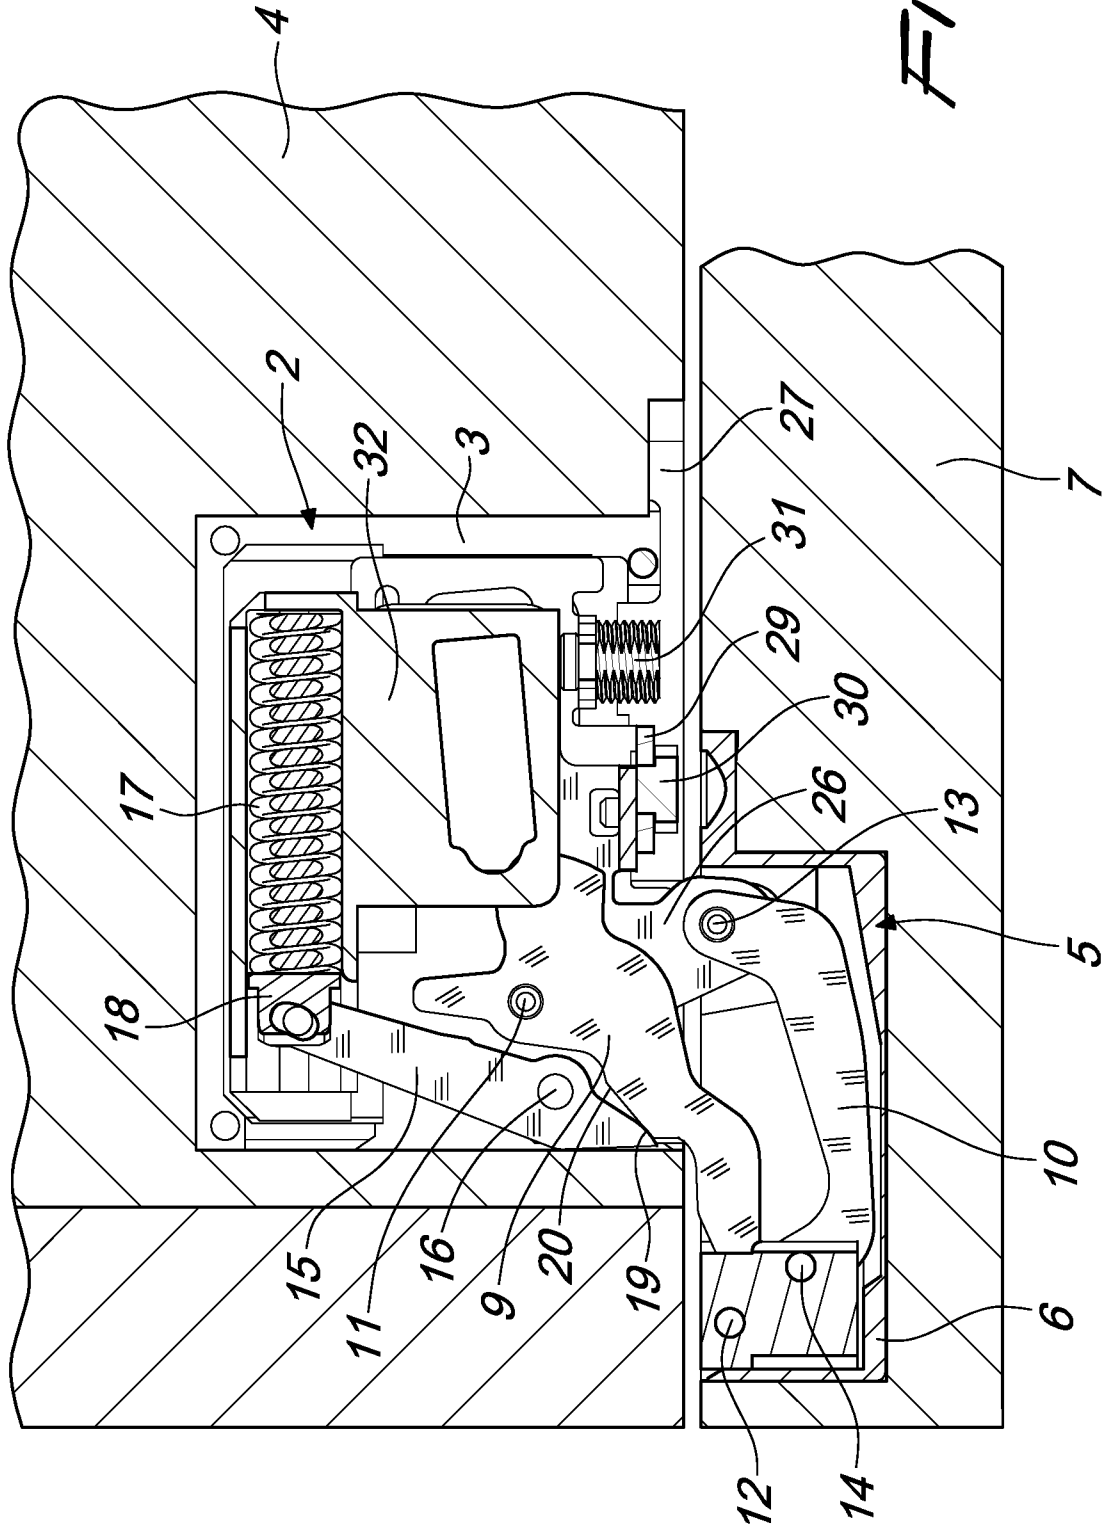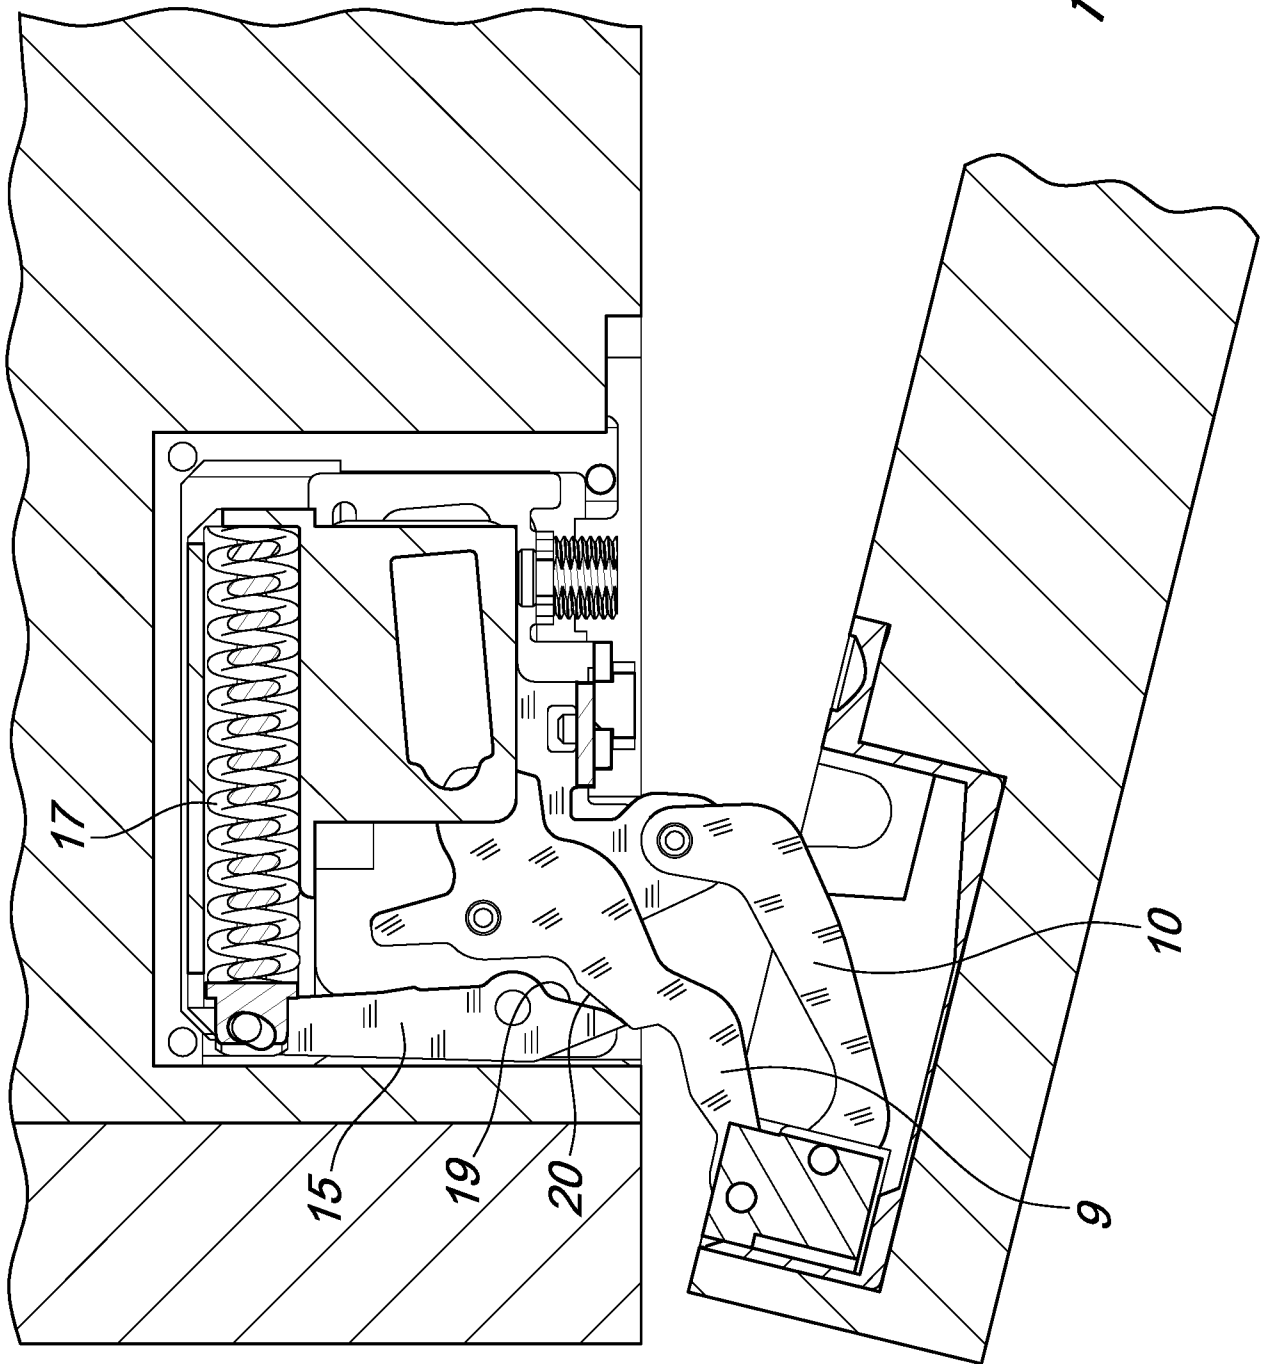



**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/EP2017/056342

**A. CLASSIFICATION OF SUBJECT MATTER**  
 INV. E05D3/14 E05D11/10  
 ADD.  
 According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**  
 Minimum documentation searched (classification system followed by classification symbols)  
 E05D  
 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
 EPO-Internal, WPI Data

<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	DE 20 2006 013360 U1 (HETTICH ONI GMBH & CO KG [DE]) 3 January 2008 (2008-01-03) paragraph [0015] - paragraph [0023]; figures 1-3	1-5,7-12 6
X A	EP 2 130 996 A2 (BAUXT S P A [IT]) 9 December 2009 (2009-12-09) abstract; figure 6	1-3,6-8, 10-12 4,5,9
X	US 4 083 082 A (HOLMES FRANK A) 11 April 1978 (1978-04-11) column 2, line 46 - column 4, line 11; figures 2,3	1-3,7-12

Further documents are listed in the continuation of Box C.  See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search <b>8 May 2017</b>	Date of mailing of the international search report <b>17/05/2017</b>
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer <b>Berote, Marc</b>
--	---

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/056342

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 202006013360 U1	03-01-2008	AU 2007291476 A1	06-03-2008
		CN 101512088 A	19-08-2009
		DE 202006013360 U1	03-01-2008
		DE 202007019637 U1	22-09-2014
		EP 2057333 A1	13-05-2009
		ES 2537090 T3	02-06-2015
		JP 5055590 B2	24-10-2012
		JP 2010501755 A	21-01-2010
		KR 20090066280 A	23-06-2009
		RU 2009111211 A	10-10-2010
		TW 200821447 A	16-05-2008
		WO 2008025592 A1	06-03-2008
-----			
EP 2130996	A2	09-12-2009	NONE
-----			
US 4083082	A	11-04-1978	NONE
-----			