



Users can mount the DJI Ronin Focus Wheel (not included) to the Ronin Series Accessories (RSA)/NATO ports of DJI RS 2 and use the communication interface of the focus wheel to connect with and control DJI RS 2. Below is an illustration of the focus wheel and how to connect:

Below shows how DJI RS 2 connects to a PC via the CAN converter:

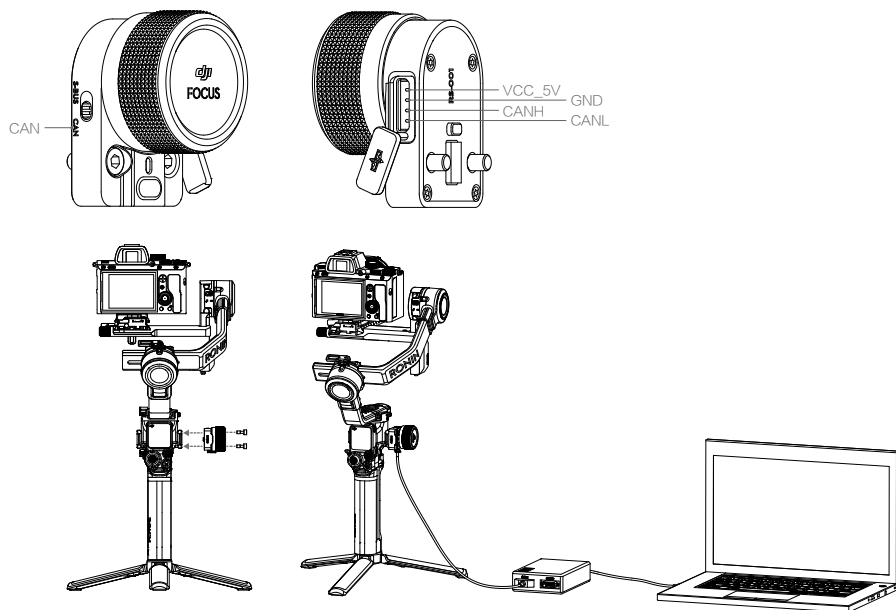

Users can also use the Ronin Series Accessories (RSA)/NATO ports of DJI RS 2 to directly connect with and control DJI RS 2. Below is an illustration of the RSA/NATO ports:

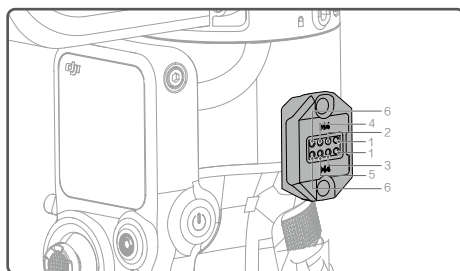

Pin	Signal	Description	Notes
1	VCC	Power output	Supply voltage range is $8\text{ V} \pm 0.4\text{ V}$, rated output current is 0.8 A, and the peak value is 1.2 A
2	CANL	CANL	/
3	SBUS_RX	SBUS input	/
4	CANH	CANH	/
5	AD_COM	Accessory detect port	DJI RS 2 has a built-in pull-up resistor and it is recommended to use an accessory with a 10-100k pull-down resistor. The NATO port will not output power unless an accessory is mounted
6	GND	GND	/