


.350 REMINGTON MAGNUM

The .350 Remington Magnum was introduced in 1965 in the Model 600 carbine. The .350 Remington Magnum, along with the 6.5mm Remington Magnum, attempted to duplicate the performance of “long-action” rifle cartridges in a small, handy, lightweight carbine.

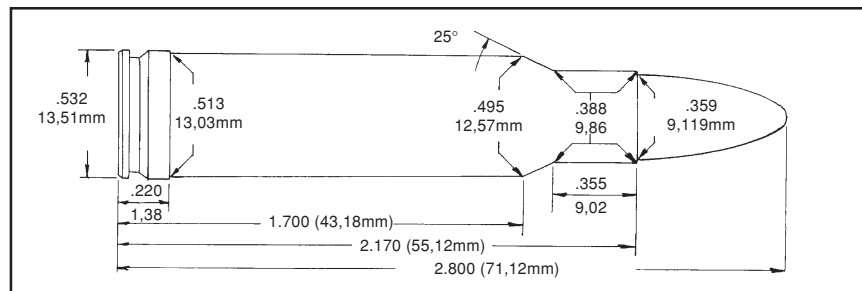

The Remington design team succeeded admirably. The .350 Remington Magnum is more than adequate for any North American game — including large bear. The American shooting public was simply not ready for the futuristic looking Model 600 carbine or the specialized cartridges designed for it.

In an attempt to salvage the cartridges, Remington later chambered the Model 700 BDL rifle for both the .350 and 6.5mm Remington Magnums as did Ruger with their Model 77 bolt action rifle. This was a case of too little, too late, and since 1974 only one short run of the Remington Model 700 Limited Edition Classics have been made in the .350 Remington Magnum. This is unfortunate since the .350 Remington Magnum will duplicate the performance of the .35 Whelen in an 18-inch barrel and will easily exceed it when fired in barrels of equal length.

The rifling twist and throat dimensions of the .350 Remington Magnum are particularly well suited to shooting cast bullets but the short overall length reduces the selection of suitable bullets that will feed from the magazine and give adequate accuracy.

The SAAMI Maximum Average Pressure for the .350 Remington Magnum is 53,000 C.U.P.

.350 REMINGTON MAGNUM

Gun	DOUGLAS	Max Length	2.170"
Barrel Length	20"	Trim Length	2.150"
Primer	REM 9° M	OAL Max	2.800"
Case	REM	OAL Min	2.730"

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
204 (L) RNGC	2015	47.7	2389	2015	53.0	2715	47,300	2.700"	LY358315
	2230	48.6	2353	2230	54.0	2674			
	2460	48.6	2312	2460	54.0	2627			
	2495	49.1	2311	2495	54.5	2626			
	2520	49.5	2348	2520	55.0	2668			
HDY 200 SP	2015	48.6	2445	2015	54.0	2778	50,700	2.800"	
	2230	53.1	2504	2230	59.0	2846			
	2460	53.6	2499	2460	59.5	2840			
	2495	53.1	2441	2495	59.0	2774			
	2520	54.0	2647	2520	60.0	3008			
SRA 225 SBT	2015	47.3	2338	2015	52.5	2657	52,600	2.800"	
	2230	51.3	2392	2230	57.0	2718			
	2460	51.8	2384	2460	57.5	2709			
	2495	50.0	2270	2495	55.5	2580			
	2520	51.8	2367	2520	57.5	2690			
NOS 225 SP	2015	47.3	2306	2015	52.5	2620	53,000	2.800"	
	2230	51.3	2409	2230	57.0	2738			
	2460	51.8	2407	2460	57.5	2735			
	2495	49.1	2269	2495	54.5	2578			
	2520	51.8	2374	2520	57.5	2698			
NOS 250 SP	2015	45.9	2200	2015	51.0	2500	52,600	2.800"	
	2230	48.6	2217	2230	54.0	2519			
	2460	50.4	2267	2460	56.0	2576			
	2495	48.6	2141	2495	54.0	2433			
	2520	50.9	2213	2520	56.5	2515			