


NOTES:

- 1) THIS DETAIL SHALL NOT BE UTILIZED IF STUD DEPTH EXCEEDS 8"
- 2) RIGID FACING MATERIAL APPLIED TO BOTH STUD FLANGES MAY BE UTILIZED IN LIEU OF U-CHANNEL, PROVIDED THE FOLLOWING CRITERIA:
 - A) STUD HEIGHT DOES NOT EXCEED 16'
 - B) SHEATHING APPLIED TO BOTH STUD FLANGES FULL HEIGHT PER APPLICABLE A.S.T.M. STANDARDS
 - C) STUD SHALL BE BRACED IF ONE FLANGE IS TEMPORARILY UNSHEATHED
 - D) STUD GAUGE IS A MAX. OF 16 ga.



U CHANNEL DETAIL

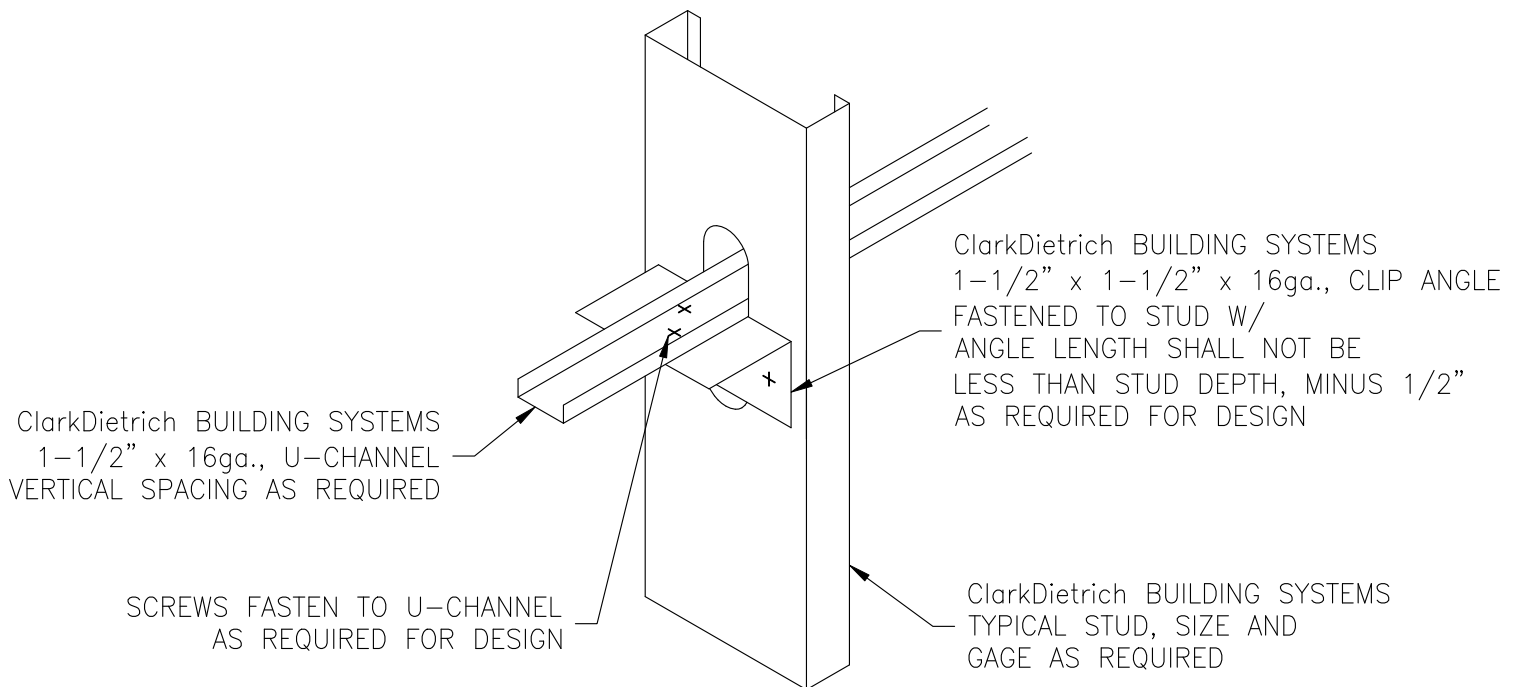

ClarkDietrich
BUILDING SYSTEMS

Engineering Services: (877) 832-3206

Technical Services: (888) 437-3244

The CAD detail library is intended to provide general framing details only and does not replace the judgments and designs of a qualified architect and/or engineer. The details are provided as a starting tool to assist the user in creating and detailing cold-formed steel framing construction details. Each detail including accompanying text must be thoroughly evaluated and approved by a qualified architect or engineer. | Find over 500 CAD details at cad.clarkdietrich.com | © Copyright 2015 ClarkDietrich Building Systems