

# QSFP28-4SFP28-AOCxM

100G QSFP28 to 4x 25G SFP28 Active Optical Cables

1M, 2M, 3M, 5M, 7M, 10M, 15M, 20M, 25M, 30M, 50M Reach



## Product Features

- ❖ Electrical interface compliant to SFF-8436 and SFF-8431
- ❖ 850nm VCSEL laser and PIN photo-detector
- ❖ Maximum link length of 70m on OM3 MMF and 100m on OM4 MMF
- ❖ Digital diagnostics functions are available via the I2C interface
- ❖ RoHS compliant
- ❖ Hot Pluggable

## Applications

- ❖ 25GBASE-SR Ethernet
- ❖ InfiniBand QDR, SDR, DDR
- ❖ Servers, switches, storage and host card adapters

## Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature	TST	-20	85	°C
Relative Humidity	RH	0	85	%
Case Operating Temperature	TOPC	0	70	°C
Supply Voltage	VCC	-0.3	3.6	V

## Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case temperature	TA	0		+70	°C
Supply Voltage	VCC	3.13	3.3	3.47	V
Supply current (SFP28)	Icc			300	mA
Supply current (QSFP28)	Icc			650	mA
Channel Data Rate	Dr		25.78125		Gbps

## Transmitter

Measured condition: Channel Data Rate 25.78125Gbps, VRCCR=3.3V, PRBS31, Case Operating Temperature 0~70°C


Parameter	Symbol	Min	Typical	Max	Unit
<b>QSFP28</b>					
Centre Wavelength	$\lambda_c$	840	850	860	nm
RMS spectral width	$\sigma$			0.65	nm
Average launch power, each lane	PAVG	-7.5	-1	+2.5	dBm
Input differential swing	V <sub>in</sub> PP	300		1100	mV
Input differential impedance	Z <sub>in</sub>	90	100	110	$\Omega$
Extinction Ratio	ER	2.0			dB
<b>SFP28</b>					
Input differential impedance	Z <sub>in</sub>	90	100	110	$\Omega$
Differential Data Input Swing	V <sub>in</sub> PP	300		1100	mV
Transmit Enable Voltage	VEN			0.8	V
Transmit Disable Voltage	VD	2.0			V
Average launch power	PAVG	-7.5	-1	+2.5	dBm
Extinction Ratio	ER	2.0			dB
Centre Wavelength	$\lambda_c$	840	850	860	nm

## Receiver

Measured condition: Channel Data Rate 25.78125Gbps, VRCCR=3.3V, PRBS31, Case Operating Temperature 0~70°C

Parameter	Symbol	Min	Typical	Max	Unit
<b>QSFP28</b>					
Center Wavelength	$\lambda_c$	840	850	860	nm
Bit Error Rate	BER			E-12	
Receiver Overload	PinMAX	2.5			dBm
Output Differential Impedance	Vout PP	500		800	mV
Output Differential Impedance	Zout	90	100	110	$\Omega$
<b>SFP28</b>					
Center Wavelength	$\lambda_c$	840	850	860	nm
Differential Data Output Swing	Vout PP	500		800	mV
Bit Error Rate	BER			E-12	
Receiver Overload	PinMAX	2.5			dBm
Output Differential Impedance	Zout	90	100	110	ohm
LOS Fault	VOH	2.4			V
LOS Normal	VOL			0.4	V


## QSFP28 Pin Descriptions

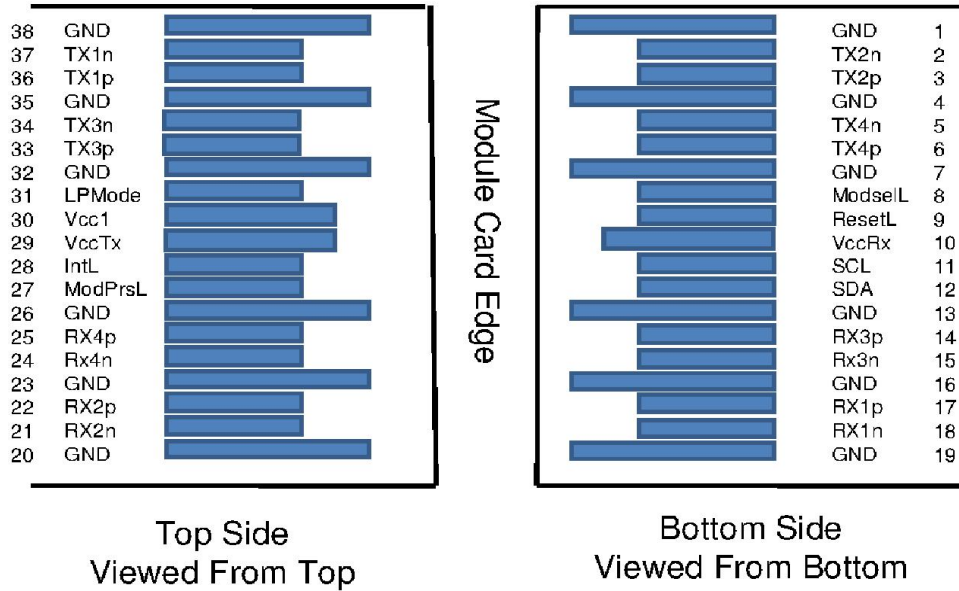

PIN	Name	Function/Description
1	GND	Module Ground
2	Tx2-	Transmitter inverted data input
3	Tx2+	Transmitter non-inverted data input
4	GND	Module Ground
5	Tx4-	Transmitter inverted data input
6	Tx4+	Transmitter non-inverted data input
7	GND	Module Ground
8	MODSEIL	Module Select
9	ResetL	Module Reset
10	VCCRx	+3.3v Receiver Power Supply
11	SCL	2-wire Serial interface clock
12	SDA	2-wire Serial interface data
13	GND	Module Ground
14	RX3+	Receiver non-inverted data output
15	RX3-	Receiver inverted data output
16	GND	Transmitter Power Supply

17	RX1+	Receiver non-inverted data output
18	RX1-	Receiver inverted data output
19	GND	Module Ground
20	GND	Module Ground
21	RX2-	Receiver inverted data output
22	RX2+	Receiver non-inverted data output
23	GND	Module Ground
24	RX4-	Receiver inverted data output
25	RX4+	Receiver non-inverted data output
26	GND	Module Ground
27	ModPrsL	Module Present, internal pulled down to GND
28	IntL	Interrupt output, should be pulled up on host board
29	VCCTx	+3.3v Transmitter Power Supply
30	VCC1	+3.3v Power Supply
31	LPMoDe	Low Power Mode
32	GND	Module Ground
33	Tx3+	Transmitter non-inverted data input
34	Tx3-	Transmitter inverted data input
35	GND	Module Ground
36	Tx1+	Transmitter non-inverted data input
37	Tx1-	Transmitter inverted data input
38	GND	Module Ground


## SFP28 Pin Descriptions

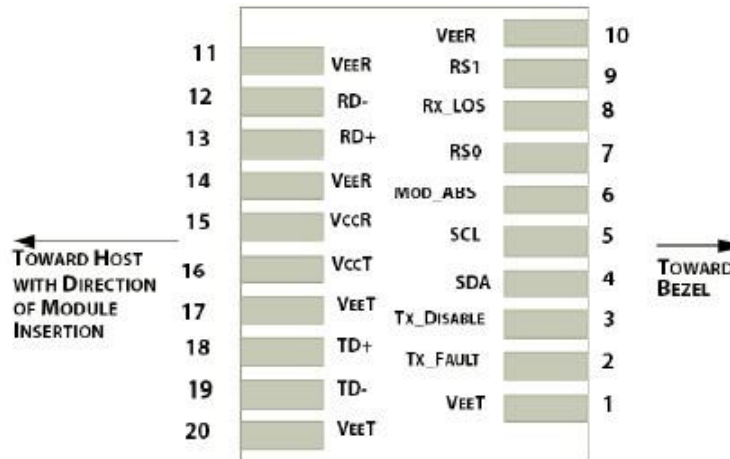

PIN	Name	Function/Description
1	VeeT	Transmitter Ground
2	Tx_Fault	Transmitter Fault - High indicates a fault condition
3	Tx_Disable	Transmitter Disable – High or open disables the transmitter
4	SDA	Two wire serial interface Data Line
5	SCL	Two wire serial interface Clock Line
6	MOD_ABS	Module Absent (Output), connected to VeeT or VeeR in the module
7	RS0	Rx Rate Select,not used
8	RX_LOS	Loss of Signal indication. Logic 0 indicates normal operation
9	RS1	Tx Rate Select,not used
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Receiver Inverted DATA out
13	RD+	Receiver Non-inverted DATA out
14	VeeR	Receiver Ground
15	VccR	Receiver Power Supply
16	VccT	Transmitter Power Supply
17	VeeT	Transmitter Ground
18	TD+	Transmitter Non-Inverted DATA in

19	TD-	Transmitter Inverted DATA in
20	VeeT	Transmitter Ground

## Mechanical Dimensions

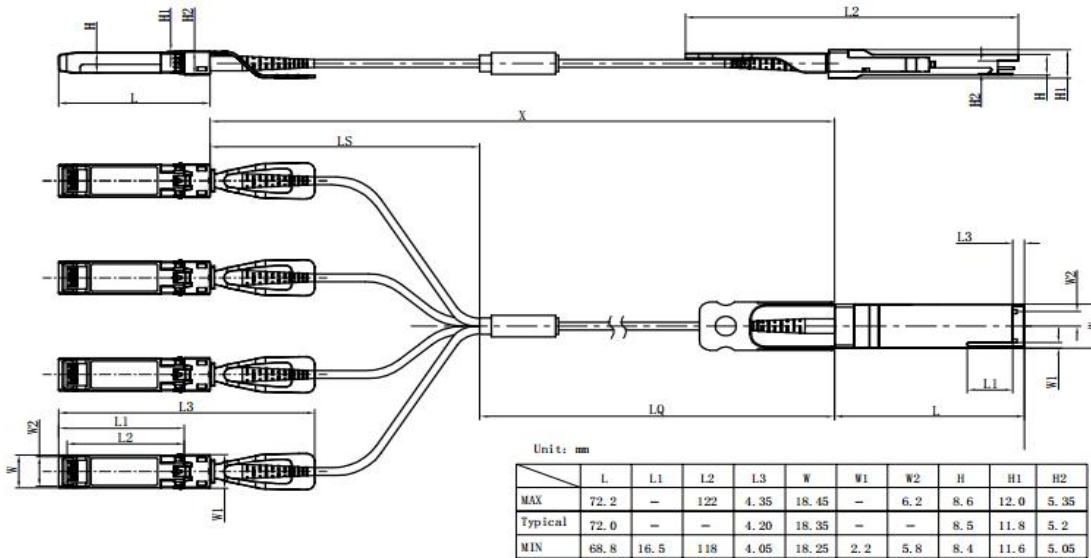

Unit: mm

	L	L1	L2	L3	W	W1	W2	H	H1	H2
MAX	57.75	48.0	44.65	102.5	13.75	14.0	12.25	8.65	0.55	10.4
Typical	57.55	47.8	44.45	101.5	13.65	13.9	12.15	8.55	0.5	10.2
MIN	57.35	47.6	44.25	100.5	13.55	13.8	12.05	8.45	0.45	10.0



## Ordering Information

Part Number	Product Description
QSFP28-4SFP28-AOC1M	100G QSFP28 to 4x SFP28 Active Optical Cable, 1m (3ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC2M	100G QSFP28 to 4x SFP28 Active Optical Cable, 2m (7ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC3M	100G QSFP28 to 4x SFP28 Active Optical Cable, 3m (10ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC5M	100G QSFP28 to 4x SFP28 Active Optical Cable, 5m (16ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC7M	100G QSFP28 to 4x SFP28 Active Optical Cable, 7m (23ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC10M	100G QSFP28 to 4x SFP28 Active Optical Cable, 10m (33ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC15M	100G QSFP28 to 4x SFP28 Active Optical Cable, 15m (49ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC20M	100G QSFP28 to 4x SFP28 Active Optical Cable, 20m (66ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC25M	100G QSFP28 to 4x SFP28 Active Optical Cable, 25m (82ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC30M	100G QSFP28 to 4x SFP28 Active Optical Cable, 30m (98ft), 0° C ~ +70° C
QSFP28-4SFP28-AOC50M	100G QSFP28 to 4x SFP28 Active Optical Cable, 50m (164ft), 0° C ~ +70° C