

# Kawasaki

## Assembly Instructions

Model:	MULE 4000 and MULE 4010
Description:	Seat Covers
Part Number:	99994-1152/KAF30-037RTX
Assembly Time:	15 Minutes

Before you begin, read through these instructions and check that all parts are present. Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect installation.

Kawasaki recommends that all genuine accessories should be fitted by an authorized Kawasaki dealer.

The following symbols indicate the information for proper installation and operation in this instruction.

**NOTICE** : NOTICE is used to address practices not related to personal injury.

- Indicates a procedural step or work to be done.

Parts List			
No.	Component Name	Qty	Remark
1	Seat Cover, Bottom	1	
2	Seat Cover, Back	1	




### Installation Instructions

- Park the vehicle on level ground, set the parking brake, turn off the ignition switch.
- Refer to the sewn in label to match and arrange the appropriate cover with the appropriate portion of the seat.
- Install the seat bottom cover (1) to the seat base by tilting the seat bottom forward and stretching the elastic cover over the seat.



- Connect the Velcro straps under the seat.

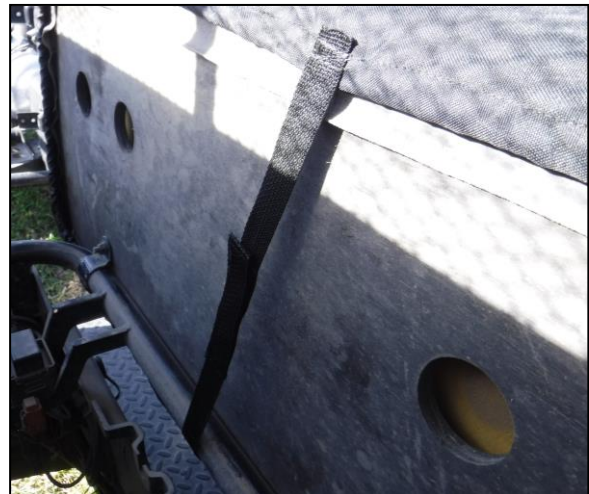

- Install the seat back cover (2) to the seat back by pulling the cover over the seat back.



## Installation Instructions

- Clean the frame tube behind the seat back.
- Remove the plastic from the Velcro strap attached to the seat back cover.
- Attach the Velcro strap to the center of the frame tube behind the seat back.



- Connect the seat back cover (2) to the Velcro strap attached to the frame tube.



### ***Seat Cover Cleaning***

- To clean, sponge with mild soap and cold water, rinse with hose and allow to drip dry.

<b><i>NOTICE</i></b>
----------------------

Do not machine wash or dry.
-----------------------------

<b><i>NOTICE</i></b>
----------------------

Use mild detergent to remove stubborn stains.
---

**Enjoy Your Kawasaki Genuine Accessory!**