

Predicting Resistive Pulse Signatures in Nanopores by Accurately

Modeling Access Regions

Martin Charron, Zachary Roelen, Deekshant Wadhwa, Vincent Tabard-Cossa*

150 Louis-Pasteur Private, Department of Physics, University of Ottawa, Ottawa K1N 6N5, Canada

*Corresponding Author: tcossa@uottawa.ca

Abstract

Resistive pulse sensing has been widely used to characterize and count single particles in solution moving through channels under an electric bias, with nanoscale pores more recently providing enough spatial resolution for nucleic acid sequencing at the single-molecule level. At its core, this technique relies on measuring the drop in ionic current through the pore induced by the passage of a molecule and, through conductance models, translating the blockage signal to molecular dimensions. However, there exists no model considering the resistive contributions of the pore exterior, i.e. the access regions, when obstructed by a molecule. This is becoming increasingly important for low aspect ratio pores, with the advent of 2D materials and ultrathin membranes. In this work, a general method by which to model the resistance of the access regions of a pore in the presence of an insulating obstruction is presented. Thin oblate spheroidal slices are used to partition access regions and infer their conductance when blocked by differently shaped objects. We show that our model accurately estimates the blocked-state conductance of 2D and finite-length pores as a function of the distance from the pore in the presence of simple obstruction geometries (e.g. cylindrical and spherical objects) or complex structures (i.e. sequence of simple obstruction sub-units). The model is further shown to capture off-axis effects by predicting deeper blockages for obstructions offset from the pore's central axis. A web-based tool is created to predict the electrical signatures of a wide range of molecule geometries translocating through differently shaped pores. The introduced model will help guide experimental designs and thus presents a straightforward way to extend the quantification of the resistive pulse technique at the nanoscale.

Resistive pulse sensing is a well-established single-particle detection method that relies on measuring the reduction of current induced by the passage of an object through a fluid-embedded channel across which a potential difference is applied (Fig. 1a).¹⁻⁶ Since the current blockage amplitude is closely related to the volume of the current-obstructing object, microchannels have been used to count and size cells, viruses and colloidal particles.^{1,2} More recently, nanopores have pushed the resolution of this technique further by sensing single molecules of DNA, and proteins as well as other nanostructures for different sequencing, diagnostics or next-generation information storage applications.³⁻⁸

At the heart of nanopore sensing and more generally the resistive pulse method, mathematical models are required to transduce blockage amplitudes into molecular dimensions so as to characterize and identify translocating objects.^{9,10} For cylindrical pores whose length L_p is much larger than their diameter d_p , the potential drop ΔV occurs almost entirely inside the channel, and as such the electric field inside the pore is estimated to be constant $E = \Delta V/L_p$. Under these conditions, the interior of the channel can be partitioned into circular slices of thickness dz , and an accurate estimate of the channel resistance can be obtained by summing up the z -dependent resistance $dR(z)$ of each slice:

$$R = \int dR(z) = \frac{1}{\sigma} \int_{-\frac{L_p}{2}}^{\frac{L_p}{2}} \frac{dz}{A(z)} \quad (1)$$

Here, σ and $A(z)$ denote the bulk conductivity and the z -dependent conductive area of each circular slice. Equation 1 can either be applied to open pores, or to pores blocked by an insulating obstruction. For example, a linear polymer with cylindrical cross-section of radius r_c passing through a cylindrical pore of radius r_p , simply results in $A(z) = \pi(r_p^2 - r_c^2)$. Equation 1 is generalizable to non-cylindrical obstructions and pores, and has been improved upon for specific use cases.¹⁰ An important result

from Eq. 1 is that the resistance change ΔR upon the introduction a molecule of volume \mathcal{V}_{mol} inside a pore channel of volume \mathcal{V}_{pore} with an open pore resistance of R_o is well approximated by $\Delta R/R_o \approx \Delta G/G_o \approx \mathcal{V}_{obs}/\mathcal{V}_{pore}$ for $\mathcal{V}_{mol} \ll \mathcal{V}_{pore}$, where $G = R^{-1}$ is the corresponding pore conductance. This simple relation has been extensively used for sizing particles from the amplitude of the induced transient resistive pulses.

This slicing technique (Eq. 1) is however non-applicable to low aspect ratio pores ($r_p \geq L_p$) for which resistive contributions from outside the pore cannot be ignored due to the significant electric field and voltage drop occurring in this access region. Although some models have addressed specific blockage scenarios,¹¹⁻¹⁶ there currently exists no generalizable approach akin to Equation 1 for modeling the conductance of a partially blocked access regions that would be applicable to ultra-thin pores.⁹ Such a model would be highly valuable in predicting electrical signatures from a wide range of translocating molecules, including cases of long obstructions that reside partially in the access regions even when inside the pore, or for obstructions entirely in the access regions, such as molecules approaching a pore.

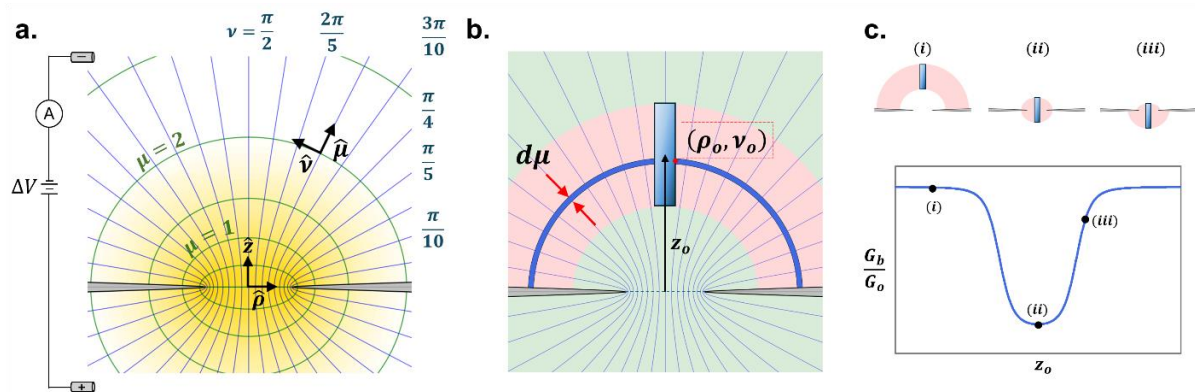


Figure 1. **a)** Oblate spheroidal coordinates used to map the access regions of a 2D pore. Constant- μ and constant- ν surfaces correspond to oblate spheroids and hyperboloid surfaces. Equipotential surfaces can be mapped to constant- μ oblate spheroids. **b)** Access region blocked by a cylindrical obstruction and divided into open (green) and blocked (red) oblate spheroidal segments. Blocked access resistance is obtained by partitioning region into spheroidal slices of thickness $d\mu$ (blue). **c)** Normalized conductance values during different translocation stages for a cylindrical obstruction through a 2D pore, with corresponding partitioning.

In this work, we expand on existing modeling methods (e.g. Equation 1) and introduce a general framework to estimate the conductance of the access region of a channel in the presence of a wide range of insulating blocking objects (i.e. obstructions) by using thin oblate spheroidal slices to partition this access region (Figure 1b). We first demonstrate how this approach can be used to estimate the conductance of pores in 2D membranes in the presence of insulating obstructions with simple geometries such as cylinders, spheres, truncated cones, and ellipsoids at a distance z_0 from a pore (Figure 1c). These results can be useful for predicting electrical signatures from DNA, proteins and other translocating molecules with simple geometries. To address effects of off-axis passage, we derive numerically solvable expressions describing the radial dependence of cylinders and spheres located away from the pore's central axis. To illustrate the model's practical utility in modeling complex translocation blockades from molecules used in many sensing applications, we then show solutions for the resistance of more complex obstructions assembled from simple geometrical units. Finite-length pores can be modeled by using a combination of oblate spheroidal slices in the access regions, and circular slices inside the pore (Eq. 1), thus treating the access regions and the pore channel as resistors in series. Importantly, finite element simulations are performed to assess the accuracy and limitations of the method, thus outlining conditions in which the model should be used. Due to the intricacy of most equations shown, a web-based tool is made available to predict the electrical signatures of any user-defined blocking object, which can be used in turn to optimize the nanopore architecture enhancing the sensing resolution for a particular application.

Oblate Spheroidal Framework for 2D membranes

Following Farahpour *et al.*,¹⁷ we use the oblate spheroidal variables $\mu \in [-\infty, \infty]$, $\nu \in [0, \pi/2]$ and $\phi \in [0, 2\pi]$ to map the access region of a pore, which are defined through the following transformations with cartesian coordinates $(\mu, \nu, \phi) \rightarrow (x, y, z)$:

$$\begin{aligned} x &= r_p \cosh \mu \cos \nu \cos \phi \\ y &= r_p \cosh \mu \cos \nu \sin \phi \\ z &= r_p \sinh \mu \sin \nu \end{aligned} \quad (2)$$

Note that the radial distance from the z axis, ρ , can be calculated to be $\rho = r_p \cosh \mu \cos \nu$ (Fig. 1a). Importantly, by defining r_p as the pore radius, this coordinate system naturally maps the access region: constant- μ surfaces form oblate spheroids with semi-axes of $r_p \sinh \mu$ along \hat{z} , and of $r_p \cosh \mu$ along $\hat{\rho}$, where the $\mu = 0$ surface corresponds to a disk of radius r_p at the pore mouth, and the $\mu \rightarrow \pm\infty$ surface to infinitely large hemispheres.

To isolate and model the electrical response of access regions, we first study pores in 2D membranes which, by definition, exclude contributions from the pores' interior. For an open pore of radius r_p in a 2D membrane, the Laplace equation $\nabla^2 V = 0$ can be solved under the assumption that the electric potential $V(\mu)$ depends solely on μ , or equivalently that equipotential surfaces form constant- μ oblate spheroids. Using boundary conditions of $V(\mu \rightarrow \pm\infty) = \pm\Delta V/2$ and $V(0) = 0$, which corresponds to the field between a circular electrode at the pore mouth and an infinitely large hemisphere electrode, an expression for the access region electric field is found:

$$\vec{E}_o(\mu, \nu) = -\frac{1}{h_\mu} \frac{dV}{d\mu} \hat{\mu} = \frac{\Delta V}{\pi r_p \cosh \mu \sqrt{\sinh^2 \mu + \sin^2 \nu}} \hat{\mu} \quad (3)$$

Here h_μ denotes one of the three scaling factors for oblate spheroidal coordinates, where $h_\mu = h_\nu = r_p \sqrt{\sinh^2 \mu + \sin^2 \nu}$ and $h_\phi = r_p \cosh \mu \cos \nu$. See Section S1 of the SI for a full derivation of Eq. 3.

Expanding on the method of Equation 1, the resistance of a pore in a 2D membrane can be calculated by first partitioning its access regions into an infinite number of oblate spheroidal slices of thickness $d\mu$.¹⁸ As per Ohm's law, the infinitesimal resistance $dR(\mu)$ of each slice can be obtained by calculating the ratio of the potential difference across the slice, $dV(\mu) = \vec{E} \cdot d\vec{\ell}$, and the current through the slice, $I(\mu) = \int \int_S \sigma \vec{E} \cdot d\vec{S}$, where σ denotes conductivity. A rigorous expression for the access resistance of a pore partially blocked by a translocating molecule requires an exact solution for \vec{E} , which in most scenarios is highly arduous or impossible to obtain. To estimate $dR(\mu)$, we thus introduce the assumption that $\vec{E} \approx \vec{E}_o = E_o \hat{\mu}$, i.e. the electric field is well approximated by that of the open pore (Equation 3). If a current-blocking molecule's surface is delimited by $\nu = \nu_o(\mu, \phi)$ (Fig. 1b), then the infinitesimal resistance is approximated as:

$$dR(\mu) = \frac{\vec{E} \cdot d\vec{\ell}}{\int \int \sigma \vec{E} \cdot d\vec{S}} \approx \frac{E_o h_\mu d\mu}{\int_0^{2\pi} \int_0^{\nu_o(\mu, \phi)} \sigma E_o h_\nu h_\phi d\nu d\phi} = \frac{d\mu}{\int_0^{2\pi} \int_0^{\nu_o(\mu, \phi)} \sigma h_\phi d\nu d\phi} \quad (4)$$

Assuming a uniform conductivity and an insulating obstruction that is rotationally symmetric about the z -axis, the above expression can be integrated to estimate the resistance between two delimiting oblate spheroid surfaces:

$$R'_{obst}(\mu_1, \mu_2) = \int_{\mu_1}^{\mu_2} dR(\mu) = \frac{1}{2\pi\sigma r_p} \int_{\mu_1}^{\mu_2} \frac{\text{sech } \mu d\mu}{\sqrt{1 - \frac{\rho_o^2(\mu)}{r_p^2} \text{sech}^2 \mu}} \quad (5)$$

Note in the above that $\rho_o(\mu)$ denotes the ρ -parametrization of the obstruction's surface, which delimits the region over which the current density σE is integrated (Fig. 1b). The expression for the resistance of an open region delimited by oblate spheroids intersecting $z = z_1$ and z_2 is readily obtained by setting $\rho_o = 0$ in Eq. 5:

$$R_{free}(z_1, z_2) = \frac{1}{2\pi\sigma r_p} \left[\tan^{-1} \left(\frac{z_2}{r_p} \right) - \tan^{-1} \left(\frac{z_1}{r_p} \right) \right] \quad (6)$$

Note importantly that in the open pore limit, we find $R_o(0, \infty) = 1/4\sigma r_p$ which corresponds to the access resistance expression determined by Hall.¹⁹

As depicted in Figure 1b, by separating the access region into different blocked and open oblate spheroidal domains, the conductance of a 2D pore in the presence of an obstruction G_b^{obst} of finite size can be calculated as the inverse of the sum of the resistances of the blocked interval, R'_{obst} , and the open segments above and below the pore

$$G_b^{obst} = R_b^{-1} = [R_{free}^{bottom} + R'_{obst} + R_{free}^{top}]^{-1} \quad (7)$$

and the corresponding conductance blockage is simply $\Delta G = G_o - G_b^{obst}$, where $G_o = 2\sigma r_p$ is the open-pore conductance. Solving Equations 5-7 represents a general method by which to calculate the blocked-state conductance of 2D membranes, which requires: i) determining the μ delimitations of blocked and open regions to use as integration bounds of Equations 5-6, ii) calculating the ρ -parametrization of the obstruction surface, $\rho_o(\mu)$, to find an expression for the integrand of R'_{obst} (Equation 5), and iii) analytically or numerically calculating the solution to R'_{obst} , and inserting this result into the blocked-state equation (Equation 7). The rest of this work showcases how to evaluate Equations 5-7 for channels and translocating objects of various geometries.

Cylindrical Obstruction

To model the conductance of a 2D pore blocked by a rigid linear polymer like double-stranded DNA, we first consider an insulating cylinder of radius r_c and of finite length L_c and half-length $\ell_c \equiv L_c/2$ centered inside a 2D pore of radius r_p , as shown above Figure 2a. Here, the obstructed region is delimited by $\mu_{\pm} = \sinh^{-1}(\pm\ell_c/r_p)$, and the cylinder surface is trivially parametrized by $\rho_o(\mu) = r_c$. Inserting those values into Equation 5, the resistance of the segment obstructed by a finite-length cylinder R'_{cyl} can be calculated:

$$\begin{aligned}
R'_{cyl}(\ell_c, r_c) &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{-\ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{\ell_c}{r_p}\right)} \frac{\operatorname{sech} \mu \, d\mu}{\sqrt{1 - \frac{r_c^2}{r_p^2} \operatorname{sech}^2 \mu}} \\
&= \frac{1}{2\pi\sigma r_p} \int_{\frac{\pi}{2} - \tan^{-1}\left(\frac{\ell_c}{r_p}\right)}^{\frac{\pi}{2} - \tan^{-1}\left(\frac{-\ell_c}{r_p}\right)} \frac{d\theta}{\sqrt{1 - \frac{r_c^2}{r_p^2} \sin^2 \theta}} \\
R'_{cyl}(\ell_c, r_c) &= \frac{1}{2\pi\sigma r_p} \left[F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{-\ell_c}{r_p}\right), \frac{r_c}{r_p}\right) - F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{\ell_c}{r_p}\right), \frac{r_c}{r_p}\right) \right] \quad (8)
\end{aligned}$$

Note that Equation 8 was obtained using the variable substitution $\tanh \mu = \cos \theta$, and that the function $F(\varphi, k)$ denotes the incomplete elliptic integral of the first kind and is defined as $F(\varphi, k) = \int_0^\varphi (1 - k^2 \sin^2 \theta)^{-1/2} d\theta$. From Equation 8, a closed-form expression for the blocked state conductance of the 2D system, G_b^{cyl} , normalized by the corresponding open-pore conductance $G_o = 2\sigma r_p$, can be obtained by considering the additional contributions from the unobstructed oblate spheroidal segments (Eq. 6-7):

$$\frac{G_b^{cyl}}{G_o}(r_c, \ell_c) = \left[1 - \frac{2}{\pi} \tan^{-1}\left(\frac{\ell_c}{r_p}\right) + \frac{1}{\pi} F\left(\frac{\pi}{2} + \tan^{-1}\left(\frac{\ell_c}{r_p}\right), \frac{r_c}{r_p}\right) - \frac{1}{\pi} F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{\ell_c}{r_p}\right), \frac{r_c}{r_p}\right) \right]^{-1} \quad (9)$$

Figure 2a and its inset plot the dependence of G_b^{cyl}/G_o on r_c (for fixed length $L_c = 5r_p$), and of G_b^{cyl}/G_o on L_c (for fixed radius $r_c = 0.5r_p$), respectively. To evaluate the model accuracy, results from finite element simulations performed with identical system dimensions (see Methods) are plotted alongside predictions from Equation 9. Figure 2b plots the error percentage measured between simulations and Equation 9 and shows that the error monotonically increases as $r_c/r_p \rightarrow 1$, and is highest for shorter L_c , but it is typically <5% for the practical cases of dsDNA (≥ 20 bp) through a ≥ 3 nm pore.

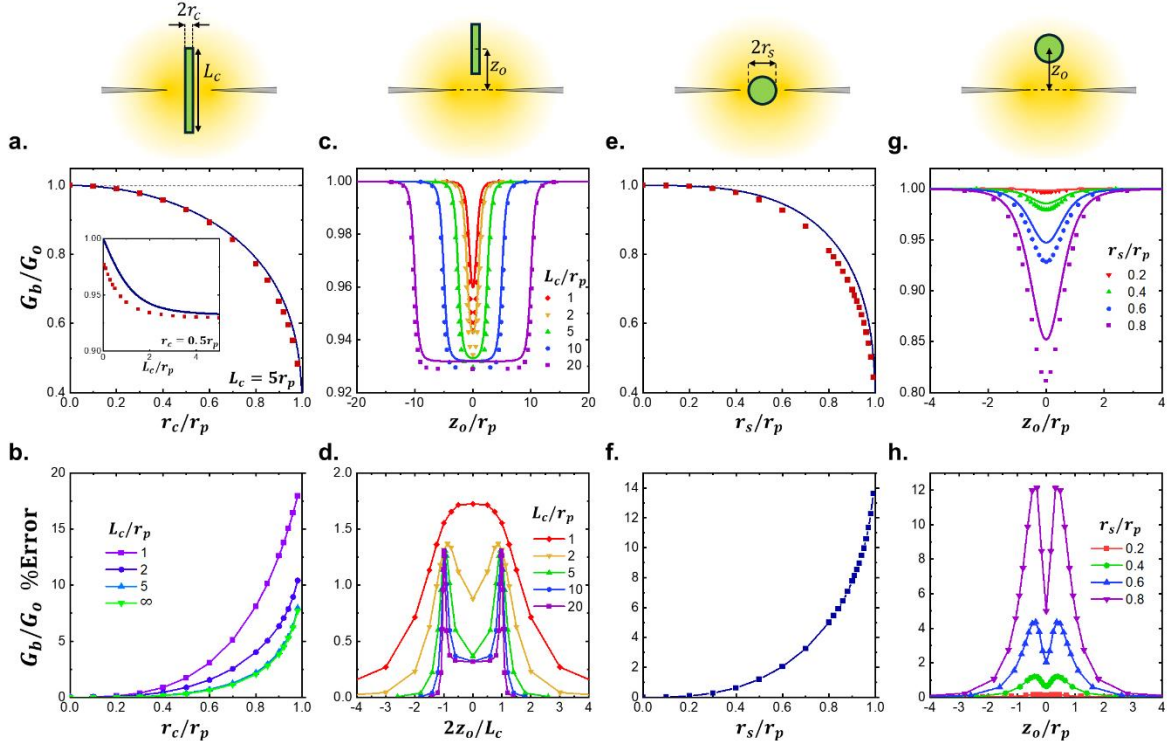


Figure 2. Dependence of normalized conductance G_b/G_0 on obstruction dimensions and distance from a 2D pore. Lines are from model predictions, whereas points are from finite element simulations. A normalized conductance of 1 is when $G_b = G_0$, i.e. the pore is unobstructed, whereas a value of 0 represents a fully blocked access region. **a)** G_b/G_0 vs cylindrical obstruction radius r_c . Inset shows dependence of G_b/G_0 on cylindrical obstruction length L_c . **b)** Absolute error percentage between modelled and simulated G_b/G_0 values from (a). **c)** G_b/G_0 vs z_o for cylindrical obstruction of radius $r_c = 0.5r_p$ and different lengths L_p . **d)** Absolute error percentage between modelled and simulated G_b/G_0 values from (c). **e)** G_b/G_0 vs centered ($z_o = 0$) spherical obstruction radius r_s . **f)** Absolute error percentage between modelled and simulated G_b/G_0 values from (e). **g)** G_b/G_0 vs z_o for spherical obstructions of different radii. **h)** Absolute error percentage between modelled and simulated G_b/G_0 values from (g).

We note that the normalized conductance blockage $\Delta G_{cyl}/G_0 = (G_0 - G_b^{cyl})/G_0$ can be calculated from Equation 9, from which it can be shown that $\Delta G_{cyl}/G_0$ scales proportionally to the ratio r_c^2/r_p^2 in the limit of ultra long and thin cylinders, i.e. $r_c \ll r_p \ll L_c$:

$$\frac{\Delta G_{cyl}}{G_0} (r_c \ll r_p \ll \ell_c) \approx \frac{1}{4} \frac{r_c^2}{r_p^2} = \frac{1}{3} \frac{2\pi r_c^2 r_p}{8\pi r_p^3} = \frac{1}{3} \frac{\mathcal{V}_{cyl}}{\mathcal{V}_{acc}} \quad (10)$$

The last term of Eq. 10 shows that just like for very long pores (Eq. 1), the fractional blockage is related to the volume ratio $\mathcal{V}_{cyl}/\mathcal{V}_{acc}$. Here \mathcal{V}_{acc} denotes the volume of the 2D-pore sensing region, defined

as a constant- μ oblate spheroid with dimension r_p along the z axis, and \mathcal{V}_{cyl} denotes the volume of the cylindrical obstruction contained within the sensing region (see Figure S1 of the SI).

Now, to model the conductance when cylindrically-shaped linear polymers like dsDNA are approaching a 2D pore of radius r_p , we consider an insulating cylinder of radius r_c and of finite length L_c along the pore's central z -axis, with its center located a distance z_o above the pore, as depicted above Fig. 2c. Given the blocked region delimitation of $\mu_{\pm} = \sinh^{-1}((z_o \pm \ell_c)/r_p)$ and the trivial parametrization of $\rho_o(\mu) = r_c$, a closed-form expression for the conductance of the blocked system can be obtained with similar manipulations to that of Equation 9 (see Section S2 of the SI for the full derivation):

$$\begin{aligned} \frac{G_b^{cyl}}{G_o}(r_c, \ell_c, z_o) = & \left[1 + \frac{1}{\pi} \tan^{-1} \left(\frac{z_o - \ell_c}{r_p} \right) - \frac{1}{\pi} \tan^{-1} \left(\frac{z_o + \ell_c}{r_p} \right) \right. \\ & \left. + \frac{1}{\pi} F \left(\frac{\pi}{2} + \tan^{-1} \left(\frac{z_o - \ell_c}{r_p} \right), \frac{r_c}{r_p} \right) - \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o + \ell_c}{r_p} \right), \frac{r_c}{r_p} \right) \right]^{-1} \end{aligned} \quad (11)$$

Figure 2c plots the z_o -dependence of Equation 11, where the five plotted curves correspond to cylinder lengths of $L_c/r_p = 1, 2, 5, 10, 20$, and fixed radius of $r_c = 0.5r_p$. Data obtained from finite element simulations in identical conditions are color-matched and plotted as individual points alongside the corresponding model predictions (continuous line). Figure 2d shows that Equation 11 is highly accurate, with consistent <2% error measurements.

We note that Equations 8-11 treat the cylinder extremities as oblate spheroidal surfaces instead of flat disks. Section S3 of the Supporting Information shows how to properly consider flat extremities, the solution of which even allows solutions for cylinders larger than pores, i.e. $r_c > r_p$, further generalizing the treatment of cylindrical obstructions.

Spherical Obstruction

To model the conductance of pores in the presence of an insulating object well approximated by spheres, such as viruses, nanoparticles, or globular proteins, we now consider a sphere of radius r_s centered inside a 2D pore of radius r_p , as shown above Figure 2e. As detailed in section S4 of the SI, inserting the right boundaries and parametrization in Equations 5-7, a closed-form expression for the conductance of the 2D pore blocked by a spherical obstruction, G_b^{sph} , is obtained:

$$\frac{G_b^{sph}}{G_o}(r_s) = \left[1 - \frac{2}{\pi} \tan^{-1}\left(\frac{r_s}{r_p}\right) + \frac{2 r_p}{\pi r_s} \tanh^{-1}\left(\frac{r_s^2}{r_p^2}\right) \right]^{-1} \quad (12)$$

Figure 2e shows the dependence of G_b^{sph}/G_o on r_s from Equation 12, and plots the corresponding values obtained from finite element simulations. The r_s dependence of G_b^{sph}/G_o is well captured by Equation 12, as shown in Figure 2f, which plots the error percentages between simulations and model predictions. Sub-15% error percentages were measured through the range of sphere radii explored ($r_s < 0.99r_p$), notably with errors $< 5\%$ observed for spheres with $r_s < 0.8r_p$.

As per long channels and cylindrical obstructions (Eq. 10), the normalized blockage $\Delta G_{sph}/G_o = (G_o - G_b^{sph})/G_o$ can be calculated from Eq. 12 and related to the volume ratio of the spherical obstruction and the access region volume $\mathcal{V}_{sph}/\mathcal{V}_{acc}$ for spheres with radii much smaller than that of the pore ($r_s \ll r_p$):

$$\frac{\Delta G_{sph}}{G_o}(r_s \ll r_p) \approx \frac{2 r_s^3}{3\pi r_p^3} = \frac{4}{3\pi} \frac{4\pi}{8\pi} \frac{r_s^3}{r_p^3} = \frac{4}{3\pi} \frac{\mathcal{V}_{sph}}{\mathcal{V}_{acc}} \quad (13)$$

To model the access conductance as spherical objects approach and traverse 2D pores, we now consider an insulating sphere of radius r_s whose center lies along the z-axis at a distance z_o

from a 2D pore of radius r_p (Figure 2g). Section S4 details the derivation for the conductance of the obstructed 2D pore system, $G_b^{sph}(z_o, r_s)$:

$$\begin{aligned} \left(\frac{G_b^{sph}}{G_o}\right)^{-1} &= 1 + \frac{1}{\pi} \tan^{-1}\left(\frac{z_o - r_s}{r_p}\right) - \frac{1}{\pi} \tan^{-1}\left(\frac{z_o + r_s}{r_p}\right) \\ &+ \frac{1}{\pi} \int_{\sinh^{-1}\left(\frac{z_o - r_s}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o + r_s}{r_p}\right)} \frac{\operatorname{sech}^2 \mu \, d\mu}{\sqrt{1 - \frac{r_s^2 + z_o^2}{r_p^2} \operatorname{sech}^2 \mu + 2 \frac{z_o^2}{r_p^2} - 2 \frac{z_o}{r_p} \tanh \mu} \sqrt{1 + \frac{z_o^2}{r_p^2} - \frac{r_s^2}{r_p^2} \operatorname{sech}^2 \mu}} \end{aligned} \quad (14)$$

Although Eq. 14 presents no closed form solution, it can be numerically integrated. Figure 2g shows the z_o dependence of G_b^{sph}/G_o for spheres with radii $r_s/r_p = 0.2, 0.4, 0.6, 0.8$ and plots finite-element simulations performed at various z_o values. As in the $z_o = 0$ case, the error percentage calculated between simulations and model predictions is biggest for larger spheres, as shown in Figure 2h. Moreover, like longer cylindrical obstructions (Fig. 2d), the error is not maximal for $z_o = 0$, but instead between $z_o = 0$ and $z_o = r_p$.

Note that the oblate spheroidal slice method presented in this work is applicable to any rotationally symmetric obstruction whose surface is parametrizable by $v_o(\mu)$ or $\rho_o(\mu)$. To demonstrate the generality of the approach, the conductance of 2D pores in the presence of ellipsoidal and conical obstructions centered in the pore ($z_o = 0$) as well as positioned above the pore ($z_o \neq 0$) are derived and illustrated in Section S5 of the SI. Non-rotationally symmetric scenarios can also be considered, as demonstrated by section S6 of the SI which shows the calculation for a wedged cylinder.

Off-Axis Effects

Because of the non-uniform electric field (Eq. 3) inside the pore, off-axis translocations are known to result in deeper blockades,²⁰⁻²⁶ yet other than the computationally demanding three-dimensional finite-element analysis, no mathematical treatment of this phenomenon currently exists, which would be a beneficial tool for properly interpreting individual blockades and predicting blockage distributions of real-world experiments. Here, we consider the off-axis effects of cylindrical and spherical obstructions positioned a distance r_o away from the central axis of the pore.

To model the off-axis effects for 2D pores in the presence of rigid linear polymers such as dsDNA, we first consider an infinitely long cylindrical obstruction of radius r_c , whose central axis is located at a distance of $\rho = r_o$ away from the pore center (Figure 3a). The equation for the ϕ -dependent obstruction surface parametrization is shown in Section S7 of the SI, which demonstrates that the conditions $r_o < r_c$ and $r_o > r_c$ need to be treated separately, since the ν integration domain for $r_o < r_c$ is a single interval, whereas the $r_o > r_c$ scenarios result in two distinct intervals over which to integrate (Fig. 3a):

$$\left(\frac{G_b^{cyl}}{G_o}(r_o)\right)^{-1} = \begin{cases} 2 \int_{-\infty}^{\infty} \frac{\operatorname{sech} \mu}{\int_0^{2\pi} \sqrt{1 - \frac{\rho_+^2}{r_p^2}(\phi) \operatorname{sech}^2 \mu} d\phi} d\mu, & \text{for } r_o \leq r_c \\ 2 \int_{-\infty}^{\infty} \frac{\operatorname{sech} \mu}{2\pi + \int_{-\sin^{-1}(\frac{r_c}{r_o})}^{\sin^{-1}(\frac{r_c}{r_o})} \left[\sqrt{1 - \frac{\rho_+^2}{r_p^2} \operatorname{sech}^2 \mu} - \sqrt{1 - \frac{\rho_-^2}{r_p^2} \operatorname{sech}^2 \mu} \right] d\phi} d\mu, & \text{for } r_o > r_c \end{cases} \quad (15)$$

Here the ρ_+ and ρ_- are the ϕ -dependent surface parametrizations of the infinitely long cylinders (see Fig. 3a), the expressions of which are found in equation S50 of the SI.

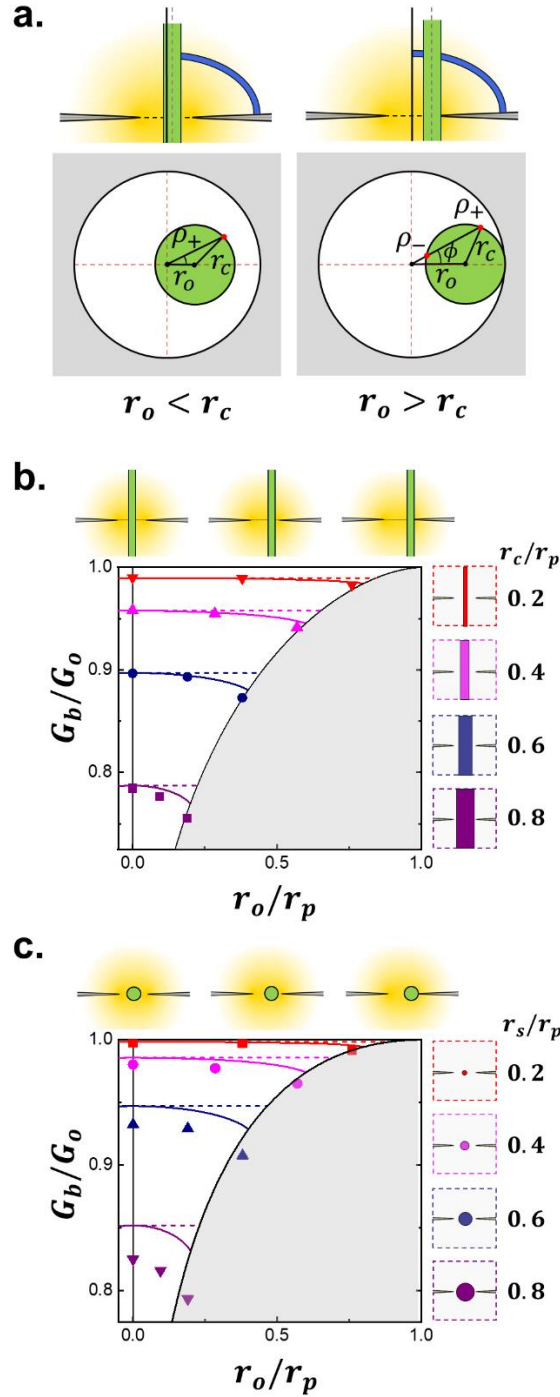


Figure 3. a) Schematic representation of 2D pores in the presence of off-centered obstructions at a distance r_o from the pore center. **b)** Normalized change in a 2D pore conductance blocked state versus normalized distance away from the pore center for four infinitely long cylindrical obstructions with different radii compared to the pore size (20, 40, 60, 80%). $r_o = 0$ corresponds to the centered case, $r_o = r_p - r_c$ corresponds to the pore in contact with the pore wall. **c)** For spherical obstruction. Continuous lines correspond to model predictions and individual points to calculations from finite element simulations. The greyed-out areas correspond to regions in the domain of Eqs. 15 where $r_o > r_p - r_{c,s}$.

Although Equation 15 presents no closed-form solution, it can be numerically integrated, as displayed in Figure 3b which plots the dependence of the blocked state conductance G_b^{cyl}/G_o on the radial position r_o away from the pore center for different cylinder radii. Finite element simulations were performed to assess the accuracy of Equation 15 and are also plotted in Figure 3b. Equation 15 captures the off-axis dependence well, with larger r_o values resulting in deeper blockades (lower G_b values) for a given cylinder radius. For example, Eq. 15 predicts that a dsDNA ($r_c = 1.1 \text{ nm}$) inside a pore with $r_p = 5.5 \text{ nm}$ could increase its blockage amplitude ΔG by $\sim 50\%$ by going from the pore's center to the pore wall, with smaller pores seeing smaller blockage fluctuation. A more quantitative comparison between simulations and Eq. 15 is shown in Section S7 of the SI.

Off-axis effects of spherical obstructions in 2D pores can also be modelled, though the manipulations are more involved in this case due to the spherical surface parametrization $\rho_o(\mu, \phi)$ depending both on ϕ and μ , unlike for cylinders. Figure 3c summarizes the results derived in Section S7 of the SI by plotting blockade state conductance values, G_b^{sph}/G_o , predicted by the model and simulated by finite element analysis for different values of r_o and different sphere sizes. Although the absolute conductance values are less accurate for spheres than for cylinders, as per the $r_o = 0$ case (Figure 2), the increase in blockage amplitude ΔG with respect to $r_o = 0$ is better captured by the spherical obstruction model, as further discussed in Section S7 of the SI.

Structured Obstruction

The development of many pore sensing schemes makes use of DNA-protein structures or nanostructured DNA to create more uniquely identifiable signals or molecular barcodes.²⁷⁻³² Predicting the signals generated by the translocation of these complex molecular structures for a given pore dimension is of high practical importance to successfully guide experimental design. To this end, we now show how to address the conductance of complex obstructions made up of a series

of simpler obstruction units, as pictured in Figure 4a. This is achieved by further partitioning the obstructed oblate segment into multiple smaller segments allowing the treatment of each obstruction sub-unit individually (Fig. 4a). For example, if z_o is the vertical distance between the 2D pore of radius r_p and the center of the complex molecule made up of N simpler units and of total length $L_{comp} = 2\ell_{comp}$, then the conductance of the system is simply:

$$\frac{G_b^{comp}}{G_o}(z_o) = \left[1 + \frac{1}{\pi} \tan^{-1} \left(\frac{z_o - \ell_{comp}}{r_p} \right) - \frac{1}{\pi} \tan^{-1} \left(\frac{z_o + \ell_{comp}}{r_p} \right) + \sum_{i=1}^N R'_i(\mu_{i-}, \mu_{i+}) \right]^{-1} \quad (16)$$

Here $R'_i(\mu_{i-}, \mu_{i+})$ denotes the resistance of the i^{th} blocked segment delimited by μ_{i-} and μ_{i+} , and other terms of Equation 16 originate from the open segment above and below the complex obstruction (Eq. 6). We note particularly that the treatment of complex obstructions made up of cylindrical sub-units of different sizes results in closed form solutions due to Eq. 9 being an analytic function.

Figures 4b-d show signals, i.e. G_b^{comp}/G_o vs. z_o traces, produced by the translocation of differently designed blocking structures as calculated from Eq. 16 (black) and compared to finite element simulations (red). Figure 4b shows the calculated electrical signature of twenty-three stacked cylinders designed to emulate the signal from a barcoded DNA design, i.e. eleven bit-like cylinders with radii $r_0 = 0.3r_p$ and $r_1 = 0.4r_p$ equally spaced along the backbone of a long cylinder of radius $r_c = 0.2r_p$. Similarly, Figure 4c shows the conductance signals of a sequence of eight spheres, with two of radius $r_s = 0.85r_p$ and six of $r_s = 0.7r_p$. To show that different sub-unit types can be used to make up complex obstructions, Figure 4d plots the conductance z-mapping of a series of cylinders ($r_c = 0.2r_p$, $L_c = 10r_p$) and spheres ($r_s = 0.5r_p$ and $0.7r_p$). As expected from the discussion surrounding cylindrical and spherical obstructions (Figure 2), strong agreement is observed between model predictions and simulations for smaller structured objects – predictions with larger structures

deviate more significantly from the simulated conductance values (while still capturing well the shape of the expected traces).

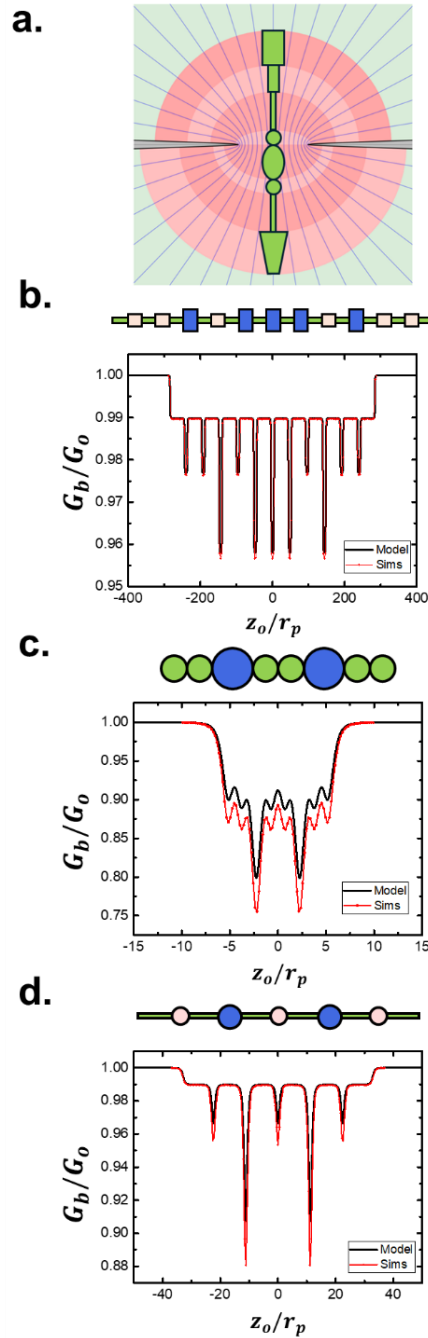


Figure 4. **a)** Oblate spheroidal partitioning of a structured obstruction made up of multiple simple geometrical units. **b)** z -dependence of G_b/G_0 for a sequence of cylinders, with three types of cylinders ($r_c, L_c = r_i, L_i$ for $i = 1, 2, 3$) mimicking the design of a DNA barcode. **c)** z -dependence of G_b/G_0 for a string of beads with $r_s = 0.85r_p$ or $r_s = 0.7r_p$. **d)** z -dependence of G_b/G_0 for a complex obstruction made up of cylinders ($r_c = 0.2r_p, L_c = 10r_p$) and spheres ($r_s = 0.5r_p, r_s = 0.7r_p$).

To demonstrate the generality of Equation 16, Section S8 of the SI shows the traces of various complex blocking structures, with different sequences of sub-unit geometries. Notably, we show that by modeling biomolecules as a sequence of simple sub-units in series, G_b^{comp} vs z_o traces can be obtained through Eq. 16 which, under a constant-velocity assumption, resemble temporal current traces measured in real experiments. We have made a web-based tool implementing Eq. 16 to predict the conductance signals of any user-defined blocking structure,³³ which we believe can assist in designing structured biomolecules to be efficiently sensed with nanopores, or conversely optimizing pore diameter and shape (discussed below) to better resolve a given molecular design.

Finite-Length Nanopores

In addition to modeling pore conductance in 2D membranes, oblate spheroidal slices can be used to treat the access resistances (R_{acc}^{top} and R_{acc}^{bot}) of finite-length pores, as a natural extension of the circular slices used to calculate the resistance within a cylindrical channel ($R_{channel}$, see Eq. 1). This is of practical significance since many nanopore devices used in experimental work rely on large ($r_p > 5 \text{ nm}$) nanopores fabricated in thin (0.3-20 nm) membranes, resulting in important access resistance contributions.³⁴⁻⁴¹ The general expression modeling the total resistance (access and channel) of a finite pore of length $L_p \equiv 2\ell_p$ with a rotationally symmetric geometry described by a z -dependent radius $r_p(z)$ can thus be approximated by treating the two contributions in series:

$$\begin{aligned}
 R_b &= R_{acc}^{bot} + R_{channel} + R_{acc}^{top} \\
 &= \frac{1}{2\pi\sigma r_p(-\ell_p)} \int_{-\infty}^0 \frac{\text{sech } \mu \, d\mu}{\sqrt{1 - \frac{\rho_o^2(\mu)}{r_p^2} \text{sech}^2 \mu}} + \frac{1}{\pi\sigma} \int_{-\ell_p}^{\ell_p} \frac{dz}{r_p^2(z) - r_o^2(z)} \\
 &\quad + \frac{1}{2\pi\sigma r_p(\ell_p)} \int_0^{\infty} \frac{\text{sech } \mu \, d\mu}{\sqrt{1 - \frac{\rho_o^2(\mu)}{r_p^2} \text{sech}^2 \mu}}
 \end{aligned} \tag{17}$$

Here, $\rho_o(\mu)$ and $r_o(z)$ denote the radial parametrization of the obstruction surface outside and inside the pore respectively, with the trivial case of $\rho_o(\mu) = r_o(z) = r_c$ for cylinders, and $\mu = 0$ corresponds to the membrane surface in the first and third integral term. Solving Equation 17 for a pore in the presence of an insulating molecule requires segmenting each access and channel region into blocked and open segments, naturally separating solutions of Equation 17 into a minimum of three regimes, depending on if the obstruction is: i) completely in one access region, ii) partially inside the pore and one of the access regions, or iii) completely inside the pore, if shorter than the pore, or partially in both access regions at once and fully inside the pore if longer than pore. Note that more conditions arise for non-symmetric pores (in z) or obstructions.

From Equation 17 and the corresponding treatment described above, closed-form z_o -mappings, mimicking the electrical signature during translocation, can be obtained for cylindrical obstructions of length L_c and radius r_c through different rotationally symmetric channels or pores of length L_p . For example, Figure 5a-c plots z_o -mappings of a cylindrical object ($r_c = 0.5r_p$ and $L_c = 20r_p$) passing through cylindrical, hyperboloidal, and conical shaped pores, the solutions of which are explicitly written out in Section S9 of the SI. Two mappings are shown per figure panel, corresponding to two different sets of dimensions tested for each pore shape. Corresponding conductance values calculated from finite element simulations are plotted as individual points alongside the z_o -mappings calculated from Equation 17. Generally, good agreement is found between model predictions and simulation values, although better agreement is found for smaller obstruction volumes and for pore radii that vary smoothly along the z -axis, as is generally expected when working with circular slices (Eq. 1).^{10,18} Additionally, as with 2D membranes, numerical solutions can be obtained for spheres as well as any other obstruction geometry treated in previous sections, as calculated in Section S9 of the SI and demonstrated in Figure 5d which shows the numerical solutions to Equation 17 for a sphere of radius $r_s = 0.5$ passing through cylindrical pores

of two different lengths, with one being thinner than the sphere diameter (green) and one longer (blue). Although only simple obstructions are shown in Figure 5, complex geometries can also be considered as per Eq. 16 and Figure 4, which can further help elucidate the effect of pore shape on the conductance signal for a given molecule, and thus a further demonstration of the usefulness of the presented model.

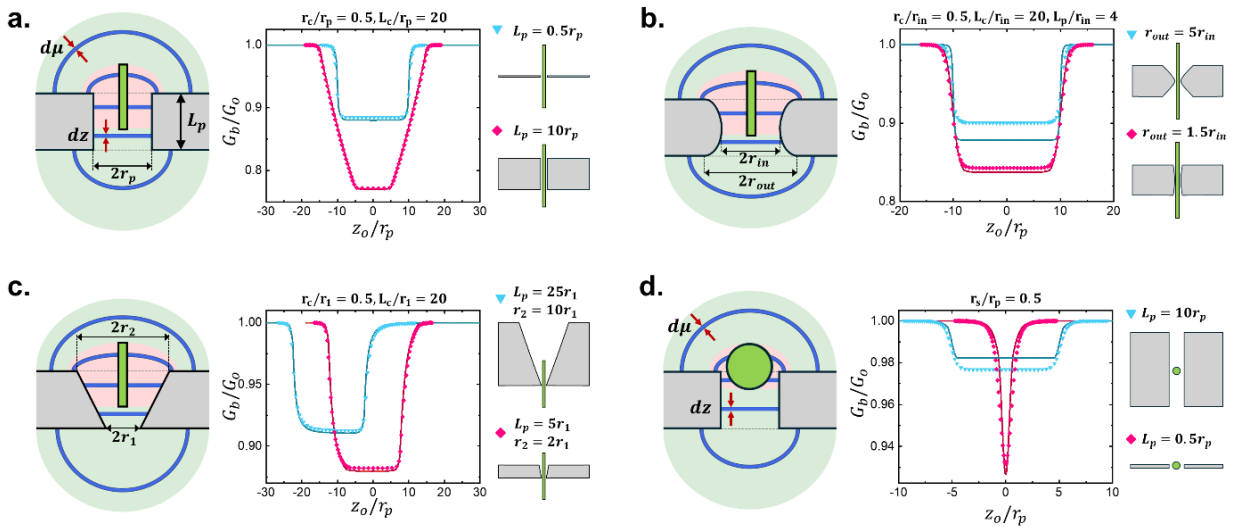


Figure 5. Conductance of finite length pores of various shapes during the translocation of a cylindrical obstruction $(r_c, L_c) = (0.5r_p, 20r_p)$: **a)** cylindrical pores with lengths $L_p = 0.5r_p$ (blue) and $L_p = 10r_p$ (green), showing different aspect ratios; **b)** hyperboloidal pores with $L_p = 4r_p$ and external radii $r_{out} = 5r_{in}$ (blue) and $r_{out} = 1.5r_{in}$ (green), showing different pore tapers; **c)** conical pores with dimensions $(L_p, r_2) = (5r_1, 2r_1)$ in blue, and $(L_p, r_2) = (25r_1, 10r_1)$ in green, emulating conical pores or pipette-like dimensions. **d)** A spherical obstruction $(r_s = 0.5r_p)$ going through cylindrical pores of length $L_p = 10r_p$ (blue) and $L_p = 0.5r_p$ (green), i.e. through membranes thicker and thinner than the sphere, respectively.

Through the oblate spheroidal treatment of the space outside a pore, we have introduced a general framework by which the resistance of the access regions blocked by an object can be modeled. This approach presents itself as a natural extension to the circular slice method commonly used to model resistances of channel interiors (Eq. 1).⁹ The applicability of the method is exemplified by the various scenarios (obstruction and pore geometries) and physical phenomena (e.g. off-axis effects) it successfully estimates, as assessed through comparison to finite element analyses. Of

particular interest, the modeling of complex molecular structures as a sequence of geometrically simple blocking units (i.e., cylinders, spheres, etc.), allows the calculation of conductance traces as a function of the distance from the pore for predicting the shape of the current traces from actual experiments. However, it should be noted that in addition to inexact field treatment being a source of error, the model is purely geometric in nature and ignores electrokinetic effects that can arise in real experiments, especially in low salt conditions (< 1 M concentrations) or on weakly charged objects.⁴² Moreover, except for cylindrical obstructions and centered spheres, many obstructions present no closed-form solutions and must be integrated numerically, the computation of which still represents a significant decrease in complexity compared to 2D or 3D finite element analysis simulations. Nevertheless, the methods presented herein represent a very useful first step towards obtaining more accurate and generally applicable models for blocked access regions, recently described as being in their infancy⁹. With the rapidly advancing micro- and nano-fabrication techniques resulting in thinner membranes with access-resistance dominated sensing conditions, we believe the introduced technique and web-based tool can greatly assist researchers in sizing molecules, for protein fingerprinting and nanoparticle sensing applications, or for optimally designing complex biomolecules for barcoding multiplexing applications.

Methods

Simulations: Finite element simulations were performed with the Electric Currents Module of COMSOL Multiphysics 5.1. In its open state, a nanopore was modeled as a channel of radius r_p in an insulating membrane of either zero or finite thickness L_p (a.k.a. pore length), centred inside a cylindrical meshing domain of length $10\ \mu\text{m}$ and diameter $5\ \mu\text{m}$. In its blocked state, an insulating region with dimensions matching those of the particular obstruction being modeled was added to

the system at the desired coordinates (r_o, z_o) . Solutions to Poisson's equation were found within the finite-resistivity regions (defined by constant conductivity σ) of a given geometry, using boundary conditions of 0.2 and 0 V at the top and bottom surfaces of the meshing domain, respectively ($\Delta V = V_{top} - V_{bottom}$). The resulting electrical conductance of the system was evaluated in both open and blocked states such that the numerical solver converged as the mesh size was reduced. The normalized conductance G/σ was calculated by integrating the current density J across the planar top boundary to find the total current I through the system and then dividing this value by the defined transmembrane potential ($G = I/\Delta V$) and conductivity.

Acknowledgments

M. C. acknowledges support of the Ontario Graduate Scholarship (OGS). All authors would like to acknowledge the support of the Natural Sciences and Engineering Research Council of Canada (NSERC), [funding reference number RGPIN-2021-04304].

References

1. Bayley, H. & Martin, C. R. Resistive-pulse sensing - from microbes to molecules. *Chem Rev* **100**, 2575–2594 (2000).
2. Don, M. The Coulter Principle: Foundation of an Industry. *JALA: Journal of the Association for Laboratory Automation* **8**, 72–81 (2003).
3. Henriquez, R. R., Ito, T., Sun, L. & Crooks, R. M. The resurgence of Coulter counting for analyzing nanoscale objects. *Analyst* vol. 129 478–482 Preprint at <https://doi.org/10.1039/b404251b> (2004).
4. Howorka, S. & Siwy, Z. Nanopore analytics: Sensing of single molecules. *Chem Soc Rev* **38**, 2360–2384 (2009).

5. Deamer, D., Akeson, M. & Branton, D. Three decades of nanopore sequencing. *Nat Biotechnol* **34**, 518–524 (2016).
6. Lindsay, S. The promises and challenges of solid-state sequencing. *Nat Nanotechnol* **11**, 109–111 (2016).
7. Xue, L. *et al.* Solid-state nanopore sensors. *Nat Rev Mater* **5**, 931–951 (2020).
8. Alfaro, J. A. *et al.* The emerging landscape of single-molecule protein sequencing technologies. *Nat Methods* **18**, 604–617 (2021).
9. Tang, W., Fried, J. P., Tilley, R. D. & Gooding, J. J. Understanding and modelling the magnitude of the change in current of nanopore sensors. *Chem Soc Rev* 5757–5776 (2022) doi:10.1039/d1cs00972a.
10. DeBlois, R. W. & Bean, C. P. Counting and Sizing of Submicron Particles by the Resistive Pulse Technique. *J Sci Instrum* **25**, 86 (1970).
11. Shah, A. *et al.* A Universal Approximation for Conductance Blockade in Thin Nanopore Membranes. *Nano Lett* (2023) doi:10.1021/acs.nanolett.3c04997.
12. Carlsen, A. T., Zahid, O. K., Ruzicka, J., Taylor, E. W. & Hall, A. R. Interpreting the conductance blockades of DNA translocations through solid-state nanopores. *ACS Nano* **8**, 4754–4760 (2014).
13. Kowalczyk, S. W., Grosberg, A. Y., Rabin, Y. & Dekker, C. Modeling the conductance and DNA blockade of solid-state nanopores. *Nanotechnology* **22**, 315101 (2011).
14. Das, N., Ropmay, G. D., Joseph, A. M. & Roychaudhuri, C. Modeling the Effective Conductance Drop Due to a Particle in a Solid State Nanopore towards Optimized Design. *IEEE Trans Nanobioscience* **19**, 598–608 (2020).
15. Terejanszky, P., Makra, I., Furjes, P. & Gyurcsanyi, R. E. Calibration-less sizing and quantitation of polymeric nanoparticles and viruses with quartz nanopipets. *Anal Chem* **86**, 4688–4697 (2014).
16. Charron, M., Roelen, Z. & Tabard-Cossa, V. Improving the Conductance Blockage Model of Cylindrical Nanopores-from 2D to Thick Membranes. doi:10.26434/chemrxiv-2023-c1c33.
17. Farahpour, F., Maleknejad, A., Varnik, F. & Ejtehadi, M. R. Chain deformation in translocation phenomena. *Soft Matter* **9**, 2750–2759 (2013).
18. Maxwell, J. C. *A Treatise on Electricity and Magnetism*. vol. 1 (Oxford: Clarendon Press, 1873).

19. Hall, J. E. Access Resistance of a Small Circular Pore. *Journal of General Physiology* **66**, 531–532 (1975).
20. Yusko, E. C. *et al.* Real-time shape approximation and fingerprinting of single proteins using a nanopore. *Nat Nanotechnol* **12**, 360–367 (2017).
21. Houghtaling, J. *et al.* Estimation of Shape, Volume, and Dipole Moment of Individual Proteins Freely Transiting a Synthetic Nanopore. *ACS Nano* **13**, 5231–5242 (2019).
22. Hinkle, P. *et al.* A hybrid resistive pulse-optical detection platform for microfluidic experiments. *Sci Rep* **7**, (2017).
23. Ying, C., Houghtaling, J. & Mayer, M. Effects of off-axis translocation through nanopores on the determination of shape and volume estimates for individual particles. *Nanotechnology* **33**, (2022).
24. Han, Z. *et al.* Off-Axis Response for Particles Passing through Long Apertures in Coulter-Type Counters Wavelet Transform-Based Methods for Denoising of Coulter Counter Signals Off-Axis Response for Particles Passing through Long Apertures in Coulter-Type Counters. *Meas. Sci. Technol* vol. 1 (1990).
25. Smythe, W. R. Off-axis particles in coulter type counters. *Review of Scientific Instruments* **43**, 817–818 (1972).
26. Qin, Z., Zhe, J. & Wang, G. X. Effects of particle's off-axis position, shape, orientation and entry position on resistance changes of micro Coulter counting devices. *Meas Sci Technol* **22**, (2011).
27. Ren, R. *et al.* Multiplexed detection of viral antigen and RNA using nanopore sensing and encoded molecular probes. *Nat Commun* **14**, (2023).
28. Bell, N. A. W. & Keyser, U. F. Digitally encoded DNA nanostructures for multiplexed, single-molecule protein sensing with nanopores. *Nat Nanotechnol* **11**, 645–651 (2016).
29. Chen, K., Zhu, J., Bošković, F. & Keyser, U. F. Nanopore-based dna hard drives for rewritable and secure data storage. *Nano Lett* **20**, 3754–3760 (2020).
30. Chen, K. *et al.* Digital Data Storage Using DNA Nanostructures and Solid-State Nanopores. *Nano Lett* **19**, 1210–1215 (2019).
31. Bošković, F. & Keyser, U. F. Nanopore microscope identifies RNA isoforms with structural colours. *Nat Chem* **14**, 1258–1264 (2022).

32. Zhu, J. *et al.* Image Encoding Using Multi-Level DNA Barcodes with Nanopore Readout. *Small* **17**, 2100711 (2021).
33. Charron, M., Roelen, Z., Wadhwa, D. & Tabard-Cossa, V. Nanopore Signal Generator. tcossalab.net/signalGenerator.
34. Schneider, G. F. *et al.* DNA translocation through graphene nanopores. *Nano Lett* **10**, 3163–3167 (2010).
35. Merchant, C. A. *et al.* DNA translocation through graphene nanopores. *Nano Lett* **10**, 2915–2921 (2010).
36. Rodríguez-Manzo, J. A., Puster, M., Nicolai, A., Meunier, V. & Drndić, M. DNA Translocation in Nanometer Thick Silicon Nanopores. *ACS Nano* **9**, 6555–6564 (2015).
37. Pore, L. *et al.* Single-nanoparticle detection using a low-aspect-ratio pore. *ACS Nano* **6**, 3499–3505 (2012).
38. Liu, K. *et al.* Geometrical Effect in 2D Nanopores. *Nano Lett* **17**, 4223–4230 (2017).
39. Garaj, S., Liu, S., Golovchenko, J. A. & Branton, D. Molecule-hugging graphene nanopores. *Proc Natl Acad Sci U S A* **110**, 12192–12196 (2013).
40. Liu, K., Feng, J., Kis, A. & Radenovic, A. Atomically thin molybdenum disulfide nanopores with high sensitivity for dna translocation. *ACS Nano* **8**, 2504–2511 (2014).
41. Davenport, M. *et al.* The role of pore geometry in single nanoparticle detection. *ACS Nano* **6**, 8366–8380 (2012).
42. Smeets, R. M. M. *et al.* Salt dependence of ion transport and DNA translocation through solid-state nanopores. *Nano Lett* **6**, 89–95 (2006).

Supporting Information: Predicting Resistive Pulse Signatures in Nanopores by Accurately Modeling Access Regions

Martin Charron, Zachary Roelen, Deekshant Wadhwa, Vincent Tabard-Cossa*

150 Louis-Pasteur Private, Department of Physics, University of Ottawa, Ottawa K1N 6N5, Canada

*Corresponding Author: tcossa@uottawa.ca

S1. Electric Field in a 2D pore

S2. Finite Cylindrical Obstruction – z dependence

S3. Treatment of Flat Cylindrical Obstruction Extremities

S4. Spherical Obstruction

S5. Rotationally Symmetric Obstructions – More Examples

S6. Rotationally Asymmetric Obstructions – Wedged Cylinder

S7. Rotationally Asymmetric Obstructions – Off-Axis Effects

S8. Complex Obstruction – Modeling Molecules

S9. Finite-Length Pore Equations

S1. Electric Field in a 2D pore

Oblate spheroidal coordinates (μ, ν, ϕ) are described by the following transformations with cartesian coordinates (x, y, z) :

$$\begin{aligned} x &= r_p \cosh \mu \cos \nu \cos \phi \\ y &= r_p \cosh \mu \cos \nu \sin \phi \\ z &= r_p \sinh \mu \sin \nu \end{aligned} \quad (S1)$$

As discussed in the main text, the electric potential V between a disk electrode of radius r_p and an infinitely large hemispherical electrode is assumed to depend solely on μ . Under the boundary conditions $V(0) = 0$ and $V(\pm\infty) = \pm\Delta V/2$, and assuming no net charge in the system, a solution for $V(\mu)$ can be found by solving the curvilinear Laplacian equation:

$$\begin{aligned} 0 &= \nabla^2 V \\ 0 &= \frac{1}{h_\mu h_\nu h_\phi} \frac{\partial}{\partial \mu} \left(\frac{h_\nu h_\phi}{h_\mu} \frac{\partial V}{\partial \mu} \right) \\ 0 &= \frac{1}{r_p^3 (\sinh^2 \mu + \sin^2 \nu) \cosh \mu \cos \nu} \frac{\partial}{\partial \mu} \left(r_p \cosh \mu \cos \nu \frac{\partial V}{\partial \mu} \right) \\ 0 &= \frac{\partial}{\partial \mu} \left(\cosh \mu \frac{\partial V}{\partial \mu} \right) \\ c_1 &= \cosh \mu \frac{\partial V(\mu)}{\partial \mu} \\ V(\mu) &= c_1 \int \frac{d\mu}{\cosh \mu} \\ V(\mu) &= c_1 \tan^{-1}(\sinh \mu) + c_2 \\ V(\mu) &= \frac{\Delta V}{\pi} \tan^{-1}(\sinh \mu) \end{aligned} \quad (S2)$$

Note here that h_μ, h_ν and h_ϕ are scaling factors defined as $h_u = \sqrt{\left(\frac{\partial x}{\partial u}\right)^2 + \left(\frac{\partial y}{\partial u}\right)^2 + \left(\frac{\partial z}{\partial u}\right)^2}$ for $u = \mu, \nu, \phi$, evaluated as:

$$\begin{aligned} h_\mu &= r_p \sqrt{\sinh^2 \mu + \sin^2 \nu} \\ h_\nu &= r_p \sqrt{\sinh^2 \mu + \sin^2 \nu} \\ h_\phi &= r_p \cosh \mu \cos \nu \end{aligned} \quad (S3)$$

The electric field can be calculated from Equations S2 and S3:

$$\vec{E}(\mu, \nu) = -\frac{1}{h_\mu} \frac{\partial V}{\partial \mu} \hat{\mu} = -\frac{\Delta V}{\pi r_p} \frac{\operatorname{sech} \mu}{\sqrt{\sinh^2 \mu + \sin^2 \nu}} \hat{\mu} \quad (S4)$$

Note that since $V(\mu)$ depends only on μ , the electric field is directed along $\hat{\mu}$ (See Figure 1a of main text), and its magnitude $E_o = \|\vec{E}\|$ depends on both μ and ν , due to the introduction of the h_μ scaling factor in Equation S3.

S2. Finite Cylindrical Obstruction – z dependence

Consider an insulating cylinder of radius r_c and of finite length $L_c = 2\ell_c$ with its center located a distance z_o away from a 2D pore of radius r_p . Inserting the obstructed region delimitation of $\mu_{\pm} = \sinh^{-1}((z_o \pm \ell_c)/r_p)$ and the trivial parametrization of $\rho_o(\mu) = r_c$ into the expression for the obstructed segment (Equation 5 in main text) results in:

$$\begin{aligned}
 R'_{cyl}(r_c, \ell_c, z_o) &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)} \frac{\operatorname{sech} \mu}{\sqrt{1 - \frac{r_c^2}{r_p^2} \operatorname{sech}^2 \mu}} d\mu \\
 &= \frac{1}{2\pi\sigma r_p} \int_{\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)}^{\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)} \frac{d\theta}{\sqrt{1 - \frac{r_c^2}{r_p^2} \sin^2 \theta}} \\
 &= \frac{1}{2\pi\sigma r_p} \left[F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o - \ell_c}{r_p}\right), \frac{r_c}{r_p}\right) - F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o + \ell_c}{r_p}\right), \frac{r_c}{r_p}\right) \right] \quad (S5)
 \end{aligned}$$

Equation S4 is obtained from the variable substitution $\tanh \mu = \cos \theta$, resulting in $\operatorname{sech} \mu d\mu = -d\theta$, and from identities of inverse trigonometric functions:

$$\begin{aligned}
 \theta|_{\mu=\sinh^{-1}(x)} &= \cos^{-1}(\tanh(\sinh^{-1}(x))) \\
 &= \cos^{-1}\left(\frac{x}{\sqrt{1+x^2}}\right) \\
 &= \frac{\pi}{2} - \sin^{-1}\left(\frac{x}{\sqrt{1+x^2}}\right) \\
 &= \frac{\pi}{2} - \tan^{-1} x \quad (S6)
 \end{aligned}$$

As noted in the main text the function $F(\varphi, k)$ is the incomplete elliptic integral of the first kind and is defined as $F(\varphi, k) = \int_0^\varphi (1 - k^2 \sin^2 \theta)^{-1/2} d\theta$.

The resistance of the unobstructed segments above and under the cylinder can be calculated:

$$\begin{aligned}
 R_{free}(z_o - \ell_c, z_o + \ell_c) &= R_{free}^{bot} + R_{free}^{top} \\
 &= \frac{1}{2\pi\sigma r_p} \int_{-\infty}^{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)} \operatorname{sech} \mu d\mu + \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)}^{\infty} \operatorname{sech} \mu d\mu \\
 &= \frac{1}{2\pi\sigma r_p} [\tan^{-1}(\sinh \mu)]_{-\infty}^{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)} + \frac{1}{2\pi\sigma r_p} [\tan^{-1}(\sinh \mu)]_{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)}^{\infty} \\
 &= \frac{1}{2\pi\sigma r_p} \left(\tan^{-1}\left(\frac{z_o - \ell_c}{r_p}\right) + \frac{\pi}{2} \right) + \frac{1}{2\pi\sigma r_p} \left(\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o + \ell_c}{r_p}\right) \right) \\
 &= \frac{1}{2\sigma r_p} \left[1 + \frac{1}{\pi} \tan^{-1}\left(\frac{z_o - \ell_c}{r_p}\right) - \frac{1}{\pi} \tan^{-1}\left(\frac{z_o + \ell_c}{r_p}\right) \right] \quad (S7)
 \end{aligned}$$

From Equations S4 and S6, an expression for the conductance of the entire 2D pore system in the presence of a cylindrical obstruction of finite length is found:

$$\frac{G_b^{cyl}}{G_o}(r_c, \ell_c, z_o) = \left[1 + \frac{1}{\pi} \tan^{-1} \left(\frac{z_o - \ell_c}{r_p} \right) - \frac{1}{\pi} \tan^{-1} \left(\frac{z_o + \ell_c}{r_p} \right) + \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o - \ell_c}{r_p} \right), \frac{r_c}{r_p} \right) - \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o + \ell_c}{r_p} \right), \frac{r_c}{r_p} \right) \right]^{-1} \quad (S8)$$

Here $G_o = 2\sigma r_p$ is the open 2D pore conductance. Figure S2 plots Equation S7 against the normalized distance $z_o/(\ell_c + r_p)$, for which a value of ± 1 corresponds the closest extremity of the cylinder being at a distance r_p from the pore mouth. Although each trace corresponds to a different cylinder length, all traces appear to converge near $z_o = \ell_c + r_p$, thus indicating that the dimension of the sensing volume of a 2D pore is on the order of r_p along the z-axis.

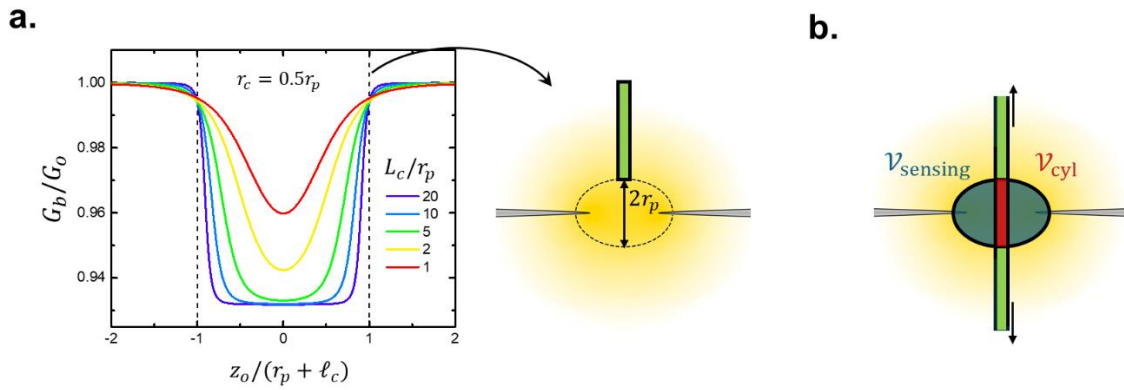


Figure S1. a) z-dependence of 2D pore conductance in the presence cylindrical obstructions of various lengths L_c , of fixed radius $r_c = 0.5r_p$, with their center at a distance z_o from the pore center.

b) Sketch demonstrating the interpretations of $\mathcal{V}_{\text{sensing}}$ and \mathcal{V}_{cyl} as the volumes of the 2D pore sensing volume, and the volume of the cylinder contained with it, respectively.

Additionally, when evaluated for long cylinders ($\ell_c \gg r_p$) centered inside a pore ($z = 0$), Equation S7 reduces to a simpler form involving the complete elliptic integral of the first kind $K(k)$, related to the incomplete elliptic integral of the first kind through $K(k) = F\left(\frac{\pi}{2}, k\right)$.

$$\begin{aligned} \frac{G_b^{cyl}}{G_o}(r_c, \ell_c \gg r_p, z_o = 0) &= \left[\frac{1}{\pi} F \left(\pi, \frac{r_c}{r_p} \right) \right]^{-1} \\ &= \left[\frac{2}{\pi} K \left(\frac{r_c}{r_p} \right) \right]^{-1} \\ &= \left[1 + \frac{1}{4} \frac{r_c^2}{r_p^2} + \frac{9}{64} \frac{r_c^4}{r_p^4} + \dots \right]^{-1} \\ &= 1 - \frac{1}{4} \frac{r_c^2}{r_p^2} - \frac{9}{64} \frac{r_c^4}{r_p^4} + \dots \end{aligned} \quad (S9)$$

The final expression of Equation S8 used the known relationship $2K(k) = F(\pi, k)$ and the series expansion of $K(k)$ around $k = 0$, the first terms of which are written.

For small values of cylinder radii, $r_c \ll r_p$, Equation S8 indicates that the fractional conductance blockage $\Delta G/G_o = 1 - G_{cyl}/G_o$ is proportional to r_c^2/r_p^2 :

$$\frac{\Delta G_{cyl}}{G_o}(r_c \ll r_p \ll \ell_c, z_o = 0) \approx \frac{1}{4} \frac{r_c^2}{r_p^2} = \frac{1}{3} \frac{2\pi r_c^2 r_p}{\frac{8}{3}\pi r_p^3} = \frac{1}{3} \frac{\mathcal{V}_{cyl}}{\mathcal{V}_{sensing}} \quad (\text{S10})$$

Multiplying r_c^2 and r_p^2 by $2\pi r_p/3$, we note interestingly that the fractional blockade $\Delta G/G_o$ is proportional to the ratio of \mathcal{V}_{cyl} and $\mathcal{V}_{sensing}$, where $\mathcal{V}_{sensing}$ is the volume of the oblate spheroid with semi-axis r_p along z (which from now on we designate as the “sensing region”), and \mathcal{V}_{cyl} is the partial volume of the cylinder contained within the sensing volume.

S3. Treatment of Flat Cylindrical Obstruction Extremities

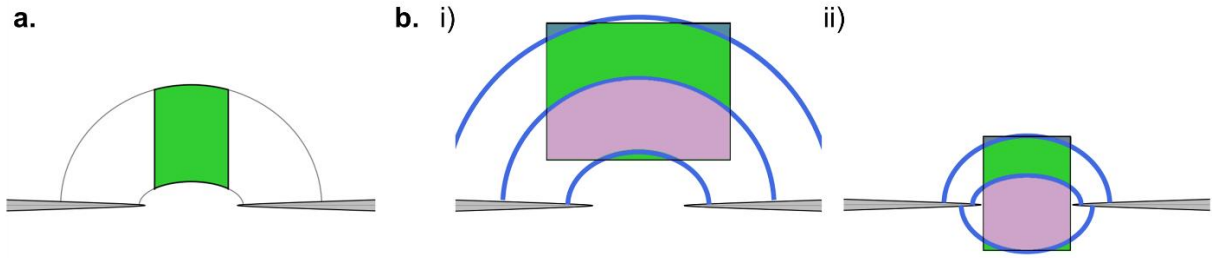


Figure S2. a) Sketch showing how cylindrical obstructions are treated as having oblate spheroidal extremities in the main text. **b)** Sketches demonstrating the two independent treatments required to address flat extremities of cylindrical obstructions outside the pore (i) or inside the pore (ii).

The treatment of cylindrical obstructions in the main text inherently assumes cylinder extremities are curved and follow the shape of the oblate spheroidal surface delimiting the obstructed segment, as depicted in Figure S2a. Cylinders with radii similar in size to that of the pore therefore have their extremities significantly deformed, with the scenario of $r_c > r_p$ even being untreatable. A more thorough treatment of cylindrical obstructions requires segmenting the access region into more domains, depending on whether constant- μ oblate spheroidal slices intersect with the cylinder’s bottom, side, top, or any combination of those, as demonstrated in Figure S2b. Two different scenarios must be considered: i) the cylinder is completely outside the pore or ii) the cylinder is partially inside the pore.

Outside the pore ($|z_o| > \ell_c$)

When the cylinder is completely outside the pore, as displayed in Figure S2b-i, the obstructed volume has to be separated into three independently treated oblate spheroidal segments corresponding to resistances R_{obs}^{bot} , R_{obs}^{side} , and $R_{obs}^{side-top}$, in addition to the unobstructed resistive contributions:

$$G_b^{cyl}(r_c, \ell_c, z_o) = [R_{free}^{bot} + R_{cyl}^{bot} + R_{cyl}^{side} + R_{cyl}^{side-top} + R_{free}^{top}]^{-1} \quad (\text{S11})$$

Before determining expressions for each term in Eq. S10, let us first determine the values of μ delimiting the different integration domains. Generally, for a cylinder edge located at z , this is

achieved by calculating for what value of μ a constant- μ oblate spheroid intersects with a cylinder edge $(\rho, z) = (r_c, z)$:

$$\frac{r_c^2}{\cosh^2 \mu} + \frac{z^2}{\sinh^2 \mu} = r_p^2 \quad (\text{S12})$$

Equation S11 can be rewritten as

$$0 = r_p^2 (\sinh^2 \mu)^2 + (r_p^2 - r_c^2 - z^2) \sinh^2 \mu - z^2$$

Which can be solved for $\sinh^2 \mu$ using the quadratic formula:

$$\sinh^2 \mu = \frac{-r_p^2 + r_c^2 + z^2 + \sqrt{(r_p^2 - r_c^2 - z^2)^2 + 4r_p^2 z^2}}{2r_p^2} \quad (\text{S13})$$

An expression for $\mu_{lim}(z)$, the value of μ delimiting the integration domains, is found:

$$\mu_{lim}(z) = \sinh^{-1} \left(\frac{z}{r_p} \sqrt{\frac{1}{2} \left(1 - \frac{r_p^2 - r_c^2}{z^2} + \sqrt{\left(\frac{r_p^2 - r_c^2}{z^2} - 1 \right)^2 + 4 \frac{r_p^2}{z^2}} \right)} \right) = \sinh^{-1} \left(\frac{z}{r_p} \xi(z) \right) \quad (\text{S14})$$

First consider the $R'_{cyl}{}^{bot}$ contribution, corresponding to the region where oblate spheroids at μ intersect solely with the bottom extremity of the cylindrical obstruction. From the coordinate transforms (Eq. S1), the fixed- z horizontal bottom extremity is parametrized as:

$$\sin \nu = \frac{z_o - \ell_c}{r_p \sinh \mu} \quad (\text{S15})$$

The resistance for the domain accounting for the flat bottom of the cylindrical obstruction is thus:

$$\begin{aligned} R'_{cyl}{}^{bot} &= \frac{1}{2\sigma\pi r_p} \int_{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o - \ell_c \xi(z_o - \ell_c)}{r_p}\right)} \frac{\text{sech } \mu \, d\mu}{\sin \nu} \\ &= \frac{1}{2\sigma\pi(z_o - \ell_c)} \int_{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o - \ell_c \xi(z_o - \ell_c)}{r_p}\right)} \frac{\sinh \mu \, d\mu}{\cosh \mu} \\ &= \frac{1}{2\sigma\pi(z_o - \ell_c)} \left[\ln(\cosh \mu) \right]_{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o - \ell_c \xi(z_o - \ell_c)}{r_p}\right)} \\ R'_{cyl}{}^{bot} &= \frac{1}{4\sigma\pi(z_o - \ell_c)} \ln \left(\frac{1 + \left(\frac{z_o - \ell_c}{r_p} \xi(z_o - \ell_c) \right)^2}{1 + \left(\frac{z_o - \ell_c}{r_p} \right)^2} \right) \end{aligned} \quad (\text{S16})$$

Now consider the R_{cyl}^{side} contribution, corresponding to the region where constant- μ surfaces intersect only with the side of the cylinder, which is trivially parametrized by $\rho_o(\mu) = r_c$, as per the main text, and delimited by $\mu = \sinh^{-1}\left(\frac{z_o - \ell_c}{r_p} \xi(z_o - \ell_c)\right)$ and $\mu = \sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)$:

$$\begin{aligned}
R_{cyl}^{side} &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p} \xi(z_o - \ell_c)\right)}^{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)} \frac{\operatorname{sech} \mu \, d\mu}{\sqrt{1 - \frac{r_c^2}{r_p^2} \operatorname{sech}^2 \mu}} \\
&= \frac{1}{2\pi\sigma r_p} \int_{\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o - \ell_c}{r_p} \xi(z_o - \ell_c)\right)}^{\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)} \frac{d\theta}{\sqrt{1 - \frac{r_c^2}{r_p^2} \sin^2 \theta}} \\
&= \frac{1}{2\sigma r_p} \left[\frac{1}{\pi} F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o - \ell_c}{r_p} \xi(z_o - \ell_c)\right), \frac{r_c}{r_p}\right) - \frac{1}{\pi} F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o + \ell_c}{r_p}\right), \frac{r_c}{r_p}\right) \right] \quad (S17)
\end{aligned}$$

$R_{cyl}^{side-top}$, the last obstructed contribution, accounts for the region where oblate spheroidal slices intersect both with the side of the cylinder and its top (Fig. S2). Note, as a result, that the ν integral in the dR calculation thus must be split into two integration domains:

$$\begin{aligned}
R_{cyl}^{side-top} &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p} \xi(z_o + \ell_c)\right)} \frac{\operatorname{sech} \mu \, d\mu}{\int_0^{\nu_{side}} \cos \nu \, d\nu + \int_{\nu_{top}}^{\frac{\pi}{2}} \cos \nu \, d\nu} \\
&= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p} \xi(z_o + \ell_c)\right)} \frac{\operatorname{sech} \mu \, d\mu}{1 - \frac{z_o + \ell_c}{r_p} \sinh \mu + \sqrt{1 - \frac{r_c^2}{r_p^2} \operatorname{sech}^2 \mu}} \quad (S18)
\end{aligned}$$

Lastly, the resistance of the unobstructed regions is calculated as:

$$\begin{aligned}
R_{free} &= R_{free}^{bot} + R_{free}^{top} \\
&= \frac{1}{2\pi\sigma r_p} \int_{-\infty}^{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)} \operatorname{sech} \mu \, d\mu + \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p} \xi(z_o + \ell_c)\right)}^{\infty} \operatorname{sech} \mu \, d\mu \\
&= \frac{1}{2\pi\sigma r_p} \left(\tan^{-1}\left(\frac{z_o - \ell_c}{r_p}\right) + \frac{\pi}{2} \right) + \frac{1}{2\pi\sigma r_p} \left(\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o + \ell_c}{r_p} \xi(z_o + \ell_c)\right) \right) \\
&= \frac{1}{2\sigma r_p} \left[1 + \frac{1}{\pi} \tan^{-1}\left(\frac{z_o - \ell_c}{r_p}\right) - \frac{1}{\pi} \tan^{-1}\left(\frac{z_o + \ell_c}{r_p} \xi(z_o + \ell_c)\right) \right] \quad (S19)
\end{aligned}$$

Inside the pore ($|z_o| \leq \ell_c$)

Again, as per Figure S1 and similarly to Equation S10, the resistances of five separate domains need to be considered when calculating the conductance of flat-ended obstructions bridging across the membrane:

$$G_{cyl}^b(r_c, \ell_c, z_o) = [R_{free}^{bot} + R_{cyl}^{bot-side} + R_{cyl}^{side} + R_{cyl}^{side-top} + R_{free}^{top}]^{-1} \quad (S20)$$

Similarly to the $|z_o| > \ell_c$ case, the resistance of the unobstructed regions is found to be:

$$\begin{aligned} R_{free}^{bot} + R_{free}^{top} &= \frac{1}{2\pi\sigma r_p} \int_{-\infty}^{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p} \xi(z_o - \ell_c)\right)} \operatorname{sech} \mu \, d\mu + \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p} \xi(z_o + \ell_c)\right)}^{\infty} \operatorname{sech} \mu \, d\mu \\ &= \frac{1}{2\sigma r_p} \left[1 + \frac{1}{\pi} \tan^{-1}\left(\frac{z_o - \ell_c}{r_p} \xi(z_o - \ell_c)\right) - \frac{1}{\pi} \tan^{-1}\left(\frac{z_o + \ell_c}{r_p} \xi(z_o + \ell_c)\right) \right] \end{aligned} \quad (S21)$$

The $R_{cyl}^{bot-side}$ terms accounts for the segment where oblate spheroidal slices intersect both with the side of the cylinder and its bottom (Fig. S2). As a result, the ν integral in the dR calculation must again be split into two integration domains:

$$\begin{aligned} R_{cyl}^{bot-side} &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p} \xi(z_o - \ell_c)\right)}^{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)} \frac{\operatorname{sech} \mu \, d\mu}{[\sin \nu]_0^{\nu_{side}} + [\sin \nu]_{\nu_{bot}}^{\frac{\pi}{2}}} \\ &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p} \xi(z_o - \ell_c)\right)}^{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)} \frac{\operatorname{sech} \mu \, d\mu}{1 - \frac{z_o - \ell_c}{r_p} \sinh \mu + \sqrt{1 - \frac{r_c^2}{r_p^2} \operatorname{sech}^2 \mu}} \end{aligned} \quad (S22)$$

The R_{cyl}^{side} terms accounts for the segment where oblate spheroidal slices intersect only with the side of the cylinder (Fig. S2), and is delimited by $\mu_{\pm} = \sinh^{-1}\left(\frac{z_o \pm \ell_c}{r_p}\right)$:

$$\begin{aligned} R_{cyl}^{side} &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)} \frac{\operatorname{sech} \mu \, d\mu}{\sqrt{1 - \frac{r_c^2}{r_p^2} \operatorname{sech}^2 \mu}} \\ &= \frac{1}{2\sigma r_p} \left[\frac{1}{\pi} F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o - \ell_c}{r_p}\right)\right) - \frac{1}{\pi} F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)\right) \right] \end{aligned} \quad (S23)$$

The $R_{cyl}^{side-top}$ terms accounts for the segment where oblate spheroidal slices intersect both with the side of the cylinder and its top (Fig. S2):

$$\begin{aligned} R_{cyl}^{side-top} &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p} \xi(z_o + \ell_c)\right)} \frac{\operatorname{sech} \mu \, d\mu}{[\sin \nu]_0^{\nu_{side}} + [\sin \nu]_{\nu_{top}}^{\frac{\pi}{2}}} \\ &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o + \ell_c}{r_p} \xi(z_o + \ell_c)\right)} \frac{\operatorname{sech} \mu \, d\mu}{1 - \frac{z_o + \ell_c}{r_p} \sinh \mu + \sqrt{1 - \frac{r_c^2}{r_p^2} \operatorname{sech}^2 \mu}} \end{aligned} \quad (S24)$$

We note that the above equations do not apply for very thin and wide cylinders whose treatment requires the consideration of an oblate spheroidal segment in which constant- μ surfaces intersect both the bottom and top surfaces of the cylinders.

Figure S3 plots Equation S10 for cylinders of length $L_c = 10r_p$ with radii smaller and larger than the pore radius. For $r_c \geq r_p$, the conductance is zero when $z_o \leq L_c/2$, as expected.

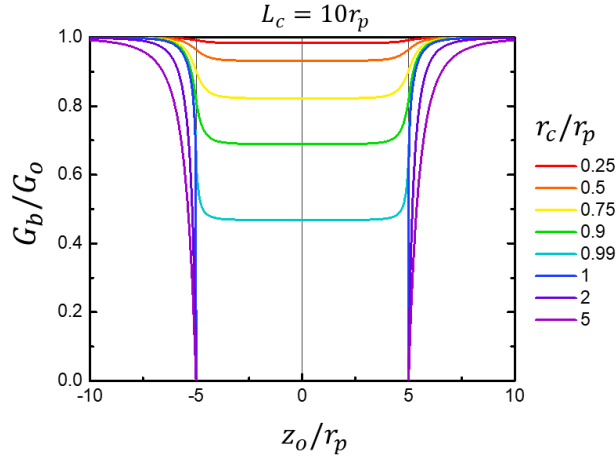


Figure S3. z -dependence of 2D pore conductance in the presence of cylinders of different radii and fixed length $L_c = 10r_p$.

S4. Spherical Obstruction

Here the full derivation of a spherical obstruction in a 2D pore is presented.

Centered case ($z_o = 0$)

The equation describing the surface of the spherical obstruction is $r_s^2 = \rho^2 + z^2$, from which an expression for $z^2 = r_s^2 - \rho^2$ is obtained and inserted into the equation of a constant- μ oblate spheroid:

$$1 = \frac{\rho^2}{r_p^2 \cosh^2 \mu} + \frac{r_s^2 - \rho^2}{r_p^2 \sinh^2 \mu} \quad (\text{S25})$$

Through simple manipulations, an expression for the ρ -parametrization can be obtained:

$$\rho_o^2 = (r_s^2 - r_p^2 \sinh^2 \mu) \cosh^2 \mu \quad (\text{S26})$$

The resistance of the oblate spheroidal segment containing the spherical obstruction is thus:

$$R'_{sph}(r_s) = \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}(-\frac{r_s}{r_p})}^{\sinh^{-1}(\frac{r_s}{r_p})} \frac{\text{sech } \mu \, d\mu}{\sqrt{1 - \frac{r_s^2 - r_p^2 \sinh^2 \mu}{r_p^2}}}$$

$$\begin{aligned}
&= \frac{1}{\pi\sigma r_p} \int_0^{\sinh^{-1}\left(\frac{r_s}{r_p}\right)} \frac{\operatorname{sech}^2 \mu \, d\mu}{\sqrt{1 - \frac{r_s^2}{r_p^2}} \sqrt{1 + \frac{r_s^2/r_p^2}{1 - \frac{r_s^2}{r_p^2}} \tanh^2 \mu}} \\
&= \frac{1}{\pi\sigma r_s} \left[\sinh^{-1} \left(\frac{r_s/r_p \tanh(\mu)}{\sqrt{1 - r_s^2/r_p^2}} \right) \right]_0^{\sinh^{-1}\left(\frac{r_s}{r_p}\right)} \\
&= \frac{1}{\pi\sigma r_s} \left(\sinh^{-1} \left(\frac{r_s^2/r_p^2}{\sqrt{1 - (r_s^2/r_p^2)^2}} \right) \right) \\
&\Rightarrow R'_{sph}(r_s) = \frac{1}{\pi\sigma r_s} \tanh^{-1} \left(\frac{r_s^2}{r_p^2} \right) \tag{S27}
\end{aligned}$$

By including the contribution from the unobstructed segments (Equation 6, main text), the conductance of a 2D nanopore in the presence of a centered spherical obstruction is:

$$\frac{G_b^{sph}}{G_o}(r_s) = \left[1 - \frac{2}{\pi} \tan^{-1} \left(\frac{r_s}{r_p} \right) + \frac{2}{\pi} \frac{r_p}{r_s} \tanh^{-1} \left(\frac{r_s^2}{r_p^2} \right) \right]^{-1} \tag{S28}$$

Non-Centered case ($z_o \neq 0$)

The surface of the sphere translated along the z axis by z_o is described by the equation:

$$\rho^2 + (z - z_o)^2 = r_s^2 \tag{S29}$$

From Equation S28, an expression for z^2 can be obtained, and inserted into the constant- μ oblate spheroidal equation:

$$\frac{\rho^2}{r_p^2 \cosh^2 \mu} + \frac{r_s^2 - \rho^2 + 2z_o \sqrt{r_s^2 - \rho^2} + z_o^2}{r_p^2 \sinh^2 \mu} = 1 \tag{S30}$$

Equation S29 can be rewritten as a quadratic equation with respect to $\rho^2 \operatorname{sech}^2 \mu$:

$$\begin{aligned}
0 = & \rho^4 \operatorname{sech}^4 \mu - (2(r_s^2 + z_o^2 - r_p^2 \sinh^2 \mu) - 4z_o^2 \cosh^2 \mu) \rho^2 \operatorname{sech}^2 \mu \\
& + \left((r_s^2 + z_o^2 - r_p^2 \sinh^2 \mu)^2 - 4z_o^2 r_s^2 \right) \tag{S31}
\end{aligned}$$

Inserting the positive quadratic formula solution for $\rho^2 \operatorname{sech}^2 \mu$ into Equation 5 of the main text, i.e.

$dR = (2\pi\sigma r_p)^{-1} / \sqrt{1 - \rho^2 \operatorname{sech}^2 \mu / r_p^2}$, results in an expression for the resistance of the obstructed oblate spheroidal segment:

$$\frac{R'_{sph}}{R_o}(r_s, z_o) = \frac{1}{\pi} \int_{\sinh^{-1}\left(\frac{z_o-r_s}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o+r_s}{r_p}\right)} \frac{\operatorname{sech}^2 \mu d\mu}{\sqrt{1 - \frac{r_s^2 + z_o^2}{r_p^2} \operatorname{sech}^2 \mu + 2 \frac{z_o^2}{r_p^2} - 2 \frac{z_o}{r_p} \tanh \mu} \sqrt{1 + \frac{z_o^2}{r_p^2} - \frac{r_s^2}{r_p^2} \operatorname{sech}^2 \mu}} \quad (\text{S32})$$

Here, $R_o = 1/2\sigma r_p$ is the resistance of an open 2D pore. The contributions from the two unobstructed segments can above and below the sphere can also be considered (as before, e.g. see Eq. S6):

$$\begin{aligned} R_{free}(r_s, z_o) &= R_{free}^{bot} + R_{free}^{top} \\ &= \frac{1}{2\pi\sigma r_p} \int_{-\infty}^{\sinh^{-1}\left(\frac{z_o-r_s}{r_p}\right)} \operatorname{sech} \mu d\mu + \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(\frac{z_o+r_s}{r_p}\right)}^{\infty} \operatorname{sech} \mu d\mu \\ &= \frac{1}{2\sigma r_p} \left(1 + \frac{1}{\pi} \tan^{-1}\left(\frac{z_o - r_s}{r_p}\right) - \frac{1}{\pi} \tan^{-1}\left(\frac{z_o + r_s}{r_p}\right) \right) \end{aligned} \quad (\text{S33})$$

The general expression for the conductance of a 2D pore in the presence of a spherical obstruction of radius r_s at a distance z_o from the pore center is thus:

$$\begin{aligned} \left(\frac{G_b^{sph}}{G_o}\right)^{-1} &= 1 + \frac{1}{\pi} \tan^{-1}\left(\frac{z_o - r_s}{r_p}\right) - \frac{1}{\pi} \tan^{-1}\left(\frac{z_o + r_s}{r_p}\right) \\ &+ \frac{1}{\pi} \int_{\sinh^{-1}\left(\frac{z_o-r_s}{r_p}\right)}^{\sinh^{-1}\left(\frac{z_o+r_s}{r_p}\right)} \frac{\operatorname{sech}^2 \mu d\mu}{\sqrt{1 - \frac{r_s^2 + z_o^2}{r_p^2} \operatorname{sech}^2 \mu + 2 \frac{z_o^2}{r_p^2} - 2 \frac{z_o}{r_p} \tanh \mu} \sqrt{1 + \frac{z_o^2}{r_p^2} - \frac{r_s^2}{r_p^2} \operatorname{sech}^2 \mu}} \end{aligned} \quad (\text{S34})$$

Equation S33 is plotted in Figure 2c of the main text alongside conductance values from corresponding finite element simulations. Interestingly, we note that unlike with cylinders, no special treatment is required for spheres bigger than the pores, as demonstrated in Figure S4 which plots examples of Equation S33 for both $r_s < r_p$ and $r_s \geq r_p$.

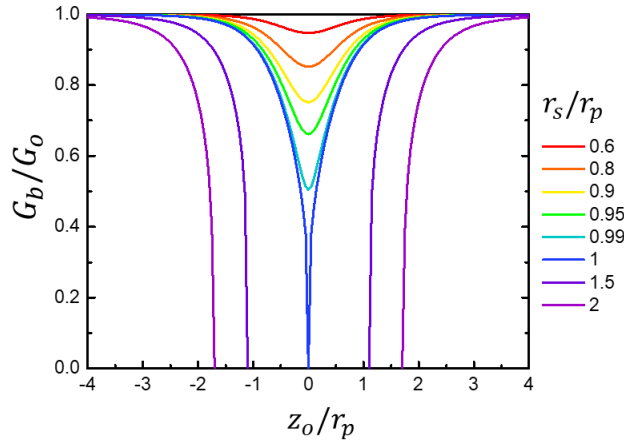


Figure S4. z -dependence of the conductance of 2D pores in the presence of spherical obstructions of various radii.

S5. Rotationally Symmetric Obstructions – More Examples

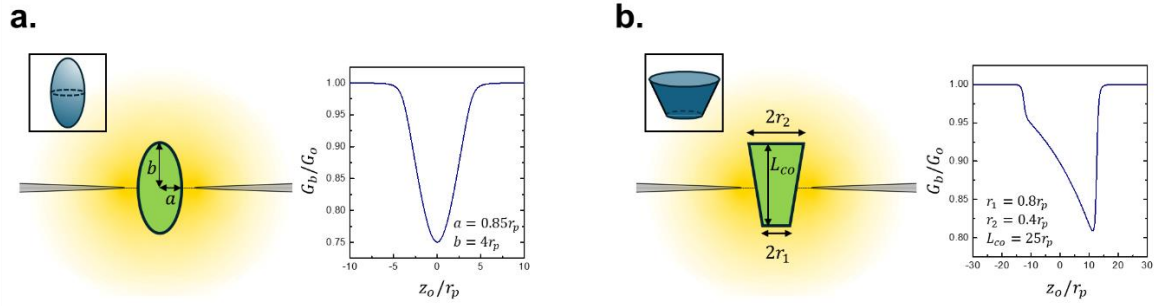


Figure S5. Conductance of a 2D pore in the presence of an obstruction with **(a)** an ellipsoidal geometry and **(b)** with a truncated conical geometry.

Prolate Ellipsoid Centered Inside a 2D Pore

The surface of an ellipsoid at a distance z_0 from a 2D pore with dimensions a along the ρ -axis and b along the z -axis is described by the equation:

$$\frac{\rho^2}{a^2} + \frac{(z - z_0)^2}{b^2} = 1 \quad (\text{S35})$$

The $\rho_o(\mu)$ parameterization of the ellipsoid obstruction is found by isolating for z^2 in Equation S34 and inserting the expression into the equation of a constant- μ surface, resulting in (for $z_0 = 0$):

$$\rho_o^2(\mu) = \frac{\sinh^2 \mu - \frac{b^2}{r_p^2}}{\sinh^2 \mu - \frac{b^2}{a^2} \cosh^2 \mu} r_p^2 \cosh^2 \mu \quad (\text{S36})$$

The corresponding expression for the resistance of the oblate spheroidal segment containing the ellipsoidal obstruction is thus:

$$\begin{aligned} R'_{\text{ellipse}}(a, b) &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(-\frac{b}{r_p}\right)}^{\sinh^{-1}\left(\frac{b}{r_p}\right)} \frac{\text{sech } \mu \, d\mu}{\sqrt{1 - \frac{\sinh^2 \mu - \frac{b^2}{r_p^2}}{\sinh^2 \mu - \frac{b^2}{a^2} \cosh^2 \mu}}} \\ &= \frac{1}{2\pi\sigma r_p} \int_{\sinh^{-1}\left(-\frac{b}{r_p}\right)}^{\sinh^{-1}\left(\frac{b}{r_p}\right)} \frac{\sqrt{1 - \frac{a^2}{b^2} \tanh^2 \mu}}{\sqrt{1 - \frac{a^2}{r_p^2} \text{sech}^2 \mu}} \text{sech } \mu \, d\mu \end{aligned} \quad (\text{S37})$$

Equation S36 presents no closed form solution, however, note that in the two limits of $a = b$ and $b \rightarrow \infty$, $R'_{\text{ellipse}}(\mu)$ corresponds exactly to the expressions for the spherical obstruction (Equation S26), and the infinitely long cylindrical obstruction (Equation S8), respectively. The resistance of a nanopore obstructed by a centered ellipsoid is therefore:

$$\frac{G_b^{ellipse}}{G_o}(a, b) = \left[1 - \frac{2}{\pi} \tan^{-1} \left(\frac{b}{r_p} \right) + \frac{1}{\pi} \int_{\sinh^{-1} \left(\frac{b}{r_p} \right)}^{\sinh^{-1} \left(\frac{b}{r_p} \right)} \frac{\sqrt{1 - \frac{a^2}{b^2} \tanh^2 \mu}}{\sqrt{1 - \frac{a^2}{r_p^2} \operatorname{sech}^2 \mu}} \operatorname{sech} \mu d\mu \right]^{-1} \quad (S38)$$

Prolate Ellipsoid Centered at distance z_o from a 2D Pore

Let an ellipsoid of semi-axes a and b along the ρ and z dimensions, respectively, have its center be at a distance z_o from a 2D nanopore. Its surface can be parametrized by finding its intersection points with constant- μ ellipses, as was done above. Doing so results in the following expression for the resistance of a punctured ellipsoidal slice:

$$\begin{aligned} \frac{R'_{ellipse}}{R_o} &= 2\sigma r_p \int dR(\mu) \\ &= \frac{1}{\pi} \int_{\sinh^{-1} \left(\frac{z_o - b}{r_p} \right)}^{\sinh^{-1} \left(\frac{z_o + b}{r_p} \right)} \frac{\operatorname{sech} \mu d\mu}{\sqrt{1 + \frac{\left(\tanh^2 \mu - \frac{b^2}{a^2} \right) \left(\frac{b^2 + z_o^2}{r_p^2} - \sinh^2 \mu \right) + 2 \frac{z_o^2 b^2}{r_p^2 a^2} - \operatorname{sign}(\mu) 2 \frac{z_o b}{r_p a} \sqrt{\left(\tanh^2 \mu - \frac{b^2}{a^2} \right) \left(\frac{b^2 + z_o^2}{r_p^2} - \sinh^2 \mu \right) + \frac{z_o^2 b^2}{r_p^2 a^2} + \frac{a^2}{r_p^2} \left(\tanh^2 \mu - \frac{b^2}{a^2} \right)^2}}{\left(\tanh^2 \mu - \frac{b^2}{a^2} \right)^2}} \end{aligned} \quad (S39)$$

The total resistance in the system can be expressed as:

$$R_b^{ellipse}(a, b, z_o) = R_{free}(-\infty, z_o - b) + R'_{ellipse} + R_{free}(z_o + b, \infty) \quad (S40)$$

and the normalized blocked-state conductance can be expressed as:

$$\frac{G_b^{ellipse}}{G_o}(a, b, z_o) = \left[1 + \frac{1}{\pi} \tan^{-1} \left(\frac{z_o - b}{r_p} \right) - \frac{1}{\pi} \tan^{-1} \left(\frac{z_o + b}{r_p} \right) + \frac{R'_{ellipse}}{R_o} \right]^{-1} \quad (S41)$$

The z dependence of Equation S40 is plotted in Figure S5a for an ellipsoid of dimension $a = 0.85r_p$ and $b = 4r_p$.

Truncated Cone

Here we consider a truncated cone of length $L_{co} = 2\ell_{co}$, centered at z_o with one of its faces located at $z = z_o - \ell_{co}$ having radius r_1 and the other located at $z = z_o + \ell_{co}$ with radius r_2 . The surface of the conical section is parametrized by the following equation:

$$\rho_o(z) = \frac{r_2 - r_1}{2\ell_{co}}(z - z_o) + \frac{r_1 + r_2}{2} \quad (S42)$$

The parametrization of ρ_o with respect to μ can be found by isolating z from the above and inserting this result into the expression of a constant- μ surface, as before. The infinitesimal resistance of an oblate spheroidal slice containing the obstruction can then be found using Equation 5 in the main text:

$$dR'_{co}(\mu) = \frac{1}{2\pi\sigma r_p} \frac{\operatorname{sech} \mu d\mu}{\sqrt{1 - \frac{\left(\frac{2\ell_{co}}{r_2 - r_1} \left(\ell_{co} \frac{r_2 + r_1}{r_2 - r_1} - z_o \right) + \operatorname{sign}(\mu(r_2 - r_1)) \sqrt{\left(\tanh^2 \mu + \frac{4\ell_{co}^2}{(r_2 - r_1)^2} \right) r_p^2 \sinh^2 \mu - \tanh^2 \mu \left(z_o - \ell_{co} \frac{r_2 + r_1}{r_2 - r_1} \right)^2}}{\left(\tanh^2 \mu + \frac{4\ell_{co}^2}{(r_2 - r_1)^2} \right)^2}} \right)^2}} \quad (S43)$$

The total resistance in the system can be expressed as:

$$R_b^{co}(r_1, r_2, \ell_{co}, z_o) = R_{free}(-\infty, z_o - \ell_{co}) + \int_{\frac{\sinh^{-1} z_o - \ell_{co}}{r_p}}^{\frac{\sinh^{-1} z_o + \ell_{co}}{r_p}} dR'_{co}(\mu) + R_{free}(z_o + \ell_{co}, \infty) \quad (S44)$$

and the normalized blocked-state conductance as:

$$\frac{G_b^{co}}{G_o} = \left[1 + \frac{1}{\pi} \tan^{-1} \left(\frac{z_o - \ell_{co}}{r_p} \right) - \frac{1}{\pi} \tan^{-1} \left(\frac{z_o + \ell_{co}}{r_p} \right) + 2\sigma r_p \int_{\frac{\sinh^{-1} z_o - \ell_{co}}{r_p}}^{\frac{\sinh^{-1} z_o + \ell_{co}}{r_p}} dR'_{co}(\mu) \right]^{-1} \quad (S45)$$

The z dependence of Equation S44 is plotted in Figure S5b for a truncated cone of dimension $r_1 = 0.8r_p$, $r_2 = 0.4r_p$ and $L_{co} = 2\ell_{co} = 25r_p$.

S6. Rotationally Asymmetric Obstructions – Wedged Cylinder

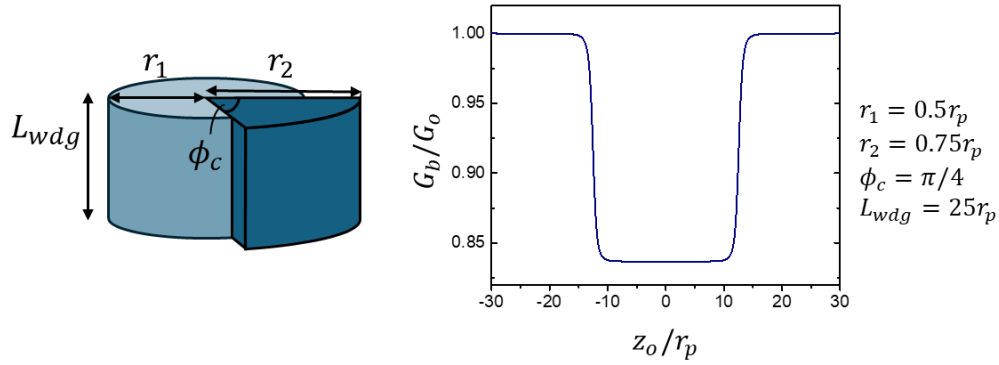


Figure S6. Conductance of a 2D pore in the presence of a wedged cylindrical obstruction.

Consider the simple rotationally asymmetric case of a wedged cylinder of length $L_{wdg} = 2\ell_{wdg}$, whose surface is defined as:

$$\rho_o(\phi) = \begin{cases} r_1, & \text{for } \phi_c/2 < \phi < 2\pi - \phi_c/2 \\ r_2, & \text{for } -\phi_c/2 < \phi < \phi_c/2 \end{cases} \quad (S46)$$

The resistance of the punctured oblate spheroidal slice at μ can be calculated as:

$$\begin{aligned} dR'_{wedge}(\mu) &= \frac{1}{\sigma r_p} \frac{\text{sech } \mu}{\int_{\phi_c/2}^{2\pi - \phi_c/2} \sqrt{1 - \frac{r_1^2}{r_p^2} \text{sech}^2 \mu} d\phi + \int_{-\phi_c/2}^{\phi_c/2} \sqrt{1 - \frac{r_2^2}{r_p^2} \text{sech}^2 \mu} d\phi} \\ &= \frac{1}{2\sigma\pi r_p} \frac{\text{sech } \mu}{\left(1 - \frac{\phi_c}{2\pi}\right) \sqrt{1 - \frac{r_1^2}{r_p^2} \text{sech}^2 \mu} + \frac{\phi_c}{2\pi} \sqrt{1 - \frac{r_2^2}{r_p^2} \text{sech}^2 \mu}} \end{aligned} \quad (S47)$$

The total resistance in the system can be expressed as:

$$R_b^{wedge}(r_1, r_2, \phi_c, \ell_{wdg}, z_o) = R_{free}(-\infty, z_o - \ell_{wdg}) + R'_{wedge} + R_{free}(z_o + \ell_{wdg}, \infty) \quad (S48)$$

and the normalized blocked-state conductance can be expressed as:

$$\frac{G_b^{wedge}}{G_o} = \left[1 + \frac{1}{\pi} \tan^{-1} \left(\frac{z_o - \ell_w}{r_p} \right) - \frac{1}{\pi} \tan^{-1} \left(\frac{z_o + \ell_w}{r_p} \right) + 2\sigma r_p \int_{\frac{\sinh^{-1} z_o - \ell_w}{r_p}}^{\frac{\sinh^{-1} z_o + \ell_w}{r_p}} dR'_{wedge}(\mu) \right]^{-1} \quad (S49)$$

S7. Rotationally Asymmetric Obstructions – Off-Axis Effects

Off-Centered Cylinder

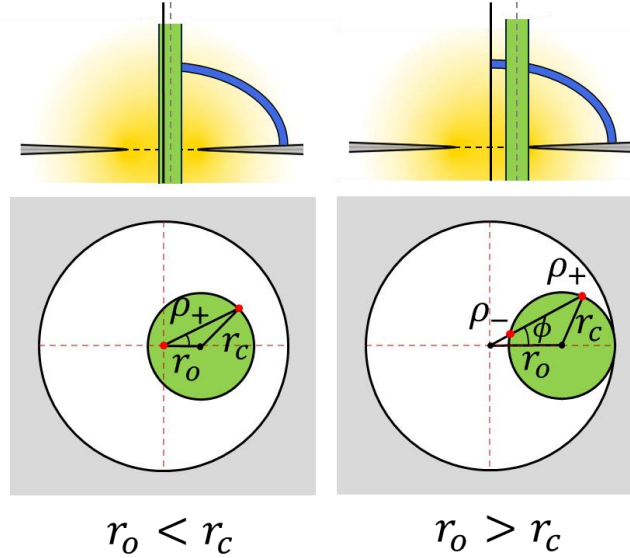


Figure S7. Cross-sectional view of the x-y plane showing the geometrical parameters of a 2D pore in the presence of an infinitely long cylindrical obstruction at a distance r_o from the pore center.

Consider an infinitely long cylindrical obstruction of radius r_c , lying parallel to the z axis, but centred at a distance r_o away from the central pore axis, as per Figure S7. The parametrization of the obstruction's surface is found by calculating the distance ρ_o at which the constant- ϕ planes and the cylindrical obstruction intersect. As per Figure S7, this can be achieved using the trigonometry of the system cross-section in the $z = 0$ plane:

$$\rho_{\pm}(\phi) = r_o \cos \phi \pm \sqrt{r_c^2 - r_o^2 \sin^2 \phi} \quad (S50)$$

Note that the scenarios for which $r_o < r_c$ and $r_o > r_c$ need to be treated separately. For $r_o < r_c$, the resistance of the obstructed system is found to be:

$$\begin{aligned} R'_{cyl}(r_o < r_c) &= \frac{1}{\sigma r_p} \int_{-\infty}^{\infty} \frac{\operatorname{sech} \mu \, d\mu}{\int_0^{2\pi} [\sin v]_0^{v_o(\phi)} \, d\phi} \\ &= \frac{1}{\sigma r_p} \int_{-\infty}^{\infty} \frac{\operatorname{sech} \mu \, d\mu}{\int_0^{2\pi} \sqrt{1 - \frac{\rho_{\pm}^2(\phi)}{r_p^2}} \operatorname{sech}^2 \mu \, d\phi} \end{aligned}$$

$$= \frac{1}{\sigma r_p} \int_{-\infty}^{\infty} \frac{\operatorname{sech} \mu \, d\mu}{\int_0^{2\pi} \sqrt{1 - \left(\frac{r_o}{r_p} \cos \phi + \sqrt{\frac{r_c^2}{r_p^2} - \frac{r_o^2}{r_p^2} \sin^2 \phi} \right)^2} \operatorname{sech}^2 \mu \, d\phi} \quad (\text{S51})$$

For $r_o > r_c$, the resistance calculation involves integrating over two distinct ν domains, and thereby using both the ρ_+ and ρ_- solutions of Equation S49. Moreover, note that not all constant- ϕ planes intersect the cylindrical obstruction, only those within the angles $|\phi| < \phi_c = \sin^{-1}(r_c/r_o)$:

$$\begin{aligned} R'_{cyl}(r_o > r_c) &= \frac{1}{\sigma r_p} \int_{-\infty}^{\infty} \frac{\operatorname{sech} \mu \, d\mu}{\int_{\phi_c}^{2\pi - \phi_c} [\sin \nu]_0^{\frac{\pi}{2}} d\phi + \int_{-\phi_c}^{\phi_c} \left([\sin \nu]_0^{\nu_+(\phi)} + [\sin \nu]_{\nu_-(\phi)}^{\frac{\pi}{2}} \right) d\phi} \\ &= \frac{1}{\sigma r_p} \int_{-\infty}^{\infty} \frac{\operatorname{sech} \mu \, d\mu}{2\pi - 2\phi_c + \int_{-\phi_c}^{\phi_c} \left(\sqrt{1 - \frac{\rho_+^2}{r_p^2} \operatorname{sech}^2 \mu} + 1 - \sqrt{1 - \frac{\rho_-^2}{r_p^2} \operatorname{sech}^2 \mu} \right) d\phi} \\ &= \frac{1}{\sigma r_p} \int_{-\infty}^{\infty} \frac{\operatorname{sech} \mu \, d\mu}{2\pi + \int_{-\sin^{-1}(\frac{r_c}{r_o})}^{\sin^{-1}(\frac{r_c}{r_o})} \left(\sqrt{1 - \frac{\rho_+^2}{r_p^2} \operatorname{sech}^2 \mu} - \sqrt{1 - \frac{\rho_-^2}{r_p^2} \operatorname{sech}^2 \mu} \right) d\phi} \end{aligned} \quad (\text{S52})$$

Equation 17 of the main text thus denotes the blocked-state conductance, i.e. inverse values of Equations S50 and S51 normalized by the open pore conductance $2\sigma r_p$. As in Figure 3b of the main text, Figure S8a plots the dependence of the normalized conductance on r_o for different values of r_c/r_p . Figure S8b plots the extra blockage arising from $r_o > 0$ values, calculated as the percentage of extra conductance in the $r_o = 0$ case as compared to $r_o \neq 0$.

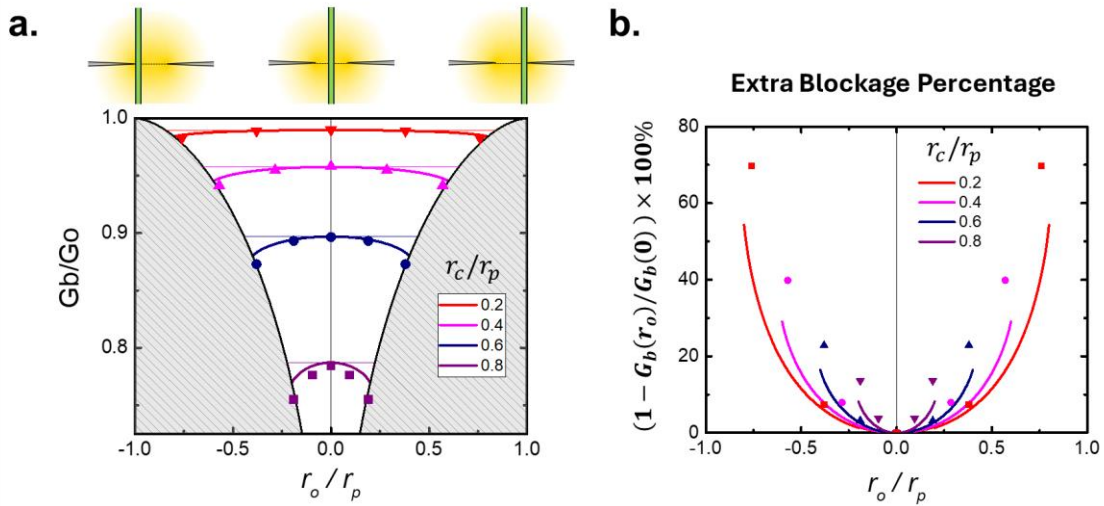


Figure S8. Off-axis effects for infinitely long cylindrical obstructions. **a)** Dependence of normalized blocked-state conductance G_b^{cyl}/G_o on radial position of cylinder inside pore r_o . **b)** Extra

conductance induced by centred cylinder position $r_o = 0$, compared to off-axis $r_o \neq 0$. All individual points are values calculated from finite element simulations, whereas continuous curves are from Equations S50-S51.

Off-Centered Sphere

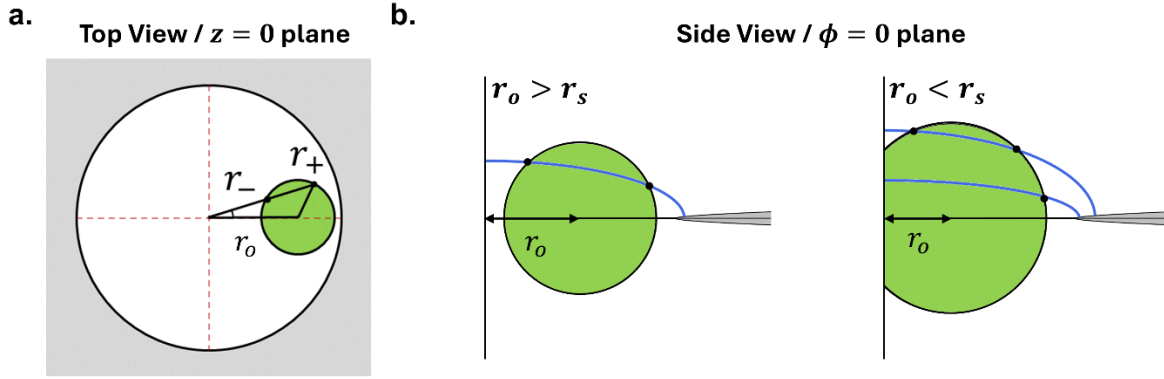


Figure S9. a) $z = 0$ cross-section sketch showing the simple trigonometry required to characterize the intersection circles resulting from the presence of a vertically centred spherical obstruction in a 2D pore using r_{\pm} . b) Sketch depicting the number of intersection points between the surface of a circle and an ellipse.

Unlike infinitely long cylindrical obstructions, the surface parametrization of spherical obstructions is not solely dependent on μ , as is now discussed. First note that the intersection of constant- ϕ planes with the sphere surface is a circle. The intersection of constant- ϕ with constant- μ oblate spheroids is instead an ellipse. Finding the parametrization $\rho_o(\phi, \mu)$ of the spherical surface therefore relies on finding the intersection point(s) between these ϕ -characteristic circles and ellipses.

Let us first characterize the circle resulting from the intersection of the ϕ -plane with the vertically centred ($z_o = 0$) spherical obstruction. As shown in Figure S9a, the problem is again solved using simple trigonometry while considering the $z = 0$ plane cross-section. We can thus find r_{\pm} , defined as the intersection points of the ϕ -plane and the sphere in the $z = 0$ plane:

$$r_{\pm} = r_o \cos \phi \pm \sqrt{r_s^2 - r_o^2 \sin^2 \phi} \quad (\text{S53})$$

The ϕ -dependent radius r_{cs} of the intersection circle as well as its mean radial distance from the pore center r_{co} can be calculated from r_{\pm} :

$$r_{cs}(\phi) = \frac{r_+ - r_-}{2} = \sqrt{r_s^2 - r_o^2 \sin^2 \phi} \quad (\text{S54})$$

$$r_{co}(\phi) = \frac{r_- + r_+}{2} = r_o \cos \phi \quad (\text{S55})$$

The surface of the intersection circle in the constant- ϕ plane is thus described by:

$$(\rho - r_{co}(\phi))^2 + z^2 = r_{cs}^2 \quad (\text{S56})$$

The parametrization $\rho_o(\mu, \phi)$ of the sphere surface is found by isolating z^2 and inserting it into the equation for the surface of a constant- μ oblate spheroid:

$$\rho_{\pm}(\mu, \phi) = r_{co}(\phi) \cosh^2 \mu \pm \sqrt{(r_{co}^2(\phi) - r_p^2) \cosh^2 \mu \sinh^2 \mu + r_{cs}^2 \cosh^2 \mu} \quad (\text{S57})$$

Note that just like cylindrical obstructions, there can be one or two intersections points, as denoted by the positive and negative signs of Equation S56. Unlike for cylinders however, the number of intersection points to consider is not only dependent on r_o but also on μ , as shown in Figure S9b. For $r_o > r_s$ there are always two intersection points, i.e. two ν intervals over which to integrate, whereas for $r_o < r_s$, there is a value of $\mu = \mu_l$ that delimits the oblate spheroidal segments with one or two intersection points. Two intersections are considered when both ρ_{\pm} are positive, and so μ_l is found by setting $\rho_- = 0$:

$$\begin{aligned} 0 &= r_o \cos \phi \cosh^2 \mu_l - \sqrt{(r_o^2 \cos^2 \phi - r_p^2) \cosh^2 \mu_l \sinh^2 \mu_l + (r_s^2 - r_o^2 \sin^2 \phi) \cosh^2 \mu_l} \\ 0 &= r_o \cos \phi \cosh \mu_l - \sqrt{(r_o^2 \cos^2 \phi - r_p^2) \sinh^2 \mu_l + (r_s^2 - r_o^2 \sin^2 \phi)} \\ 0 &= r_o^2 \cos^2 \phi \cosh^2 \mu_l - r_o^2 \cos^2 \phi \sinh^2 \mu_l + r_p^2 \sinh^2 \mu_l - r_s^2 + r_o^2 \sin^2 \phi \\ \sinh^2 \mu_l &= \frac{r_s^2 - r_o^2}{r_p^2} \\ \Rightarrow \mu_l &= \sinh^{-1} \left(\sqrt{\frac{r_s^2 - r_o^2}{r_p^2}} \right) \end{aligned} \quad (\text{S58})$$

Note that μ_l is independent of ϕ , an important requirement for the slice method to function properly.

Now, we note that the ϕ interval spanned by the obstruction depends both on r_o and on the μ -value of a slice, i.e. $|\phi| < \phi_{max}(r_o, \mu)$. The limiting value $\phi_{max}(r_o, \mu)$ is found by setting $\rho_-(\mu, \phi_{max}) = \rho_+(\mu, \phi_{max})$, which results in:

$$\begin{aligned} 0 &= \sqrt{(r_o^2 \cos^2 \phi_{max} - r_p^2) \cosh^2 \mu \sinh^2 \mu + (r_s^2 - r_o^2 \sin^2 \phi_{max}) \cosh^2 \mu} \\ 0 &= r_o^2 \cos^2 \phi_{max} \sinh^2 \mu - r_p^2 \sinh^2 \mu + r_s^2 - r_o^2 \sin^2 \phi_{max} \\ 0 &= (r_o^2 - r_p^2) \sinh^2 \mu + r_s^2 - r_o^2 \sin^2 \phi_{max} \cosh^2 \mu \\ \sin^2 \phi_{max} &= \left(1 - \frac{r_p^2}{r_o^2} \right) \tanh^2 \mu + \frac{r_s^2}{r_o^2} \operatorname{sech}^2 \mu \\ \Rightarrow \phi_{max} &= \sin^{-1} \left(\sqrt{\left(1 - \frac{r_p^2 + r_s^2}{r_o^2} \right) \tanh^2 \mu + \frac{r_s^2}{r_o^2}} \right) \end{aligned} \quad (\text{S59})$$

Lastly, we find the maximal μ -value containing the sphere, μ_{max} , in order to delimit the obstructed and unobstructed μ -integrals. μ_{max} is found by setting both $\rho_- = \rho_+$ and $\phi = 0$:

$$\mu_{max} = \sinh^{-1} \left(\sqrt{\frac{r_s^2}{r_p^2 - r_o^2}} \right) \quad (S60)$$

For $r_o > r_s$, the resistance of the obstructed oblate spheroidal segment is therefore:

$$\begin{aligned} R'_{sph}(r_o > r_s) &= \frac{2}{\sigma r_p} \int_0^{\mu_{max}} \frac{\operatorname{sech} \mu \, d\mu}{\int_{\phi_{max}}^{2\pi - \phi_{max}} [\sin v]_0^{\frac{\pi}{2}} d\phi + \int_{-\phi_{max}}^{\phi_{max}} \left([\sin v]_0^{v_+} + [\sin v]_{v_-}^{\frac{\pi}{2}} \right) d\phi} \\ &= \frac{2}{\sigma r_p} \int_0^{\sinh^{-1} \left(\frac{r_s}{\sqrt{r_p^2 - r_o^2}} \right)} \frac{\operatorname{sech} \mu \, d\mu}{2\pi + \int_{-\phi_{max}}^{\phi_{max}} \left(\sqrt{1 - \frac{\rho_+^2}{r_p^2} \operatorname{sech}^2 \mu} - \sqrt{1 - \frac{\rho_-^2}{r_p^2} \operatorname{sech}^2 \mu} \right) d\phi} \end{aligned} \quad (S61)$$

And for $r_o < r_s$:

$$\begin{aligned} R'_{sph}(r_o < r_s) &= \frac{2}{\sigma r_p} \int_0^{\sinh^{-1} \left(\frac{\sqrt{r_s^2 - r_o^2}}{r_p} \right)} \frac{\operatorname{sech} \mu \, d\mu}{\int_0^{2\pi} \sqrt{1 - \frac{\rho_+^2}{r_p^2} \operatorname{sech}^2 \mu} \, d\phi} \\ &+ \frac{2}{\sigma r_p} \int_{\sinh^{-1} \left(\frac{\sqrt{r_s^2 - r_o^2}}{r_p} \right)}^{\sinh^{-1} \left(\frac{r_s}{\sqrt{r_p^2 - r_o^2}} \right)} \frac{\operatorname{sech} \mu \, d\mu}{2\pi + \int_{-\phi_{max}}^{\phi_{max}} \left(\sqrt{1 - \frac{\rho_+^2}{r_p^2} \operatorname{sech}^2 \mu} - \sqrt{1 - \frac{\rho_-^2}{r_p^2} \operatorname{sech}^2 \mu} \right) d\phi} \end{aligned} \quad (S62)$$

The conductance of the entire system considers the contributions from the unobstructed segments:

$$\frac{G_b^{sph}}{G_o}(r_o, r_s) = \left[1 - \frac{2}{\pi} \tan^{-1} \left(\frac{r_s}{\sqrt{r_p^2 - r_o^2}} \right) + 2\sigma r_p R'_{sph}(r_o, r_s) \right]^{-1} \quad (S63)$$

The dependence of Equation S62 on r_o/r_p is plotted in Figure S10a for different sphere radii alongside the corresponding values obtained from finite-element simulations. Figure S10b further plots the predicted and simulated excess conductance at $r_o = 0$ compared to nonzero r_o values. Interestingly, although the absolute values predicted from equation S62 are in worse agreement with the simulations than those of cylinders (Fig. S8a), the relative r_o -dependence compared to a centred obstruction is better captured for spheres than for cylinders, as evidenced by the closer spacing between modelled and simulated values in Figure S10b (compare to Fig. S8b).

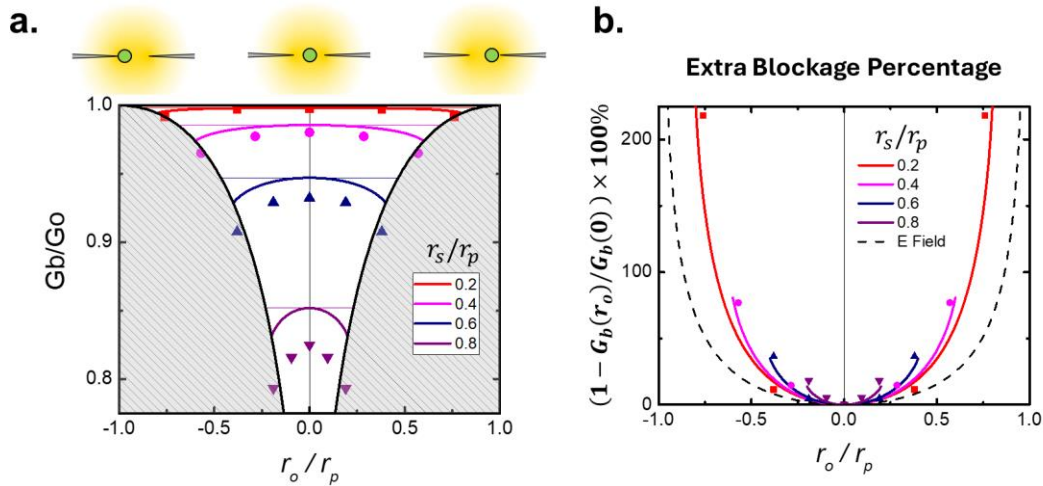


Figure S10. Off-axis effects for vertically centred spherical obstructions. **a)** Dependence of normalized blocked-state conductance G_b^{sph}/G_o on radial position r_o of the sphere inside the pore. **b)** Extra conductance induced by centred sphere position $r_o = 0$, compared to off-axis $r_o \neq 0$. All individual points are values calculated from finite element simulations, whereas continuous curves are from Equations S60-S62.

S8. Complex Obstruction – More Examples

As discussed in the main text (Figure 4), the presented modeling framework allows for predicting the shape of signals from real-life complex molecules by first modeling them as a sequence of sub-units with simple geometries. Here, we show a few examples to demonstrate how this can be applied to various types of molecules.

Side Chains on Scaffold

We first show how to address modeling the nanopore signals of molecules used in scaffold-assisted sensing, wherein molecules of interest such as RNA, proteins, or biomarkers are bound along an extended double-stranded DNA backbone and produce an additional transient blockage during their passage through the pore. Here, we model the passage of a cylindrical backbone $r_c = 0.4r_p$, with 7 equidistant side chains of length $L_{side} = 10r_p$ separated by $L_{space} = 100r_p$. Figure S11 shows three different methods to model sidechains: i) as cylinders with radii $r_{side} = 0.6r_p$, ii) as wedged cylinders with $r_1 = 0.4r_p$, $r_2 = 0.83r_p$, $\phi_{side} = 3\pi/4$, and iii) as ellipsoids with $a = L_{side}$ and $b = 0.6r_p$. These specific values were chosen so that the maximal cross-sectional area of each type of side chain would be kept constant.

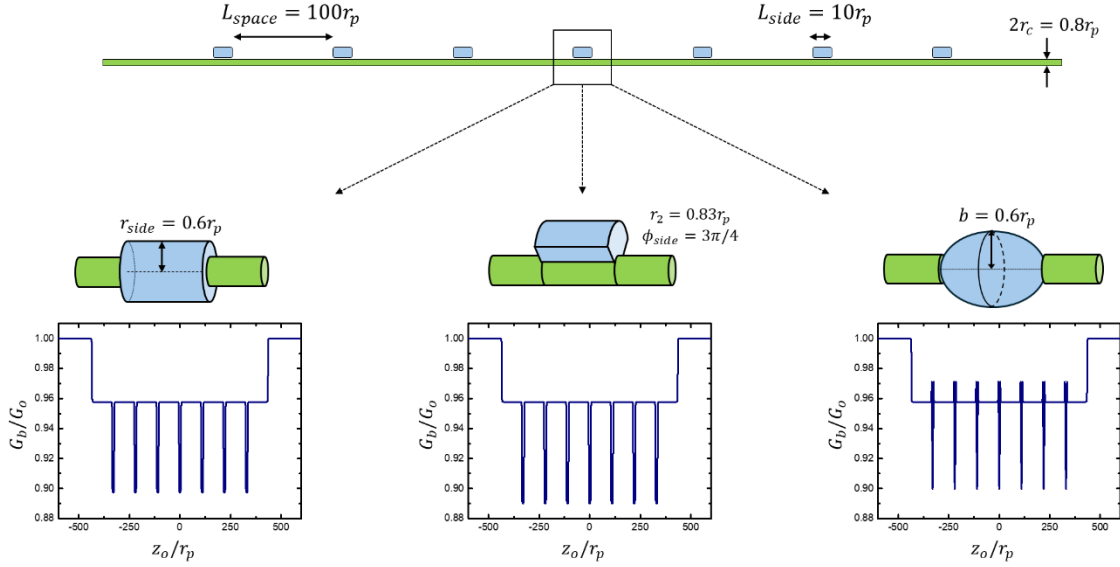


Figure S11. Different ways of modeling seven sidechains along a cylindrical scaffold: **a)** cylindrical, **b)** wedged cylinder, and **c)** ellipsoidal obstructions. In each case, the modeled conductance blockages G_b are plotted as a function of the distance z_o of the scaffold centre from the 2D pore opening (radius r_p).

Shooting Stars

Here, we model real-world DNA nanostructures as a series of simple sub-structures and, motivated by the discussion of a constant-velocity approximation surrounding Equation 18 in the main text, compare their predicted conductance z -mappings to experimentally acquired time traces of corresponding translocation events. Figure S12 shows the current traces induced by the passage of two DNA nanostructures through a nanopore of diameter $d_p = 2r_p = 13 \text{ nm}$ and length $L_p = 12 \text{ nm}$, from prior work.¹ The nanostructures are made up of a single 12-arm DNA star attached to double-stranded DNA tails with lengths of 1.8 and 6.2 kilo-base pairs (kbp), and can be modeled as two cylinders of corresponding radii of $r_c^{tail} = 2.2 \text{ nm}$ and $r_c^{star} = \sqrt{6} \times 2.2 \text{ nm} = 5.4 \text{ nm}$ (i.e. same cross-sectional area as six DNA fragments) and lengths $L_{star} = 48 \text{ bp} \times 0.34 \frac{\text{nm}}{\text{bp}} = 16.3 \text{ nm}$ and $L_{tail} = 1.8 \text{ kbp} = 0.61 \mu\text{m}$ or $6.2 \text{ kbp} = 2.1 \mu\text{m}$. The closed-form conductance z -mappings calculated for both structures in a 2D pore of size $2r_p = 13 \text{ nm}$ are also shown in Figure S12 and although the modelled and experimental x scales (position vs. time) and pore geometries (2D vs. 3D) inherently differ in nature, the z -mappings calculated from Eq. 18 qualitatively capture the overall shape of experimental traces.

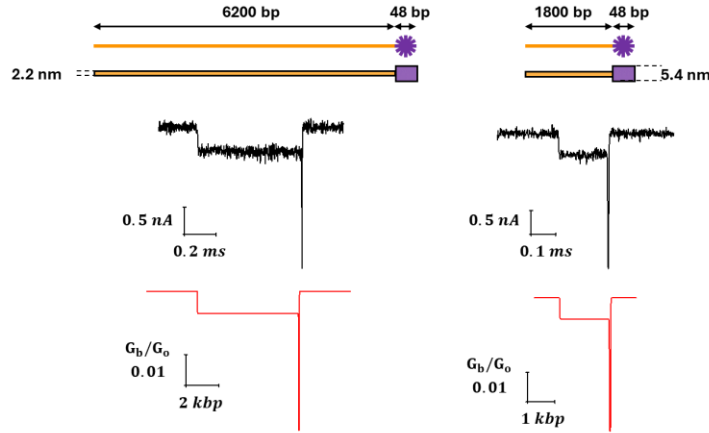


Figure S12. Modeling shooting star DNA nanostructures to predict their conductance blockages. Current traces (conductance blockage vs. time) were obtained from translocations of shooting stars through a nanopore of diameter $d_p = 2r_p = 13$ nm and thickness of $L_p = 12$ nm¹, while z-mappings (conductance blockage vs. position) were calculated through Eq. 18 in the main text by approximating the nanostructures as two cylinders in series (dimensions $r_c^{tail} = 2.2$ nm, $L_{tail} = 0.61/2.1$ μ m and $r_c^{star} = 5.4$ nm, $L_{star} = 16.3$ nm) passing through a 2D pore of diameter $d_p = 13$ nm.

Spatial Resolution Limit for Molecular Design

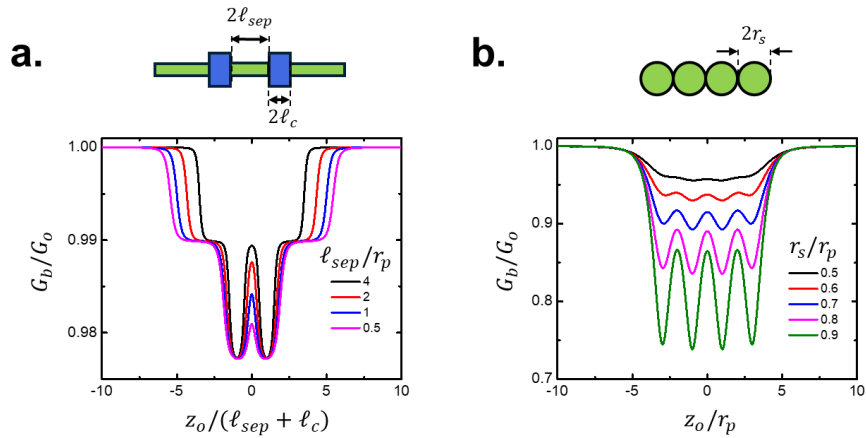


Figure S13. Inherent resolution limit demonstrated with **a)** short barcode-like cylinders in series ($r_c^{wide} = 0.3r_p$, $r_c^{narrow} = 0.2r_p$, $l_c = 2r_p$), and **b)** spheres in series.

We now comment on the intrinsic z -resolution limit of the components of a complex obstruction, imposed by the non-zero sensing volume of a 2D pore. Figure S13a shows the conductance trace of a barcode-like obstruction made up of five cylinders in series, with two wider but shorter ($r_c^{wide} = 0.3r_p$, $L_c = 2l_c = 4r_p$) sub-units separated by $L_{sep} = 2l_{sep}$ along a backbone with $r_c^{narrow} = 0.2r_p$. By changing the value of l_{sep} , Figure S13 shows that the larger diameter features are harder to resolve within a z -mapping when they are separated by less than $2r_p$, again

implying that the sensing volume of a 2D pore of radius r_p has dimension $2r_p$ in the z direction. Similarly, Figure S13b shows the conductance z -mappings expected from a series of four identical spheres with radii ranging between $r_s = 0.5r_p$ and $r_s = 0.9r_p$. Although spheres that take up most of the sensing volume ($r_s \approx r_p$) can be identified individually, strings of smaller spheres result in traces without obviously identifiable sub-unit characteristics. The observations from Figure S13 provide useful insights with regards to designing molecules with information contained in their substructure to be sensed with pores.

Insects Wearing Hats

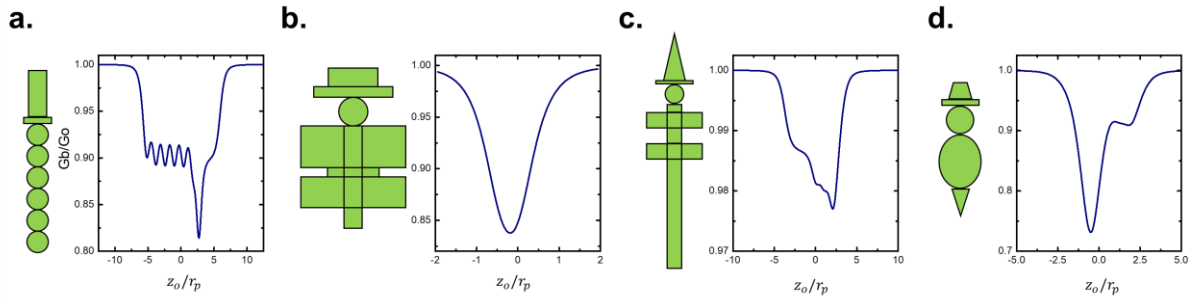


Figure S14. Extra demonstration of blockade predictions for complex obstructions by modeling simple sub-units in series. Conductance expected during the passage through a 2D pore of **a)** Caterpillar wearing a top hat; **b)** Butterfly wearing a boater hat; **c)** Dragonfly wearing a witch hat; **d)** Bee wearing a fedora hat.

S9. Finite-Length Pore Equations

As discussed in the main text, the oblate spheroidal resistive slice method can also be applied to estimate the access resistance of finite-length pores. The total conductance of a pore of radius r_p and length $L_p = 2\ell_p$ is thus calculated by considering the contributions from the two access regions and channel region in series:

$$\begin{aligned}
 G_b &= [R_{acc}^{bot} + R_{pore} + R_{acc}^{top}]^{-1} \\
 &= \left[\int_{-\infty}^0 dR_{acc}^{bot}(\mu) + \int_{-\ell_p}^{\ell_p} dR_{pore}(z) + \int_0^{\infty} dR_{acc}^{top}(\mu) \right]^{-1}
 \end{aligned} \tag{S64}$$

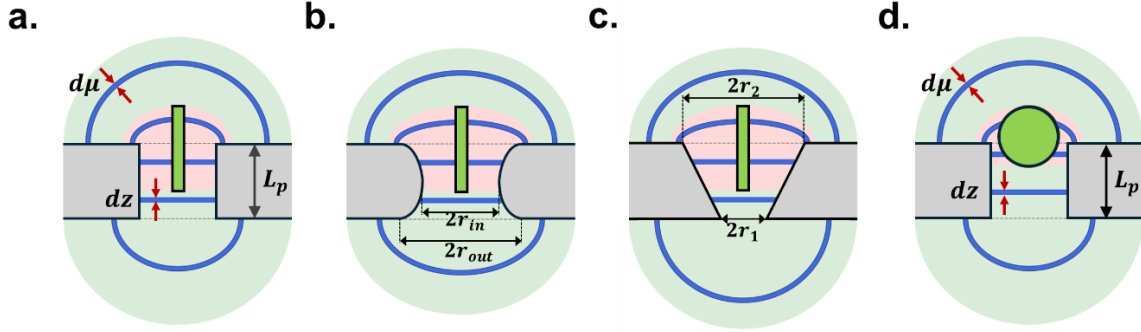


Figure S15. Method for modeling conductance of finite-length pores: oblate spheroidal slices outside the pore and circular slices inside the pore. **a)** Cylindrical obstruction in a cylindrical pore. **b)** Cylindrical obstruction in a hyperboloidal pore. **c)** Cylindrical obstruction in a conical pore. **d)** Spherical obstruction in a cylindrical pore.

For the simple scenario of a cylindrical obstruction of radius r_c and length $L_c = 2\ell_c$ at a distance of z_o from a pore with a z -dependent radial profile of $r_p(z)$, and of length $L_p = 2\ell_p$, the terms of equation S63 can be further segmented into obstructed and unobstructed regions. For this reason, the resistance calculation needs to be broken down into five scenarios, depending on whether the cylindrical obstruction is: i) completely in the top access region ($z_o > \ell_p + \ell_c$), ii) partially in the pore and the top access region ($|\ell_p - \ell_c| < z_o < \ell_p + \ell_c$), iii) entirely inside the pore ($\ell_c - \ell_p < z_o < \ell_p - \ell_c$ for $\ell_c < \ell_p$) or partially inside the top access region, pore, and bottom access region ($\ell_p - \ell_c < z_o < \ell_c - \ell_p$ for $\ell_c > \ell_p$), iv) partially in the pore and the bottom access region ($-\ell_p - \ell_c < z_o < -|\ell_p - \ell_c|$), or v) entirely in the bottom access region ($z_o < -\ell_p - \ell_c$). Note that in the case of z -symmetric pore shapes, the number of scenarios to consider drops to three. Let us now consider the solutions for cylindrical obstructions in channels of various rotationally symmetric shapes.

Finite Cylinder in Cylindrical Pore

We first consider a cylindrical pore with a radial profile trivially parametrized as $r_p(z) = r_p$. Note that the access region contributions are identical to Equation 10 from the main text, only with a translation in z_o of $\pm\ell_p$ due to the presence of the membrane. The infinitesimal resistance of thin obstructed slices inside and outside the pore are thus calculated as:

$$dR'_{pore}(z) = \frac{dz}{\sigma\pi(r_p^2 - r_c^2)} \quad (S65)$$

$$dR'_{acc}(\mu) = \frac{\text{sech } \mu \, d\mu}{2\pi\sigma r_p \sqrt{1 - \frac{r_c^2}{r_p^2} \text{sech}^2 \mu}} \quad (S66)$$

Open-Pore

$$R_o = \frac{2\ell_p}{\sigma\pi r_p^2} + \frac{1}{2\sigma r_p} \quad (\text{S67})$$

Cylinder Outside the pore ($\ell_p + \ell_c < |z_o|$):

$$R_b(z) = \frac{2\ell_p}{\sigma\pi r_p^2} + \frac{1}{2\sigma r_p} \left[1 + \frac{1}{\pi} \tan^{-1} \left(\frac{|z_o| - \ell_p - \ell_c}{r_p} \right) - \frac{1}{\pi} \tan^{-1} \left(\frac{|z_o| - \ell_p + \ell_c}{r_p} \right) \right. \\ \left. + \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{|z_o| - \ell_p - \ell_c}{r_p} \right), \frac{r_c}{r_p} \right) - \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{|z_o| - \ell_p + \ell_c}{r_p} \right), \frac{r_c}{r_p} \right) \right] \quad (\text{S68})$$

Cylinder Partially inside the pore ($|\ell_p - \ell_c| < |z_o| < \ell_p + \ell_c$):

$$R_b(z_o) = \frac{\ell_p - |z_o| + \ell_c}{\sigma\pi(r_p^2 - r_c^2)} + \frac{\ell_p + |z_o| - \ell_c}{\sigma\pi r_p^2} + \frac{1}{2\sigma r_p} \left[1 - \frac{1}{\pi} \tan^{-1} \left(\frac{|z_o| + \ell_c - \ell_p}{r_p} \right) \right. \\ \left. + \frac{1}{\pi} F \left(\frac{\pi}{2}, \frac{r_c}{r_p} \right) - \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{|z_o| + \ell_c - \ell_p}{r_p} \right), \frac{r_c}{r_p} \right) \right] \quad (\text{S69})$$

Long cylinder ($\ell_c > \ell_p$) inside the pore ($0 < |z_o| < \ell_c - \ell_p$):

$$R_b(z_o) = \frac{2\ell_p}{\sigma\pi(r_p^2 - r_c^2)} + \frac{1}{2\sigma r_p} \left[1 + \frac{1}{\pi} \tan^{-1} \left(\frac{|z_o| - \ell_c + \ell_p}{r_p} \right) - \frac{1}{\pi} \tan^{-1} \left(\frac{|z_o| + \ell_c - \ell_p}{r_p} \right) \right. \\ \left. + \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{|z_o| - \ell_c + \ell_p}{r_p} \right), \frac{r_c}{r_p} \right) - \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{|z_o| + \ell_c - \ell_p}{r_p} \right), \frac{r_c}{r_p} \right) \right] \quad (\text{S70})$$

Short cylinder ($\ell_c < \ell_p$) inside the pore ($0 < |z_o| < \ell_p - \ell_c$):

$$R_b(z_o) = \frac{2\ell_c}{\sigma\pi(r_p^2 - r_c^2)} + \frac{2(\ell_p - \ell_c)}{\sigma\pi r_p^2} + \frac{1}{2\sigma r_p} \quad (\text{S71})$$

Interactive Desmos plot (for $z_o = 0$): <https://www.desmos.com/calculator/vocbsxz6yn>

Very long cylinder ($\ell_c \gg \ell_p$) centered inside pore:

As it is relevant for semiflexible linear polymers with a persistence length longer than that of the pore, such as for double stranded DNA in a nanoscale pore, we also note the solution for very long cylindrical obstructions ($\ell_c \gg \ell_p$):

$$R_b = \frac{2\ell_p}{\sigma\pi(r_p^2 - r_c^2)} + \frac{\frac{2}{\pi} K \left(\frac{r_c}{r_p} \right)}{2\sigma r_p} \quad (\text{S72})$$

Here $K(k) = F \left(\frac{\pi}{2}, k \right)$ is the complete elliptic integral of the first kind. Equation S71 and its accuracy in various conditions has been evaluated and discussed extensively in a recent publication.²

Finite Cylinder in Hyperboloidal Pore

We now consider a cylindrical obstruction of length $L_c = 2\ell_c$ and radius r_c passing through a hyperboloidal pore of length $L_p = 2\ell_p$ characterized by its inner and outer radii r_{in} and r_{out} (See Figure S15) described by the following parametrization:

$$r_p^2(z) = r_{in}^2 + \frac{r_{out}^2 - r_{in}^2}{\ell_p^2} z^2 \quad (S73)$$

The infinitesimal resistance of thin obstructed slices inside and outside the pore are calculated as:

$$dR'_{pore}(z) = \frac{dz}{\sigma\pi \left(r_{in}^2 - r_c^2 + \frac{r_{out}^2 - r_{in}^2}{\ell_p^2} z^2 \right)} \quad (S74)$$

$$dR'_{acc}(\mu) = \frac{\text{sech } \mu d\mu}{2\pi\sigma r_{out} \sqrt{1 + \frac{r_c^2}{r_{out}^2} \text{sech}^2 \mu}} \quad (S75)$$

Open-Pore

$$R_o = \frac{2\ell_p}{\sigma\pi r_{in} \sqrt{r_{out}^2 - r_{in}^2}} \tan^{-1} \sqrt{\frac{r_{out}^2}{r_{in}^2} - 1} + \frac{1}{2\sigma r_{out}} \quad (S76)$$

Cylinder Outside the pore ($\ell_p + \ell_c < |z_o|$):

$$\begin{aligned} R_b(z_o) = & \frac{2\ell_p}{\sigma\pi r_{in} \sqrt{r_{out}^2 - r_{in}^2}} \tan^{-1} \sqrt{\frac{r_{out}^2}{r_{in}^2} - 1} \\ & + \frac{1}{2\sigma r_{out}} \left[1 + \frac{1}{\pi} \tan^{-1} \left(\frac{|z_o| - \ell_c - \ell_p}{r_{out}} \right) - \frac{1}{\pi} \tan^{-1} \left(\frac{|z_o| + \ell_c - \ell_p}{r_{out}} \right) \right. \\ & \left. + \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{|z_o| - \ell_p - \ell_c}{r_{out}} \right), \frac{r_c}{r_{out}} \right) - \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{|z_o| - \ell_p + \ell_c}{r_{out}} \right), \frac{r_c}{r_{out}} \right) \right] \end{aligned} \quad (S77)$$

Cylinder Partially inside the pore ($|\ell_p - \ell_c| < |z_o| < \ell_p + \ell_c$):

$$\begin{aligned} R_b(z_o) = & \frac{\ell_p}{\sigma\pi \sqrt{r_{out}^2 - r_{in}^2}} \left[\frac{1}{r_{in}} \tan^{-1} \left(\sqrt{\frac{r_{out}^2}{r_{in}^2} - 1} \left(\frac{|z_o| |z_o - \ell_c|}{\ell_p} \right) \right) + \frac{1}{r_{in}} \tan^{-1} \left(\sqrt{\frac{r_{out}^2}{r_{in}^2} - 1} \right) \right. \\ & \left. + \frac{1}{\sqrt{r_{in}^2 - r_c^2}} \tan^{-1} \left(\sqrt{\frac{r_{out}^2 - r_{in}^2}{r_{in}^2 - r_c^2}} \right) - \frac{1}{\sqrt{r_{in}^2 - r_c^2}} \tan^{-1} \left(\sqrt{\frac{r_{out}^2 - r_{in}^2}{r_{in}^2 - r_c^2}} \left(\frac{|z_o| - \ell_c}{\ell_p} \right) \right) \right] \\ & + \frac{1}{2\sigma r_{out}} \left[1 - \frac{1}{\pi} \tan^{-1} \left(\frac{|z_o| + \ell_c - \ell_p}{r_{out}} \right) + \frac{1}{\pi} F \left(\frac{\pi}{2}, \frac{r_c}{r_{out}} \right) \right. \\ & \left. - \frac{1}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{|z_o| + \ell_c - \ell_p}{r_{out}} \right), \frac{r_c}{r_{out}} \right) \right] \end{aligned} \quad (S78)$$

Long cylinder ($\ell_c > \ell_p$) inside the pore ($|z_o| < \ell_c - \ell_p$):

$$R_b(z_o) = \frac{2\ell_p}{\sigma\pi\sqrt{(r_{out}^2 - r_{in}^2)(r_{in}^2 - r_c^2)}} \tan^{-1}\left(\sqrt{\frac{r_{out}^2 - r_{in}^2}{r_{in}^2 - r_c^2}}\right) + \frac{1}{2\sigma r_{out}} \left[1 + \frac{1}{\pi} \tan^{-1}\left(\frac{|z_o| - \ell_c + \ell_p}{r_{out}}\right) - \frac{1}{\pi} \tan^{-1}\left(\frac{|z_o| + \ell_c - \ell_p}{r_{out}}\right) + \frac{1}{\pi} F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{|z_o| - \ell_c + \ell_p}{r_{out}}\right), \frac{r_c}{r_{out}}\right) - \frac{1}{\pi} F\left(\frac{\pi}{2} - \tan^{-1}\left(\frac{|z_o| + \ell_c - \ell_p}{r_{out}}\right), \frac{r_c}{r_{out}}\right) \right] \quad (S79)$$

Short cylinder ($\ell_c < \ell_p$) inside the pore ($|z_o| < \ell_p - \ell_c$):

$$R_b(z_o) = \frac{1}{2\sigma r_{out}} + \frac{L}{\sigma\pi\sqrt{r_{out}^2 - r_{in}^2}} \left[\frac{2}{r_{in}} \tan^{-1}\left(\sqrt{\frac{r_{out}^2 - r_{in}^2}{r_{in}^2}}\right) + \frac{1}{r_{in}} \tan^{-1}\left(\sqrt{\frac{r_{out}^2}{r_{in}^2} - 1} \left(\frac{|z_o| - \ell_c}{\ell_p}\right)\right) - \frac{1}{r_{in}} \tan^{-1}\left(\sqrt{\frac{r_{out}^2}{r_{in}^2} - 1} \left(\frac{|z_o| + \ell_c}{\ell_p}\right)\right) - \frac{1}{\sqrt{r_{in}^2 - r_c^2}} \tan^{-1}\left(\sqrt{\frac{r_{out}^2 - r_{in}^2}{r_{in}^2 - r_c^2}} \left(\frac{|z_o| - \ell_c}{\ell_p}\right)\right) + \frac{1}{\sqrt{r_{in}^2 - r_c^2}} \tan^{-1}\left(\sqrt{\frac{r_{out}^2 - r_{in}^2}{r_{in}^2 - r_c^2}} \left(\frac{|z_o| + \ell_c}{\ell_p}\right)\right) \right] \quad (S80)$$

Interactive Desmos plot (for $z_o = 0$): <https://www.desmos.com/calculator/lymjxdn9kj>

Very long cylinder ($\ell_c \gg \ell_p$) centered inside pore:

$$R_b(z_o = 0) = \frac{2\ell_p}{\sigma\pi\sqrt{(r_{out}^2 - r_{in}^2)(r_{in}^2 - r_c^2)}} \tan^{-1}\left(\sqrt{\frac{r_{out}^2 - r_{in}^2}{r_{in}^2 - r_c^2}}\right) + \frac{2}{\pi} K\left(\frac{r_c}{r_{out}}\right) \quad (S81)$$

Finite Cylinder in Conical Pore

We now consider a cylindrical obstruction of length $L_c = 2\ell_c$ and radius r_c passing through a conical pore of length $L_p = 2\ell_p$ characterized by its lower and upper radii r_1 and r_2 (See Figure S15) described with the following parametrization:

$$r_p(z) = \frac{r_2 - r_1}{2\ell_p} z + \frac{r_1 + r_2}{2} \quad (S82)$$

The infinitesimal resistance of thin obstructed slices inside and outside the pore are calculated as:

$$dR'_{pore}(z) = \frac{dz}{\sigma\pi\left(\left(\frac{r_2 - r_1}{2\ell_p} z + \frac{r_1 + r_2}{2}\right)^2 - r_c^2\right)} \quad (S83)$$

$$dR_{acc}^{top}(\mu) = \frac{\operatorname{sech} \mu d\mu}{2\pi\sigma r_2 \sqrt{1 + \frac{r_c^2}{r_2^2} \operatorname{sech}^2 \mu}} \quad (\text{S84})$$

$$dR_{acc}^{bot}(\mu) = \frac{\operatorname{sech} \mu d\mu}{2\pi\sigma r_1 \sqrt{1 + \frac{r_c^2}{r_1^2} \operatorname{sech}^2 \mu}} \quad (\text{S85})$$

Open-Pore

$$R_o = \frac{1}{4\sigma r_1} + \frac{1}{4\sigma r_2} + \frac{2\ell_p}{\pi\sigma r_1 r_2} \quad (\text{S86})$$

Cylinder above the pore ($\ell_p + \ell_c < z_o$):

$$\begin{aligned} R_b(z_o) = & \frac{1}{4\sigma r_1} + \frac{2\ell_p}{\pi\sigma r_1 r_2} \\ & + \frac{1}{4\sigma r_2} \left[1 + \frac{2}{\pi} \tan^{-1} \left(\frac{z_o - \ell_c - \ell_p}{r_2} \right) - \frac{2}{\pi} \tan^{-1} \left(\frac{z_o + \ell_c - \ell_p}{r_2} \right) \right. \\ & \left. + \frac{2}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o - \ell_c - \ell_p}{r_2} \right), \frac{r_c}{r_2} \right) - \frac{2}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o + \ell_c - \ell_p}{r_2} \right), \frac{r_c}{r_2} \right) \right] \end{aligned} \quad (\text{S87})$$

Cylinder above and partially inside the pore ($|\ell_c - \ell_p| < z_o < \ell_p + \ell_c$):

$$\begin{aligned} R_b(z_o) = & \frac{1}{4\sigma r_1} + \frac{2\ell_p}{\pi\sigma(r_2 - r_1)} \left[\frac{1}{r_1} - \frac{2}{\frac{r_2 - r_1}{\ell_p} (z_o - \ell_c) + r_1 + r_2} \right. \\ & \left. + \frac{1}{2r_c} \ln \left(\frac{(r_2 - r_c) \left(\frac{r_2 - r_1}{\ell_p} (z_o - \ell_c) + r_1 + r_2 + 2r_c \right)}{(r_2 + r_c) \left(\frac{r_2 - r_1}{\ell_p} (z_o - \ell_c) + r_1 + r_2 - 2r_c \right)} \right) \right] \\ & + \frac{1}{4\sigma r_2} \left[1 - \frac{2}{\pi} \tan^{-1} \left(\frac{z_o + \ell_c - \ell_p}{r_2} \right) + \frac{2}{\pi} F \left(\frac{\pi}{2}, \frac{r_c}{r_2} \right) \right. \\ & \left. - \frac{2}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o + \ell_c - \ell_p}{r_2} \right), \frac{r_c}{r_2} \right) \right] \end{aligned} \quad (\text{S88})$$

Long cylinder ($\ell_c > \ell_p$) inside the pore ($|z_o| < \ell_c - \ell_p$):

$$\begin{aligned} R_b(z_o) = & \frac{1}{4\sigma r_1} \left(1 + \frac{2}{\pi} \tan^{-1} \left(\frac{z_o - \ell_c + \ell_p}{r_1} \right) + \frac{2}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o - \ell_c + \ell_p}{r_1} \right), \frac{r_c}{r_1} \right) - \frac{2}{\pi} F \left(\frac{\pi}{2}, \frac{r_c}{r_1} \right) \right) \\ & + \frac{1}{4\sigma r_2} \left(1 - \frac{2}{\pi} \tan^{-1} \left(\frac{z_o + \ell_c - \ell_p}{r_2} \right) - \frac{2}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o + \ell_c - \ell_p}{r_2} \right), \frac{r_c}{r_2} \right) + \frac{2}{\pi} F \left(\frac{\pi}{2}, \frac{r_c}{r_2} \right) \right) \\ & + \frac{\ell_p}{\pi\sigma r_c (r_2 - r_1)} \ln \left(\frac{(r_2 - r_c)(r_1 + r_c)}{(r_2 + r_c)(r_1 - r_c)} \right) \end{aligned} \quad (\text{S89})$$

Short cylinder ($\ell_c < \ell_p$) inside the pore ($|z_o| < \ell_p - \ell_c$):

$$R_b(z_o) = \frac{2\ell_p}{\pi\sigma(r_2 - r_1)} \left[\frac{1}{r_1} - \frac{1}{r_2} + \frac{2}{\frac{r_2 - r_1}{\ell_p}(z_o + \ell_c) + r_1 + r_2} - \frac{2}{\frac{r_2 - r_1}{\ell_p}(z_o - \ell_c) + r_1 + r_2} \right. \\ \left. + \frac{1}{2r_c} \ln \left(\frac{\left(\frac{r_2 - r_1}{\ell_p}(z_o + \ell_c) + r_1 + r_2 - 2r_c\right) \left(\frac{r_2 - r_1}{\ell_p}(z_o - \ell_c) + r_1 + r_2 + 2r_c\right)}{\left(\frac{r_2 - r_1}{\ell_p}(z_o + \ell_c) + r_1 + r_2 + 2r_c\right) \left(\frac{r_2 - r_1}{\ell_p}(z_o - \ell_c) + r_1 + r_2 - 2r_c\right)} \right) \right] \\ + \frac{1}{4\sigma r_1} + \frac{1}{4\sigma r_2} \quad (S90)$$

Cylinder under and partially inside the pore ($-|\ell_c - \ell_p| > z_o > -(\ell_p + \ell_c)$):

$$R_b(z_o) = \frac{1}{4\sigma r_2} + \frac{2\ell_p}{\pi\sigma(r_2 - r_1)} \left[\frac{2}{\frac{r_2 - r_1}{\ell_p}(z_o + \ell_c) + r_1 + r_2} - \frac{1}{r_2} \right. \\ \left. + \frac{1}{2r_c} \ln \left(\frac{\left(\frac{r_2 - r_1}{\ell_p}(z_o + \ell_c) + r_1 + r_2 - 2r_c\right) (r_1 + r_c)}{\left(\frac{r_2 - r_1}{\ell_p}(z_o + \ell_c) + r_1 + r_2 + 2r_c\right) (r_1 - r_c)} \right) \right] \\ + \frac{1}{4\sigma r_1} \left[1 + \frac{2}{\pi} \tan^{-1} \left(\frac{z_o - \ell_c + \ell_p}{r_1} \right) - \frac{2}{\pi} F \left(\frac{\pi}{2}, \frac{r_c}{r_1} \right) \right. \\ \left. + \frac{2}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o - \ell_c + \ell_p}{r_1} \right), \frac{r_c}{r_1} \right) \right] \quad (S91)$$

Cylinder under the pore ($z_o < -(\ell_p + \ell_c)$):

$$R_b(z_o) = \frac{2\ell_p}{\pi\sigma r_1 r_2} + \frac{1}{4\sigma r_2} \\ + \frac{1}{4\sigma r_1} \left[1 + \frac{2}{\pi} \tan^{-1} \left(\frac{z_o - \ell_c + \ell_p}{r_1} \right) - \frac{2}{\pi} \tan^{-1} \left(\frac{z_o + \ell_c + \ell_p}{r_1} \right) \right. \\ \left. + \frac{2}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o - \ell_c + \ell_p}{r_1} \right), \frac{r_c}{r_1} \right) - \frac{2}{\pi} F \left(\frac{\pi}{2} - \tan^{-1} \left(\frac{z_o + \ell_c + \ell_p}{r_1} \right), \frac{r_c}{r_1} \right) \right] \quad (S92)$$

Interactive Desmos plot (for $z_o = 0$): <https://www.desmos.com/calculator/xewxe1svij>

Very long cylinder ($\ell_c \gg \ell_p$) centered inside pore:

$$R_b = \frac{K \left(\frac{r_c}{r_1} \right)}{2\pi\sigma r_1} + \frac{K \left(\frac{r_c}{r_2} \right)}{2\pi\sigma r_2} + \frac{\ell_p}{\pi\sigma r_c (r_2 - r_1)} \ln \left(\frac{(r_2 - r_c)(r_1 + r_c)}{(r_2 + r_c)(r_1 - r_c)} \right) \quad (S93)$$

Sphere in Cylindrical Pore

As discussed in Section S4, the infinitesimal resistance of a constant- μ oblate spheroidal slice in the presence of a spherical obstruction (radius r_s) at a distance of z_o from a pore in a 2D membrane is (see Eq. S31):

$$dR'_{2D}(z_o) = \frac{1}{2\pi\sigma r_p} \frac{\operatorname{sech}^2 \mu d\mu}{\sqrt{1 - \frac{r_s^2 + z_o^2}{r_p^2} \operatorname{sech}^2 \mu + 2 \frac{z_o^2}{r_p^2} - 2 \frac{z_o}{r_p} \tanh \mu} \sqrt{1 + \frac{z_o^2}{r_p^2} - \frac{r_s^2}{r_p^2} \operatorname{sech}^2 \mu}} \quad (\text{S94})$$

When treating oblate spheroidal slices in the access regions of finite-length pores, Equation S93 can be adapted through a corresponding z -translation:

$$dR'_{acc}(z_o) = dR'_{2D}(|z_o| - \ell_p) \quad (\text{S95})$$

The surface of the spherical obstruction is parametrized with $r_o^2 = r_s^2 - (z - z_o)^2$, and thus the resistance of an obstructed circular slice inside the pore is evaluated as:

$$dR'_{pore}(z_o) = \frac{dz}{\sigma\pi(r_p^2 - r_s^2 + (z - z_o)^2)} = \frac{1}{\sigma\pi(r_p^2 - r_s^2)} \frac{dz}{1 + \frac{(z - z_o)^2}{r_p^2 - r_s^2}} \quad (\text{S96})$$

Sphere outside pore ($\ell_p + r_s < |z_o|$):

$$R_b(z_o) = \frac{2\ell_p}{\sigma\pi r_p^2} + \int_{\sinh^{-1}\left(\frac{|z_o| - r_s - \ell_p}{r_p}\right)}^{\sinh^{-1}\left(\frac{|z_o| + r_s - \ell_p}{r_p}\right)} dR'_{2D}(|z_o| - \ell_p) + \frac{1}{2\sigma r_p} \left[1 - \frac{1}{\pi} \tan^{-1}\left(\frac{|z_o| + r_s - \ell_p}{r_p}\right) + \frac{1}{\pi} \tan^{-1}\left(\frac{|z_o| - r_s - \ell_p}{r_p}\right) \right] \quad (\text{S97})$$

Sphere partially inside pore ($|\ell_p - r_s| < |z_o| < \ell_p + r_s$):

$$R_b(z_o) = \frac{\ell_p + |z_o| - r_s}{\sigma\pi r_p^2} + \frac{1}{2\sigma r_p} \left(1 - \frac{1}{\pi} \tan^{-1}\left(\frac{|z_o| + r_s - \ell_p}{r_p}\right) \right) + \frac{1}{\sigma\pi \sqrt{r_p^2 - r_s^2}} \left(\tan^{-1}\left(\frac{\ell_p - |z_o|}{\sqrt{r_p^2 - r_s^2}}\right) + \sin^{-1}\left(\frac{r_s}{r_p}\right) \right) + \int_0^{\sinh^{-1}\left(\frac{|z_o| + r_s - \ell_p}{r_p}\right)} dR'_{2D}(|z_o| - \ell_p) \quad (\text{S98})$$

Large sphere ($r_s > \ell_p$) inside the pore ($|z_o| < r_s - \ell_p$):

$$\begin{aligned}
 R_b(z_o) = & \frac{1}{2\sigma r_p} \left(1 + \frac{1}{\pi} \tan^{-1} \left(\frac{z_o - r_s + \ell_p}{r_p} \right) + \frac{1}{\pi} \tan^{-1} \left(\frac{-z_o - r_s + \ell_p}{r_p} \right) \right) \\
 & + \int_0^{\sinh^{-1} \left(\frac{-z_o + r_s - \ell_p}{r_p} \right)} dR'_{2D}(-z_o - \ell_p) + \int_0^{\sinh^{-1} \left(\frac{z_o + r_s - \ell_p}{r_p} \right)} dR'_{2D}(z_o - \ell_p) \\
 & + \frac{1}{\sigma \pi \sqrt{r_p^2 - r_s^2}} \left(\tan^{-1} \left(\frac{\ell_p - z_o}{\sqrt{r_p^2 - r_s^2}} \right) + \tan^{-1} \left(\frac{\ell_p + z_o}{\sqrt{r_p^2 - r_s^2}} \right) \right) \quad (S99)
 \end{aligned}$$

Small sphere ($r_s < \ell_p$) inside the pore ($|z_o| < \ell_p - r_s$):

$$R_b(z_o) = \frac{1}{2\sigma r_p} + \frac{2\ell_p - 2r_s}{\sigma \pi r_p^2} + \frac{2}{\sigma \pi \sqrt{r_p^2 - r_s^2}} \sin^{-1} \left(\frac{r_s}{r_p} \right) \quad (S100)$$

Interactive Desmos plot (for $z_o = 0$): <https://www.desmos.com/calculator/zvan4euncv>

References

1. Roelen, Z. & Tabard-Cossa, V. Synthesis of length-tunable DNA carriers for nanopore sensing. *PLoS One* **18**, (2023).
2. Charron, M., Roelen, Z., Wadhwa, D. & Tabard-Cossa, V. Improved Conductance Blockage Modeling of Cylindrical Nanopores, from 2D to Thick Membranes. *Nano Lett* (2024) doi:10.1021/acs.nanolett.4c02538.