
T² of Thoughts: Temperature Tree Elicits Reasoning in Large Language Models

Chengkun Cai^{1*} Xu Zhao^{1*} Yucheng Du¹ Haoliang Liu² Lei Li^{3†}

¹University of Edinburgh ²University of Manchester ³University of Copenhagen

{C.Cai-13, X.Zhao-95, Y.Du-53}@sms.ed.ac.uk

haoliang.liu@postgrad.manchester.ac.uk

lilei@di.ku.dk

Abstract

Large Language Models (LLMs) have emerged as powerful tools in artificial intelligence, especially in complex decision-making scenarios, but their static problem-solving strategies often limit their adaptability to dynamic environments. We explore the enhancement of reasoning capabilities in LLMs through Temperature Tree (T²) prompting via Particle Swarm Optimization, termed as T² of Thoughts (T²oT). The primary focus is on enhancing decision-making processes by dynamically adjusting search parameters, especially temperature, to improve accuracy without increasing computational demands. We empirically validate that our hybrid T²oT approach yields enhancements in, single-solution accuracy, multi-solution generation and text generation quality. Our findings suggest that while dynamic search depth adjustments based on temperature can yield mixed results, a fixed search depth, when coupled with T²oT's adaptive capabilities, provides a more reliable and versatile problem-solving strategy. This work highlights the potential for future explorations in optimizing algorithmic interactions with foundational language models, particularly illustrated by our development for the Game of 24 and Creative Writing tasks.

1 Introduction

Large Language models (LLMs) are increasingly employed across a broad spectrum of Natural Language Processing (NLP) tasks, including machine translation [1], summarization [2], and question answering [3]. Recent years a number of language modes such as GPT [4, 5, 6, 7], LLaMa [8, 9] are developed in a rapid speed. However, they are typically constrained to sequential, token-by-token processing during reasoning. These methods, while efficient, may be insufficient in scenarios that require forward-thinking or strategic planning, where early decisions significantly impact results.

Traditional approaches to enhancing these models, such as, Input-output (IO), Chain of Thought (CoT) [10], have made strides by enabling models to follow a logical sequence of reasoning steps. However, this method often lacks the flexibility to explore multiple reasoning pathways concurrently or revisit prior decisions to optimize outcomes. To address these limitations, a new processing framework for language models, termed Tree of Thoughts (ToT) [11], has been developed. Building on the well-regarded CoT, ToT enables language models to explore multiple reasoning pathways and evaluate various options to decide the next steps. This methodology not only anticipates future actions but also allows revisiting prior decisions to optimize overall outcomes, significantly enhancing the problem-solving capabilities of language models in complex tasks [12, 13], such as Game of 24, Creative Writing and Mini Crosswords.

*Equal Contribution.

†Corresponding Author.

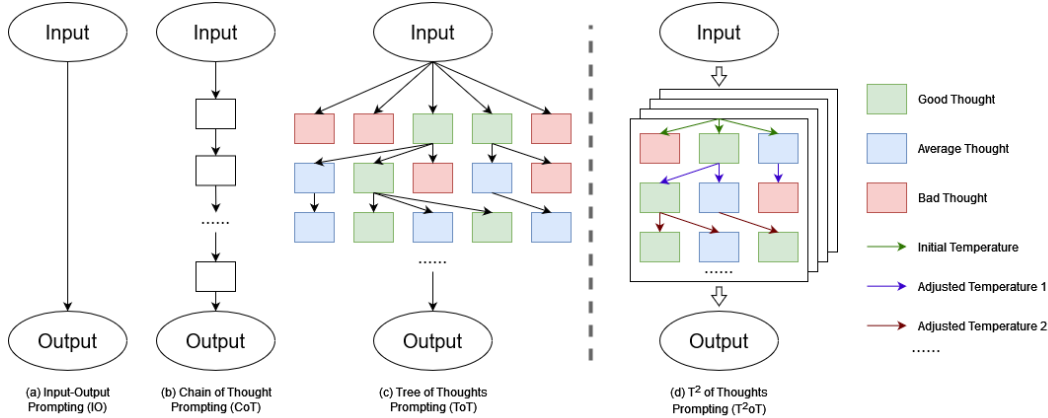


Figure 1: Our T²oT compared with IO, CoT and ToT. Rectangles of different colors represent thoughts with different evaluations. Arrows of different colors represent different temperatures in the reasoning process.

However, in these prompting methods, a significant parameter, temperature is often set as fixed [14, 15], which may introduce a number of limitations. To control the model generation, temperature sampling [16] is used to control the decoding process and influence the model performance by adjusting the probability distribution of the next token to be generated. To achieve a balance between generation quality and diversity, temperature sampling should be used properly [17]. In LLMs, the temperature primarily controls the randomness of text generation. A lower temperature value makes the model more likely to choose the conservative paths, leading to more deterministic and consistent outputs. Conversely, a higher temperature value increases the likelihood of selecting aggressive paths, resulting in more diverse and unpredictable text. As a result, fixed temperature restricts the flexibility to modulate the randomness and diversity of the responses based on different tasks. It has been demonstrated that using a fixed temperature is not the optimal choice in many cases, regardless of the type of language tasks being executed by the model [18].

As a result, a reasonable dynamic temperature adjustment strategy could be developed for problem-solving in LLMs. Some strategies of dynamic temperature sampling have been developed to improve the performance of LLMs [18, 19, 20]. However, the strategies proposed by these works have some limitations, lack comprehensive analysis and are not connected with prompting methods in LLMs. Our research proposes T² of Thoughts (T²oT), a novel prompting method that addresses existing limitations by merging the structured exploration capabilities of Tree of Thoughts (ToT) with the dynamic adaptability of temperature adjustment. This integration enables more deliberate and refined reasoning processes.

Figure 1 illustrates the architecture of our T²oT compared with other prompting methods. Inspired from Particle swarm optimization (PSO) [21], T²oT can derive multiple trees. For each tree, it adjusts the temperature of the next reasoning step based on its own and other trees’ evaluations of the previous reasoning steps. This method allows combining the own and the group’s cognition of reasoning.

The temperature adjustment based on the best evaluations from multiple trees allows T²oT to correct insufficient reasoning directions, thereby significantly improving the overall quality of the reasoning process. The randomness introduced by the dynamic adjustment mechanism enhances the robustness of the method. Furthermore, T²oT can better adapt to dynamically changing environments or problems, as the information from all trees is updated in real time.

Our contribution can be included for two points:

- **Dynamic Temperature Adjustment:** We introduce T²oT to dynamically adjust the temperature parameter during inference. This adjustment improves both the accuracy and diversity of solutions generated by GPT-4 [7].
- **Empirical Validation:** We empirically validate our T²oT by comparing it against ToT on GPT-4. Our results show significant enhancements in both single-solution accuracy and

multi-solution generation in Game of 24 and improvement of coherency scores in Creative Writing.

1.1 Related Work

Prompting and Reasoning for LLMs. Machine learning for prompting involves using various techniques to improve the ability of language models to interpret and generate text based on given prompts. In recent years, research in this area has primarily focused on improving the efficiency and effectiveness of language models in understanding and responding to prompts. Various prompt engineering strategies are discussed and highlighted their importance in fine-tuning model behavior [22]. A prompt-based fine-tuning and automatic prompting generation method are introduced to conduct few-shot fine-tuning of language models [23]. In the research and application of LLMs, different prompting methods are developed and used to optimize the model’s reasoning and generation capabilities. Input-Output (IO) prompting is the most basic method, where a specific input is provided, and the LLM generates the corresponding output. CoT breaks down complex reasoning tasks into a series of intermediate steps, allowing the model to reason step-by-step, building each step upon the previous one. ToT structures the reasoning process as a tree, where each node represents a potential solution path, allowing for making decisions of the next step by multiple paths and self-evaluation. Graph of Thoughts (GoT) [24] models the reasoning of a LLM as an arbitrary graph, where units of information are considered as vertices, and dependencies between these vertices are considered as edges. This method allows for the integration of various LLMs thoughts to create synergistic results, to extract key insights from comprehensive thought networks, or to enhance thoughts through iterative feedback. Hypergraph of Thought (HoT) [25] is applied in multimodal reasoning. This method uses triple as the primary thought to model higher-order relationships, thus generate a hyperedge of thought by multi-hop walking to achieve multi-hop inference.

Heuristic Optimization. Artificial intelligence is closely related to heuristic algorithms, which often solve optimization and search problems by simulating the behavior of nature and living organisms. Evolutionary algorithms [26, 27, 28, 29] are a type of optimization algorithm that imitates biological evolution mechanisms, whose core idea is to continuously evolve better solutions through an iterative process among the population of candidate solutions. The idea of evolutionary algorithms is used to optimize discrete prompt to have a better performance of LLMs [30]. Particle swarm optimization (PSO) [21] is a method for optimization of continuous nonlinear functions. PSO operates on a population of potential solutions, called particles, which move through the solution space to find the optimal solution. Each particle represents a candidate solution and adjusts its position based on its own experience and the experience of neighboring particles. The particles track their own best positions (personal best) and the overall best position (global best) found by any particle in the swarm. The movement of the particles is influenced by their own past performance and the performance of their neighbors, guiding them towards better solutions over time. PSO has demonstrated strong performance in various application. For instance, in neural network training, PSO has been shown to be as effective as the traditional error back-propagation method in optimizing network weights [31].

2 Methodology

2.1 Problem Formulation

Considering an LLM tasked with generating solutions in a dynamic environment, the reasoning approaches generate multiple ideas or hypotheses from the initial input, forming a treelike structure. Each node represents a thought process, and the branches represent the exploration of subsequent thoughts. However, in ToT, the temperature parameter, which controls the randomness of text generation, remains fixed. This static nature restricts the flexibility needed to adapt to varying contexts or needs.

To address this, we propose T²oT for problem solving. The primary objective is to dynamically adjust the temperature parameter, thereby modulating the randomness and diversity of the responses based on the reasoning state. This dynamic adjustment is governed by PSO, which leverages personal best and global best values to fine-tune the temperature. Practically, T²oT can derive multiple trees. For each tree, it adjusts the temperature at each step of the reasoning process based on its own best

evaluation value (personal best) and the best evaluation value among all the trees (global best). The problem can be formally defined as follows:

- **Objective:** Enhance the problem-solving capabilities of LLMs by dynamically adjusting the temperature parameter using T²oT.
- **Constraints:** Maintain computational efficiency equivalent to ToT when limiting the number of number of trees to one.

The temperature adjustment can be expressed as:

$$T_i[n] = w_0 \cdot T_i[n - 1] + \alpha_1 \cdot (pb_i[n - 1] - x_i[n]) + \alpha_2 \cdot (gb[n - 1] - x_i[n]) \quad (1)$$

where:

- n is the n -th reasoning step.
- T is the temperature.
- i is the index of the current tree
- pb is the personal best value.
- gb is the global best value.
- x is the evaluation value.
- w_0 is the inertial weight.
- α_1 and α_2 are the acceleration coefficients for personal and global bests, respectively.

The inertial weight governs the degree to which the current temperature is influenced by the previous temperature, thereby affecting the exploration-exploitation balance in the reasoning process. The acceleration coefficient for the personal best dictates the extent to which the temperature is adjusted towards the local optimal solution identified by the individual tree. This parameter enhances the algorithm’s ability to utilize its accumulated knowledge. Conversely, the acceleration coefficient for the global best determines the extent to which the temperature is adjusted towards the global optimal solution identified across all trees, thereby emphasizing the collective learning from the group’s experience.

The adjusted temperature T_n is subsequently constrained within a predefined range to ensure stability and to prevent excessive randomness or determinism, which could undermine the effectiveness of the reasoning process.

T² of Thoughts. As illustrated in Algorithm 1, we present the T²oT framework, where the temperature scale is dynamically adjusted. Throughout the reasoning process, the temperature undergoes continuous iteration in each tree.

Algorithm 1 T²oT Temperature Adjustment in a Tree

- 1: **Input:** Current reasoning step n , temperature in previous reasoning step $T[n]$, $x[n]$, $pb[n - 1]$, $gb[n - 1]$, maximum temperature limit T_{max} , minimum temperature limit T_{min} , maximum reasoning step N .
 - 2: **Output:** Adjusted temperature in n -th reasoning step in a particular tree.
 - 3: **for** n in range(0, N) **do**
 - 4: $T[n] \leftarrow w_0 \cdot T[n - 1] + \alpha_1 \cdot (pb_i[n - 1] - x[n]) + \alpha_2 \cdot (gb[n - 1] - x[n])$
 - 5: **if** $T_n > T_{max}$ **then**
 - 6: $T_n \leftarrow T_{max}$
 - 7: **else if** $T_n < T_{min}$ **then**
 - 8: $T_n \leftarrow T_{min}$
 - 9: **end if**
 - 10: **end for**
-

2.2 Theoretical Analysis

In this section, we have meticulously delineated the mathematical underpinnings of the T²oT algorithm, providing an analysis of its expectations, convergence, error bounds, and stability. This rigorous examination not only underscores the robustness and reliability of T²oT, but also paves the way for further exploration and optimization in large language model applications. More details refer to SupplementA.1.

Expectation and Variance in T² To derive the expectations of the personal best (pb) and global best (gb).

The personal best for a particle n at iteration $t + 1$ is updated as:

$$pb_n[t + 1] = \begin{cases} x_n[t + 1], & \text{if } f(x_n[t + 1]) < f(pb_n[t]) \\ pb_n[t], & \text{otherwise} \end{cases} \quad (2)$$

The expected value of the personal best can be written as:

$$\mathbb{E}[pb_n[t + 1]] = \mathbb{E}[\min(pb_n[t], x_n[t + 1])] \quad (3)$$

Using the law of total expectation, we have:

$$\mathbb{E}[pb_n[t + 1]] = \mathbb{E}[pb_n[t]] \cdot \Pr(x_n[t + 1] \geq pb_n[t]) + \mathbb{E}[x_n[t + 1]] \cdot \Pr(x_n[t + 1] < pb_n[t]) \quad (4)$$

Assuming a uniform distribution for the positions, the probabilities can be simplified. Let U be the uniform distribution over the search space:

$$\Pr(x_n[t + 1] < pb_n[t]) = F(pb_n[t]) \quad (5)$$

where F is the cumulative distribution function of the uniform distribution.

The expected value of $x_n(t + 1)$ is:

$$\mathbb{E}[x_n[t + 1]] = \frac{a + b}{2} \quad (\text{mean of uniform distribution over } [a, b]) \quad (6)$$

Thus, the expected value of the personal best becomes:

$$\mathbb{E}[pb_n[t + 1]] = \mathbb{E}[pb_n[t]] \cdot (1 - F(pb_n[t])) + \frac{a + b}{2} \cdot F(pb_n[t]) \quad (7)$$

Expectation of Global Best (gb): The global best at iteration $t + 1$ is updated as:

$$gb[t + 1] = \min(gb[t], \min_n f(x_n[t + 1])) \quad (8)$$

Convergence Analysis: Assuming that the algorithm converges to a stable temperature T^* , then we can get:

$$T^* = \frac{\alpha_1 \cdot (pb^* - x^*) + \alpha_2 \cdot (gb^* - x^*)}{1 - w_0} \quad (9)$$

Error Bounds: Let $e_n(t)$ denote the error in temperature adjustment for particle n at iteration t . The error can be defined as:

$$e_n[t] = T_n[t] - T^* \quad (10)$$

$$E_{\max} = \frac{\alpha_1 \cdot \max |pb_n[t] - x_n| + \alpha_2 \cdot \max |gb[t] - x_n|}{1 - w_0} \quad (11)$$

This error bound provides an upper limit on the deviation of the temperature from the optimal value T^* , α_1 , α_2 , and w_0 are hyperparameters. For more details refer to A.1.2.

Assumption 1. *The T²oT algorithm is applied to a dataset of reasoning steps (x_i, t_i) , where x_i represents the input at step i , and t_i is the corresponding temperature. The pairs (x_i, t_i) are drawn i.i.d. from an unknown distribution \mathcal{D} .*

Assumption 2. *The temperature adjustment loss L_{temp} is L -Lipschitz continuous with respect to the temperature T .*

Stability and Robustness: The stability of the T²oT algorithm is ensured if the inertial weight w_0 , and the acceleration coefficients α_1 and α_2 are chosen such that $w_0 < 1$.

3 Experiments

3.1 Game of 24

3.1.1 Experimental Setup

Task. To evaluate our method, we employed the same task as used in ToT: Game of 24 in GPT-4. This game involves using arithmetic operations to manipulate four numbers to arrive at the number 24, a common benchmark in studies of computational problem solving and algorithmic efficiency. This specific task selection helps in directly comparing the performance and efficacy of T²oT against established results in ToT, providing a clear metric for improvement or competitiveness in problem-solving scenarios. To evaluate the enhancements of T²oT, we conducted two distinct types of experiments. The first experiment is designed to evaluate the performance of our method across 50 games on each method, comparing the accuracy of T²oT against ToT. The second experiment focused specifically on T²oT’s capability to explore multiple solutions. We selected a specific instance of a game "7, 5, 2, 6" which have multiple solutions and run both methods on this instance 10 times each and track the frequency of distinct solutions produced by each run.

Dataset. In order to set up a reliable experiment plan for T²oT, to test its performance when applied into a large language model, a newly generated dataset is necessary. To align with our experiments, the dataset for this task was algorithmically generated. Each instance of the Game of 24 consists of four numbers. For more details refer to A.2.2.

Baseline and Framework Setup. For our experiments, we use ToT as the baseline and the same setup in our T²oT. T²oT breaks down the thought process into three steps. We set the depth of search to 3. Utilizing a breadth-first search (BFS) methodology within the framework, we consistently select and advance the top five most promising solutions at every stage of the decision-making process. As shown in Figure 2, this selection is evaluated by the language model prompt, which classifies each potential solution into categories: "sure", "maybe" or "impossible" based on the likelihood of reaching the total of 24. The primary objective remains to progress viable partial solutions that can be substantiated with a limited number of predictive steps, eliminate those solutions that are evidently unfeasible through practical judgments such as being "too large" or "too small," and continue to explore those deemed as "maybe". We perform value sampling three times for each conceptual step in the thought process.

Parameter Setup. In this experiment, the inertial weight was set to 1, as each temperature update is based on the previous temperature, making it reasonable to set the inertial weight to 1. The acceleration coefficients for personal best and global best were both set to 0.1 for two reasons. First, this normalization is based on the magnitude of the temperature values and the evaluation scores for each node. Second, we assume that the influence of each individual step of reasoning and the overall influence of the group are equal. The number of trees in T²oT is another hyperparameter that can be adjusted. Increasing this parameter is equivalent to performing multiple ToT reasoning for the same input in terms of computational efficiency. In the experiments, we set the number of trees to one to control that the computational efficiency of T²oT is the same as ToT.

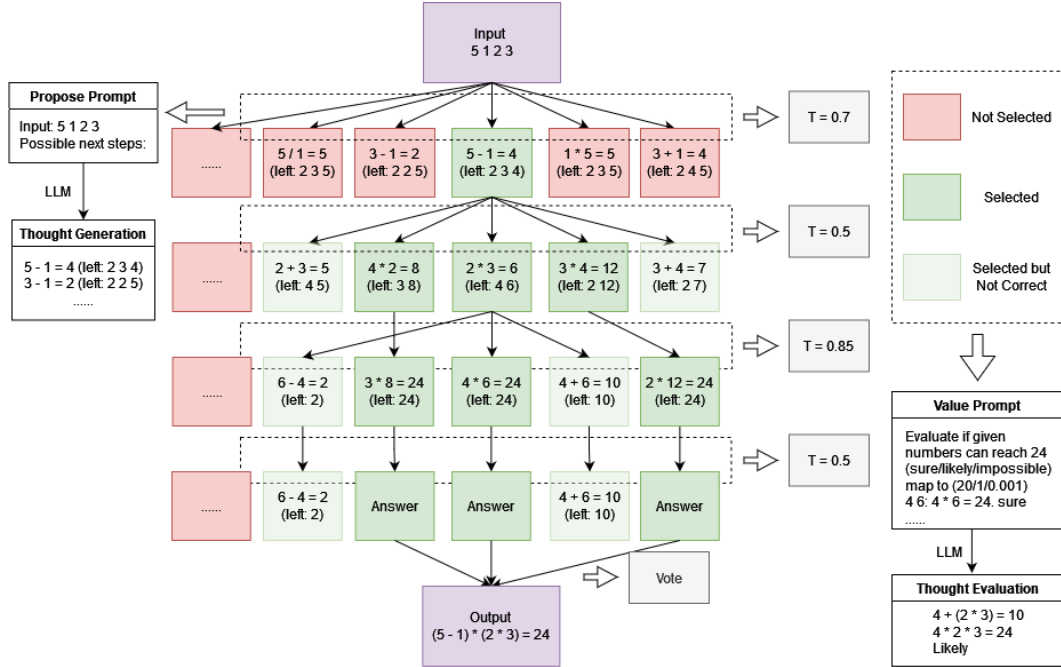


Figure 2: T²oT in a Game of 24. The LM is prompted for thought generation and evaluation. The temperature changes in each step of reasoning.

3.1.2 Results

Table 1: Game of 24 Success Rates

Method	Success
TOT	72%
T ² oT (ours)	80%

Table 2: Game of 24 Multiple Solutions Results

Method	Solution Types	Solution Frequency
ToT	2	(0.9, 0.1)
T ² oT (ours)	3	(0.5, 0.3, 0.2)

As shown in Table 1, the success rate for T²oT is 80%, which is higher than ToT at 72%. This indicates an improvement of 8% increase in success. T²oT appears to provide a more effective search strategy than ToT. The increased accuracy suggests that T²oT may be better at navigating the problem space or more efficient at finding solutions that meet the goal. This could be due to better exploration of the search space or more effective pruning of less promising paths.

The result of the second experiment is shown in Table 2. ToT is able to generate two distinct solution types for the given game, with the primary solution type occurring with a high frequency of 0.9 and a secondary, less frequent type at 0.1. In contrast, T²oT demonstrates a superior ability to diversify its approach, producing three different types of solutions with a more balanced distribution of frequencies at 0.5, 0.3, and 0.2, respectively. This indicates that T²oT not only increases the number of potential solutions explored but also promotes a more equitable exploration across these solutions, preventing over-concentration on a dominant solution path. More details about this experiment can refer to A.2.3.

3.2 Creative Writing

3.2.1 Experimental Setup

Task. To evaluate our algorithm, we employed the same Creative Writing task as used in ToT [11] on GPT-4. In this task, 4 random sentences are given as input. The goal is to produce a coherent passage divided into 4 paragraphs, with each paragraph concluding with one of the given sentences. This open-ended task encourages creative thinking and complex planning. We use 50 sentence inputs,

which are sampled randomly from randomwordgenerator.com, with no predefined correct passage for each set of constraints.

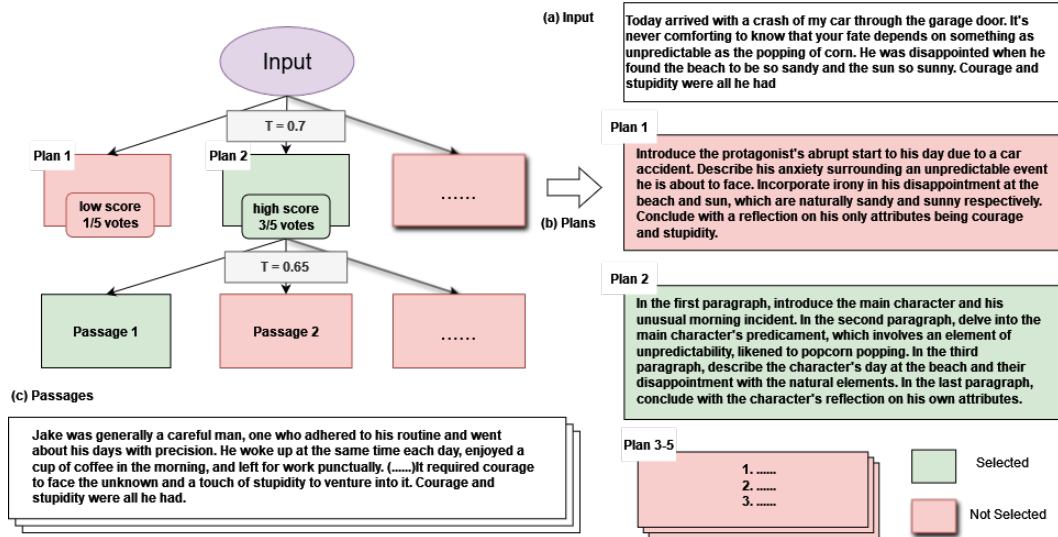


Figure 3: T^2oT in Creative Writing. After generating five plans by prompting, dynamically adjust the temperature for producing passages based on the highest score. Full passage can be seen in A.2.5

Baseline and Framework Setup. For our experiments, we also utilize ToT as the baseline, employing a comparable setup in our T^2oT . As shown in Figure 3, T^2oT breaks down the thought process into two steps (depth=2): Firstly, the language model generates 5 different plans, then conducts 5 rounds of voting to determine the best plan. Secondly, the majority choice is used to write the output passage, following the same generate-and-vote procedure. As we find that GPT can follow the input constraints most of the time, and since the original evaluation method can lead to inflated scores in the first step of plan assessment, and the 10-point scale results in many similar scores, making it difficult to distinguish among plans, we use a GPT zero-shot prompt to provide a 1-100 scalar score: "Analyze the following passage in detail. Consider the clarity, structure, argument coherence, and style of the writing. (.....) Conclude with: 'Thus, the coherency score is s', where s is an integer from 0 to 100, aiming for a normal distribution of scores with an average of 50." (see full prompt in A.2.4). This evaluation method aims for a normal distribution of scores with an average score of 50.

Parameter Setup. In this experiment, the inertial weight is also set to 1, as each temperature update is based on the previous temperature, making it reasonable to set the inertial weight to 1. The initial temperature for all experiments is set to 0.7, as this is considered a balanced temperature. The acceleration coefficients for personal best and global best were both set to -0.005. we still set the number of trees to one to ensure that the computational efficiency of T^2oT are the same as ToT.

3.2.2 Results

Figure 4(a) presents the average GPT-4 coherency scores across various experimental setups, illustrating that T^2oT , with an average score of 71.4, produces more coherent passages compared to IO (62.28), CoT (64.8) and ToT (67.5). The T^2oT appears to provide a more effective search strategy and offer a good dynamic balance: lowering the temperature to achieve higher textual consistency when plan consistency is low, and raising the temperature to enhance creativity when plan consistency is high. Figure 4(b) confirms the trend by showing that humans prefer ToT over T^2oT in 9 out of 50 passage pairs, while preferring T^2oT over ToT in 20 pairs, with the remaining 21 pairs judged as similarly coherent.

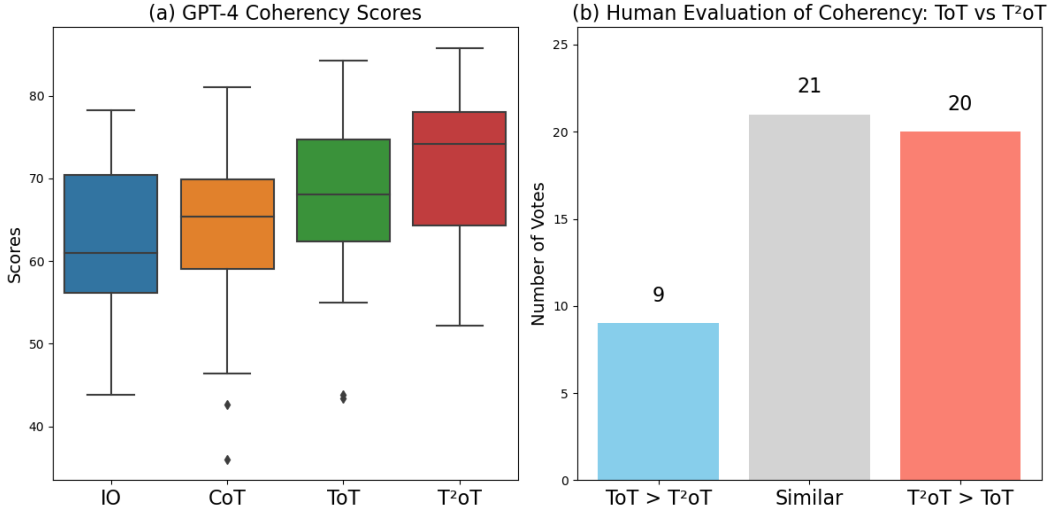


Figure 4: Creative Writing results.

4 Discussion

Multiple Trees in T²oT. T²oT supports setting the number of trees. Setting multiple trees is equivalent to performing multiple ToT reasoning for the same input in terms of computational efficiency. In our experiments, to control the computational efficiency of T²oT is the same as ToT, this parameter is set to one. When there are multiple trees in T²oT, the method is not only based on the historical experience of a single tree, but also learns from the successful experience of the group, thereby adapting to the solution of complex problems more flexibly and accurately. Since each tree is constantly updating and adjusting its own reasoning path, the reasoning capabilities of the entire system will increase. The global best results in the group can help other trees correct deviated or insufficiently optimized inference directions, improving the quality of the solution as a whole.

Limitations While our method can dynamically adjust the temperature and demonstrate significant efficiency improvements, our algorithm is not a gradient-based and learnable algorithm. In our task, the inertial weight, acceleration coefficient for personal best, and acceleration coefficient for global best in the T²oT are all fixed values. This means they may need manual adjustment depending on the specific task. Therefore, integrating neural networks with the reasoning process can allow for learning these parameter selections based on performance outcomes.

Future Directions Future research could enhance the T²oT framework by incorporating adaptive learning mechanisms for parameter optimization. Integrating neural networks into the reasoning process could enable the automatic adjustment of inertial weight and acceleration coefficients based on real-time performance feedback, transforming T²oT into a more flexible and learnable algorithm, thereby reducing the need for manual parameter tuning. Additionally, exploring the application of T²oT in other complex problem-solving domains, such as natural language processing tasks and multi-modal reasoning, such as HoT [32], could further validate its efficacy and versatility. Research could also investigate the scalability of T²oT with larger datasets and more extensive computational resources, aiming to understand its potential in large-scale AI systems. Moreover, integrating reinforcement learning techniques to dynamically adjust the temperature parameter in response to changing task complexities could lead to more robust and adaptive AI solutions, advancing the state of the art in adaptive reasoning algorithms.

5 Conclusion.

In this paper, we presents T²oT, a novel prompting method that dynamically adjusts the temperature parameter during inference in large language models, significantly enhancing both accuracy and diversity of solutions generated by GPT-4. Through comprehensive empirical validation, T²oT

demonstrates superior performance over the static temperature method ToT, achieving higher single-solution accuracy and improved multi-solution generation in tasks such as the Game of 24, as well as better coherency in Creative Writing. This integration of heuristic algorithms with artificial intelligence exemplifies a promising approach for developing more adaptive and efficient language model prompting techniques.

References

- [1] W. Zhu, H. Liu, Q. Dong, J. Xu, S. Huang, L. Kong, J. Chen, and L. Li, “Multilingual machine translation with large language models: Empirical results and analysis,” *arXiv preprint arXiv:2304.04675*, 2023.
- [2] B. Pang, E. Nijkamp, W. Kryściński, S. Savarese, Y. Zhou, and C. Xiong, “Long document summarization with top-down and bottom-up inference,” in *Findings of the Association for Computational Linguistics: EACL 2023*, 2023, pp. 1267–1284.
- [3] A. Zou, L. Phan, S. Chen, J. Campbell, P. Guo, R. Ren, A. Pan, X. Yin, M. Mazeika, A.-K. Dombrowski *et al.*, “Representation engineering: A top-down approach to ai transparency,” *arXiv preprint arXiv:2310.01405*, 2023.
- [4] A. Radford, K. Narasimhan, T. Salimans, I. Sutskever *et al.*, “Improving language understanding by generative pre-training,” 2018.
- [5] A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, I. Sutskever *et al.*, “Language models are unsupervised multitask learners,” *OpenAI blog*, vol. 1, no. 8, p. 9, 2019.
- [6] T. Brown, B. Mann, N. Ryder, M. Subbiah, J. D. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell *et al.*, “Language models are few-shot learners,” *Advances in neural information processing systems*, vol. 33, pp. 1877–1901, 2020.
- [7] J. Achiam, S. Adler, S. Agarwal, L. Ahmad, I. Akkaya, F. L. Aleman, D. Almeida, J. Altenschmidt, S. Altman, S. Anadkat *et al.*, “Gpt-4 technical report,” *arXiv preprint arXiv:2303.08774*, 2023.
- [8] H. Touvron, L. Martin, K. Stone, P. Albert, A. Almahairi, Y. Babaei, N. Bashlykov, S. Batra, P. Bhargava, S. Bhosale *et al.*, “Llama 2: Open foundation and fine-tuned chat models,” *arXiv preprint arXiv:2307.09288*, 2023.
- [9] H. Touvron, T. Lavril, G. Izacard, X. Martinet, M.-A. Lachaux, T. Lacroix, B. Rozière, N. Goyal, E. Hambro, F. Azhar *et al.*, “Llama: Open and efficient foundation language models,” *arXiv preprint arXiv:2302.13971*, 2023.
- [10] J. Wei, X. Wang, D. Schuurmans, M. Bosma, F. Xia, E. Chi, Q. V. Le, D. Zhou *et al.*, “Chain-of-thought prompting elicits reasoning in large language models,” *Advances in neural information processing systems*, vol. 35, pp. 24 824–24 837, 2022.
- [11] S. Yao, D. Yu, J. Zhao, I. Shafran, T. Griffiths, Y. Cao, and K. Narasimhan, “Tree of thoughts: Deliberate problem solving with large language models,” *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [12] L. Li, “Cpseg: Finer-grained image semantic segmentation via chain-of-thought language prompting,” in *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, 2024, pp. 513–522.
- [13] J. Shi, J. Li, Q. Ma, Z. Yang, H. Ma, and L. Li, “Chops: Chat with customer profile systems for customer service with llms,” *arXiv preprint arXiv:2404.01343*, 2024.
- [14] S. Ouyang, J. M. Zhang, M. Harman, and M. Wang, “Llm is like a box of chocolates: the non-determinism of chatgpt in code generation,” *arXiv preprint arXiv:2308.02828*, 2023.
- [15] C.-H. Chiang and H.-Y. Lee, “Can large language models be an alternative to human evaluations?” in *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 2023, pp. 15 607–15 631.
- [16] D. H. Ackley, G. E. Hinton, and T. J. Sejnowski, “A learning algorithm for boltzmann machines,” *Cognitive science*, vol. 9, no. 1, pp. 147–169, 1985.
- [17] M. U. Nasir, S. Earle, J. Togelius, S. James, and C. Cleghorn, “Llmatic: Neural architecture search via large language models and quality-diversity optimization,” *arXiv preprint arXiv:2306.01102*, 2023.

- [18] S. Zhang, Y. Bao, and S. Huang, “Edt: Improving large language models’ generation by entropy-based dynamic temperature sampling,” *arXiv preprint arXiv:2403.14541*, 2024.
- [19] C.-C. Chang, D. Reitter, R. Aksitov, and Y.-H. Sung, “K1-divergence guided temperature sampling,” *arXiv preprint arXiv:2306.01286*, 2023.
- [20] Y. Zhu, J. Li, G. Li, Y. Zhao, Z. Jin, and H. Mei, “Hot or cold? adaptive temperature sampling for code generation with large language models,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 38, no. 1, 2024, pp. 437–445.
- [21] J. Kennedy and R. Eberhart, “Particle swarm optimization,” in *Proceedings of ICNN’95 - International Conference on Neural Networks*, vol. 4, 1995, pp. 1942–1948 vol.4.
- [22] P. Liu, W. Yuan, J. Fu, Z. Jiang, H. Hayashi, and G. Neubig, “Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing,” *ACM Computing Surveys*, vol. 55, no. 9, pp. 1–35, 2023.
- [23] T. Gao, A. Fisch, and D. Chen, “Making pre-trained language models better few-shot learners,” in *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, 2021, pp. 3816–3830.
- [24] M. Besta, N. Blach, A. Kubicek, R. Gerstenberger, M. Podstawski, L. Gianinazzi, J. Gajda, T. Lehmann, H. Niewiadomski, P. Nyczyk *et al.*, “Graph of thoughts: Solving elaborate problems with large language models,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 38, no. 16, 2024, pp. 17 682–17 690.
- [25] F. Yao, C. Tian, J. Liu, Z. Zhang, Q. Liu, L. Jin, S. Li, X. Li, and X. Sun, “Thinking like an expert: Multimodal hypergraph-of-thought (hot) reasoning to boost foundation modals,” *arXiv preprint arXiv:2308.06207*, 2023.
- [26] R. Storn and K. Price, “Differential evolution—a simple and efficient heuristic for global optimization over continuous spaces,” *Journal of global optimization*, vol. 11, pp. 341–359, 1997.
- [27] J. Vesterstrom and R. Thomsen, “A comparative study of differential evolution, particle swarm optimization, and evolutionary algorithms on numerical benchmark problems,” in *Proceedings of the 2004 congress on evolutionary computation (IEEE Cat. No. 04TH8753)*, vol. 2. IEEE, 2004, pp. 1980–1987.
- [28] J. Brest, S. Greiner, B. Boskovic, M. Mernik, and V. Zumer, “Self-adapting control parameters in differential evolution: A comparative study on numerical benchmark problems,” *IEEE transactions on evolutionary computation*, vol. 10, no. 6, pp. 646–657, 2006.
- [29] J. Zhang and A. C. Sanderson, “Jade: adaptive differential evolution with optional external archive,” *IEEE Transactions on evolutionary computation*, vol. 13, no. 5, pp. 945–958, 2009.
- [30] Q. Guo, R. Wang, J. Guo, B. Li, K. Song, X. Tan, G. Liu, J. Bian, and Y. Yang, “Connecting large language models with evolutionary algorithms yields powerful prompt optimizers,” in *The Twelfth International Conference on Learning Representations*, 2023.
- [31] R. A. Fisher, “The use of multiple measurements in taxonomic problems,” *Annals of eugenics*, vol. 7, no. 2, pp. 179–188, 1936.
- [32] Z. Zhang, A. Zhang, M. Li, H. Zhao, G. Karypis, and A. Smola, “Multimodal chain-of-thought reasoning in language models,” *arXiv preprint arXiv:2302.00923*, 2023.

A Appendix

A.1 Explanation for T²oT

Expected Value of Global Best

The global best at iteration $t + 1$ is updated as:

$$gb[t + 1] = \min(gb[t], \min_n f(x_n[t + 1])) \quad (12)$$

The expected value of the global best can be written as:

$$\mathbb{E}[gb[t + 1]] = \mathbb{E}[\min(gb[t], \min_n x_n[t + 1])] \quad (13)$$

Using the law of total expectation, we have:

$$\mathbb{E}[gb[t + 1]] = \mathbb{E}[gb[t]] \cdot \Pr(\min_n x_n[t + 1] \geq gb[t]) + \mathbb{E}[\min_n x_n[t + 1]] \cdot \Pr(\min_n x_n[t + 1] < gb[t]) \quad (14)$$

For the global best:

$$\Pr(\min_n x_n[t + 1] < gb[t]) = 1 - (1 - F(gb[t]))^N \quad (15)$$

where N is the number of trees.

Putting these together:

$$\mathbb{E}[gb[t + 1]] = \mathbb{E}[gb[t]] \cdot (1 - (1 - F(gb[t]))^N) + \mathbb{E}[\min_n x_n[t + 1]] \cdot (1 - F(gb[t])^N) \quad (16)$$

A.1.1 Convergence Analysis

The convergence of the T² algorithm can be analyzed by examining the behavior of the particles as $t \rightarrow \infty$. Assuming that the algorithm converges to a stable temperature T^* , then we can get:

$$T^* = w_0 \cdot T^* + \alpha_1 \cdot (pb^* - x^*) + \alpha_2 \cdot (gb^* - x^*) \quad (17)$$

Solving for T^* gives:

$$T^* = \frac{\alpha_1 \cdot (pb^* - x^*) + \alpha_2 \cdot (gb^* - x^*)}{1 - w_0} \quad (18)$$

This equation indicates the conditions under which the temperature converges to a stable value.

A.1.2 Error Bounds

To ensure the reliability of the T² algorithm, it is crucial to establish error bounds for the temperature adjustments. Let $e_n(t)$ denote the error in temperature adjustment for tree n at iteration t . The error can be defined as:

$$e_n[t] = T_n[t] - T^* \quad (19)$$

The error bounds can then be derived by analyzing the propagation of errors over iterations:

$$|e_n[t + 1]| \leq w_0 \cdot |e_n[t]| + \alpha_1 \cdot |pb_n - x_n - T^*| + \alpha_2 \cdot |gb - x_n - T^*| \quad (20)$$

Given that $|pb_n - x_n|$ and $|gb - x_n|$ are bounded, we can define a maximum error bound E_{\max} :

$$E_{\max} = \frac{\alpha_1 \cdot \max |pb_n[t] - x_n| + \alpha_2 \cdot \max |gb[t] - x_n|}{1 - w_0} \quad (21)$$

This error bound provides an upper limit on the deviation of the temperature from the optimal value T^* .

A.1.3 Stability and Robustness

The stability of the T^2 algorithm is ensured if the inertial weight w_0 , and the acceleration coefficients α_1 and α_2 are chosen such that $w_0 < 1$. This ensures that the error diminishes over iterations, leading to convergence.

Robustness can be analyzed by introducing perturbations or noise into the temperature adjustments and studying their impact on the convergence properties. Let $\eta(t)$ represent a noise term:

$$T_n[t + 1] = w_0 \cdot T_n[t] + \alpha_1 \cdot (pb_n[t] - x_n) + \alpha_2 \cdot (gb[t] - x_n) + \eta[t] \quad (22)$$

To ensure robustness, the magnitude of $\eta(t)$ should be controlled such that it does not disrupt the convergence process.

A.2 Experiments

A.2.1 One-Tree T^2 oT

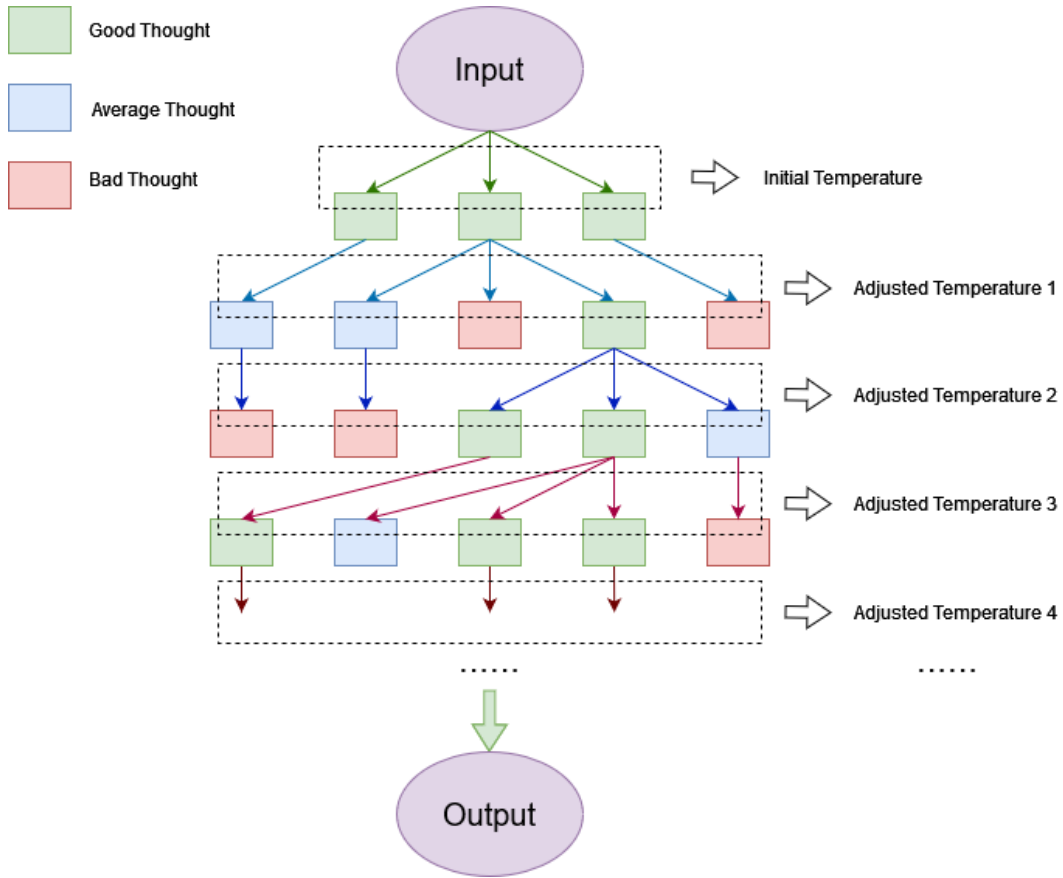


Figure 5: The reasoning process of T^2 oT when the number of trees is set to one.

Figure 5 illustrates the reasoning process of T^2 oT when the number of trees is limited to one, showing how the initial temperature adjusts dynamically through multiple steps based on the quality of

thoughts—categorized as good, average, and bad—to produce the final output. Specifically, in each reasoning step, the adjusted temperature is iterated according to algorithm 1.

A.2.2 Dataset Generation of Game of 24

Algorithm 2 Generating Game of 24

Require: A set of four numbers: game_set, final result is 24

- 1: for every first and second elements in the input array, apply +, -, ×, and ÷ to the first two elements and calculate the remaining.
 - 2: for the remaining and the other elements in the array, merge them to build a new array: new_set
 - 3: **if** remaining \neq 24 **then**
 - 4: execute the Algorithm of generating Game of 24 based on the new_set
 - 5: **else if** remaining = 24 **then**
 - 6: return the original game_set
 - 7: **end if**
-

Algorithm 2 is used to generate our dataset for the experiment in Game of 24.

A.2.3 Details about Multiple Solution of Game of 24

Table 3: Details of Game of 24 Multiple Solutions

Method	Solution Types	Frequency
ToT	$(7 - 5) * 2 * 6 = 24$	0.9
ToT	$5 + 7 + (2 * 6) = 24$	0.1
ToT	$(7 - 5 + 2) * 6 = 24$	0
T ² oT (ours)	$(7 - 5) * 2 * 6 = 24$	0.3
T ² oT (ours)	$5 + 7 + (2 * 6) = 24$	0.5
T ² oT (ours)	$(7 - 5 + 2) * 6 = 24$	0.2

Table 3 contains the specific solutions of the game "7, 5, 2, 6" and their frequency in our multiple solution experiments.

A.2.4 Prompt Used for Creative Writing Scores

prompt = "Analyze the following passage in detail. Consider the clarity, structure, argument coherence, and style of the writing. Use the following scale to assign a coherency score:

- 0-10: The text is mostly incoherent or very poorly structured. Major issues pervade the text, making it nearly impossible to understand.
- 11-30: The text has significant issues in clarity or structure that heavily impede understanding. Many parts of the text do not flow logically.
- 31-50: The text is adequately coherent and structured but lacks refinement and contains noticeable errors that affect readability.
- 51-70: The text is coherent and well-structured with some room for improvement. Minor errors or stylistic inconsistencies are present.
- 71-90: The text is very well-structured and coherent. It is clear, with only slight imperfections in style or structure.
- 91-100: The text demonstrates exceptional clarity and structure, showcasing excellent coherence and nearly flawless execution.

Conclude with: "Thus, the coherency score is s", where s is an integer from 0 to 100, aiming for a normal distribution of scores with an average of 50."

A.2.5 Creative Writing Passage Example

Jake was generally a careful man, one who adhered to his routine and went about his days with precision. He woke up at the same time each day, enjoyed a cup of coffee in the morning, and left for work punctually. However, this morning was not a typical one. Today arrived with a crash of my car through the garage door.

The car accident was just the first in a series of unfortunate events Jake was to experience that day. At work, he was tasked with predicting the outcome of a significant business deal. The pressure was immense and the task, unpredictable. It was akin to standing over a pot of kernels waiting for them to pop - a daunting spectacle of uncertainty. It's never comforting to know that your fate depends on something as unpredictable as the popping of corn.

After a gruelling day, Jake decided to unwind at the beach. The beach had always been his sanctuary, a place where he could relax and enjoy some fresh air. But today, it felt different. The sand was irritating him, getting into his shoes and his clothes, and the sun was blazing, causing him discomfort. He was disappointed when he found the beach to be so sandy and the sun so sunny.

As Jake walked back home, he reflected on his day. He had always relied on his meticulous planning and careful approach to navigate through life. But today's events made him realize that life is unpredictable and sometimes, it required more than just careful planning. It required courage to face the unknown and a touch of stupidity to venture into it. Courage and stupidity were all he had.