<u>elmah.io</u> #3956


Table of Content

Table of Content
Sources
New Error - Passed

Sources


New Error - Passed


On elmah.io, I fire some exceptions following 2 different formats

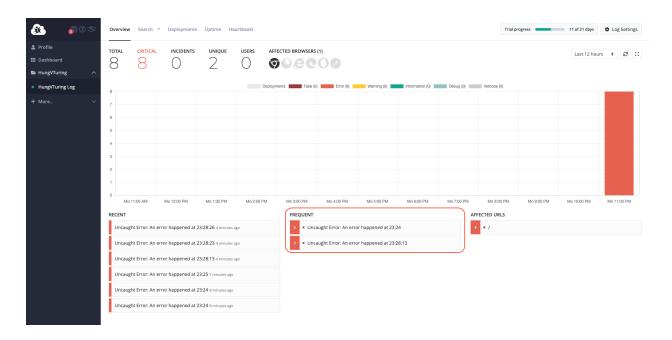

On Pipedream source, I observed there're only 2 events emitted following

elmah.io #3956

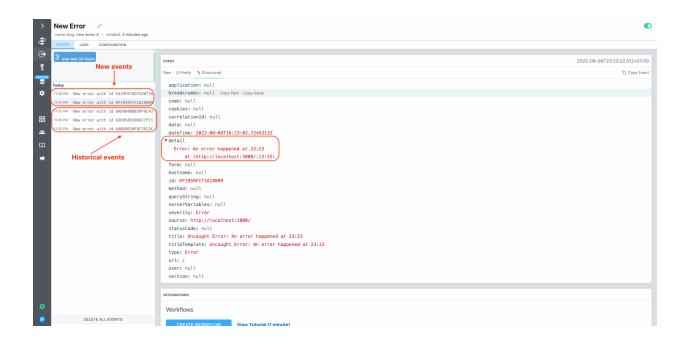

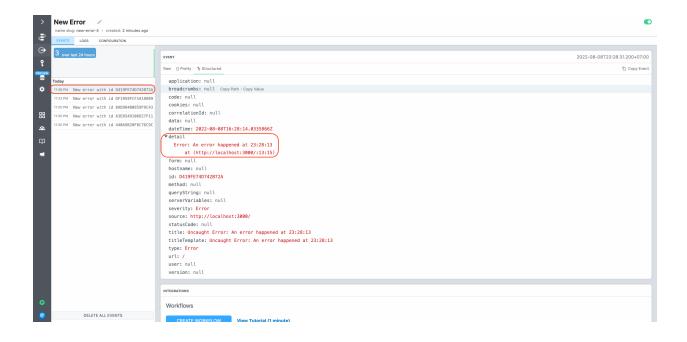

I suppose it makes sense to have events emitted in 1-1 mapping with **grouped exceptions**, as opposed to 1-1 mapping with every exceptions

elmah.io #3956