



US008806357B2

(12) **United States Patent**
Demant et al.

(10) **Patent No.:** **US 8,806,357 B2**
(45) **Date of Patent:** **Aug. 12, 2014**

(54) **PLUG-INS FOR EDITING TEMPLATES IN A BUSINESS MANAGEMENT SYSTEM**

(75) Inventors: **Hilmar Demant**, Karlsruhe (DE); **Frank Schertel**, Walldorf (DE); **Asif Raj**, Udaipur (IN); **Nikhil Sharma**, Bangalore (IN); **Eckhard Farrenkopf**, Schriesheim (DE); **Ramesh B.G.**, Hyderabad (IN); **Juergen Sattler**, Wiesloch (DE)

(73) Assignee: **SAP AG**, Walldorf (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 815 days.

6,704,906	B1	3/2004	Yankovich et al.	
6,826,727	B1	11/2004	Mohr et al.	
7,107,525	B2	9/2006	Purvis	
7,168,035	B1	1/2007	Bell et al.	
7,409,710	B1 *	8/2008	Uchil et al.	726/19
7,415,669	B1	8/2008	Davidson et al.	
7,496,599	B2	2/2009	Brundage et al.	
7,562,304	B2 *	7/2009	Dixon et al.	715/738
7,657,549	B2	2/2010	Morris et al.	
7,676,689	B1	3/2010	Shioyama	
7,703,003	B2	4/2010	Payne et al.	
7,734,995	B1	6/2010	Saikaly	
7,747,941	B2	6/2010	Campbell et al.	
7,818,662	B2	10/2010	Nene et al.	
7,882,489	B2 *	2/2011	Chandrasekharan et al.	717/106
7,890,478	B2	2/2011	Fiedler	
2002/0184310	A1	12/2002	Traversat et al.	

(Continued)

(21) Appl. No.: **12/202,049**

(22) Filed: **Aug. 29, 2008**

(65) **Prior Publication Data**

US 2010/0058170 A1 Mar. 4, 2010

(51) **Int. Cl.**
G06F 3/048 (2013.01)

(52) **U.S. Cl.**
USPC **715/762**; 715/765; 715/771; 715/853; 715/970

(58) **Field of Classification Search**
USPC 715/854, 762, 765, 771, 853, 970
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,819,293	A	10/1998	Comer et al.
5,983,227	A	11/1999	Nazem et al.
5,987,480	A	11/1999	Donohue et al.
6,026,433	A	2/2000	D'arlach et al.
6,286,007	B1	9/2001	Miller et al.

FOREIGN PATENT DOCUMENTS

EP	1302867	A2	4/2003
EP	1304614	A2	4/2003
EP	1699007	A1	9/2006
EP	1855241	A1	11/2007

OTHER PUBLICATIONS

"European Application Serial No. 09010735.0, Search Report mailed on Dec. 4, 2009", 6 pgs.

(Continued)


Primary Examiner — Namitha Pillai

(74) Attorney, Agent, or Firm — Schwegman, Lundberg & Woessner, P.A.

(57) **ABSTRACT**

A template authoring method and system includes an application business component view that provides an interface to a user to select templates. A dialog provides a wrapper for each template to be edited by launching a server page and a host using controls provides authoring abstractions for selected authoring applications to edit the templates.

17 Claims, 17 Drawing Sheets

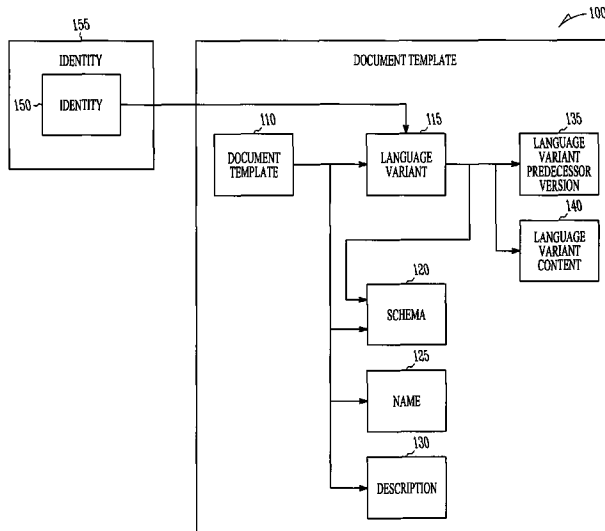

(56)

References Cited

U.S. PATENT DOCUMENTS

2004/0088647	A1	5/2004	Miller et al.
2004/0143581	A1	7/2004	Bohannon et al.
2004/0172592	A1	9/2004	Collie et al.
2004/0230637	A1	11/2004	Lecouche et al.
2005/0203747	A1	9/2005	Lecoeuche
2006/0173865	A1	8/2006	Fong
2007/0016610	A1	1/2007	Cohen et al.
2007/0044014	A1	2/2007	Hanechak
2007/0074105	A1	3/2007	McVeigh et al.
2007/0208769	A1	9/2007	Boehm et al.
2008/0059506	A1	3/2008	Kalia et al.
2008/0117448	A1	5/2008	Ijams et al.
2008/0120283	A1	5/2008	Liu et al.
2010/0057760	A1	3/2010	Hilmar et al.
2010/0058169	A1	3/2010	Demant et al.

OTHER PUBLICATIONS

- "U.S. Appl. No. 12/202,039 , Response filed Aug. 3, 2011 to Final Office Action mailed Jun. 13, 2011", 9 pgs.
- "U.S. Appl. No. 12/202,039, Final Office Action mailed Jun. 13, 2011", 17 pgs.
- "U.S. Appl. No. 12/202,039, Non Final Office Action mailed Jan. 5, 2011", 14 pgs.
- "U.S. Appl. No. 12/202,039, Response filed Apr. 1, 2011 to Non Final Office Action mailed Jan. 5, 2011", 8 pgs.
- "U.S. Appl. No. 12/202,056, Final Office Action mailed Sep. 2, 2011", 21 pgs.
- "U.S. Appl. No. 12/202,056, Non Final Office Action mailed Mar. 8, 2011", 16 pgs.
- "U.S. Appl. No. 12/202,056, Response filed Jun. 8, 2011 to Non Final Office Action mailed Mar. 8, 2011", 10 pgs.
- "European Application Serial No. 09010452.2, Extended European Search Report mailed Apr. 14, 2010", 5 Pgs.
- "European Application Serial No. 09010452.2, Office Action mailed Jan. 24, 2011", 5 pgs.
- "European Application Serial No. 09010517, Extended European Search Report mailed Nov. 11, 2009", 11 pgs.
- Abiteboul, Serge, "On Views and XML", Proceedings of the 18th ACM SIGACT-SIGMOD-SIGART Symposium on Principles of Database Systems, (May 1999), 1-9 pgs.
- Benedikt, M, et al., "Managing XML Data: An Abridged Overview", Computing in Science and Engineering vol. 6, No. 4, (Jul. 4), 12-19.
- Bossung, Sebastian, et al., "Automated Data Mapping Specification via Schema Heuristics and User Interaction", Proceedings of the 19 International Conference on Automated Software Engineering, (Sep. 4), 10 pgs.
- Braganholo, Vanessa P, et al., "PATAXO: A Framework to Allow Updates Through XML Views", ACM Transactions on Database Systems vol. 31, No. 3, (Sep. 2006), 839-886.
- Groppe, Sven, et al., "Reformulating XPath queries and XSLT queries on XSLT views", Data & Knowledge Engineering vol. 57, No. 1, (Apr. 2006), 64-110.
- Rajugan, R, et al., "Engineering XML Solutions Using Views", Computer Information and Technology, (Sep. 2005), 116-123.
- "U.S. Appl. No. 12/202,039, Non Final Office Action mailed Oct. 7, 2013", 17 pgs.
- "U.S. Appl. No. 12/202,056 , Response filed Aug. 23, 2013 to Final Office Action mailed Jun. 27, 2013", 9 pgs.
- "U.S. Appl. No. 12/202,056, Advisory Action mailed Sep. 25, 2013", 4 pgs.
- "U.S. Appl. No. 12/202,056, Final Office Action mailed Jun. 27, 2013", 21 pgs.
- "U.S. Appl. No. 12/202,056, Non Final Office Action mailed Nov. 26, 2012", 19 pgs.
- "U.S. Appl. No. 12/202,056, Response filed Apr. 26, 2013 to Non Final Office Action mailed Nov. 26, 2013", 9 pgs.
- "U.S. Appl. No. 12/202,056, Response filed Nov. 2, 2011 to Final Office Action mailed Sep. 2, 2011", 10 pgs.
- "U.S. Appl. No. 12/202.056, Pre-Appeal Brief Request filed Sep. 26, 2013", 5 pgs.
- "U.S. Appl. No. 12/202,056, Decision on Pre-Appeal Brief mailed Nov. 19, 2013", 2 pgs.

* cited by examiner

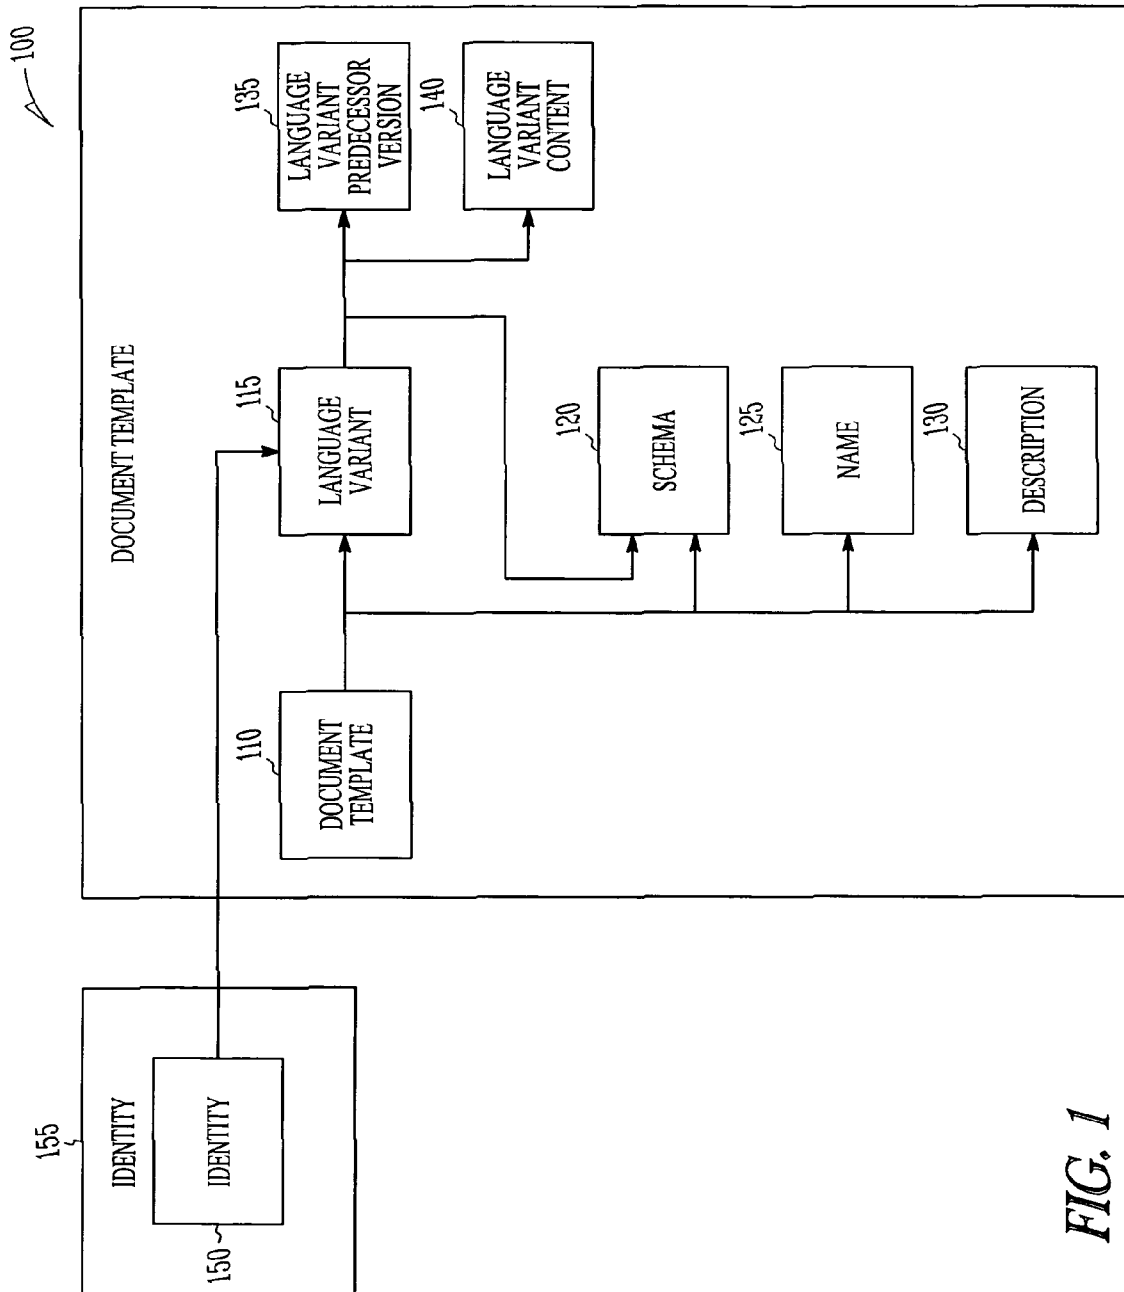


FIG. 1

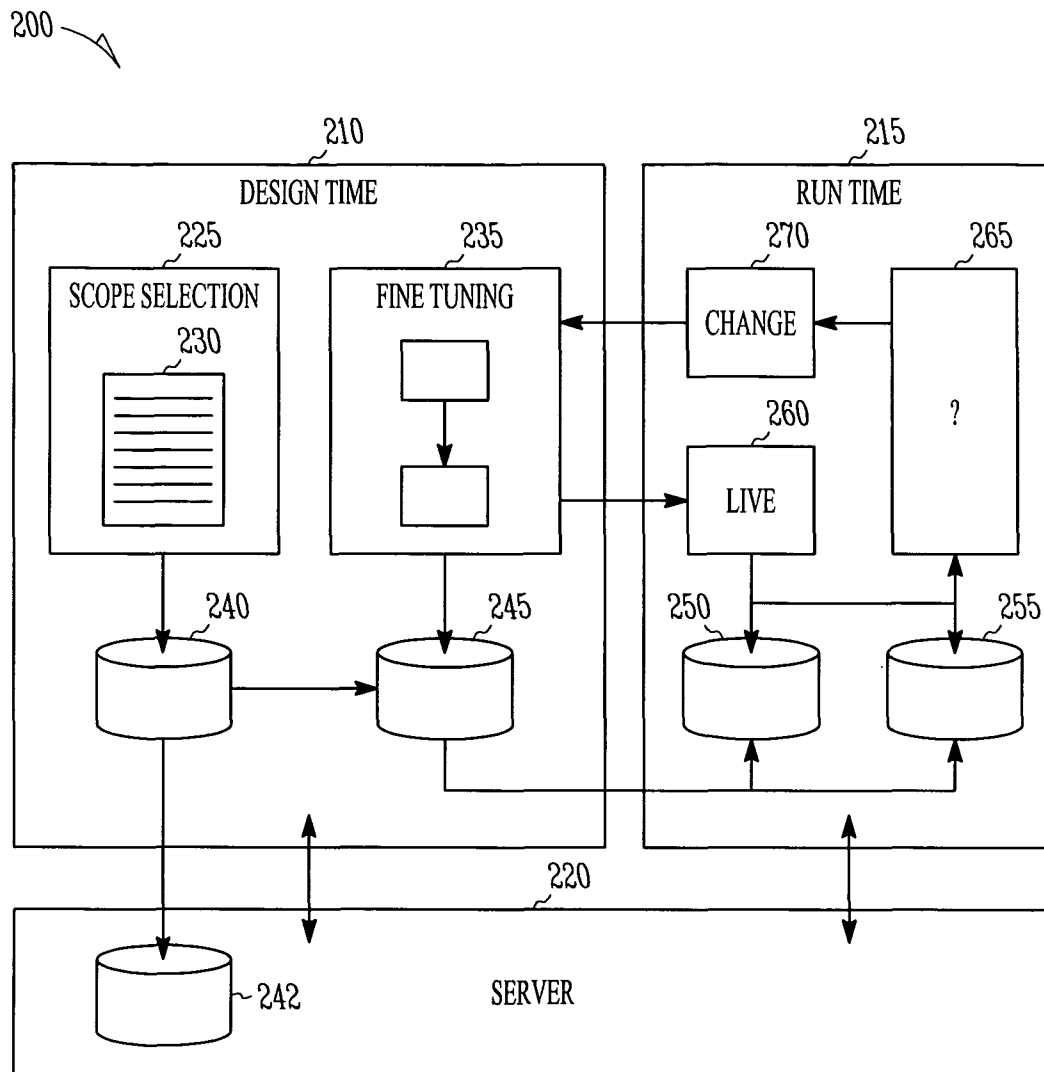


FIG. 2

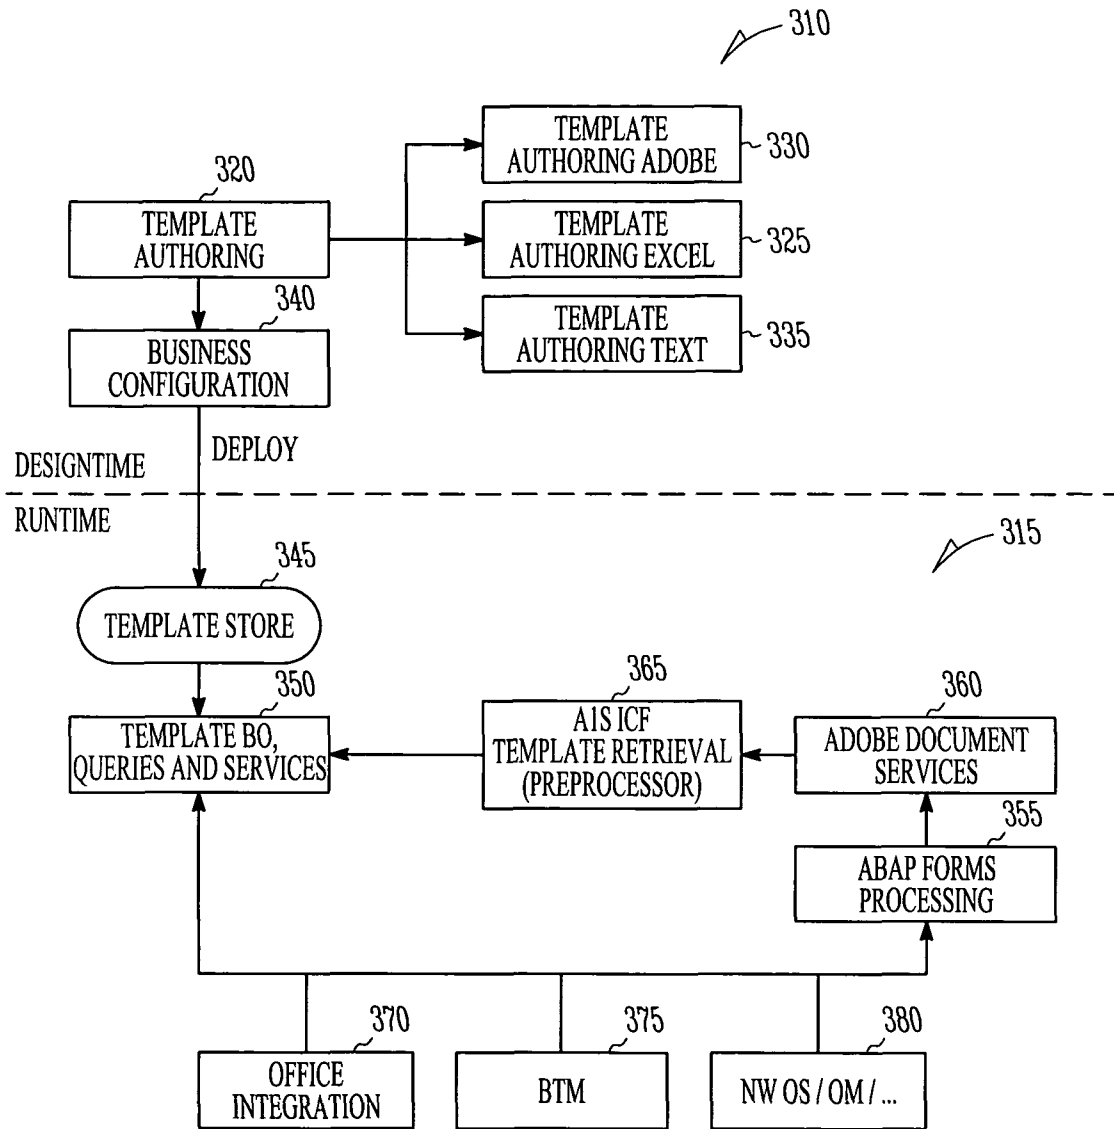


FIG. 3

Excel Template Repository
Personalize Help

Owner Eric Butler Version SAP Default Business Option Embedded Service: Office and Desktop Integration: MS Office Integration: MS Excel Integration

Please choose the following application screen to configure its excel template

Application Screens 415

Application Screen	Description	Belong to Application Area
Quotes Comparison	This screen is to compare quotes in RFQ process	Supply Chain Management
Export My Employees List	This screen is to export my employees list	Human Capital Management
Maintain Forecast	This screen is to maintain the forecast data	Supply Chain Management
Product Planning Details	This screen is to show product planning details	Supply Chain Management
Resource Load Profile	This screen is to show resource load profile	Supply Chain Management
Other screens (Generic Screens)	They are all screens in AIS except the 5 specified screens above	All

Excel Template of Quotes Comparison

The selected application screen has a master template provided by SAP. You can create the new template by following steps:

1. Download a template to your local machine.
2. Edit the template based on your own requirement, then save as XML.
3. Upload your template (XML) to system.

420

Excel Template	Created by	Date Modified	Set as available template
<input checked="" type="checkbox"/>	SAP		<input checked="" type="radio"/>
<input checked="" type="checkbox"/>	Terry Lang	13/12/2006 11:45	<input type="radio"/>
<input checked="" type="checkbox"/>	Terry Lang	17/12/2006 10:12	<input type="radio"/>
<input checked="" type="checkbox"/>	Terry Lang	18/12/2006 10:14	<input type="radio"/>

FIG. 4

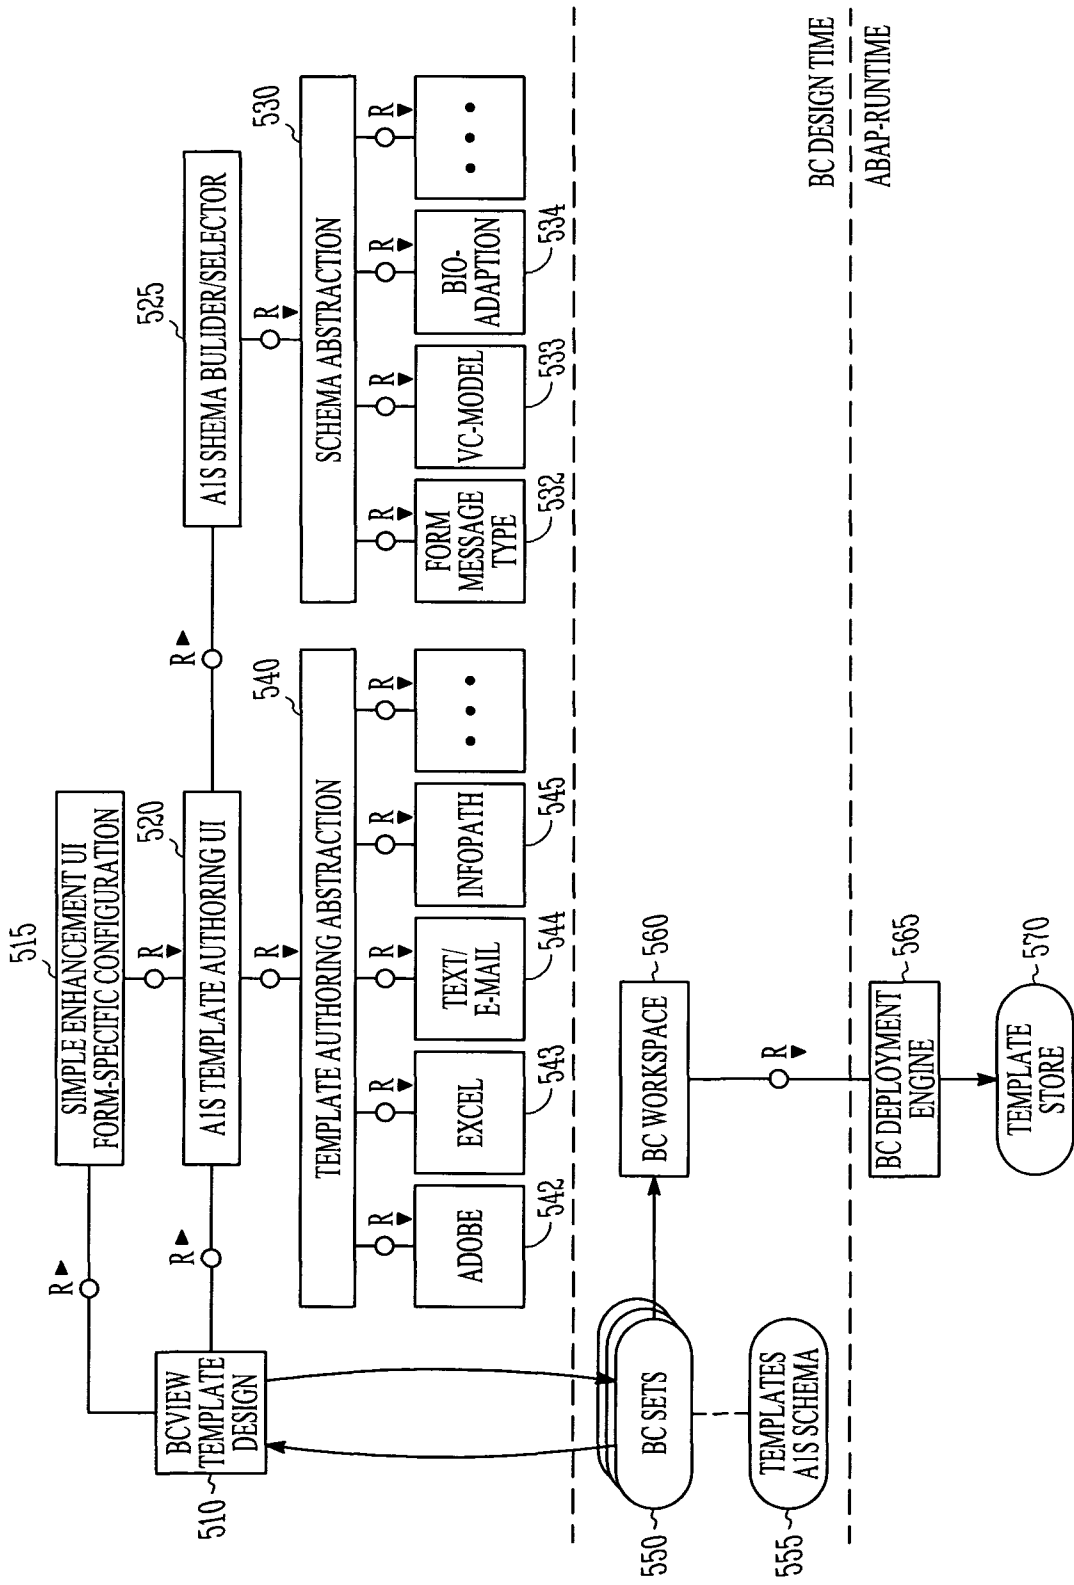


FIG. 5

FIG. 6A
FIG. 6B

FIG. 6

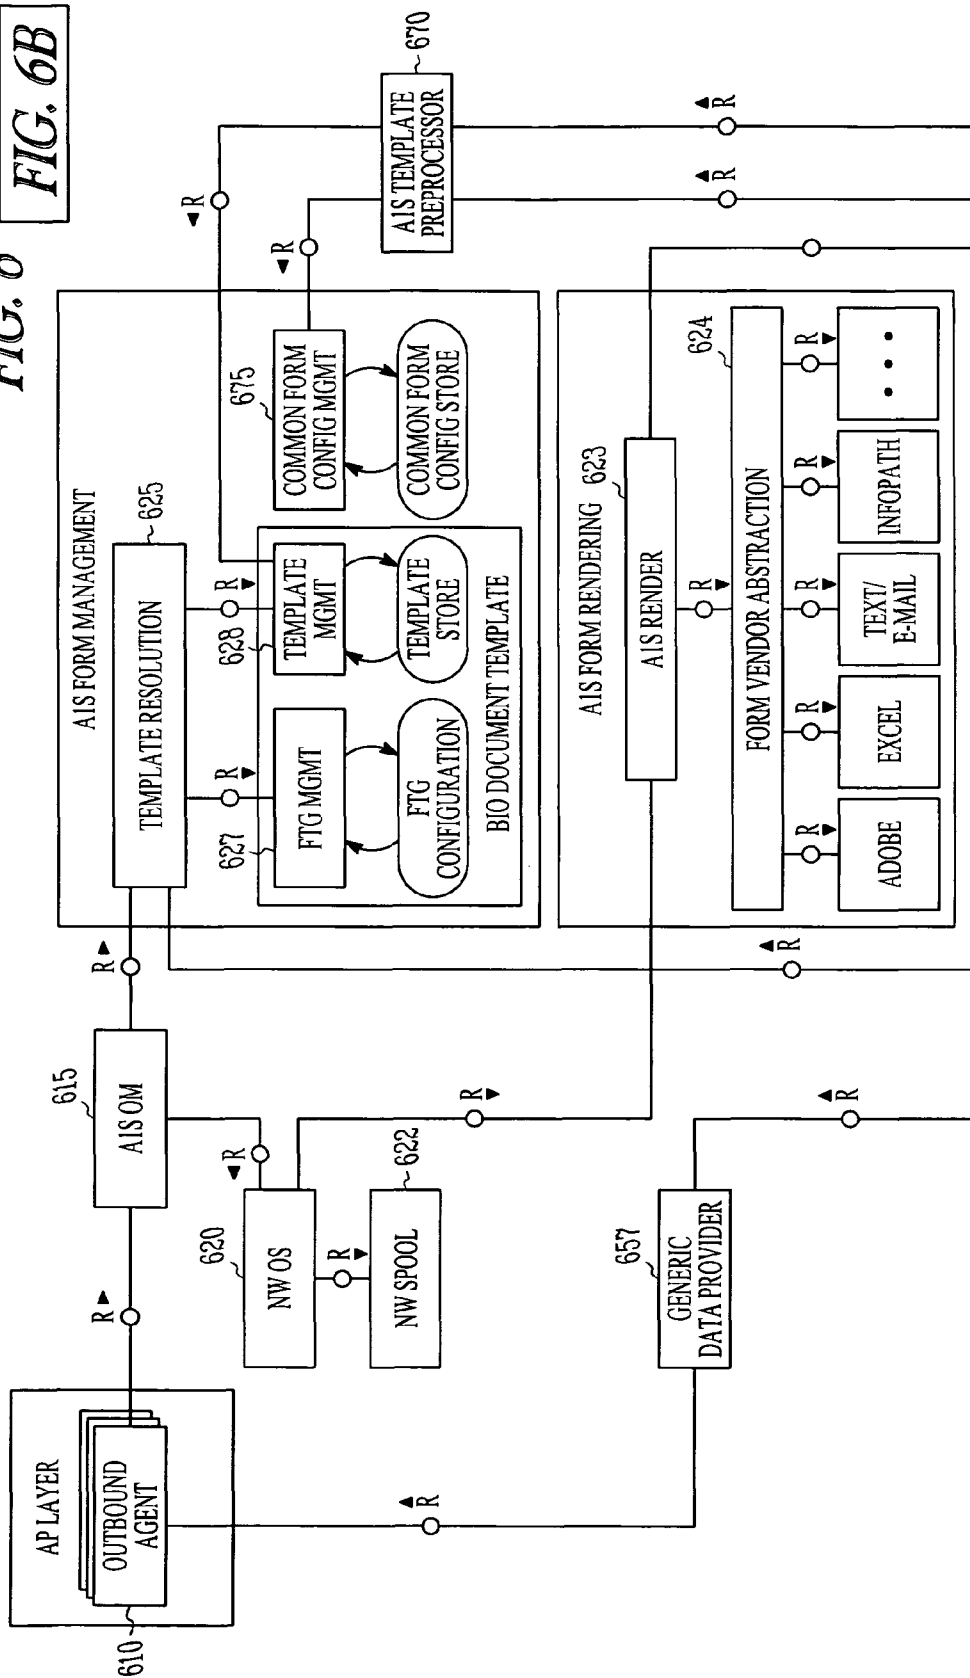


FIG. 6A

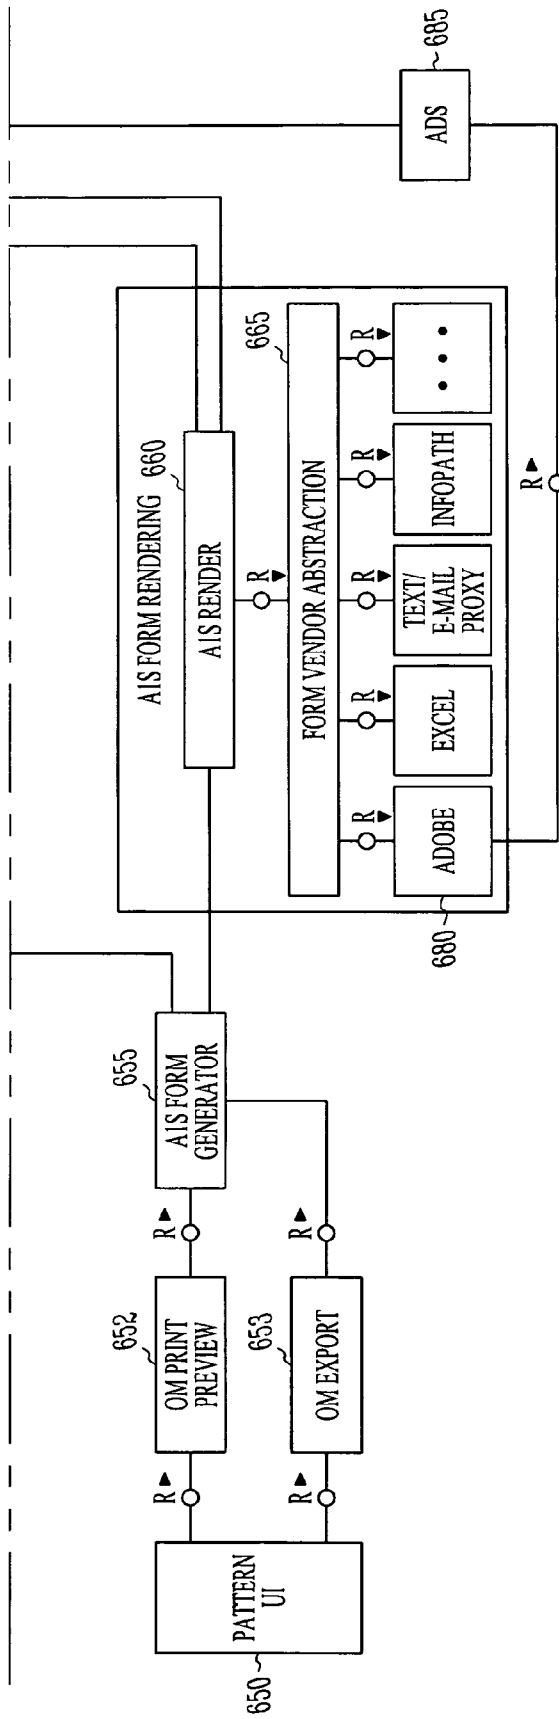


FIG. 6B

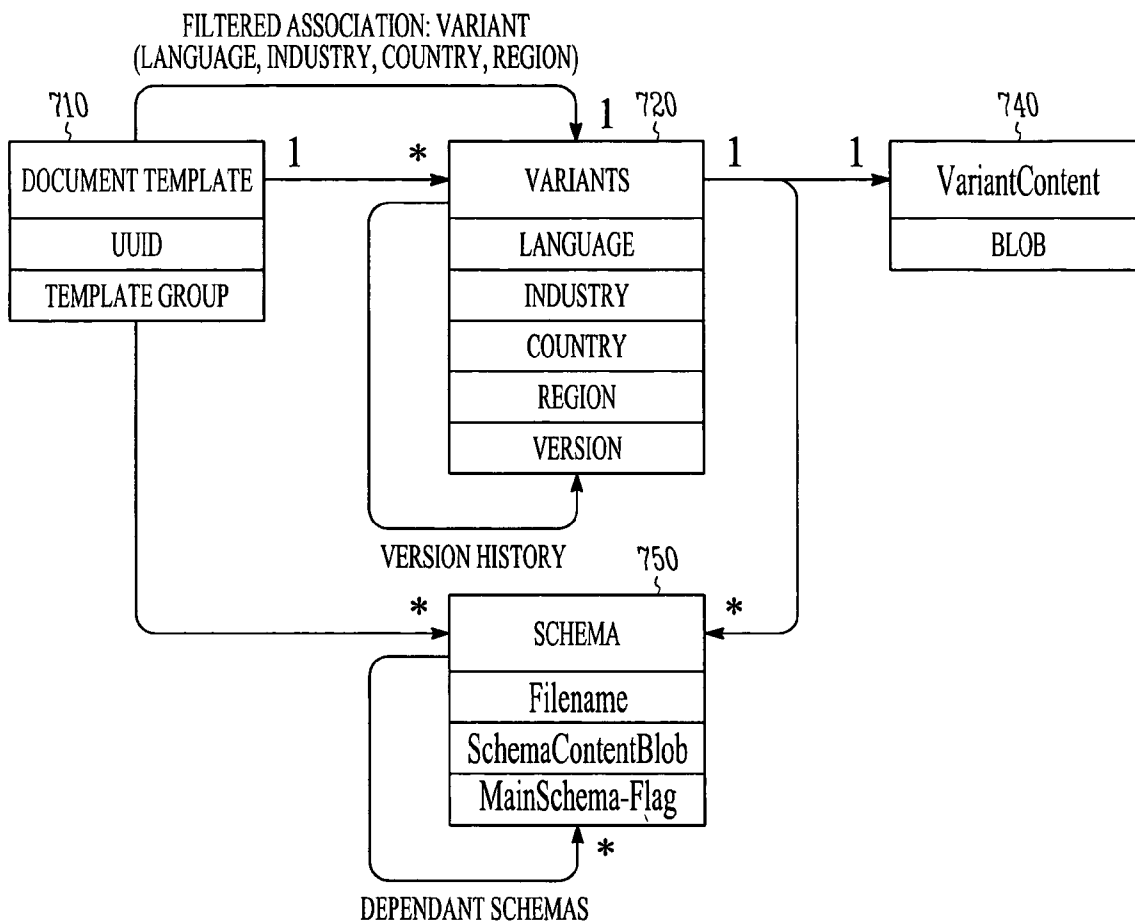


FIG. 7A

730

UUID	LANGUAGE	INDUSTRY	COUNTRY	REGION	VERSION	INTERNALID
4711	DE	OIL	-	-	1	1
	DE	OIL	-	-	2	2
	EN	OIL	US	-	1	3
	EN	OIL	US	-	2	4
	EN	OIL	UK	-	1	5
	EN	OIL	UK	-	2	6
	EN	OIL	-	-	1	7
	FR	OIL	FR	-	1	8
	DE	-	-	-	1	9
	EN	-	-	-	1	10
	EN	WATER	-	-	1	11
	EN	WATER	US	-	1	12
	EN	WATER	US	CA	1	13

FIG. 7B

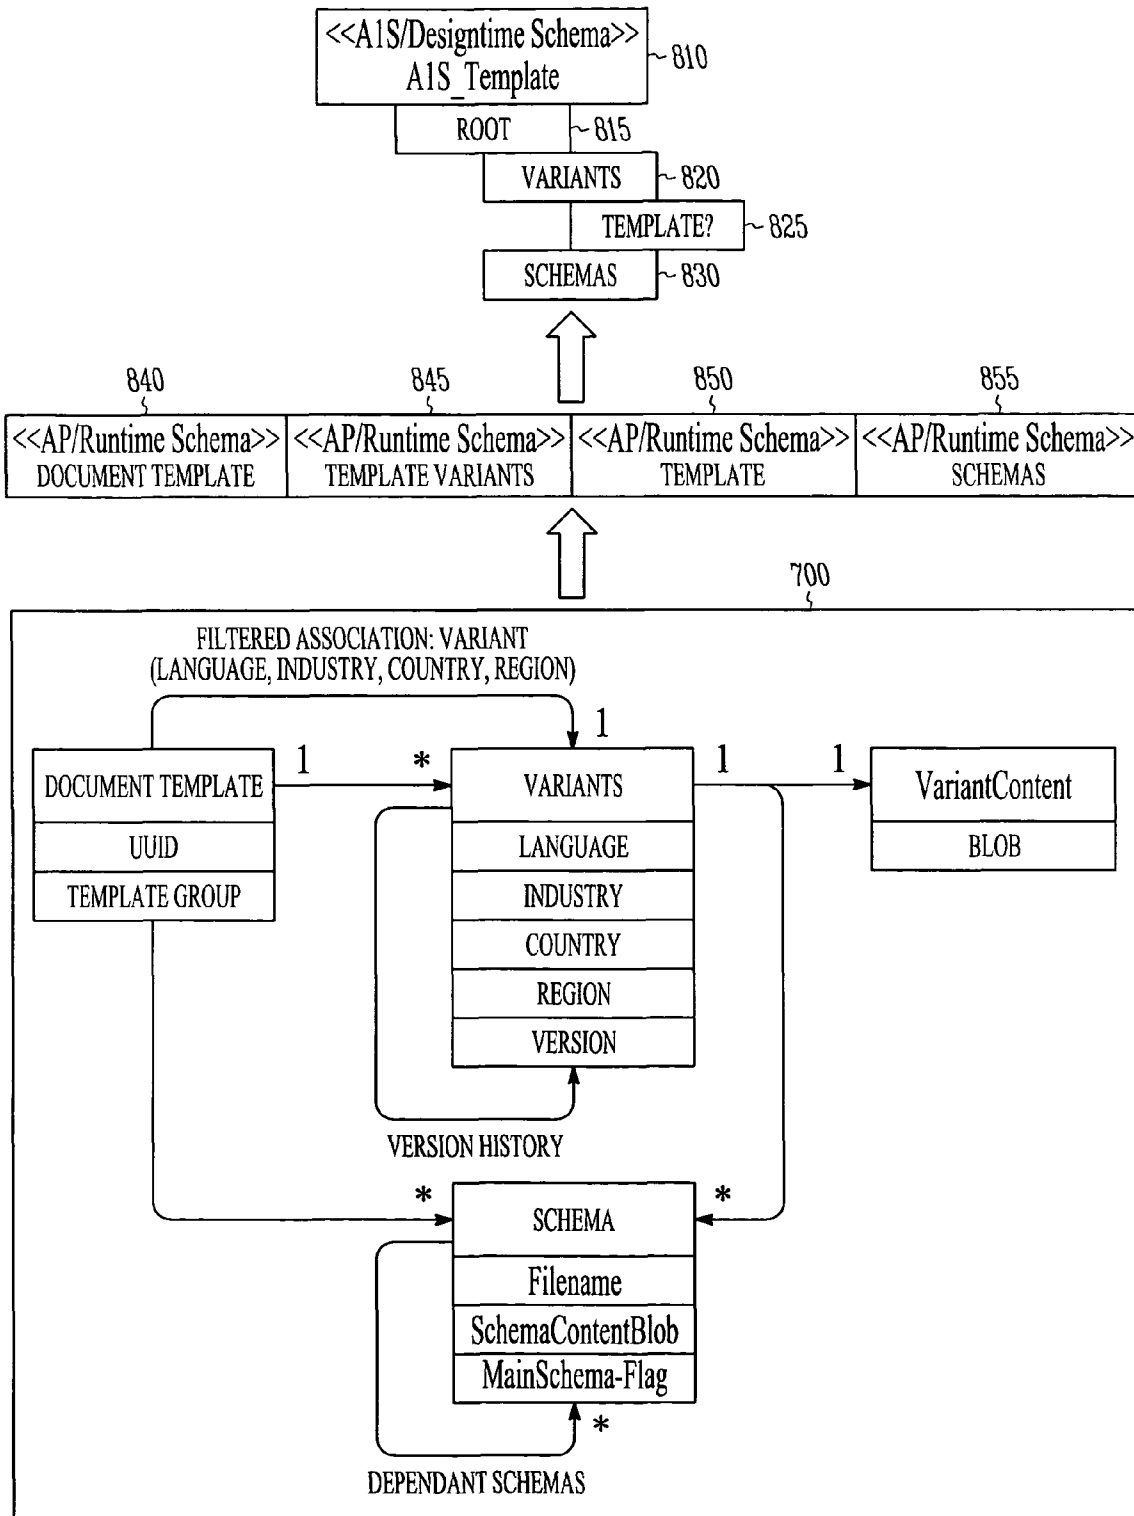


FIG. 8

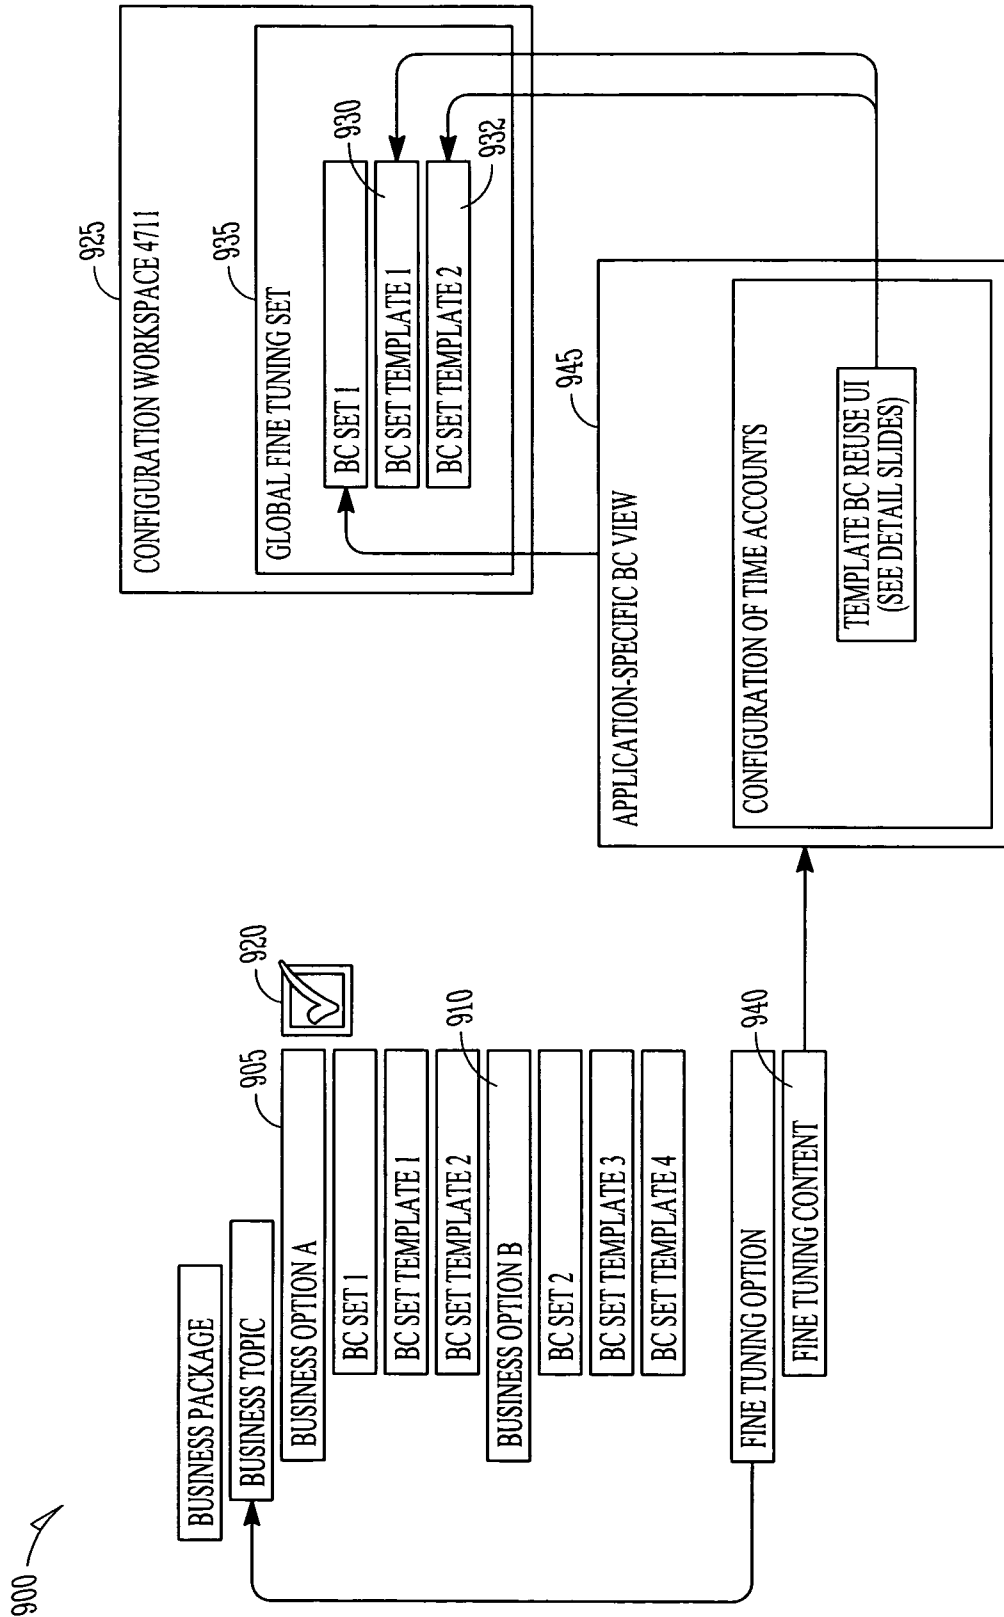


FIG. 9

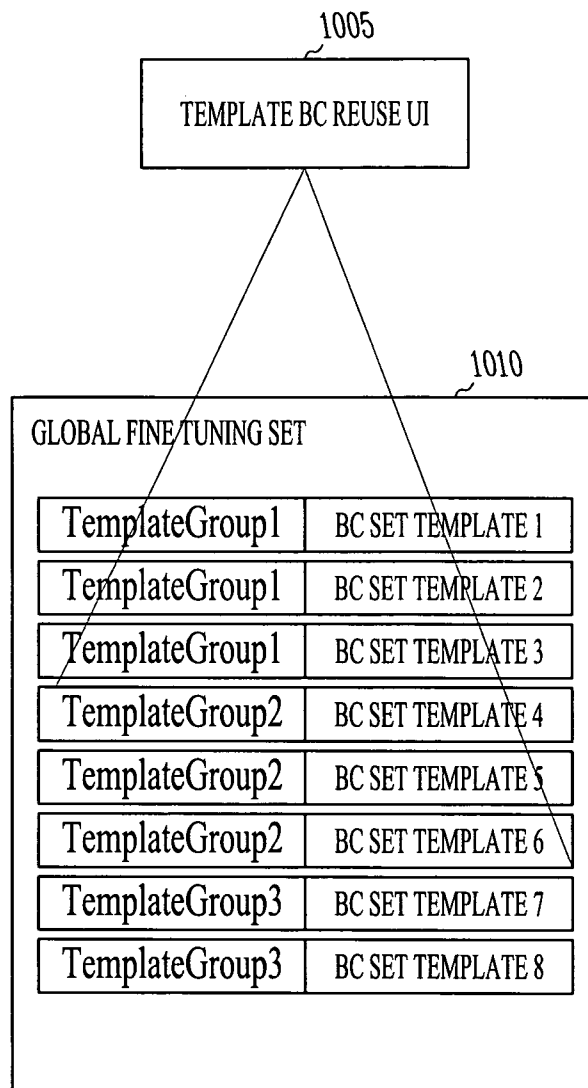


FIG. 10

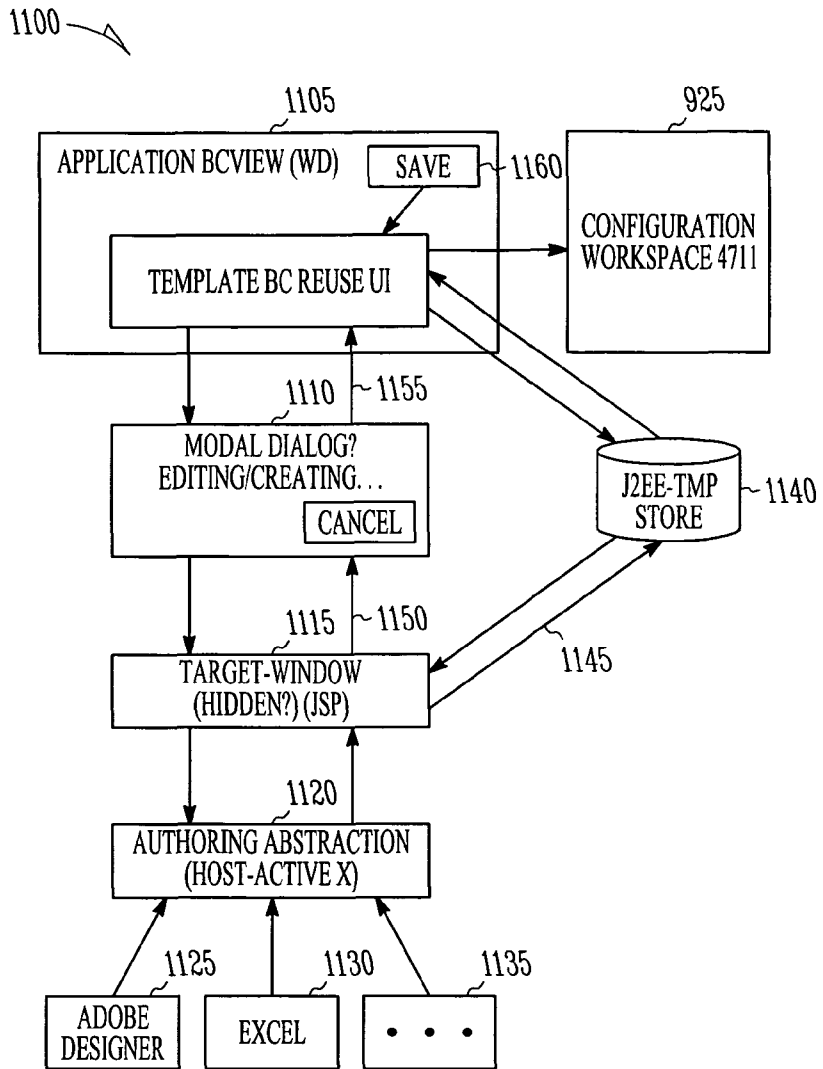


FIG. 11

1200 ↗

1210 ADD	1215 DELETE	1205 EDIT	1220 LANGUAGE ▾	1225 REGION ▾	1230 INDUSTRY ▾
	TEMPLATES			DESCRIPTION	
	TEMPLATE NAME XYZ			• • •	
	TEMPLATE NAME 0815			• • •	
	TEMPLATE NAME 4711			• • •	

FIG. 12

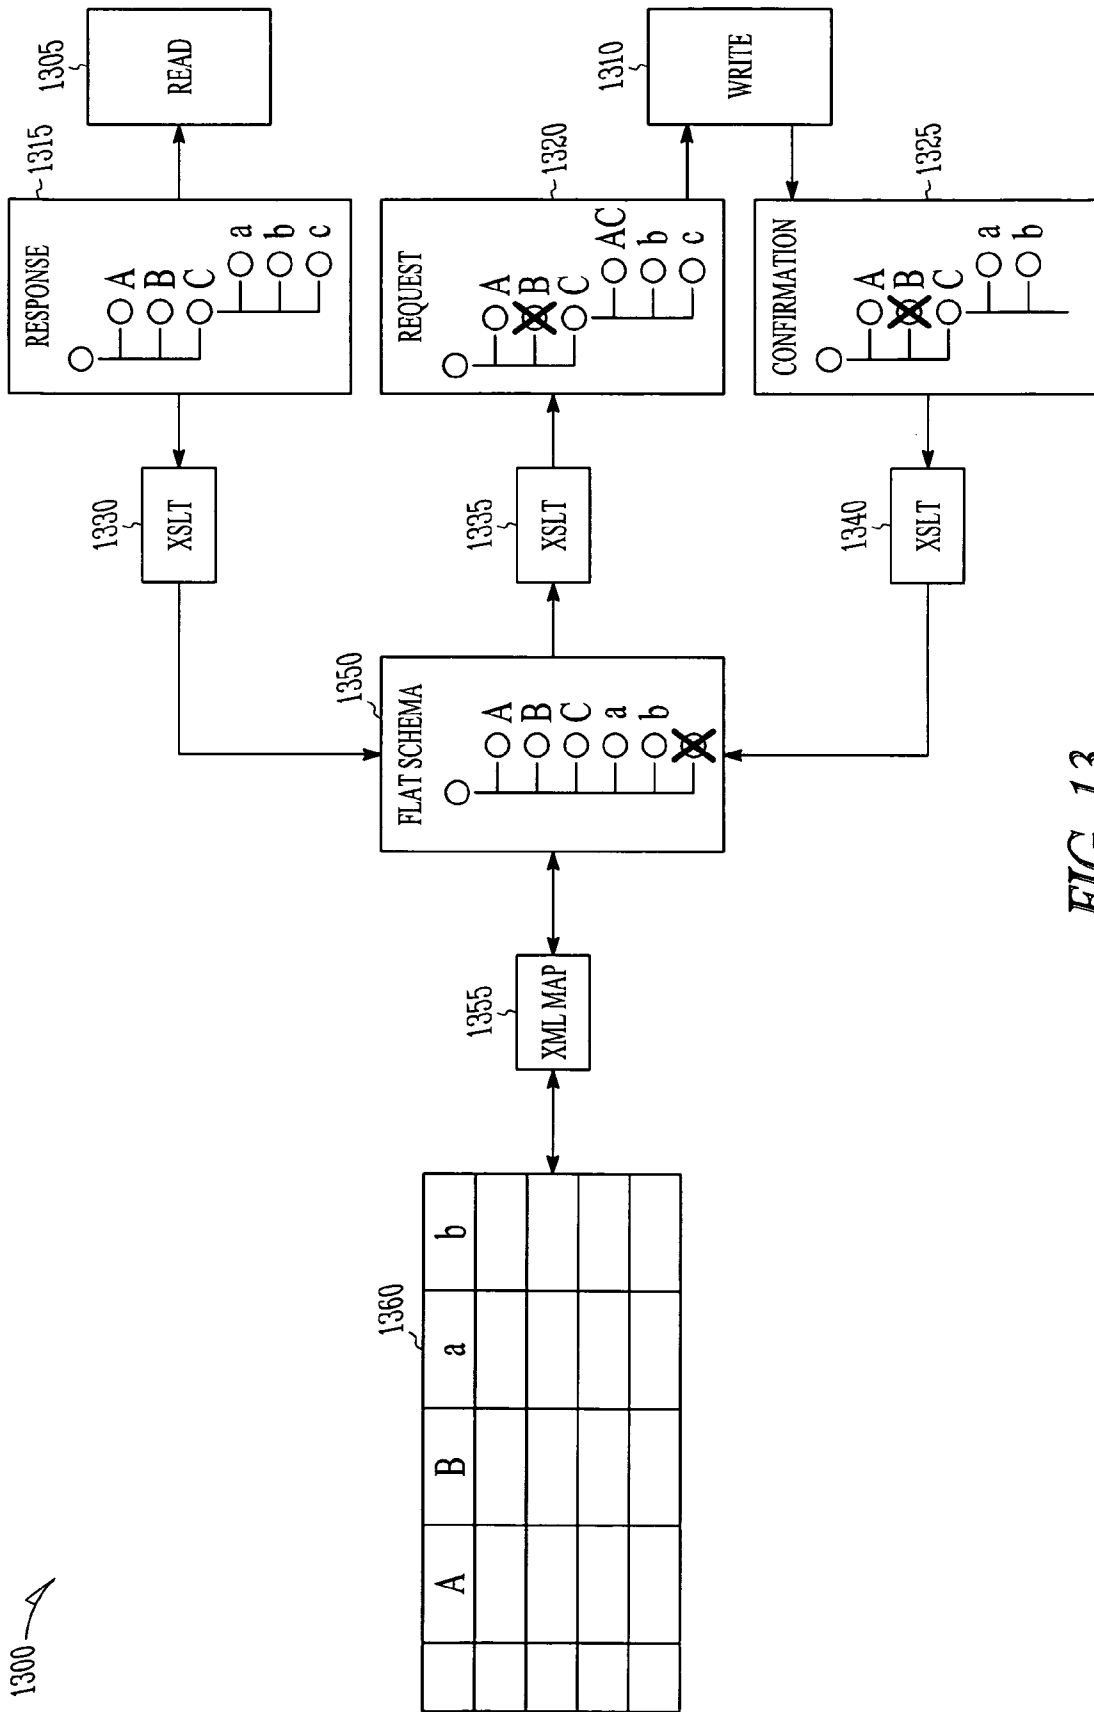


FIG. 13

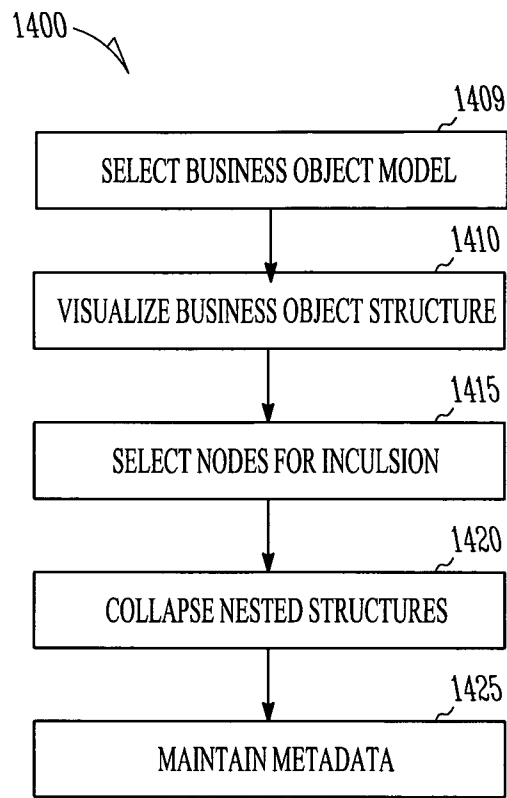


FIG. 14

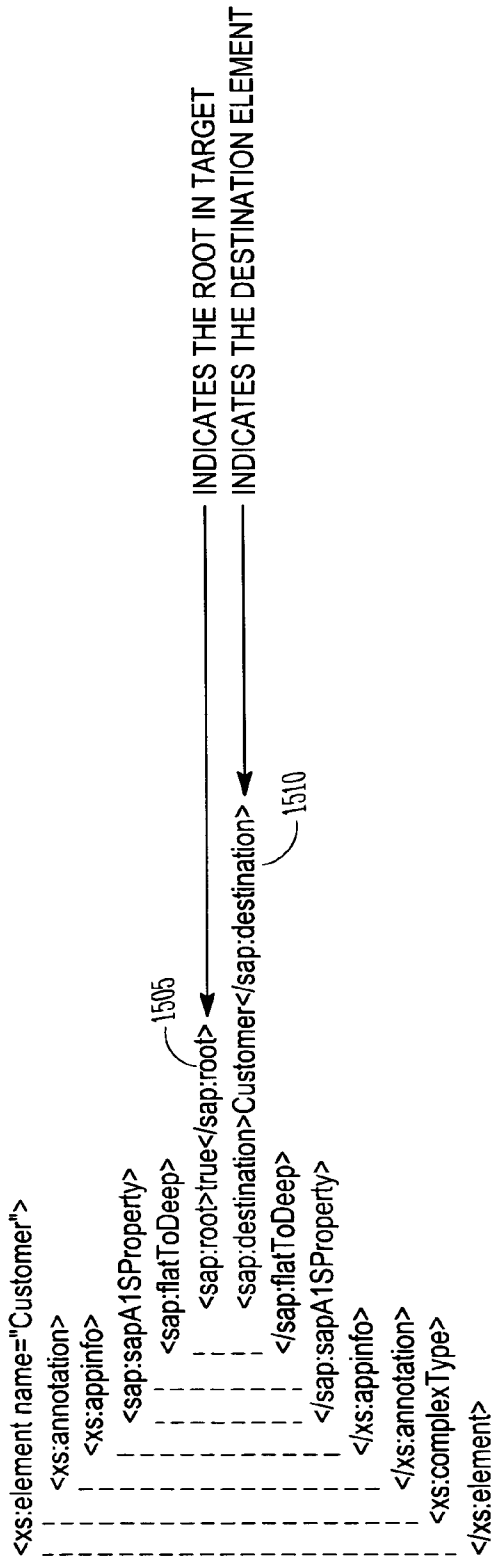


FIG. 15

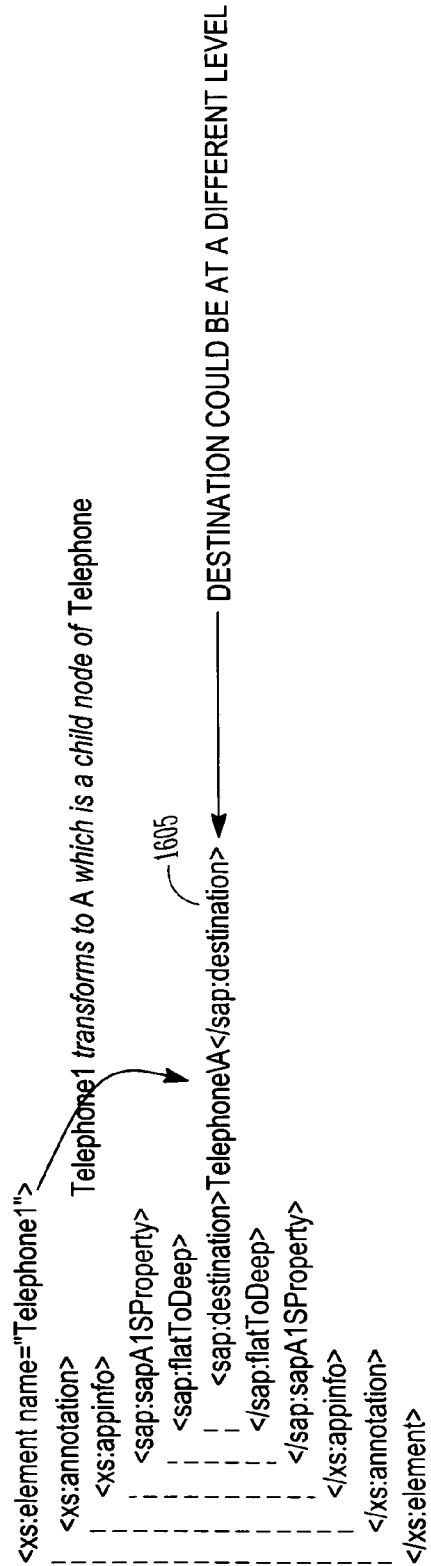


FIG. 16

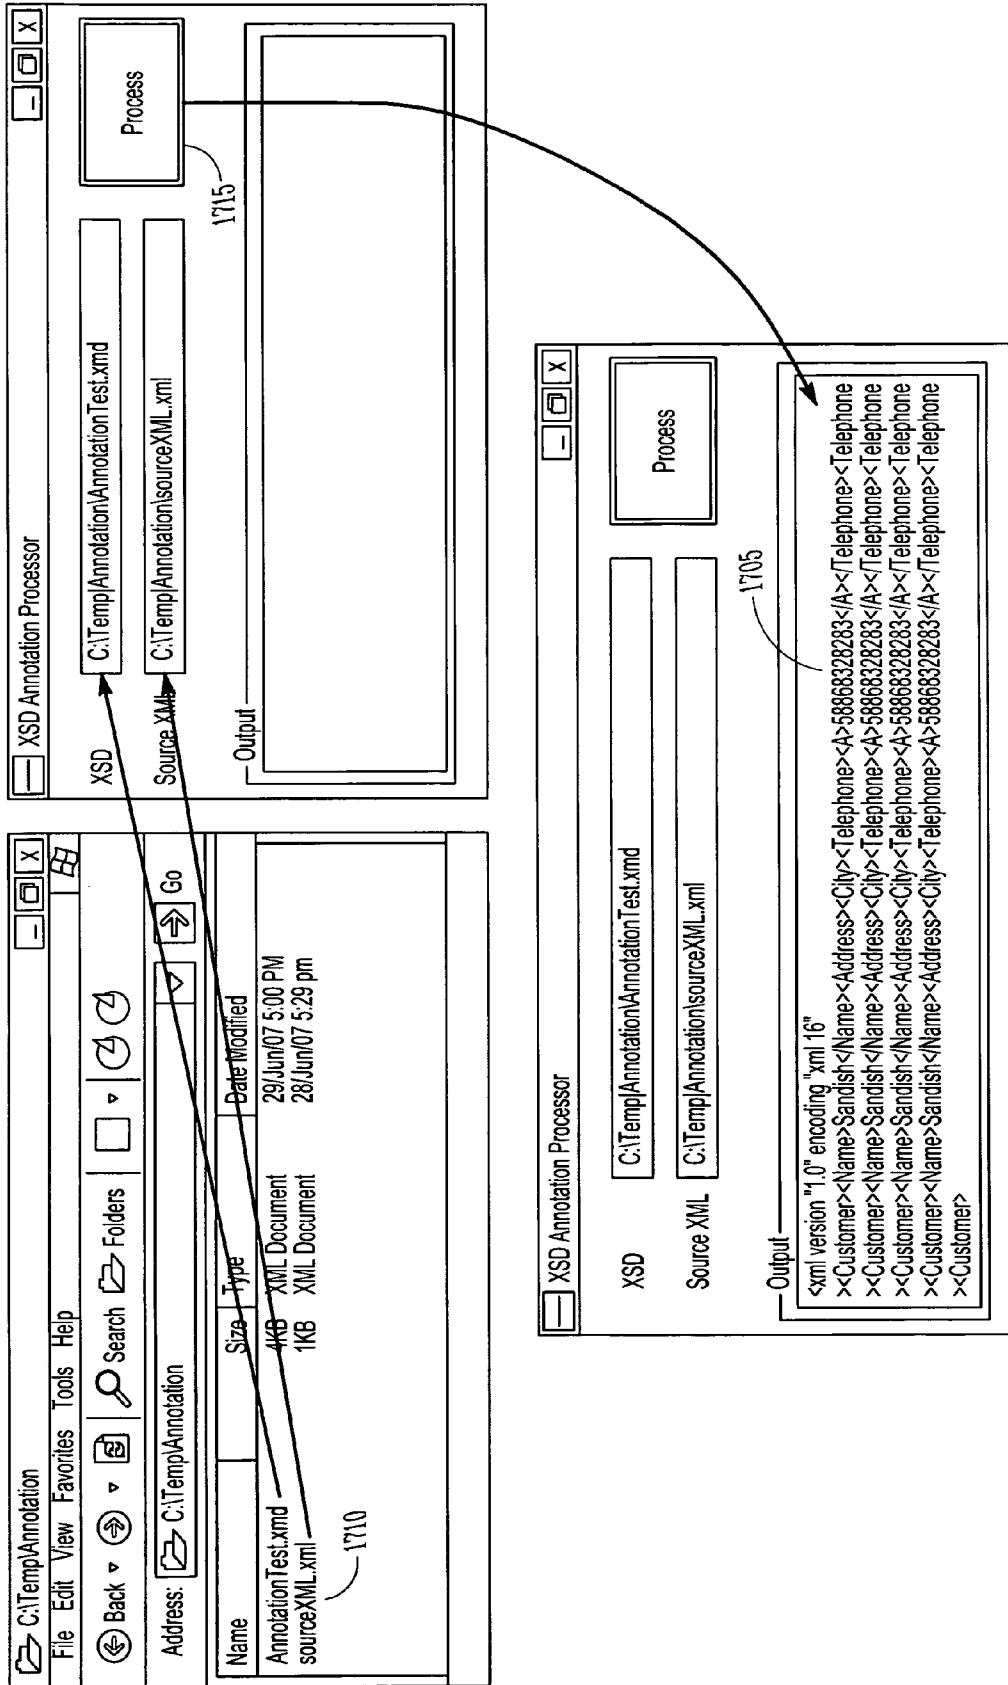


FIG. 17

PLUG-INS FOR EDITING TEMPLATES IN A BUSINESS MANAGEMENT SYSTEM

RELATED APPLICATIONS

U.S. Application entitled, Integrated Document Oriented Templates filed Aug. 29, 2008 and given U.S. application Ser. No. 12/202,039; and

U.S. Application entitled, Generic Data Retrieval filed Aug. 29, 2008 and given U.S. application Ser. No. 12/202,056.

BACKGROUND

Templates are commonly provided for many different types of documents. The templates facilitate batch processing that may pull information from a database to fill in placeholders of a template and result in customized documents. Some examples include a mailing to multiple customers. The address field and salutation may be placeholders in a template of the mailing, and when filled in with data from a customer database, each customer may be mailed a letter that is personalized. Other examples may include invoices, purchase orders and many other types of business documents produced by many different types of programs, from word processors to spreadsheet programs.

In server oriented business management systems, many different clients may be served by a single system, which may consist of multiple computers and storage devices coupled to the clients via network. Templates in such systems may be treated as a development object. Development objects are available across all clients, while the data to populate the templates for each client is separated between clients. Since the development objects have global aspects, which means that they are available to all the clients, a template change instigated by one client will show up in the template for all clients. Such a change may not be desired by all clients.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram illustrating a document template stored on a business management system according to an example embodiment.

FIG. 2 is a block diagram of a system illustrating use of customized templates with a business configuration design time system and a run time system on a business management service backbone according to an example embodiment.

FIG. 3 is a block diagram illustrating a logical component view of handling document templates according to an example embodiment.

FIG. 4 is an example screen shot of a template repository according to an example embodiment.

FIG. 5 is a block diagram illustrating components at design time according to an example embodiment.

FIGS. 6A and 6B are a block diagram of a component view during runtime according to an example embodiment.

FIG. 7A is a block diagram of an example business object document template design according to an example embodiment.

FIG. 7B is a table illustrating variants for an example business object document template design according to an example embodiment.

FIG. 8 is a block diagram illustrating business configuration integration of schemas for document templates according to an example embodiment.

FIG. 9 is a block flow diagram illustrating fine tuning of templates during business configuration activities according to an example embodiment.

FIG. 10 is a block diagram illustrating a template business configuration reuse user interface according to an example embodiment.

FIG. 11 is a block diagram illustration of a template authoring architecture according to an example embodiment.

FIG. 12 is a block diagram illustrating a list reuse user interface that provides a list of templates according to an example embodiment.

FIG. 13 is a block diagram of a schema builder that provides schema transformations according to an example embodiment.

FIG. 14 is a flow chart representation of a schema building process according to an example embodiment.

FIG. 15 illustrates schema definition annotations used to deliver schema transformations according to an example embodiment.

FIG. 16 illustrates schema definition annotations used to deliver schema transformations according to an example embodiment.

FIG. 17 shows example screen shots illustrating example user interactions for transformations according to an example embodiment.

DETAILED DESCRIPTION

In the following description, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration specific embodiments which may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that structural, logical and electrical changes may be made without departing from the scope of the present invention. The following description of example embodiments is, therefore, not to be taken in a limited sense, and the scope of the present invention is defined by the appended claims.

The functions or algorithms described herein may be implemented in software or a combination of software and human implemented procedures in one embodiment. The software may consist of computer executable instructions stored on computer readable media such as memory or other type of storage devices. The term "computer readable media" is also used to represent any means by which the computer readable instructions may be received by the computer, such as by different forms of wired or wireless transmissions. Further, such functions correspond to modules, which are software, hardware, firmware or any combination thereof. Multiple functions may be performed in one or more modules as desired, and the embodiments described are merely examples. The software may be executed on a digital signal processor, ASIC, microprocessor, or other type of processor operating on a computer system, such as a personal computer, server or other computer system.

In various embodiments, a system includes a server that provides a business management service to multiple independent customers. The server has a template repository having predefined templates that may be used by customers for tasks such as a mass mailings. The templates are stored as content, and not as development objects. A configuration storage stores customer changes to the predefined templates to provide customized templates. A user interface facilitates selection of customized templates as a function of scope of work and customized templates available for fine tuning corre-

sponding to the scope of work. In this manner, customers may create customized templates that need not be shared across the entire set of customers using the system. A common base for templates like Adobe® print forms, Excel download templates, text templates and many other types of templates may be provided.

FIG. 1 is a block diagram illustrating a document template **100** stored on a business management system according to an example embodiment. Template **100** is a business object that defines the content, format, placeholders, and the structure for creating new documents having a uniform style. Business objects are objects used in a business management system to represent business processes. They contain data related to the business process, as well as methods for processing the data. In one embodiment, the business object, template **100**, belongs to a process component referred to as document management. This process component treats template **100** as content as opposed to a development object.

Business objects, as described above, are a technical representation of a concept that includes data and logic. In some embodiments, a business object has a structure that includes a root node and sub nodes. The nodes hold information such as data and logic corresponding to various business processes that can be modified in a design time environment.

Placeholders may be thought of as variables in a template **100** that refer to data to be looked up in a database when documents are created based on template **100**. One way to represent the placeholders is in a well-structured XSD-XML-schema. Such a schema may be used to represent data which is organized in a hierarchical way with dependencies and different multiplicities. Placeholders provide for customization of the documents. In one example, template **100** is a template for a word processing application, spreadsheet application, or other application that can be used for mass mailing via an output management function, or to create reports via a spreadsheet application integrated with preconfigured content.

A document template **100**, as indicated at a document template node **110**, contains meta information such as type and description and template content. Elements located at the document template node **110** are defined by data type: DocumentTemplateElements, and may include a UUID (universally unique identifier) for a document template, a MIME-Code that specifies the MIMECode for a document template, a GroupCode that is a coded representation of a document template group according to their business content, and VersionEnabledIndicator that indicates whether versioning has been enabled for the document template. These elements may be used to respond to queries to provide a list of all document templates **100** that meet selection criteria specified by query elements.

Document template **100** has further subordinate nodes, such as a language variant **115**, and some language variant filter elements including a language variant schema **120**, name **125** and description **130**. These are identified as nodes in FIG. 1. Template **100** is a simplified template illustrating only a language variant for one template. In further embodiments, many different types of variants may be handled by the document template node structure.

Schema **120** contains binding information which describes how placeholders in a document template **110** are replaced by real business object data for a language variant of the document template **110**. The elements located directly at the node Schema **120** are defined by the data type: DocumentTemplateSchemaElements. These elements may include a language independent name of the schema, MainIndicator, that specifies whether schema **120** is the main schema. In one

embodiment, the schema MainIndicator can only be set for one schema. The main schema is the schema **120** that is loaded first by an application, which is responsible for placeholder substitution. Schema **120** may also include a Binary-Object that describes the unstructured data in binary form.

Node name **125** is a language-dependent name of a document template **110**. Elements located directly at the node Name **125** are defined by the data type: DocumentTemplateNameElements. These elements may include a name specifying the name of a document template. Node description **130** provides a language-dependent description of document template **110**. The elements located directly at the node Description are defined by the data type DocumentTemplateDescriptionElements. These elements may include a description that specifies the description of the document template.

Node language variant **115** is a language specific variant of a document template **110**. The elements located directly at the node language variant **115** may be defined by the data type, DocumentTemplateLanguageVariantElements. These elements may be a UUID, a VersionID that is a unique identifier of a document template variant, and a SystemAdministrative-Data that is stored in a system. In one embodiment, Creation-DateTime and LastChangeTime are relevant and used by the Template Language Variant. A LanguageCode may also be included, that defines the language in which the Document Template Variant is specified, a CountryCode defines the country for which the document template variant is specified, and a RegionCode defines the region for which the document template variant is specified.

The following composition relationships to subordinate nodes include a language variant predecessor version node at **135**, and a language variant content node at **140**.

From a business object identity node **150**, a last change identity identifies the identity that changed the language variant **115**. A creation identity identifies the identity that created the language variant **115**.

Language variant predecessor version **135** is a list of all predecessoring versions of a language variant **115**. The elements located directly at the node language variant predecessor version **135** may be defined by the data type, DocumentTemplateLanguageVariantElements. These elements may include a UUID for a document template variant, a versioned that is a unique identifier of a document template variant, and SystemAdministrativeData that is administrative data that is stored in a system. CreationDateTime and LastChangeTime are relevant and may be used by the Template Language Variant. Further elements may include a LanguageCode that defines the language in which the Document Template Variant is specified, a CountryCode that defines the country for which the document template variant is specified, and a RegionCode that defines the region for which the document template variant is specified. From the business object document template **110** node language variant, language variant **115** is an explicit version of a language variant.

In one embodiment, language variant content **140** is the binary content of the document template language variant. In one embodiment, the node is provided due to potential large quantities of data, the determination of which may have lead to performance problems. The elements located directly at the node Language Variant Content **140** may be defined by the data type, such as BinaryObject that describes the unstructured data in binary form. Such unstructured data has also been referred to as binary large objects or BLOBs, and may include data such as image data.

In further embodiments, many other attributes of the template **110** may be defined. Such attributes may be added as additional metadata in one embodiment. Time dependency

5

(template is eventually valid for a period of time like a fiscal year), or paper size (as a print form might be designed only for A4 or Letter US) are just a few examples of such attributes.

In one embodiment, things directly influencing parameters may be included as attributes on the language variant or template header node, which are in common for different kinds of templates. In yet further embodiments, the attributes may be related to industry or layer-ID which gives the opportunity to abstract from vendor specific industry solutions.

In one embodiment, soft attributes may be included. Soft attributes are specific to a template type or business context stored in a kind of property bag attached to the template. For example, papersize might only be applicable for print forms and therefore could go into such a property bag. The template infrastructure would still need to expose such soft attributes via query services by the application context using this templates, e.g. to query for a template variant in papersize="Letter US".

FIG. 2 is a block diagram of a system 200 illustrating use of customized templates with a business configuration design time system 210 and a run time system 215 on a business management service backbone 220. Utilizing the previous business object structure for templates, many different templates may be created from a set of standard templates. Customers may create their own customized templates. In system 200, deciding which templates to use for a customer is simplified. By storing the templates as business configuration objects, those objects may be selected and modified during normal design time business configuration processes as illustrated at design time system 210.

Design time system 210 provides for scope selection at 225. In one embodiment, scope selection 225 provides a list of areas, such as marketing, sales, after sales service, procurement, supply chain control, financials, etc. Each of these groups may be broken out into smaller groups. For example, financials may be subdivided into general ledger, which may be further subdivided into GL Accounts, set of books, etc. Other areas may also be listed.

When a customer selects one of the areas, at 235, a work item list of predefined templates for the customer is displayed. The list may be generated as a function of a customer profile that specifies the business objects of the customer that are available to that customer, including templates from the business configuration objects. In this manner, a customer will only see templates that may be needed based on the scope selection. At this point, the customer may select one of the templates for use, or may also select a template for further modification.

When the customer has selected a template, or has modified an existing template, decisions and changes are stored as indicated at storage 240, and are provided to the server 220 for storage at 242 and use by the run time system 215. The decisions and changes are also provided to run time system 215 via a storage 245. Run time system 215 includes a test tenant 250 and a production tenant 255. The decisions and changes are run through a run time checklist 260 to ensure that they are valid for live operation, and also through a production unit 265 and a continuous change component 270, which provides the modified templates back to the work item list 235 for future selection by the customer. In one embodiment, the moving of the templates from development objects to business configuration objects may be done with only very few changes in the runtime 215. The runtime 215 is switched to retrieve from a new persistency, the business configuration document template object, but the complete output process in printing need not be fundamentally changed.

6

One result of the selection of a template or modifying a template is that the template may be associated with a business task. When that business task is next run during run time, the associated template will be used, obtained by the runtime, and documents will be produced and mailed, or sent to an outside mailing service to be mailed in one embodiment involving mass mailings. The runtime may utilize the schema associated with the content of the template and customize the appropriate placeholders. This is one approach which enables dynamically changing the schema to fetch other or more different data from business object models. A further approach involves the use of a development object defining the interface for data-retrieval. Changing the development object may involve adaptation of a static interface and messages types. The schema in the latter case is just a proxy representation of the form message type where as in the first approach the schema is defining on its own how data is to be read.

In further embodiments, a postal service may be utilized for the mailing, or email, or fax may be used. In still further embodiments, an interactive form may be utilized that is sent to a supplier. It may be a purchase order in one embodiment. The business task may then retrieve the data from the form when it is returned, and store the data. The use of a template for such tasks may simplify dealing with different message formats, as it may include appropriate logic for interacting with the form.

A logical component view of handling document templates is illustrated in block form in FIG. 3. The components are divided into design time generally at 310 and run time generally at 315. At design time 310, template authoring 320 may occur when a template is selected from a list of templates at 235 that are listed under a particular selected scope, such as an invoice template under a finances/invoices scope. When an Excel based template is selected, template authoring Excel at 325 is selected to allow the customer to further customize the template. If it is so customized, the changes will be stored, and a new template reflecting those changes will be created and stored. Further authoring may be provided for Adobe based templates at 330 and text template authoring at 335. The authoring blocks 325, 330 and 335 may be integrated editors, and the resulting templates are stored in fine tuning 235.

A business configuration block 340 is used to deploy the template in the form of a business configuration object. As a business object, the template includes business data that is exposed by one or more methods such as queries and other actions to use and manipulate the business data.

In runtime 315, the templates are stored at 345, and queries and services may be provided at 350 on such templates. In some embodiments, an additional layer may be provided which allows end-user related templates which are not present in the design time. This additional layer provides further flexibility.

An example of processing an Adobe formatted template is illustrated by ABAP forms processing block 355, an Adobe document service block 360 and a system template retrieval and pre-processing block 365. These blocks provide rendering of the template and a callback into the runtime system when completed. The runtime also includes office integration 370, business task management (BTM) 375 and other system functions at 380.

FIG. 4 is an example screen shot of a template repository for Excel templates at 400 that can be displayed and viewed or modified by template authoring 325. A top portion 410 of the screen shot 400 describes the owner, version and business option corresponding to several different applications. At 415, a list of application screens is provided, and includes as

an example only, quotes comparison, export my employees list, maintain forecast, product planning details, resource load profile and other screens. As indicated above, these screens may deal with many different types of business processes, such as finance related, and there may be many more available than those shown in the list at **415**.

The application screen “quotes comparison” is highlighted in the list at **415**. A corresponding list of actual templates corresponding to this quotes comparison scope is shown at **420**. The list at **420** includes a first master template, that is provided by the maker of the business management system. This master template may be available to all customers of the business management system, but it should be noted that the master template may be designed for the particular scope, quotes comparison, in this embodiment. Following the master template are several customized templates. The templates each have an associated creator, date of modification, and a selection button to indicate whether the template is to be included as an available template for that scope. This provides the ability to present an uncluttered interface back in the business configuration screens, allowing for easier navigation for users of the customer when setting up mass mailing or performing other tasks that utilize customized templates. For instance, a template may be obsolete. By not setting that template as available, it will not be mistakenly used. However it may still be retrieved to re-create prior documents if desired.

In one embodiment, an active flag may be used to indicate whether a template is available. One use for the active flag is to allow for resolving conflicting attribute combinations. A customer may decide which of eventually concurring variants should be the active one. This could happen if different ISVs ship the same templates for a given attribute context. Or, if a new language is shipped and the customer already has created a language variant in a previous version.

FIG. 5 is a block diagram illustrating components at design time generally at **500**. At **510**, a user may select a template from a business configuration view of templates. In one embodiment, fine tuning on the selected template are kept separate from the business component. A request is made to a simple enhancement user interface **515** to modify the selected template. The user interface **515** generates a request to an authoring user interface at **520**. In one embodiment, the template appears to a user to look very much like the resulting documents to be generated from the template. Complex data structures are hidden from the user by use of a schema builder/selector **525**. A schema abstraction component **530** provides an abstraction from the actual data structures for messages **532**, models **533**, business objects **534** and other data structures, such as relational databases from which data is to be inserted into documents in accordance with the templates.

The ability to abstract the schema or data structure from the user enables the user to focus on the format of the actual resulting documents, as reflected in the template being edited. The template authoring user interface **520** thus provides an editor which abstracts completely from the schema. Word based templates appear as flowing text and paragraphs. The resulting printed page of a document derived from the template is the result of the same flow of text.

In one embodiment, a template authoring abstraction **540** is provided. The templates are represented in XML format by the abstraction, interfacing with the abstraction provided via requests from an Adobe type component **542**, Excel component **543**, text/email component **544** and InfoPath component **545**. Other components may also be provided. The XML abstraction is provided to the template authoring UI such that

a common set of editing functions may be provided for every template regardless of the original source of the template. The editing functions may be fairly limited to ensure that they operate on each type of template in the same way. For instance, some templates may utilize a pixel based approach. It may not be easy in all cases to just convert between pixel and text formats.

In one embodiment, the templates to select from at **510** are provided from business configuration sets **550**. Configuration data is bundled together in one embodiment to form a container of data. The templates are schema based as indicated at **555** and may be built on top of a database table. A business configuration workspace **560** holds business configuration data for one customer going through configuration. The modification of templates may be just one part of the configuration occurring. Constraints on branches of business processes may also be used to determine which business configuration sets **550** are needed.

On completion of the business configuration efforts, a request is made to a deployment engine **565** in a run time environment, and the templates are stored at **570** for use when performing business management functions. Each modification of a template in design time leads to a new version of the template. In the run time, the versions may be persisted separately. The run time can thus make the template or different versions of the templates accessible from applications. The desired template can be retrieve by a special identifier.

In one embodiment, a template may have one or more schemas. These schemas may be associated with different message types, such as one for printing or output, one for VC (visual composer), and business object adaption, which is a way to build views on business object models. The ability to have multiple schemas for a template removes prior limitations of using merges to obtain the different message types.

FIGS. 6A and 6B are block diagrams of a component view during runtime. Business object logic triggers an outbound agent **610** that generates a request to an output manager **615**. Output manager **615** will determine whether the request is for a Net Weaver output service **620**, and route it appropriately for handling by that service after template resolution at **625**, fetching the data and rendering at **623**. Output service **620** spools the requests at **622** until it can process them appropriately. Such processing may include sending a request to a renderer **623**, which forms appropriate abstractions of the form from various vendor formats at **624** such as in an XML or other format as previously discussed.

If output manager **615** determines that the request is not for output service **620**, the request is routed to a template resolution component at **625**. Template resolution component **625** will find an appropriate template for use to perform the function that appears to be desired by a user. For instance, a user may not know the exact template to use, but does know that they want to print a purchase order in English. Using this information, the template resolution component **625** obtains the proper template and forms a request to either a FTG management component at **627** or template management component at **628**, both corresponding to business object document templates.

In a further embodiment, requests may be generated by a pattern user interface at **650**. The requests may be to an output manager print preview component **652** or an output manager export component **653**. These components generate requests to a form generator **655**. Form generator **655** then makes requests to one or more other components. One such request may be made to a generic data provider component **657**, which in turn makes a request to outbound agent component **610**. Form generator **655** may also make a request to the

template resolution component **625**, which handles such request in the same manner as request from output manager **615**. In one embodiment, form generator **655**, operating in a Java environment, may make a request to a second renderer **660**, which also provides for abstraction of various different types of documents as indicated at **665**. In non-Java environments, such requests may not be necessary. Renderer component **660** may also make a request to a template preprocessor **670**, which can make a request to a common form configuration management component **675**, or to the template management component **628** as desired. In a further embodiment, the form abstraction component, via an Adobe component **680** may make a request to an adobe document server **685**, which also makes request to template preprocessor component **670**.

FIG. 7A is a detailed block diagram of an example business object document template design **700** providing further detail than FIG. 1. Design **700** includes a document template UUID, and a template group code at **710**. The template group code is a logical group around templates to assign them to a specific logical area. It can be used in queries to retrieve all templates within a template group. In one embodiment, the code list is an extensible code list.

The document template **710** is viewed as a logical concept with a unique identifier. In one embodiment, document template **710** has a name, which may be a short description visible to the user. The description may be language dependent and stored in a separate table. A description of the document template **710** may be used to describe the purpose of the template and is visible during business configuration. This description may also be language dependent and stored in a separate table. For one logical template, there may be variants for languages, industries, countries, regions and versions as indicated at node **720**. Some example variants are shown in table **730** in FIG. 7B. A variant may have an internal GUID, which can be used to directly access the specific variant version. This may be useful for reprinting documents if needed. If some of the variants, such as industry, country, etc., are not used by an application, they can be left as empty or null. One template is persisted for each variant in one embodiment. In further embodiments, a mime type, such as XDP, XLS, plain/text, xhtml, etc., may be provided in a variants node.

Table **730** may be used by template resolution component **625** in FIG. 6 to find an appropriate template variant when a user does not uniquely specify the variant to use. Using information, including context information about the user and the user request, a best fit may be found in the table. If insufficient information is provided to uniquely identify a variant, a fall back sequence may be used to revert back to the template having matching information deemed more important. This is easily done if the templates are hierarchically arranged. For example, if language is not specified, the fall back may be an English language persisted template, or other predetermined language template.

Design **700** may also include variant content, such as a binary large object as indicated at node **740**. In one embodiment, a schema is provided at **750**. As previously noted, there may be more than one schema for each variant. All schemas may be related to a main schema root node shown. Each schema **750** has a file name, schema content and a main schema flag, which is set if the schema is the main schema.

A query application programming interface (API) may be provided to provide several different queries. A GetAllTemplatesByTemplateContainer query may be used to retrieve all templates in a template container. It may be used to fill a dropdown list in a user interface so that the user can choose a

specific template. A GetDefaultTemplateInTemplateContainer query may be used to retrieve a default template within a template container. In one embodiment, a filtered association may be used in a query to retrieve a variant for a template starting from the root node of the template at **710**. Language, industry, country, region may be used as inputs, and a variant ID is provided as an output. In one embodiment, a version is not part of the filter association query interface. Versions may be retrieved directly for special use cases with an internal shortcut ID.

FIG. 8 is a block diagram illustrating business configuration integration of schemas for document templates generally at **800**. A top level design time schema **810** is exposed in terms of business configuration activities, including various nodes, such as a root node **815**, variants **820**, template **825** and schemas **830**. These nodes may be exposed to allow modification by the user to create additional variants off a base template. In one embodiment, the template node **825** is not included in the design time schema to avoid increasing storage and work space size, as well as increasing load times.

The exposed nodes may be generated from a runtime template store business object document template indicated at **700**, the same as shown at **700** in FIG. 7. The template **700** is translated into AP/runtime schemas as indicated at document template schema **840**, template variants schema **845**, template schema **850** and schemas **855**. In one embodiment, one schema **855** is provided for each table in the schema node representation. Transformation rules may be applied to expose the design time schema **810** and other nodes used during business configuration. Such transformation may transform the run time versions to provide an XML version for such use.

FIG. 9 is a block flow diagram **900** illustrating fine tuning of templates during business configuration activities. From a business adaptation catalog that provides multiple business options **905**, **910** under a business topic **915**, a user, such as a customer may select one or more options. Option A at **905** is indicated as selected at a check box **920**.

The selection of option A results in a configuration workspace **925** having multiple templates associated with a selected business configuration set loaded as indicated at **930** and **932** in a global fine tuning set **935**. The loaded sets correspond to sets assigned to the selected options.

Fine tuning may occur where a customer starts fine tuning via a fine tuning context **940** this is assigned to a fine tuning relevant option. Context **940** allows a customer to select templates. An application specific business configuration view **945** will thus select templates from the workspace **925**. From the view **945**, a customer can check and change the configuration data. A delta of the configuration made by the customer may be saved in the global fine tuning set.

In one embodiment, application specific business configuration view **945** includes a template business configuration reuse user interface as indicated at **1005** in FIG. 10. A global fine tuning set is indicated at **1010**, and comprises a representation of templates by business configuration set and template group. The templates are stored in an abstract format to allow invoking of a correct editor.

In one embodiment, reuse user interface **1005** is invoked with a template group as a context-filter for the global fine tuning set in the business configuration workspace **925**. The templates selected by this context may be displayed in the reuse user interface **1005**. If a template is added anew, it exists in the business configuration template reuse user interface **1005**. It may still not be persisted in the business configuration workspace **925**. Therefore, the user interface **1005** offers a function to send a notification after something has changed

along with the current ids and template names. When the business configuration view data is saved, it also invokes a save on the business configuration template reuse user interface.

Template content may be content of a runtime schema, so it is not part of a business configuration schema. The reuse user interface will have to deal with two separate schemas internally (in addition to the schema of the surrounding application business configuration view. In one embodiment, for transaction reasons, all content for the reuse user interface may be stored in a separate buffer within the reuse user interface, because multiple business configuration sets of the two schemas could be manipulated and potentially re-changed. Such sets may be managed via hashed-object lists in one embodiment.

The surrounding business configuration view may call a save function for its content and then call save in the reuse user interface and afterwards may call a do save to commit the changes to ensure that all changes are stored at the same time. In one embodiment, the reuse user interface provides the information if unsaved data is available and the surrounding business configuration view can ask the user if save should be applied.

In further embodiments, a cancel request results in a reversion back of the changes and initializes the reuse user interface again from the workspace/global fine tuning content. In one embodiment, XML template descriptions may be compressed prior to saving.

A template authoring architecture is shown generally at **1100** in FIG. **11**. The architecture **1100** invokes editors for authoring templates, as well as editing existing templates using plug-ins corresponding to the native editor for the template being edited. An application business configuration view **1105** includes the template business configuration reuse user interface that may be used to invoke a modal dialog at **1110** so that a wrapper is provided for each template to be edited. The modal dialog **1110** launches a server page, such as a Java server page (JSP) at **1115** with a universal resource locator (URL) plus SSO (single sign on). At **1120**, authoring is invoked through a host such as by ActiveX® type controls. Such controls allow developers to create software components that perform a particular function or a set of functions. Software may encapsulate functionality as controls so that the functionality can be embedded in other applications, such as on web pages. In further embodiments, editing functions may be seamlessly integrated in a host application.

Several different authoring abstractions are provided for native programs, such as Adobe Designer, Excel, and many word processing programs indicated at **1125**, **1130** and **1135** respectively. Data from the authoring abstraction **1120** may be passed back to the JSP page at **1115** and may be temporarily stored at a temp store at **1140**. A returned storage ID may be provided by the temp store **1140** as indicated at **1145**. A portal event may be invoked as indicated at **1150** from JSP page **1115**, and the dialog may be closed as indicated at **1155**. Template business configuration reuse user interface **1005** may access the temp store **1140** to retrieve data corresponding to the edited template. A save may be invoked at **1160**, and the template business configuration set data may be saved to configuration workspace **925**. In embodiments where communication is permitted back and forth between external components, direct back eventing or notification to the main and original application user interface may be used in place of the temp store **1140**.

In one embodiment, template authoring as illustrated at **1100** is a business configuration view reuse plug-in, which may be plugged into an existing business configuration view.

There are at least three modes for different use cases. In a first mode a list reuse user interface illustrated at **1200** in FIG. **12** provides a list of templates within a container or a fixed passed list of template-ids is provided. An overview of the templates may be provided in the list mode user interface **1200**, and templates or language versions may be edited, added, or deleted as indicated at **1205**, **1210** and **1215** respectively. Different regions and industry variants of the templates may also be added or deleted in various embodiments. A language selector **1220** is provided in one embodiment, along with region **1225** and industry **1230** selector lists from which template variants and context attributes may be selected.

In a further embodiment, a single view mode of one template instance may be provided to support BTM cases, fax cover letters for output management or other situations where a list of templates is not required but the application context knows already of one template. In a third mode, a list of template and single edit details for text support is provided. Multiple templates in a template group may be listed to allow in place editing. In these different modes, blank templates may be provided for copying and schema storage. Existing templates may be edited and stored as variants, or as new templates.

In one embodiment, the business configuration template authoring architecture or framework (TAF) provides a mechanism to register plug-in authoring user interfaces for specific mime-types. The plug-ins may contain controls, such as ActiveX controls to embed native design tools, such as Adobe Designer, Excel, Word, etc. For a plug-in, TAF provides a base implementation with functions to invoke modal/dialog **1110** with parameters from the generic TAF business configuration view to pass templates, schemas, etc. Further, communications back to the generic TAF business configuration view **1105** are provided via events to pass changes to templates and schemas back. In one embodiment, the functions are JSP based, allowing the use of such controls.

Template authoring using Adobe plug-ins inherits from the TAF plug-in base implementation. Multiple schema files may be passed to the Adobe Designer and hook in to close/save of the Adobe Designer to return changed templates. With respect to template authoring using Excel, uploads and downloads in the generic TAF business configuration view **1105** are provided. Automation of Excel is similar to the Adobe TAF plug-in, as is automation of text based editors such as Word.

Templates use schemas, which may be considered as binding information which describes how placeholders in a document template are replaced by real business object data for a language variant of the document template. The schemas take into account the organization of the database and identify how to retrieve data for the placeholders. In one embodiment, the data is stored in business objects in a backend that utilizes multi-node hierarchical deep schemas to identify fields in a database. The deep schema is hierarchical in nature, and works well at the database level to access data. However, when creating templates in a design time environment, such deep schemas are not conducive to being easily understood by users, and also may have structures which vary with different database implementations.

In one embodiment, a schema transformation is utilized to convert from the deep schema to a flat schema and back. The flat schema may be used in the design time environment, while the deep schema remains intact for the database, or what is referred to as the back end of a business management system. An example of a schema builder that provides schema transformations is illustrated in block form at **1300** in FIG. **13**. A read service **1305** and a write service **1310** are used to read and write data to and from a backend database. The read and

write services **1305** and **1310** work with deep schemas as indicated at actions such as response **1315**, request **1320** and confirmation **1325**. In one embodiment, a root level node has three next levels, A, B and C. Node C has three further nodes at yet a further level, labeled a, b and c. Thus, the deep schema structure in this simple example has three levels, a root, and two deeper levels.

Several XML transformation modules **1330**, **1335** and **1340** are coupled to the actions for providing transformation back and forth between a flat schema representation **1350**, and the deep schema structures. The transformation modules are labeled as XSLT (Extensible Stylesheet Language Transformation) modules, and operate to track the path in the original deep schema, and exposes "a" as belonging to "C" and is a sub element. Thus when a deep schema is transformed to a flat schema, meta data is tracked to expand the flat schema back out to the deep schema. The flat schema may be easily converted to an XML map as indicated at **1355** and to various other formats for use in editors, such as a spreadsheet **1360**, allowing users to view the data in a very user friendly manner, and as a resulting document produced from a template may appear.

In one embodiment, response action **1315** interfaces with read service **1305** to retrieve data from a database using a deep schema. The data is then transformed at **1330** to the flat schema. Similarly, when a write request **1320** is processed, the flat schema is transformed into the deep schema at **1335**, and upon confirmation **1325** by the write service **1310**, the deep schema is transformed back into the flat schema at **1340**.

Schema builder **1300** operates to build a simplified flat schema out of a potentially complex enterprise service repository business object model for use in design time. Such complex object models can be very difficult to comprehend by ordinary users. Vertical schema reduction allows the inclusion or exclusion of associations, nodes and data structures of the complex object model, while keeping track of metadata to enable conversion back and forth. In one embodiment, the data is pushed up to consolidate all the levels on a single node level. A horizontal schema reduction allows the simplification of complex nested structures. The results of the schema transformations may be provided as re-usable net components in one embodiment. Hooks may also be provided for applications to enrich schema nodes with custom markups. The generated schemas may be used by a generic data provider to retrieve business object instances at run time.

A schema building process is illustrated in flow chart form at **1400** in FIG. **14**. At **1405**, a business object model is selected. In one embodiment the business object structure is visualized, illustrating internal and external associations to enhance the visual representation at **1410**. A top level of the data structure definition of the business object nodes may be included in the visual representation. Nodes may be selected for inclusion at **1415**. As indicated in FIG. **13**, in vertical schema building, each node of the visual representation of a business object node is associated with a checkbox. Only checked nodes are included in the custom schema in one embodiment. With respect to horizontal schema building, nested complex structures may be collapsed by virtually inserting them at a higher level of the business object structure as indicated at **1420**. Such an operation is also indicated at request **1320** in FIG. **13**. Cardinality constraints may be automatically enforced. Meta data is kept as indicated at **1425** to identify where data was in the original deep schema tree structure. The schema building process **1400** assists in optimization and providing a simplified view of the data.

In one embodiment, XSD (XML schema definitions) annotations are used to deliver the transformation. Other notations,

such as SAP notations may be used to mark the transformations as indicated in FIG. **15** at **1500** and FIG. **16** at **1600**, which are example schema definitions. The transformation may be generated at run time. In further embodiments, a creator of the schema may mark the transformation. For simple scenarios, such mark ups may be considered in normal services, such as read and write services **1305** and **1310** respectively in FIG. **13**.

In FIG. **15** at **1500**, an element, "Customer" is shown for a flat to deep transformation. A root in a target is identified at **1505**, and a destination element is indicated at **1510** at the same level as the root. In FIG. **16** at **1600**, an element, "Telephone1" is shown for a flat to deep transformation to A, which is a child node of Telephone. The destination, which may be at a different level, is identified at **1605**.

FIG. **17** provides some screen shots illustrating example user interactions to transform source XML based on transform notations in the XSD, such as those illustrated in FIGS. **15** and **16**. The output in one embodiment is the transformed XML at **1705**, resulting from a user selecting the XSD and source XML at **1710** and pressing a process button at **1715**. This is just one example interface illustrating simple selection of files and initiation of processing. Many other interfaces, including simple command lines or drag and drop interactions may be used in further embodiments.

The Abstract is provided to comply with 37 C.F.R. §1.72(b) to allow the reader to quickly ascertain the nature and gist of the technical disclosure. The Abstract is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims.

What is claimed is:

1. A template authoring system comprising:

a computer system executing an application business component view that provides an interface to a user to select templates, wherein the templates are business configuration objects stored on a storage device that include variants, variant content, and schemas identifying information in a database corresponding to placeholder variables in the variant content to create customized documents, and wherein the templates are organized as nodes organized in accordance with a multi-node hierarchical deep schema;

the computer system executing a dialog that provides a wrapper for each template to be edited by launching a server page; and

the computer system executing a host using controls to provide authoring abstractions for selected authoring applications to edit the templates while abstracting the underlying multi-node hierarchical deep schema to a flat schema and converting the flat schema to a markup language map such that the template appears as multiple documents it will produce when customized using information in the database, wherein abstracting the deep schema to the flat schema includes collapsing a plurality of nodes of the multi-node hierarchical deep schema by inserting the nodes at a higher level of the hierarchical deep schema.

2. The template authoring system of claim 1 wherein the host controls comprise web page embedded controls.

3. The template authoring system of claim 1 and further comprising a server page launched from the dialog that invokes the host.

4. The template authoring system of claim 3 and further comprising a temporary storage device that stores data from the server page.

15

5. The template authoring system of claim 4 wherein the temporary storage device is coupled to the application business component.

6. The template authoring system of claim 5 and further comprising a configuration workspace to which stores data from the temporary storage device.

7. The template authoring system of claim 6 wherein the server page invokes a portal event when editing is complete to close the dialog, retrieve data from the temporary storage device and save template data to the configuration workspace.

8. The template authoring system of claim 1 plug-in wherein the host provides authoring abstractions by providing active x controls to embed native design tools.

9. The template authoring system of claim 8 wherein the native design tools include spreadsheet editors, word processing editors and pixel based editors.

10. A computer implemented method of authoring templates in a business management system, the method comprising:

providing an interface to a user to select templates via an application business component view, wherein the templates are business configuration objects stored on a storage device that include variants, variant content, and schemas identifying information in a database corresponding to placeholder variables in the variant content to create customized documents, and wherein the templates are organized as nodes organized in accordance with a multi-node hierarchical deep schema; and

providing authoring abstractions for selected authoring applications to edit the templates via a host using controls while abstracting the underlying deep schema to a flat schema such that the template appears as documents it will produce when customized, wherein abstracting the deep schema to the flat schema includes collapsing a plurality of nodes of the multi-node hierarchical deep schema by inserting the nodes at a higher level of the hierarchical deep schema.

11. The method of claim 10 wherein the host controls comprise web page imbedded controls.

16

12. The method of claim 10 and further comprising a launching a server page to invoke the host.

13. The method of claim 12 and further comprising storing data from the server page in a temporary storage.

14. The method of claim 13 wherein the server page invokes a portal event when editing is complete to close the dialog, retrieve data from the temporary storage and save template data to a configuration workspace.

15. The method of claim 10 wherein the host provides authoring abstractions by providing active x controls to embed native design tools.

16. The method of claim 15 wherein the native design tools include spreadsheet editors, word processing editors and pixel based editors.

17. A non-transitory computer readable storage device having instructions that when executed by a computer cause the computer to perform a method of authoring templates in a business management system, the method comprising:

providing an interface to a user to select templates via an application business component view, wherein the templates are business configuration objects stored on a storage device that include variants, variant content and schemas identifying information in a database corresponding to placeholder variables in the variant content to create customized documents, and wherein the templates are organized as nodes organized in accordance with a multi-node hierarchical deep schema; and

providing authoring abstractions for selected authoring applications to edit the templates via a host using controls while abstracting the underlying deep schema to a flat schema such that the template appears as documents it will produce when customized, wherein abstracting the deep schema to the flat schema includes collapsing a plurality of nodes of the multi-node hierarchical deep schema by inserting the nodes at a higher level of the hierarchical deep schema.

* * * * *