

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199736767 B2
(10) Patent No. 736886

(54) Title
Absorbent product

(51)⁶ International Patent Classification(s)
A61F 013/46

(21) Application No: **199736767** (22) Application Date: **1997 .09 .01**

(30) Priority Data

(31) Number	(32) Date	(33) Country
9603634	1996 .09 .02	BR

(43) Publication Date : **1998 .03 .05**

(43) Publication Journal Date : **1998 .03 .05**

(44) Accepted Journal Date : **2001 .08 .02**

(71) Applicant(s)
Johnson and Johnson Industria E Comercio Ltda

(72) Inventor(s)
Antonio Carlos Ribeiro De Carvalho; Paulo Roberto Amaral Serra

(74) Agent/Attorney
BALDWIN SHELSTON WATERS, Level 21,60 Margaret Street, SYDNEY NSW 2000

(56) Related Art
US 3881489
WO 96/01095

ABSTRACT

The present invention refers to an absorbent product, especially a sanitary napkin (1), including an absorbent body (2) characterised by having a first portion (5) of perforated plastic film (8) and, on the surface (13) adapted to come into contact with the user's body, a longitudinal layer which includes a second central portion (7) of woven or non-woven material on the body contact surface (13), the first portion (5) being at least near the side edges (11) of the absorbent body (2) at the contact surface and having the thickness of the absorbent body (2).

1
2
3
4
5
6
7
8
9
10
11
12
13

- 1 -

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

Name of Applicant/s: Johnson & Johnson Industria E Comercio Ltda

Actual Inventor/s: Antonio Carlos Ribeiro De CARVALHO and Paulo Roberto Amaral SERRA

Address of Service: SHELSTON WATERS
60 MARGARET STREET
SYDNEY NSW 2000

Invention Title: "ABSORBENT PRODUCT"

The following statement is a full description of this invention,
including the best method of performing it known to us:-

(File: 20040.00)

Title: "ABSORBENT PRODUCT".

The present invention refers to an absorbent product, preferably a disposable sanitary napkin for women, with a top layer that comes in contact with the user's body - with a longitudinal central band made of non-fabric material and a perforated plastic film covering the rest of the top layer, the sides of the above mentioned napkin and possibly the bottom layer.

As is known in the art, feminine sanitary napkins are generally disposable and used to collect and contain vaginal exudates, especially menstrual bleeding, intermenstrual secretions and even urine in cases of incontinence.

Typically, these sanitary napkins are made up of an elongated body made of absorbent material, covered by an external at least partially liquid permeable layer, at least on the top side which comes into contact with the user's body.

As the above mentioned sanitary napkin becomes saturated with liquid, the possibility of leaking increases, because of two main reasons:

- new discharges of liquid will have less chance of being absorbed, as there is less absorbent material available; and
- part of the liquid inside the absorbent material may eventually be exuded, especially when the user moves, compressing and deforming the sanitary napkin.

Some prior art patent documents refer to sanitary napkins or diapers which have a perforated plastic film in the central longitudinal area on the part that comes into contact with the user's body, and non-woven on that same side in the areas near the edges and throughout the thickness of the product. WO 9312745 and WO 9510254 of Moelnlycke and EP 523683 and EP 523719 of Kimberly-Clark can be cited.

These documents have as a common denominator the concern with leaking and comfort. They propose perforated plastic films on the user's body contact surface, as being presumably more efficient for retaining liquids, and non-wovens at the sides of the absorbent product, as being presumably more pleasant to touch the user's skin. Nonetheless, it is known that the plastic film surface is a reason for discomfort, for those users who complain about the feeling of sweater (thus prejudicing comfort) while the non-woven at the sides of the product is a substrate which may potentially lead liquids through its structure which is provided with interstices (whereby protection against leaking may be improved).

This technology is different from that of the present invention, and there is no hint in those documents that show the invention results from the former.

Still referring to the prior art, GB patent application 2.262.235 of 11/27/92 discloses that the intermediate body of absorbent material is wrapped with a bottom liquid permeable film, a top perforated plastic film and side bands of impermeate embossed plastic.

5 The above discussion of the prior art is not to be construed as an admission with regard to the common general knowledge in Australia.

It is an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative.

According to a first aspect the invention provides an absorbent product adapted to
10 be worn in a user's undergarment including an absorbent body having a top, body-facing side and a bottom, undergarment-facing side, and a pair of opposite longitudinally extending sides, the top, body-facing side being covered by a surface layer adapted to come into contact with the user's body, the surface layer having opposite longitudinally extending first portions adjacent to and covering the opposite longitudinally extending
15 sides of the absorbent body and a centrally located, longitudinally extending second portion, wherein the first portions are perforated plastic film and the second portion is a non-woven fabric, and wherein the longitudinally extending second portion covers a part of the opposite longitudinally extending sides of the absorbent body.


Some observations must be made on the terms used in the former paragraph:

- 20 - "absorbent product" includes any materials that are absorbent per se or that cause absorbency, the most common of which are papel, wood pulp and hydrocoloids.
- "elongated" includes both flat products and products that are curved before use.
- "longitudinal layer" means that the layer has its length aligned with the length of the absorbent product, but not necessary of the same width or length.
25 - "central portion" refers to a generically spectral shape referring to the imaginary central longitudinal axis along the length of the absorbent product.
- "Non-woven" includes, needled, hydrophobic or hydrophilic non-wovens that are chemically or thermally bonded, with or without openings, of natural, artificial or synthetic fibers or mono or multilayered mixtures thereof. It is preferable to use a thermobonded web of polypropylene carded fibers.
- "perforated plastic film" refers to any thin films of polymeric material, for example, polyethylene, polyurethane and mixtures thereof and/or of other polymers, or



laminates of more than one material, having any thickness or color. The openings may have any size or geometry. The film can have macro or micro protrusions embossed in the non-perforated areas.

2025
1000

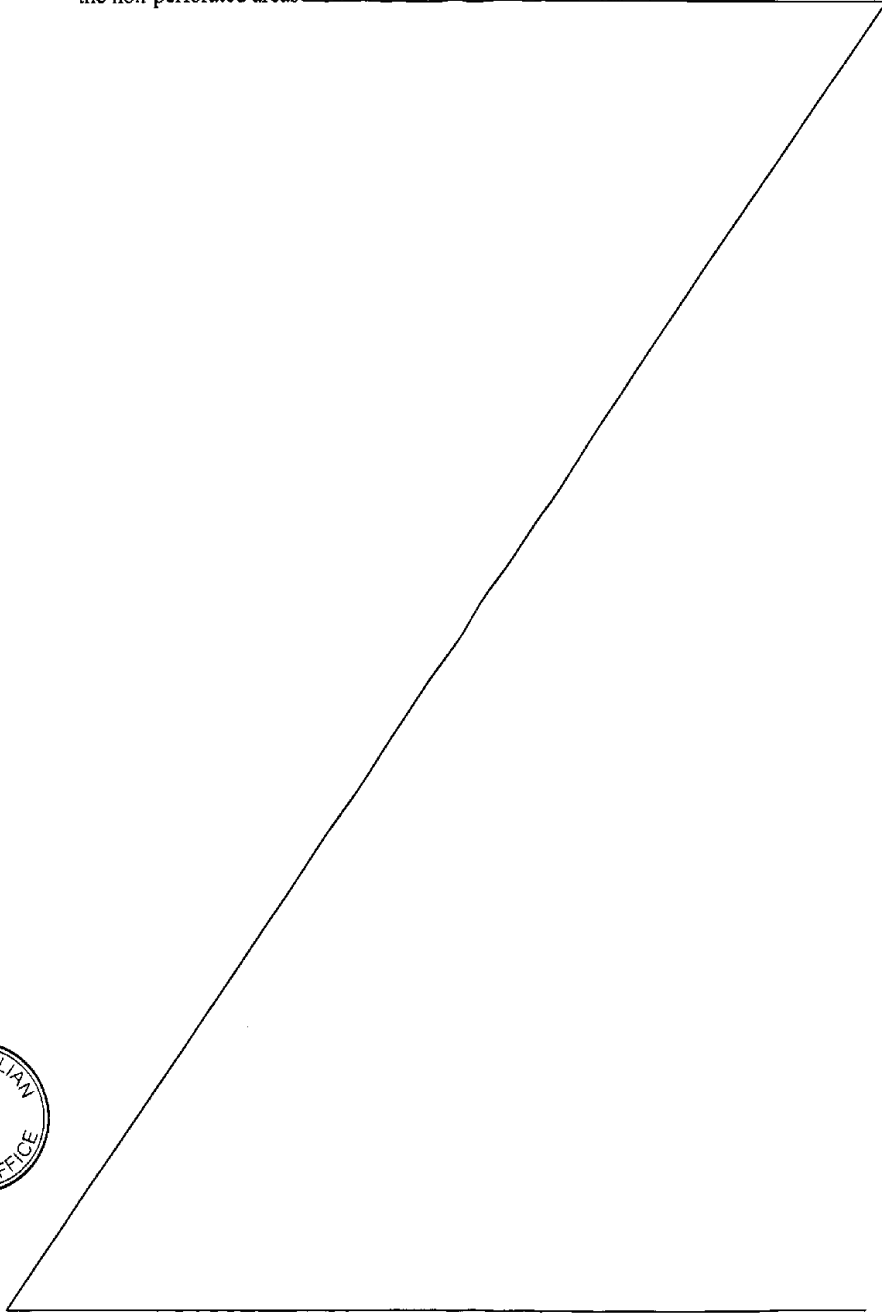

- "first part at least near the side edges of the absorbent body" means a straight or otherwise strip, adjacent or partially superimposed or overlaid on a first part of woven/non-woven fabric. It is evident that this absorbent body has two side edges whereby there are two strips, of equal widths or otherwise, the lengths of which, when summed, preferably occupy approximately 1/5 to 3/5 of the width of the surface that comes into contact with the body, reaching up to 7/8 of this width.

- "and having the thickness of the absorbent body" means that the perforated plastic film, that already covers part of the surface in contact with the body, also covers the side of the absorbent body.

The perforated plastic film that constitutes the first portion of that longitudinal layer is a substrate which begins near the side edges and on the surface of the absorbent body, and preferably continues throughout the entire thickness of the body, covering the sides as well. Optionally, the plastic film covers the back part of the absorbent body, that is, the surface opposite that which comes into contact with the user's body and which touches the underwear.

It is important to highlight one of the advantages of the present invention over the prior art in which a central longitudinal strip of the surface of the sanitary napkin in contact with the user's body comprises a perforated plastic film, sandwiched between non-woven fabric adjacent the edges of the absorbent body. Two factors seem to favor leaking:

1. Liquid falling on the non-woven/plastic film interfaces will tend to flow towards the non-wovens (at the edges) which are less liquid repellent than the plastic film (in the center).
2. The absorbent body, when wet and squeezed between the user's legs, can force the liquid towards the longitudinal edges covered by non-woven fabric, that is to say, it is little resistant to leakage.

The product of the present invention eliminates or greatly minimizes these factors which are favorable to leakage, that is to say:

1. Liquid which reaches the non-woven/plastic film interfaces will go towards the less repellent material, or non-woven. As this is found in the center of the surface of the absorbent body, the liquid to be absorbed will tend to move away from the edges, eliminating leaks. It is obvious that the liquid that only contacts the perforated plastic film will tend to go through the orifices towards the absorbent material.

2. The absorbent body, when wet and pressed between the user's legs, may force the liquid towards perforated plastic film at the edges, which is less likely to absorb the liquid than the non-woven. This aspect is enhanced if the holes are conical, that is to say, if their

diameter decreases closer to the absorbent body - and this is the form of the plastic film that is preferred in this invention.

The invention will now be described in detail based on a preferred embodiment illustrated in the accompanying drawings, in which:

5 - Figure 1 is a perspective view of a preferred embodiment of a in accordance with this invention;

- Figure 2 is a cross sectional view of the sanitary napkin illustrated in Figure 1.

10 It can be observed from Figures 1 and 2 that the sanitary napkin 1 of this invention is made of a substantially flat and elongated, approximately parallelepiped shaped absorbent body 2, covered by an external layer 3. According to this invention, this external layer 3 has a first portion 5 made of a plastic film containing orifices 6, and a second portion 7 which comes into direct contact with the user's pubic region (not illustrated). This second portion 7 is made up of a layer of non-woven material with orifices 8.

15 The first portion 5 of layer 3 extends throughout the lower face of napkin 1, which faces the user's underwear, and also along the side walls 11 and a longitudinal stretch 12 of the superior face 13 of napkin 1. The second portion 7 extends along the entire upper central longitudinal region 13, which in use contacts the skin. The first and second portions 5 and 7 overlap where they are joined together by means of an adhesive strip along region 12.

20 To prevent leaking at its bottom, absorbent body 2 is protected with a liquid-impermeable barrier (not shown) at its lower face 10, between body 2 and the first portion 5 of layer 3.

According to an alternative embodiment, the first portion 5 could be a non-woven covering that is more hydrophobic than the material of second portion 7.

25 As the plastic film that covers the first portion 5 is opaque, the presently proposed construction is advantageous since it provides good masking, that is to say, it also partially hides any blood at the edges of the absorbent body 2, minimizing the impression of imminent leaking caused in such circumstances.

30 The absorbent body 2 can be made from any material that is absorbent and/or retains body exudates, such as wood pulp, bamboo fibers, cane bagasse or corn stalk or corn cob, turf moss, absorbent foams or sponges, synthetic or polymeric fibers, superabsorbent materials (that form hydrogels when in contact with liquids) or combinations of such materials.

As is known in the art, bottom face 10 can be at least partially coated with an adhesive (not illustrated) to ensue attachment of the sanitary napkin to the user's underwear. A removable sheet (also not illustrated) protects the adhesive until the product is used. This



adhesive can be in the form of one or more be longitudinal or transverse strips or bands, continuous or non-continuous lines, etc.

The present invention also does not exclude alternative embodiments in which the sanitary napkin has side flaps, used better to accommodate the napkin on the user's underwear.

3 It should be borne in mind that the sanitary napkin described above is merely a preferred embodiment of the present invention, the true scope of which is defined in the following claims.

U
S
P
A
T
E
N
T

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOW:

1. An absorbent product adapted to be worn in a user's undergarment including an absorbent body having a top, body-facing side and a bottom, undergarment-facing side, and a pair of opposite longitudinally extending sides, the top, body-facing side being
5 covered by a surface layer adapted to come into contact with the user's body, the surface layer having opposite longitudinally extending first portions adjacent to and covering the opposite longitudinally extending sides of the absorbent body and a centrally located, longitudinally extending second portion, wherein the first portions are perforated plastic film and the second portion is a non-woven fabric, and wherein the longitudinally
10 extending second portion covers a part of the opposite longitudinally extending sides of the absorbent body.
2. The absorbent product according to claim 1, wherein the non-woven fabric is a thermobonded web of carded polypropylene fibers.
3. The absorbent product according to claim 2, wherein the non-woven fabric is
15 hydrophilic.
4. The absorbent product according to claim 1, wherein the first portions of the surface layer extend to the bottom, undergarment-facing surface of the absorbent product.
5. The absorbent product according to claim 1, wherein the first portions of the
20 surface layer cover the side edges of the absorbent body and up to approximately 7/8 of the top, body-facing surface of the absorbent body.
6. The absorbent product according to claim 1 wherein the first portions of the surface layer cover the side edges of the absorbent product between 1/5 to 3/5 of the top, body-facing surface of the absorbent body.
- 25 7. The absorbent product according to claim 1, wherein the absorbent product is a sanitary napkin.

DATED this 16th Day of May, 2000

JOHNSON & JOHNSON INDUSTRIA E COMERCIO LTDA



Attorney: CHARLES W. TANSEY
Registered Patent Attorney of
The Institute of Patent and Trade Mark Attorneys of
Australia of BALDWIN SHELSTON WATERS

36767 36767

36767/97

- 1/1 -

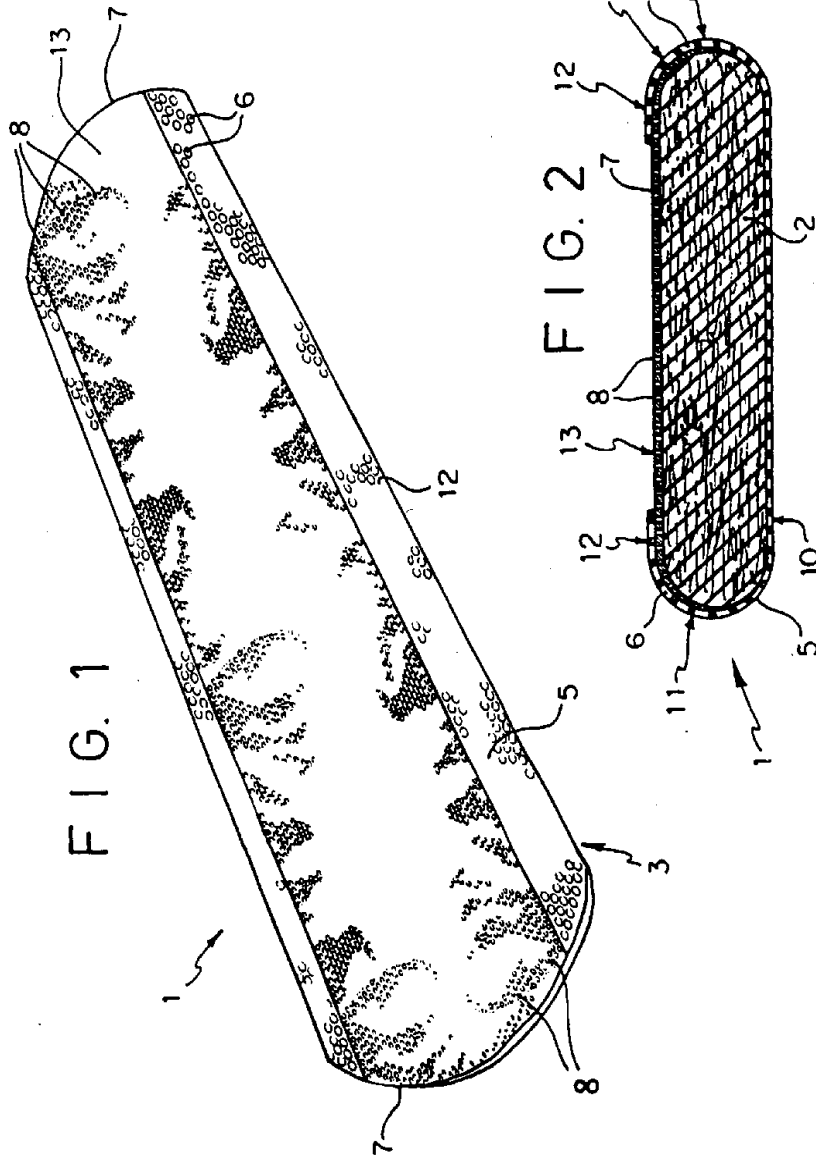


FIG. 1

FIG. 2