



US007904404B2

(12) **United States Patent**  
**Patoskie**

(10) **Patent No.:** **US 7,904,404 B2**  
(45) **Date of Patent:** **\*Mar. 8, 2011**

(54) **MOVEMENT OF AN AGENT THAT UTILIZES AS-NEEDED CANONICAL RULES**

(76) Inventor: **John P. Patoskie**, Allen, TX (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.  
This patent is subject to a terminal disclaimer.

(21) Appl. No.: **12/647,964**

(22) Filed: **Dec. 28, 2009**

(65) **Prior Publication Data**

US 2010/0223210 A1 Sep. 2, 2010

**Related U.S. Application Data**

(63) Continuation of application No. 11/645,190, filed on Dec. 22, 2006, now Pat. No. 7,660,780.

(51) **Int. Cl.**  
**G06F 15/18** (2006.01)

(52) **U.S. Cl.** ..... **706/45**; 706/62; 706/10; 706/47

(58) **Field of Classification Search** ..... 706/10, 706/45, 47, 62

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

- 4,714,995 A 12/1987 Materna et al.
- 5,465,111 A 11/1995 Fukushima et al.
- 5,495,533 A 2/1996 Linehan et al.
- 5,524,253 A 6/1996 Pham et al.
- 5,604,800 A 2/1997 Johnson et al.
- 5,675,711 A 10/1997 Kephart et al.
- 5,721,912 A 2/1998 Stepczyk et al.

- 5,778,395 A 7/1998 Whiting et al.
- 5,812,997 A 9/1998 Morimoto et al.
- 5,859,911 A 1/1999 Angelo et al.
- 5,930,798 A 7/1999 Lawler et al.
- 5,982,891 A 11/1999 Ginter et al.
- 6,038,500 A 3/2000 Weiss
- 6,055,562 A 4/2000 Devarakonda et al.
- 6,065,040 A 5/2000 Mima et al.
- 6,088,689 A 7/2000 Kohn et al.
- 6,113,650 A 9/2000 Sakai
- 6,134,580 A 10/2000 Tahara et al.
- 6,134,660 A 10/2000 Boneh et al.
- 6,154,777 A 11/2000 Ebrahim
- 6,172,986 B1 1/2001 Watanuki et al.
- 6,199,195 B1 3/2001 Goodwin et al.
- 6,202,060 B1 3/2001 Tran
- 6,209,124 B1 3/2001 Vermeire et al.
- 6,230,309 B1 5/2001 Turner et al.
- 6,233,601 B1 5/2001 Walsh
- 6,256,773 B1 7/2001 Bowman-Amuah
- 6,272,478 B1 8/2001 Obata et al.

(Continued)

**FOREIGN PATENT DOCUMENTS**

JP 2005190103 7/2005

**OTHER PUBLICATIONS**

"Advisory Action", U.S. Appl. No. 11/086,120, (May 4, 2010), 3 pages.


(Continued)

*Primary Examiner* — Michael B. Holmes  
*Assistant Examiner* — Ola Olude-Afolabi

(57) **ABSTRACT**

Various embodiments enable an agent that utilizes a first, as-needed canonical rule set in a first execution environment to be moved to a second execution environment where the agent utilizes a second, as-needed canonical rule set.

**27 Claims, 25 Drawing Sheets**

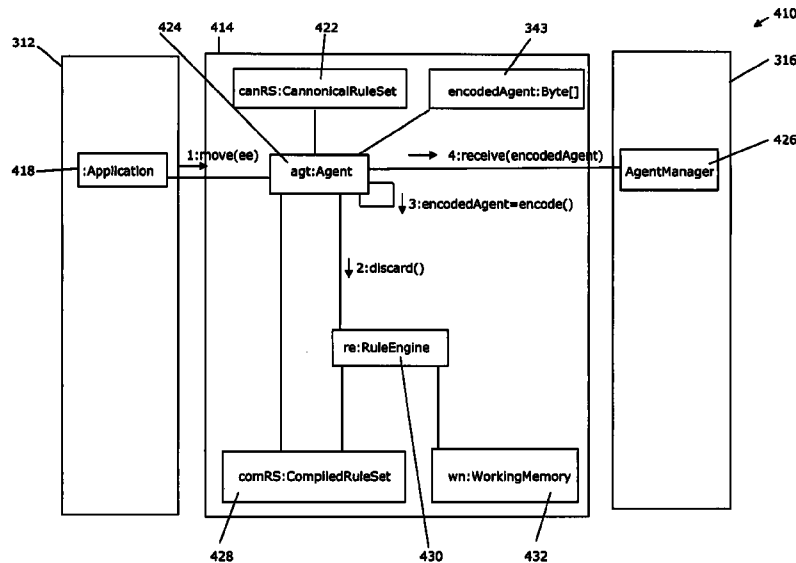

U.S. PATENT DOCUMENTS						
			7,664,721	B1	2/2010	Hauser
6,282,563	B1	8/2001	7,698,243	B1	4/2010	Hauser
6,282,697	B1	8/2001	7,702,602	B1	4/2010	Hauser
6,304,556	B1	10/2001	7,702,603	B1	4/2010	Hauser
6,330,677	B1	12/2001	7,702,604	B1	4/2010	Hauser
6,343,265	B1	1/2002	7,774,789	B1	8/2010	Wheeler
6,349,343	B1	2/2002	7,810,140	B1	10/2010	Lipari et al.
6,389,462	B1	5/2002	7,823,169	B1	10/2010	Wheeler
6,438,744	B2	8/2002	7,840,513	B2	11/2010	Hauser
6,442,537	B1	8/2002	7,844,759	B1	11/2010	Cowin
6,452,910	B1	9/2002	2001/0029526	A1	10/2001	Yokoyama et al.
6,477,372	B1	11/2002	2001/0051515	A1	12/2001	Rygaard
6,496,871	B1	12/2002	2001/0056425	A1	12/2001	Richard
6,600,430	B2	7/2003	2002/0016912	A1	2/2002	Johnson
6,600,975	B2	7/2003	2002/0032783	A1	3/2002	Tuatini
6,611,516	B1	8/2003	2002/0035429	A1	3/2002	Banas
6,629,032	B2	9/2003	2002/0091680	A1	7/2002	Hatzis et al.
6,629,128	B1	9/2003	2002/0115445	A1	8/2002	Myllymaki
6,662,642	B2	12/2003	2002/0116454	A1	8/2002	Dyla et al.
6,671,680	B1	12/2003	2002/0159479	A1	10/2002	Watanuki et al.
6,687,761	B1	2/2004	2002/0174222	A1	11/2002	Cox
6,701,381	B2	3/2004	2002/0196771	A1	12/2002	Vij et al.
6,714,844	B1	3/2004	2003/0009539	A1	1/2003	Hattori
6,738,975	B1	5/2004	2003/0018950	A1	1/2003	Sparks et al.
6,744,352	B2	6/2004	2003/0023573	A1	1/2003	Chan et al.
6,744,358	B1	6/2004	2003/0033437	A1	2/2003	Fischer et al.
6,744,820	B1	6/2004	2003/0046377	A1	3/2003	Daum et al.
6,768,417	B2	7/2004	2003/0046432	A1	3/2003	Coleman et al.
6,816,452	B1	11/2004	2003/0051172	A1	3/2003	Lordemann et al.
6,831,375	B1	12/2004	2003/0055898	A1	3/2003	Yeager et al.
6,851,108	B1	2/2005	2003/0070071	A1	4/2003	Riedel et al.
6,862,443	B2	3/2005	2003/0101441	A1	5/2003	Harrison et al.
6,876,845	B1	4/2005	2003/0177170	A1	9/2003	Glass
6,879,570	B1	4/2005	2003/0191797	A1	10/2003	Gurevich et al.
6,895,391	B1	5/2005	2003/0191969	A1	10/2003	Katsikas
6,901,588	B1	5/2005	2003/0225789	A1	12/2003	Bussler et al.
6,904,593	B1	6/2005	2003/0225935	A1	12/2003	Rivard et al.
6,931,455	B1	8/2005	2004/0003243	A1	1/2004	Fehr et al.
6,931,623	B2	8/2005	2004/0015539	A1	1/2004	Alegria et al.
6,947,965	B2	9/2005	2004/0037315	A1	2/2004	Delautre et al.
6,951,021	B1	9/2005	2004/0044985	A1	3/2004	Kompalli et al.
6,957,439	B1	10/2005	2004/0044986	A1	3/2004	Kompalli et al.
6,963,582	B1	11/2005	2004/0044987	A1	3/2004	Kompalli et al.
6,981,150	B2	12/2005	2004/0064503	A1	4/2004	Karakashian et al.
6,985,929	B1	1/2006	2004/0078423	A1	4/2004	Satyavolu et al.
6,993,774	B1	1/2006	2004/0078687	A1	4/2004	Partamian et al.
7,010,689	B1	3/2006	2004/0082350	A1	4/2004	Chen et al.
7,043,522	B2	5/2006	2004/0088369	A1	5/2004	Yeager et al.
7,047,518	B2	5/2006	2004/0111730	A1	6/2004	Apte
7,055,153	B2	5/2006	2004/0133656	A1	7/2004	Butterworth et al.
7,058,645	B2	6/2006	2004/0148073	A1	7/2004	Hawig et al.
7,062,708	B2	6/2006	2004/0153653	A1	8/2004	Abhyankar et al.
7,069,551	B2	6/2006	2004/0172614	A1	9/2004	Gallagher
7,127,259	B2	10/2006	2004/0194072	A1	9/2004	Venter
7,127,724	B2	10/2006	2004/0203731	A1	10/2004	Chen et al.
7,146,614	B1	12/2006	2004/0220952	A1	11/2004	Cheenath
7,146,618	B1	12/2006	2004/0221292	A1	11/2004	Chiang et al.
7,172,113	B2	2/2007	2005/0004727	A1	1/2005	Remboski et al.
7,174,533	B2	2/2007	2005/0030202	A1	2/2005	Tsuboi
7,197,742	B2	3/2007	2005/0090279	A9	4/2005	Witkowski et al.
7,210,132	B2	4/2007	2005/0114832	A1	5/2005	Manu
7,213,227	B2	5/2007	2005/0141706	A1	6/2005	Regli et al.
7,225,425	B2	5/2007	2005/0144218	A1	6/2005	Heintz
7,228,141	B2	6/2007	2005/0163549	A1	7/2005	Shima et al.
7,231,403	B1	6/2007	2005/0172123	A1	8/2005	Carpentier et al.
7,237,225	B2	6/2007	2005/0246302	A1	11/2005	Lorenz et al.
7,293,261	B1	11/2007	2005/0256614	A1	11/2005	Habermas
7,376,959	B2	5/2008	2005/0256876	A1	11/2005	Eidson
7,475,107	B2	1/2009	2005/0262155	A1	11/2005	Kress et al.
7,477,897	B2	1/2009	2005/0273668	A1	12/2005	Manning
7,496,637	B2	2/2009	2005/0281363	A1	12/2005	Qi et al.
7,499,990	B1	3/2009	2006/0005177	A1	1/2006	Atkin et al.
7,502,615	B2	3/2009	2006/0031850	A1	2/2006	Falter et al.
7,506,309	B2	3/2009	2006/0040640	A1	2/2006	Thompson et al.
7,519,455	B2	4/2009	2006/0041337	A1	2/2006	Augsburger et al.
7,566,002	B2	7/2009	2006/0048145	A1	3/2006	Celli et al.
7,643,447	B2	1/2010	2006/0080646	A1	4/2006	Aman
7,660,777	B1	2/2010	2006/0090103	A1	4/2006	Armstrong et al.
7,660,780	B1	2/2010	2006/0111089	A1	5/2006	Winter et al.

2006/0112183 A1 5/2006 Corson et al.  
 2006/0121916 A1 6/2006 Aborn  
 2006/0123396 A1 6/2006 Fox et al.  
 2006/0143600 A1 6/2006 Cottrell et al.  
 2006/0149746 A1 7/2006 Bansod et al.  
 2006/0167981 A1 7/2006 Bansod et al.  
 2006/0173857 A1 8/2006 Jackson  
 2006/0190931 A1 8/2006 Scott et al.  
 2006/0200494 A1 9/2006 Sparks  
 2006/0206864 A1 9/2006 Shenfield et al.  
 2006/0220900 A1 10/2006 Ceskutti et al.  
 2006/0221901 A1 10/2006 Yaqub et al.  
 2006/0245406 A1 11/2006 Shim  
 2006/0256008 A1 11/2006 Rosenberg  
 2006/0272002 A1 11/2006 Wightman et al.  
 2007/0004432 A1 1/2007 Hwang et al.  
 2007/0015495 A1 1/2007 Winter et al.  
 2007/0026871 A1 2/2007 Wager  
 2007/0103292 A1 5/2007 Burkley et al.  
 2007/0112773 A1 5/2007 Joyce  
 2007/0223432 A1 9/2007 Badarinath  
 2007/0243880 A1 10/2007 Gits et al.  
 2008/0077667 A1 3/2008 Hwang et al.  
 2010/0161543 A1 6/2010 Hauser  
 2010/0235459 A1 9/2010 Wheeler

## OTHER PUBLICATIONS

- “Advisory Action”, U.S. Appl. No. 11/086,121, (Sep. 11, 2009), 3 pages.  
 “Final Office Action”, U.S. Appl. No. 11/495,053, (Mar. 17, 2010), 17 pages.  
 “Final Office Action”, U.S. Appl. No. 11/645,301, (May 12, 2010), 32 pages.  
 “Non Final Office Action”, U.S. Appl. No. 10/975,827, (Mar. 25, 2010), 19 pages.  
 “Non Final Office Action”, U.S. Appl. No. 11/439,059, (Mar. 26, 2010), 6 pages.  
 “Non Final Office Action”, U.S. Appl. No. 11/645,191, (May 5, 2010), 17 pages.  
 “Non Final Office Action”, U.S. Appl. No. 11/645,192, (May 4, 2010), 14 pages.  
 “Non Final Office Action”, U.S. Appl. No. 11/645,194, (Mar. 26, 2010), 26 pages.  
 “Non Final Office Action”, U.S. Appl. No. 11/645,196, (Apr. 28, 2010), 32 pages.  
 “Non Final Office Action”, U.S. Appl. No. 11/645,198, (Apr. 12, 2010), 14 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/645,195, (Apr. 15, 2010), 20 pages.  
 Adnan, Syed et al., “A Survey of Mobile Agent Systems”, CSE 221, Final Project, Jun. 13, 2000., 12 pages.  
 Baumann, J. et al., “Mole 3.0: A Middleware for Java-Based Mobile Software Agents”, (1998), 18 pages.  
 Bigus, J.P. et al., “ABLE: A toolkit for building multiagent autonomic systems”, IBM Systems Journal, vol. 41, No. 3, 2002.,(2002), 22 pages.  
 Brazier, F.M.T. et al., “Generative Migration of Agents”, Department of Computer Science, Faculty of Sciences, Vrije Universiteit Amsterdam; de Boelelaan 1081a, 1081 HV Amsterdam, The Netherlands {frances, bjo, steen, niek} @cs.vu.nl,(Aug. 2002), 4 pages.  
 Bursell, Michael et al., “Comparison of autonomous mobile agent technologies”, (May 12, 1997), 28 pages.  
 Christopoulou, Eleni et al., “An ontology-based context management and reasoning process for UbiComp applications”, Research Academic Computer Technology Institute, Research Unit 3, Design of Ambient Information Systems Group, N. Kazantzaki str., Rio Campus, 26500, Patras, Greece {hristope, goumop, kameas} @cti.gr,(Oct. 2005), 6 pages.  
 Hasegawa, Tetsou et al., “Inoperability for mobile agents by incarnation agents”, AAMAS; Melbourne, Australia.,(Jul. 14, 2003), 2 pages.  
 Jih, Wan-Rong et al., “Context-aware Access Control in Pervasive Healthcare”, Computer Science and Information Engineering, National Taiwan University, Taiwan. jih@agents.csie.ntu.edu.tw., {r93070, yjhsu} @csie.ntu.edu.tw,(2005), 8 pages.  
 Pauline, Siu Po Lam “Context-Aware State Management for Supporting Mobility in a Pervasive Environment”, A thesis submitted to The University of Hong Kong in fulfillment of the thesis requirement for the degree of Master of Philosophy.,(Aug. 2004), 106 pages.  
 Qui-Sheng, He et al., “A Lightweight Architecture to Support Context-Aware Obiquitous Agent System”, Department of Computer Science and Engineering, Fudan University, Shanghai 200433, Chain {hequisheng, situ} @fudan.edu.cn,(Aug. 2006), 6 pages.  
 Sterritt, Roy et al., “From Here to Autonomicity: Self-Managing Agents and the Biological Metaphors that Inspire Them”, (Jun. 2005), 8 pages.  
 Yu, Ping et al., “Mobile Agent Enabled Application Mobility for Pervasive Computing”, Internet and Mobile Computing Lab, Department of Computing, Hong Kong Polytechnic University, Hung Hom, Kowloon, Hong Kong {cspyu, csjcao, cswen} @comp.polyu.edu.hk.,(Aug. 2006), 10 pages.  
 “Advisory Action”, U.S. Appl. No. 11/086,121, (Sep. 11, 2009), 3 pages.  
 “Final Office Action”, U.S. Appl. No. 10/975,827, (Nov. 23, 2009), 17 pages.  
 “Final Office Action”, U.S. Appl. No. 11/052,680, (Oct. 5, 2009), 16 pages.  
 “Final Office Action”, U.S. Appl. No. 11/086,102, (Oct. 20, 2009), 13 pages.  
 “Final Office Action”, U.S. Appl. No. 11/086,120, (Feb. 23, 2010), 43 pages.  
 “Final Office Action”, U.S. Appl. No. 11/086,211, (Sep. 29, 2009), 18 pages.  
 “Final Office Action”, U.S. Appl. No. 10/975,146, (Dec. 1, 2009), 11 pages.  
 “Final Office Action”, U.S. Appl. No. 11/052,680, (Feb. 13, 2009), 16 pages.  
 “Final Office Action”, U.S. Appl. No. 11/086,120, (Apr. 14, 2009), 34 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/052,680, (Feb. 4, 2010), 12 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/086,101, (Sep. 2, 2009), 20 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/086,102, (Mar. 5, 2010), 15 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/086,121, (Dec. 30, 2009), 25 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/086,211, (Mar. 4, 2009), 17 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/439,059, (Oct. 30, 2009), 9 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/495,053, (Jun. 10, 2009), 13 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/645,197, (Feb. 24, 2010), 13 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/645,301, (Jan. 6, 2010), 25 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/645,303, (Feb. 8, 2010), 18 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 10/975,146, (May 26, 2009), 10 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 10/975,623, (Nov. 12, 2009), 8 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 10/975,827, (Apr. 7, 2009), 22 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/052,680, (May 6, 2009), 15 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/086,102, (Jun. 2, 2009), 7 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/086,120, (Aug. 13, 2009), 35 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/086,121, (Jun. 22, 2009), 26 pages.  
 “Non-Final Office Action”, U.S. Appl. No. 11/645,190, (Mar. 13, 2009), 12 pages.

- "Non-Final Office Action", U.S. Appl. No. 11/645,193, (Mar. 16, 2009), 12 pages.
- "Non-Final Office Action", U.S. Appl. No. 11/645,291, (Mar. 13, 2009), 12 pages.
- "Non-Final Office Action", U.S. Appl. No. 11/645,292, (Apr. 17, 2009), 13 pages.
- "Non-Final Office Action", U.S. Appl. No. 11/645,300, (May 11, 2009), 13 pages.
- "Non-Final Office Action", U.S. Appl. No. 11/645,302, (May 11, 2009), 13 pages.
- "Non-Final Office Action", U.S. Appl. No. 11/645,306, (Jun. 4, 2009), 15 pages.
- "Notice of Allowance", U.S. Appl. No. 10/975,623, (Feb. 23, 2010), 9 pages.
- "Notice of Allowance", U.S. Appl. No. 11/086,101, (Feb. 25, 2010), 9 pages.
- "Notice of Allowance", U.S. Appl. No. 11/645,190, (Sep. 17, 2009), 8 pages.
- "Notice of Allowance", U.S. Appl. No. 11/645,193, (Sep. 17, 2009), 8 pages.
- "Notice of Allowance", U.S. Appl. No. 11/645,291, (Oct. 1, 2009), 11 pages.
- "Notice of Allowance", U.S. Appl. No. 11/645,292, (Nov. 17, 2009), 9 pages.
- "Notice of Allowance", U.S. Appl. No. 11/645,300, (Nov. 18, 2009), 9 pages.
- "Notice of Allowance", U.S. Appl. No. 11/645,302, (Nov. 17, 2009), 8 pages.
- "Notice of Allowance", U.S. Appl. No. 11/645,306, (Nov. 17, 2009), 8 pages.
- "Notice of Allowance", U.S. Appl. No. 11/086,101, (Mar. 23, 2009), 7 pages.
- "Restriction Requirement", U.S. Appl. No. 11/645,191, (Jan. 28, 2010), 7 pages.
- "Restriction Requirement", U.S. Appl. No. 11/645,192, (Jan. 28, 2010), 6 pages.
- "Restriction Requirement", U.S. Appl. No. 11/645,198, (Jan. 28, 2010), 6 pages.
- "Restriction Requirement", U.S. Appl. No. 11/645,200, (Feb. 26, 2010), 8 pages.
- "Restriction Requirement", U.S. Appl. No. 10/975,623, (Jun. 9, 2009), 6 pages.
- "Restriction Requirement", U.S. Appl. No. 11/086,102, (Apr. 6, 2009), 7 pages.
- "Stuffit Deluxe", Aladdin Systems, (Jan. 1, 2004), 83 pages.
- Ballance, Robert A., et al., "The Pan Language-Based Editing System For Integrated Development Environments", *ACM* (Oct. 1990), pp. 77-93.
- Blackwell, John "Ramit—Rule-Based Alert Management Information Tool", *Thesis*, Florida State University College of Arts and Sciences, (2004), pp. 1-69.
- Bussler, Christoph "The Role of B2B Engines in B2B Integration Architectures", *ACM, Sigmod Record*, vol. 31, No. 1, (Mar. 2002), pp. 67-72.
- Dilts, David M., et al., "An Intelligent Interface to CIM Multiple Data Bases", *Proceedings of the 1990 ACM SIGBDP Conference on Trends and Directions in Expert Systems*, vol. 3, Issue 1., (Mar. 2004), pp. 491-509.
- Emmerich, Wolfgang et al., "TIGRA—An Architectural Style for Enterprise Application Integration", *IEEE*, (Jul. 2001), p. 567-576.
- Flanagan, Roxy "Graphic + Internet Related Tutorials Using Winzip", Retrieved from: <<http://www.autumnweb.com/Roxys/2Tutorials/4WinzipTutorial.html>> on Feb. 10, 2009, indexed by [www.archive.org](http://www.archive.org), (Oct. 30, 2008), 8 pages.
- Forte, "Feature Comparison of Agent and Free Agent", Retrieved from: <[www.forteinc.com/agent/features.php](http://www.forteinc.com/agent/features.php)> on Jan. 26, 2010, (2002), 3 pages.
- Gu, Tao et al., "Toward an OSGi-Based Infrastructure for Context-Aware Applications", *Pervasive Computing IEEE*, vol. 3, Issue 4. Digital Object Identifier 10.1109/MPRV.2004.19. (Oct.-Dec. 2004), 9 pages.
- Jandl, M. et al., "Enterprise Application Integration by means of a generic CORBA LDAP Gateway", *Proceedings of the 24th International Conference on Software Engineering*, (May 2002), p. 711.
- Lockemann, Peter C., "Agents and Databases: Friends or Foes?", *Proceedings of the 9th International Database Engineering & Application Symposium (IDEAS '05)*, (2005), 11 pages.
- Pantic, M. et al., "Simple Agent Framework: An Educational Tool Introducing the Basics of AI Programming", *Information Technology: Research and Education*, 2003. Proceedings. ITRE2003., (Aug. 2003), pp. 426-430.
- Russell, Stuart et al., "Artificial Intelligence: A Modern Approach", *Pearson*, (2003), pp. 5, 32-56, 449-454.
- Singh, V.K. et al., "DYSWIS: An Architecture for Automated Diagnosis of Networks", Operations and Management Symposium, 2008. NOMS 2008. IEEE, (Apr. 7-11, 2008), pp. 851-854.
- Stallings, William "ISDN and Broadband ISDN with Framw Relay and ATM", *Prentice-Hall*, (1999), p. 516.
- Sutherland, et al., "Enterprise Application Integration and Complex Adaptive Systems", *ACM* (Oct. 2002), pp. 59-64.
- Van Praet, J. et al., "Processor Modeling and Code Selection for Retargetable Compilation", *ACM, TODAES* vol. 6, Issue 3, (Jul. 2001), pp. 277-307.
- "Advisory Action", U.S. Appl. No. 11/495,053, (May 26, 2010), 3 pages.
- "Final Office Action", U.S. Appl. No. 11/086,102, (Jul. 1, 2010), 14 pages.
- "Final Office Action", U.S. Appl. No. 11/086,121, (Jun. 16, 2010), pp. 1-30.
- "Final Office Action", U.S. Appl. No. 11/052,680, (May 17, 2010), 12 pages.
- "Final Office Action", U.S. Appl. No. 11/645,303, (May 21, 2010), 32 pages.
- "Non Final Office Action", U.S. Appl. No. 11/645,200, (May 26, 2010), 34 pages.
- "Notice of Allowability", U.S. Appl. No. 10/975,146, (Jul. 13, 2010), 2 pages.
- "Notice of Allowance", U.S. Appl. No. 11/439,059, (Jul. 14, 2010), 12 pages.
- Bagci, et al., "Communication and Security Extensions for a Ubiquitous Mobile Agent System (UbiMAS)", *In Proceedings of CF 2005*, Available at <[http://portal.acm.org/ft\\_gateway.cfm?id=1062302&type=pdf&coll=GUIDE&dl=GUIDE&CFID=91857573&CFTOKEN=53726080](http://portal.acm.org/ft_gateway.cfm?id=1062302&type=pdf&coll=GUIDE&dl=GUIDE&CFID=91857573&CFTOKEN=53726080)>, (May 2005), pp. 246-251.
- Brandt, Raimund "Dynamic Adaptation of Mobile Code in Heterogenous Environments", *Der Technischen Universitat Munchen*, (Feb. 15, 2001), 76 pages.
- Karnik, Neeran M., et al., "Security in the Ajanta Mobile Agent System", *Softw. Pract. Exper.* 31, 4 (Apr. 2001), 301-329, (2001), 28 pages.
- Korba, Larry "Towards Secure Agent Distribution and Communication", *In Proceedings of the 32nd Annual Hawaii International Conference on System Science—vol. 8* (Jan. 5-8, 1999). HICSS. IEEE Computer Society, Washington, DC, 8059., (1999), 10 pages.
- Poggi, Agostino et al., "Security and Trust in Agent-Oriented Middleware", *OTM Workshops 2003: 989-1003*, (2003), 15 pages.
- Rosenberg, Jonathan et al., "Programming Internet Telephony Services", *IEEE Network*, (May/Jun. 1999), 8 pages.
- Walsh, Tom et al., "Security and Reliability in Concordia", *In Mobility: Processes, Computers, and Agents* ACM Press/Addison-Wesley Publishing Co., New York, NY, 524-534., (1999), 10 pages.
- "Advisory Action", U.S. Appl. No. 11/052,680, (Jul. 28, 2010), 3 pages.
- "Advisory Action", U.S. Appl. No. 11/645,303, (Jul. 28, 2010), 3 pages.
- "Final Office Action", U.S. Appl. No. 10/975,827, (Sep. 15, 2010), 22 pages.
- "Final Office Action", U.S. Appl. No. 11/645,192, (Sep. 15, 2010), 14 pages.
- "Final Office Action", U.S. Appl. No. 11/645,194, (Sep. 15, 2010), 28 pages.
- "Final Office Action", U.S. Appl. No. 11/645,196, (Sep. 22, 2010), 33 pages.

- "Final Office Action", U.S. Appl. No. 11/645,197, (Jul. 19, 2010), 16 pages.
- "Final Office Action", U.S. Appl. No. 11/645,198, (Sep. 16, 2010), 22 pages.
- "Non Final Office Action", U.S. Appl. No. 11/645,301, (Jul. 30, 2010), 18 pages.
- "Non Final Office Action", U.S. Appl. No. 11/645,303, (Aug. 19, 2010), 20 pages.
- "Notice of Allowance", U.S. Appl. No. 12/714,753, (Sep. 27, 2010), 7 pages.
- "Notice of Allowance", U.S. Appl. No. 11/495,053, (Aug. 31, 2010), 7 pages.
- "The Sims", *Sims, Electronic Arts*, (2000), 57 pages.
- "WOW, World of Warcraft", Wikipedia (online), Retrieved from Internet in 2010, <URL:[http://en.wikipedia.org/wiki/World\\_of\\_Warcraft](http://en.wikipedia.org/wiki/World_of_Warcraft)>, (2010), 28 pages.
- Barba, Rick "The Sims Prima's Official Strategy Guide", Prima Publishing; ISBN: 7615-2339-1, (2000), 98 pages.
- Chang, Yao-Chung et al., "All-IP Convergent Communications over Open Service Architecture", *2005 Wireless Telecommunications Symposium, IEEE*, 0-7803-8856, (2005), pp. 202-210.
- Erfurth, Christian et al., "Migration Intelligence for Mobile Agents", Cited by examiner in U.S. Appl. No. 11/645,192 on Sep. 15, 2010, (2001), 8 pages.
- Hinchey, Michael G., et al., "Formal Approaches to Agent-Based Systems", *2nd International Workshop FAABS*, (Oct. 2002), 291 pages.
- Taylor, T.L. "Does WoW Change Everything?", *Games and Culture*, vol. 1, No. 4, (Oct. 2006), 20 pages.
- "Advisory Action", U.S. Appl. No. 11/645,197, (Oct. 6, 2010), 3 pages.
- "Final Office Action", U.S. Appl. No. 11/645,200, (Oct. 21, 2010), 34 pages.
- "Final Office Action", U.S. Appl. No. 11/645,191, (Oct. 28, 2010), 19 pages.
- "Non Final Office Action", U.S. Appl. No. 11/052,680, (Nov. 19, 2010), 17 pages.
- "Non Final Office Action", U.S. Appl. No. 11/645,197, (Nov. 29, 2010), 20 pages.
- "Notice of Allowance", U.S. Appl. No. 11/086,121, (Oct. 7, 2010), 6 pages.
- "Notice of Allowance", U.S. Appl. No. 11/645,195, (Oct. 7, 2010), 8 pages.

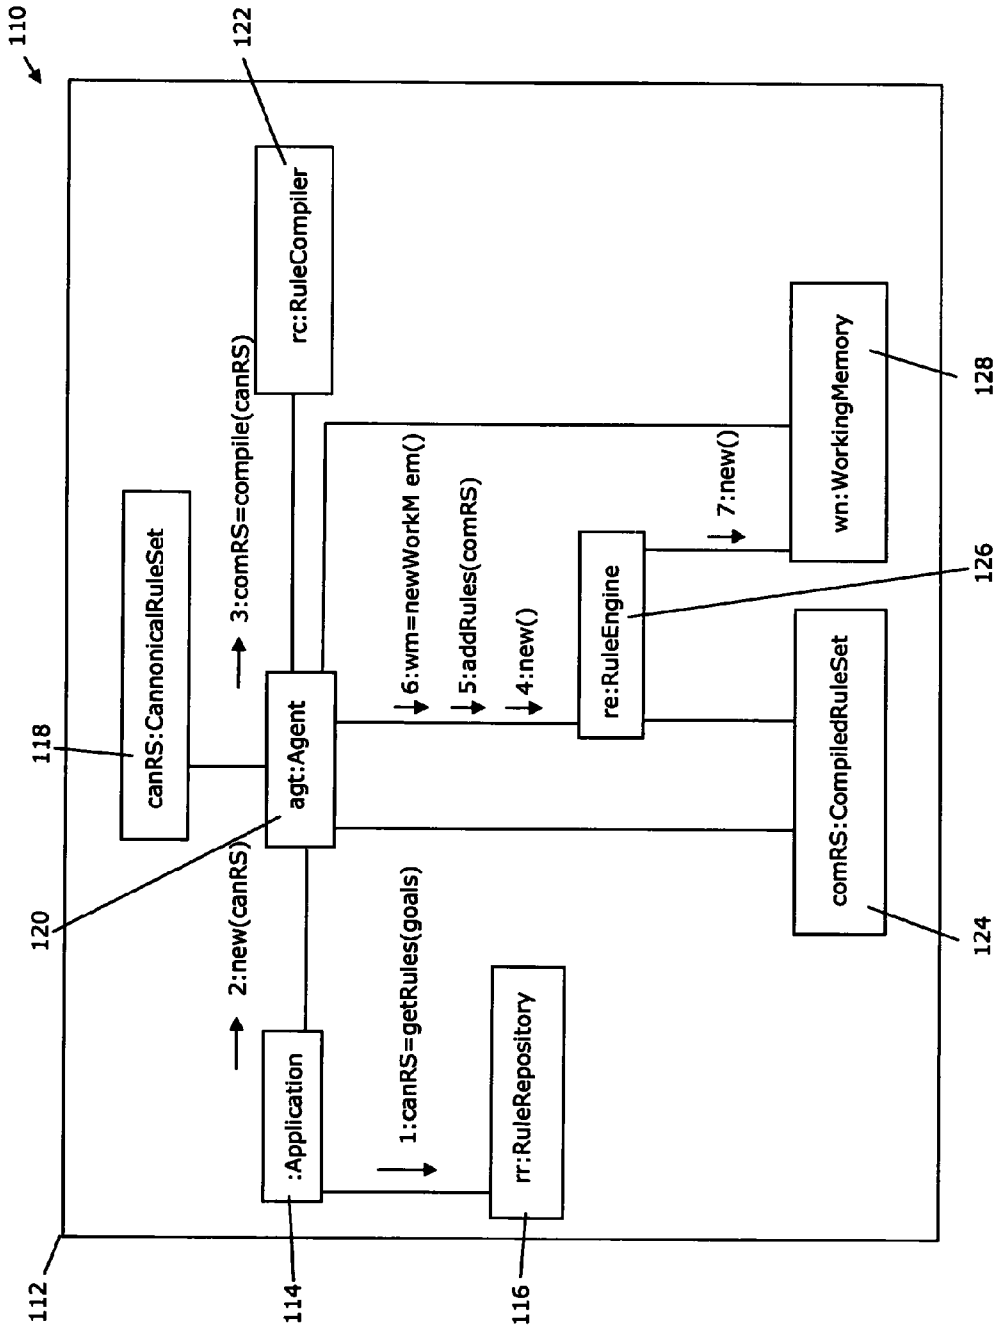


FIG. 1

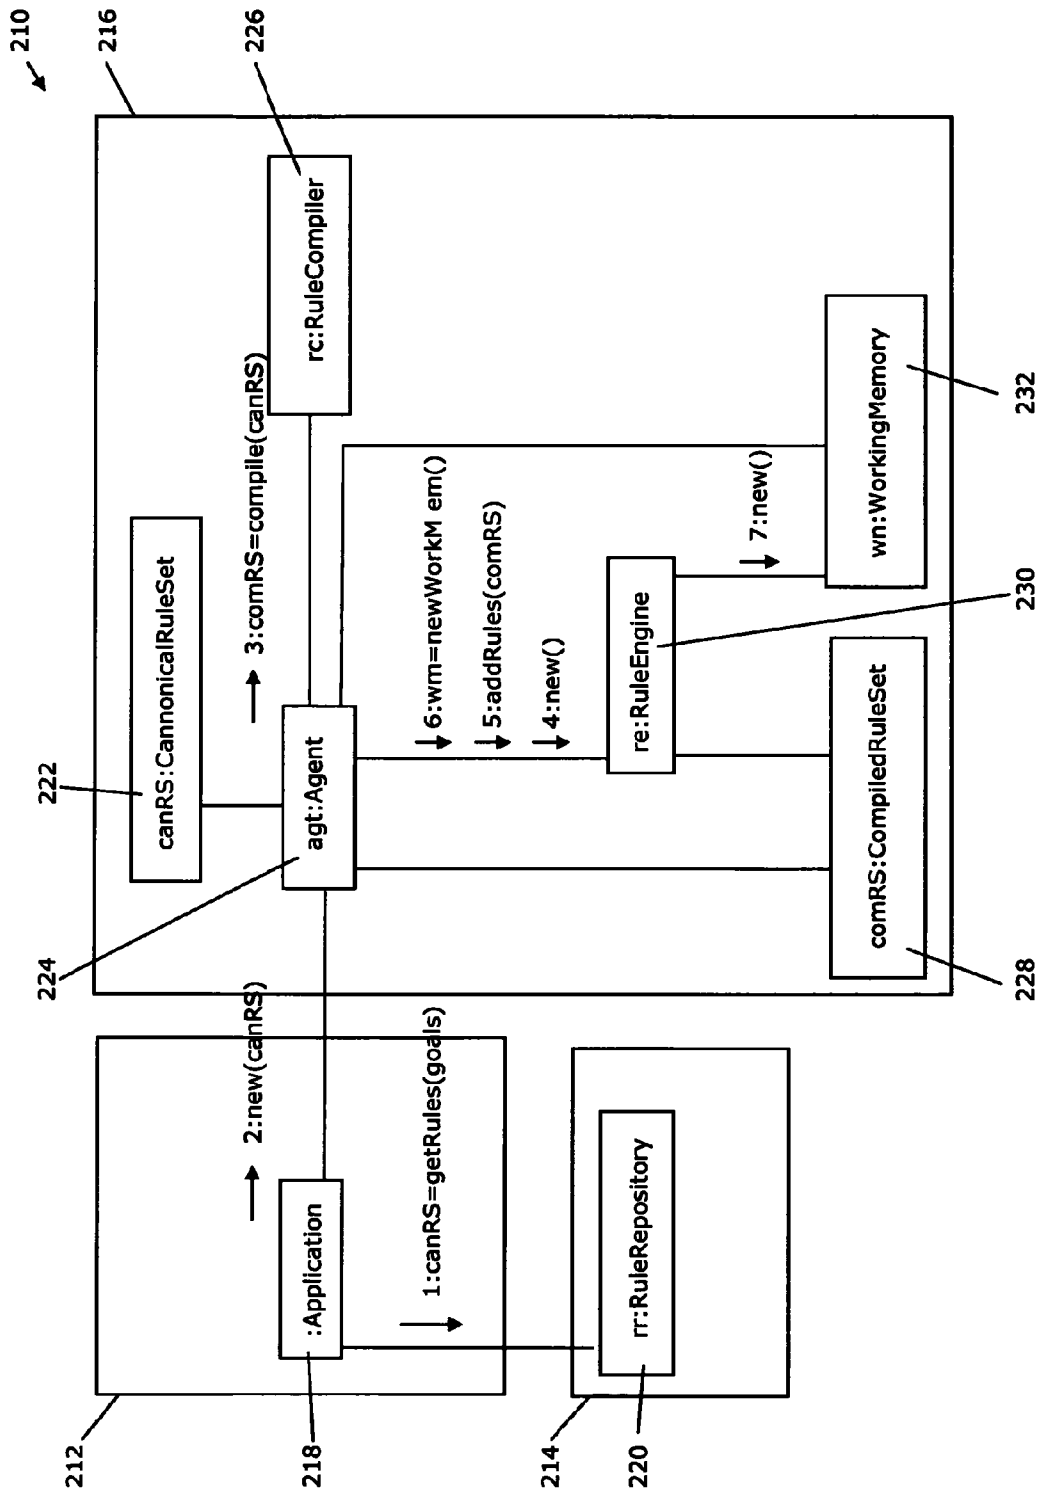


FIG. 2

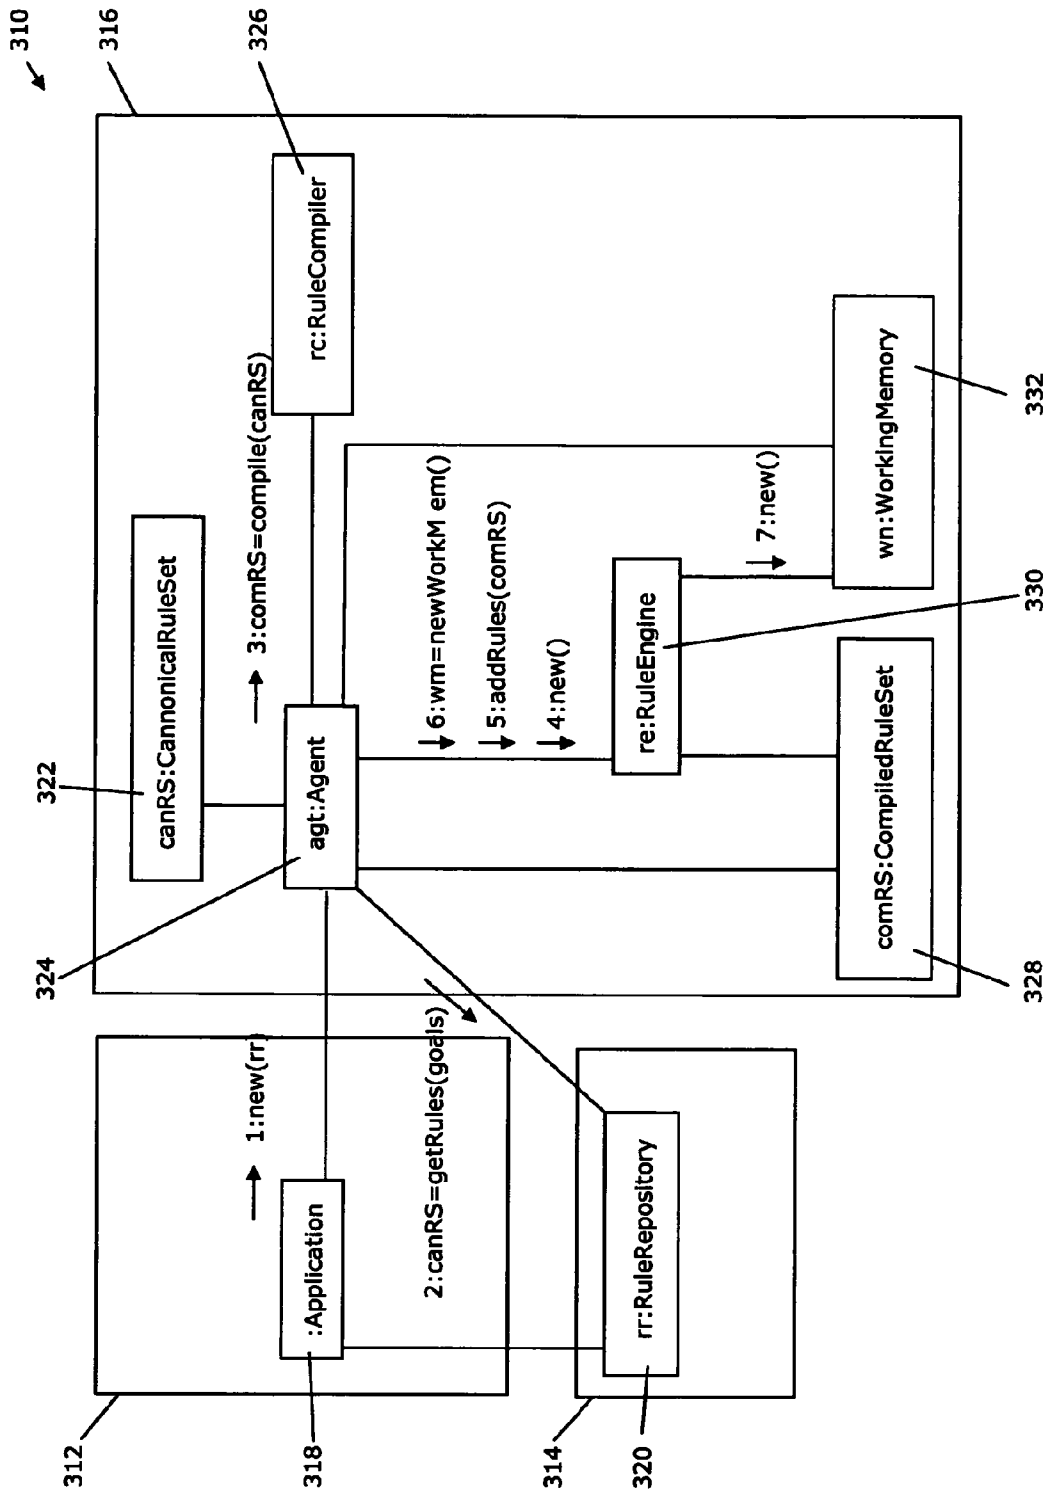


FIG. 3



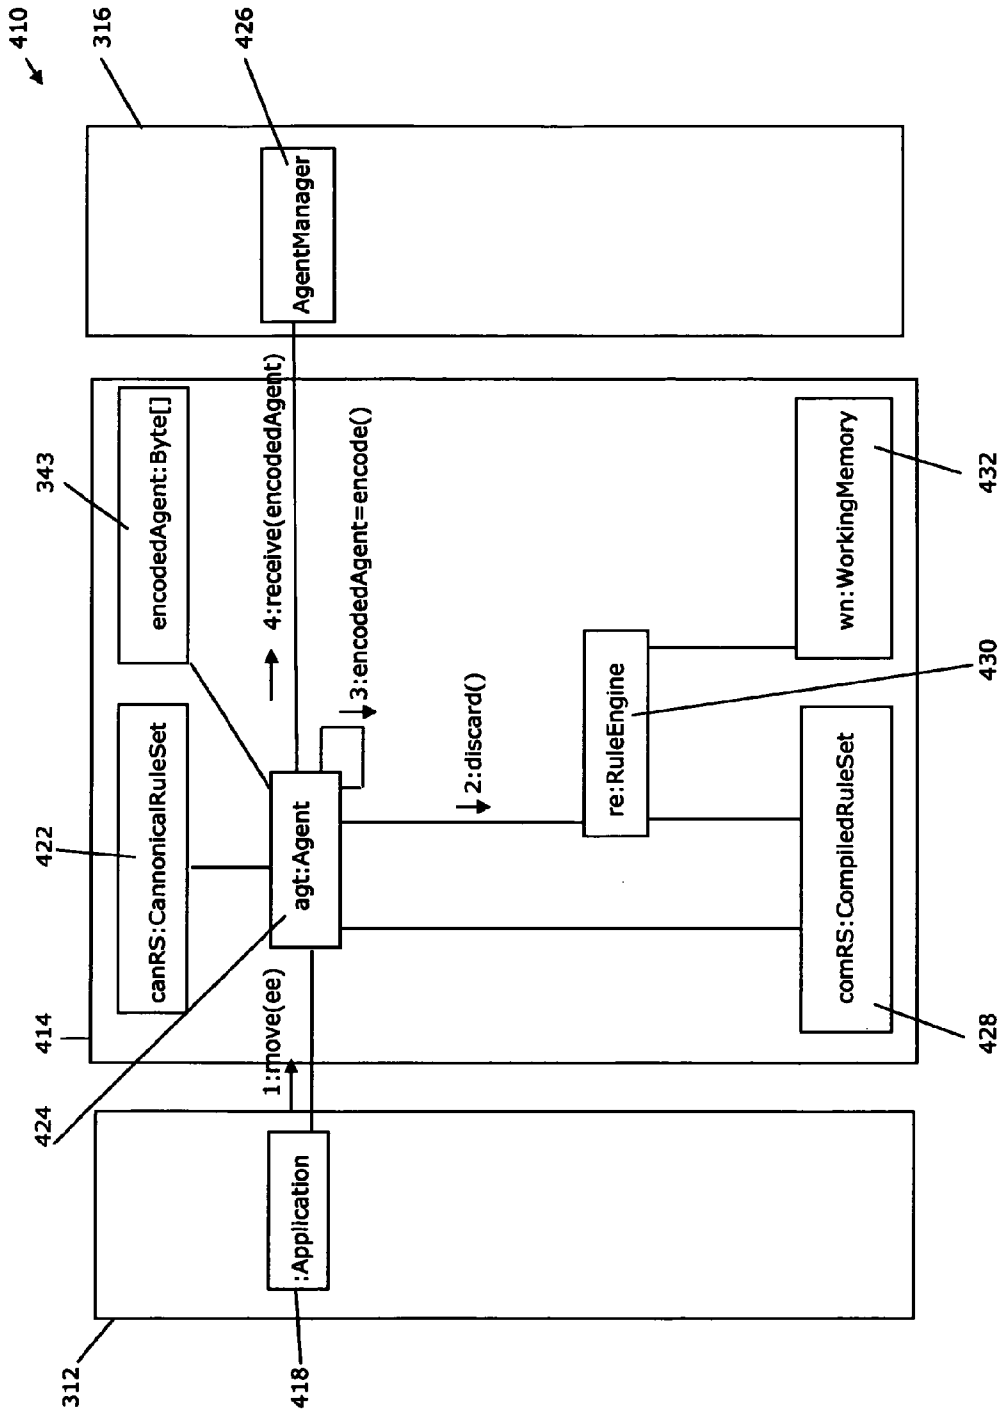


FIG. 4

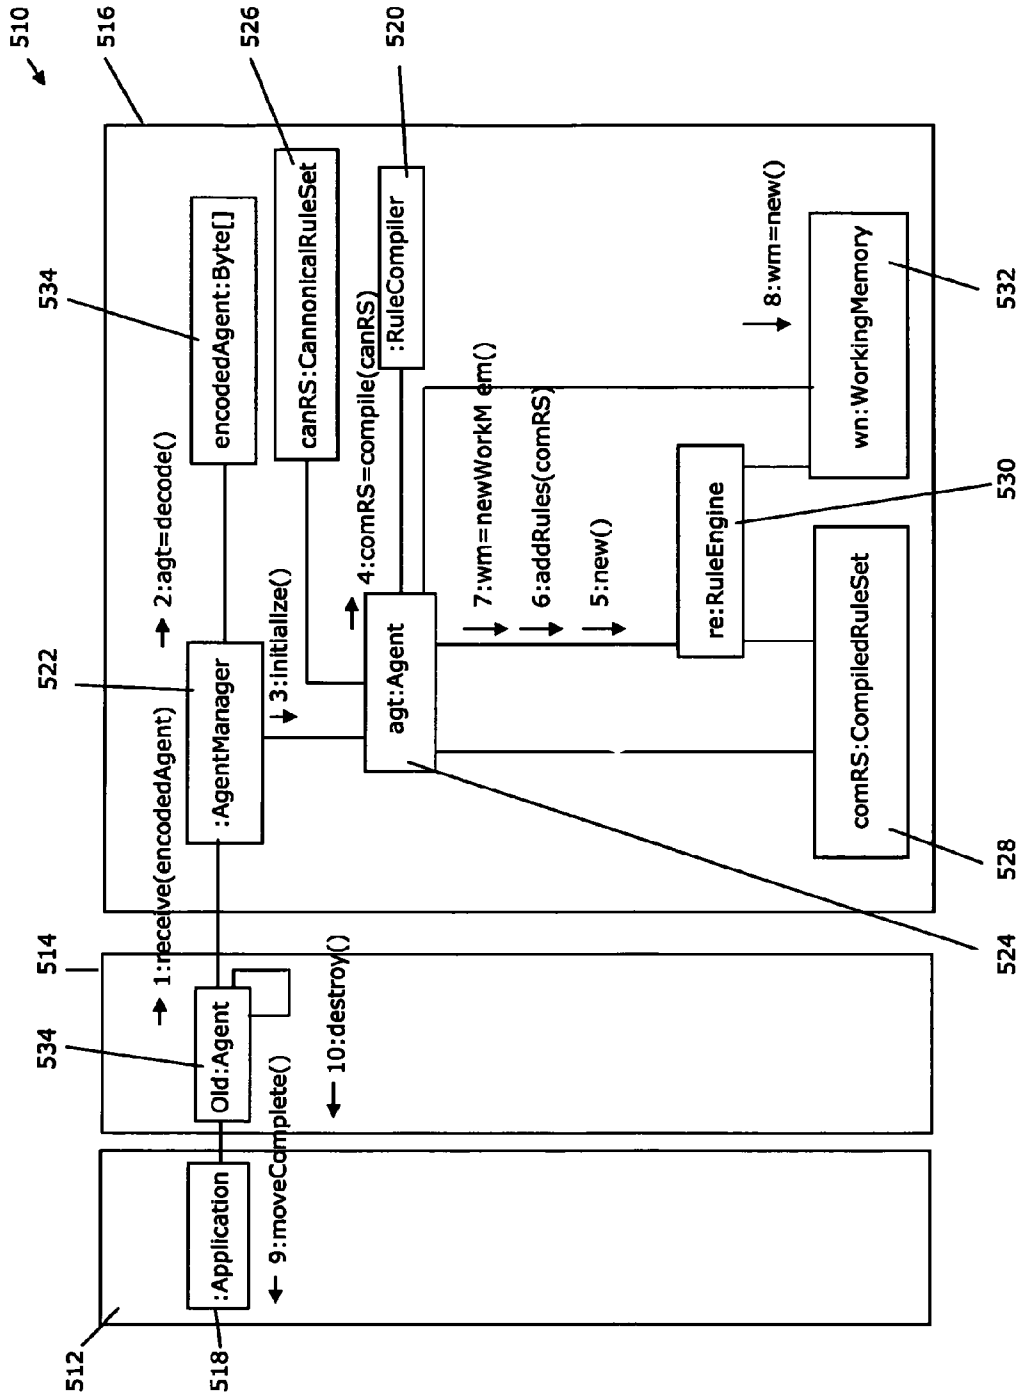


FIG. 5

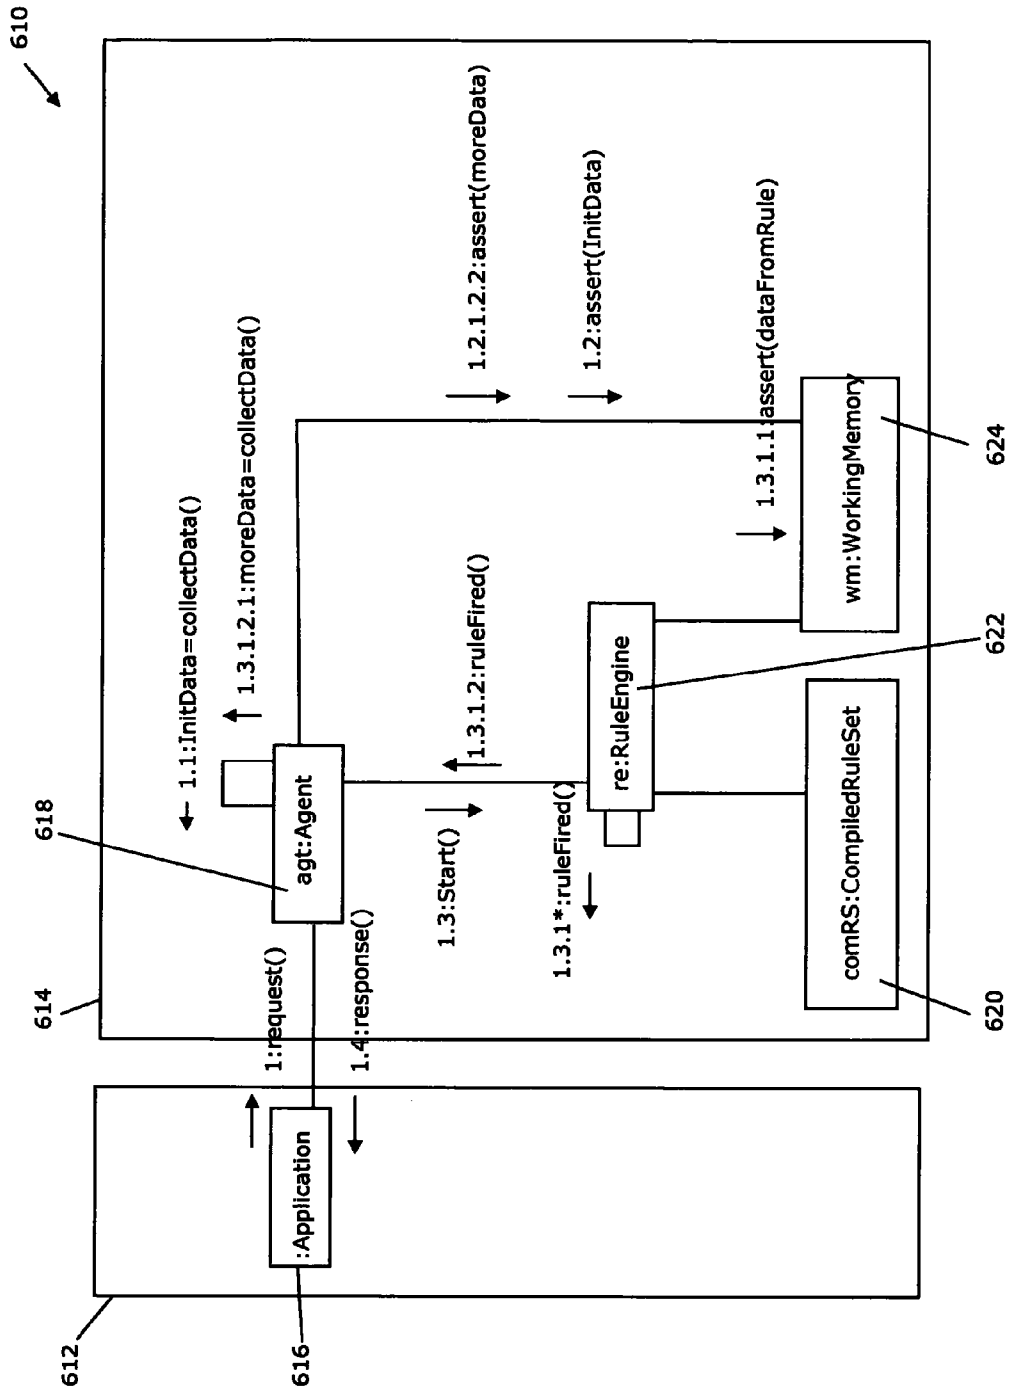


FIG. 6

710

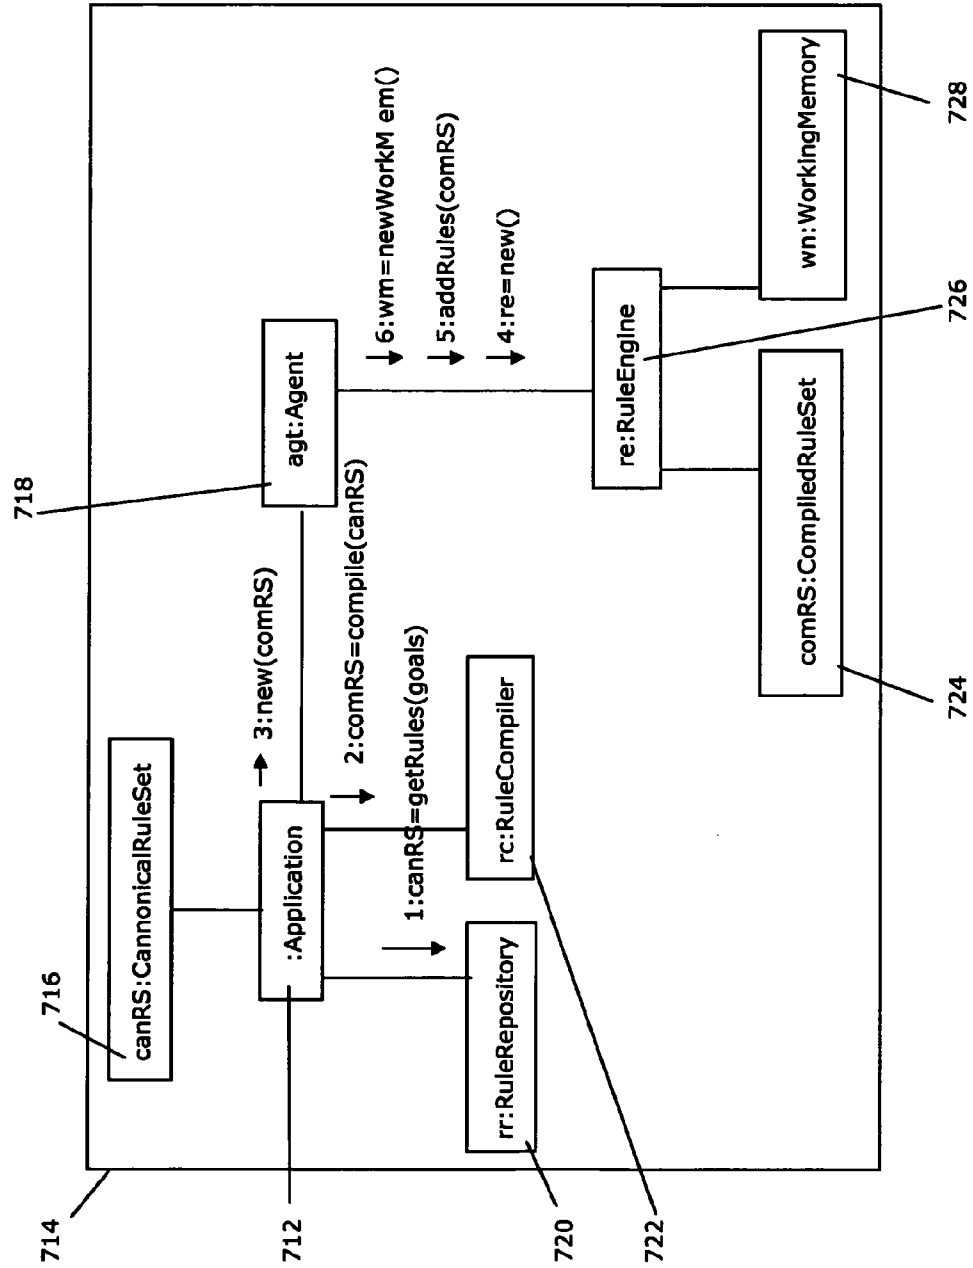


FIG. 7

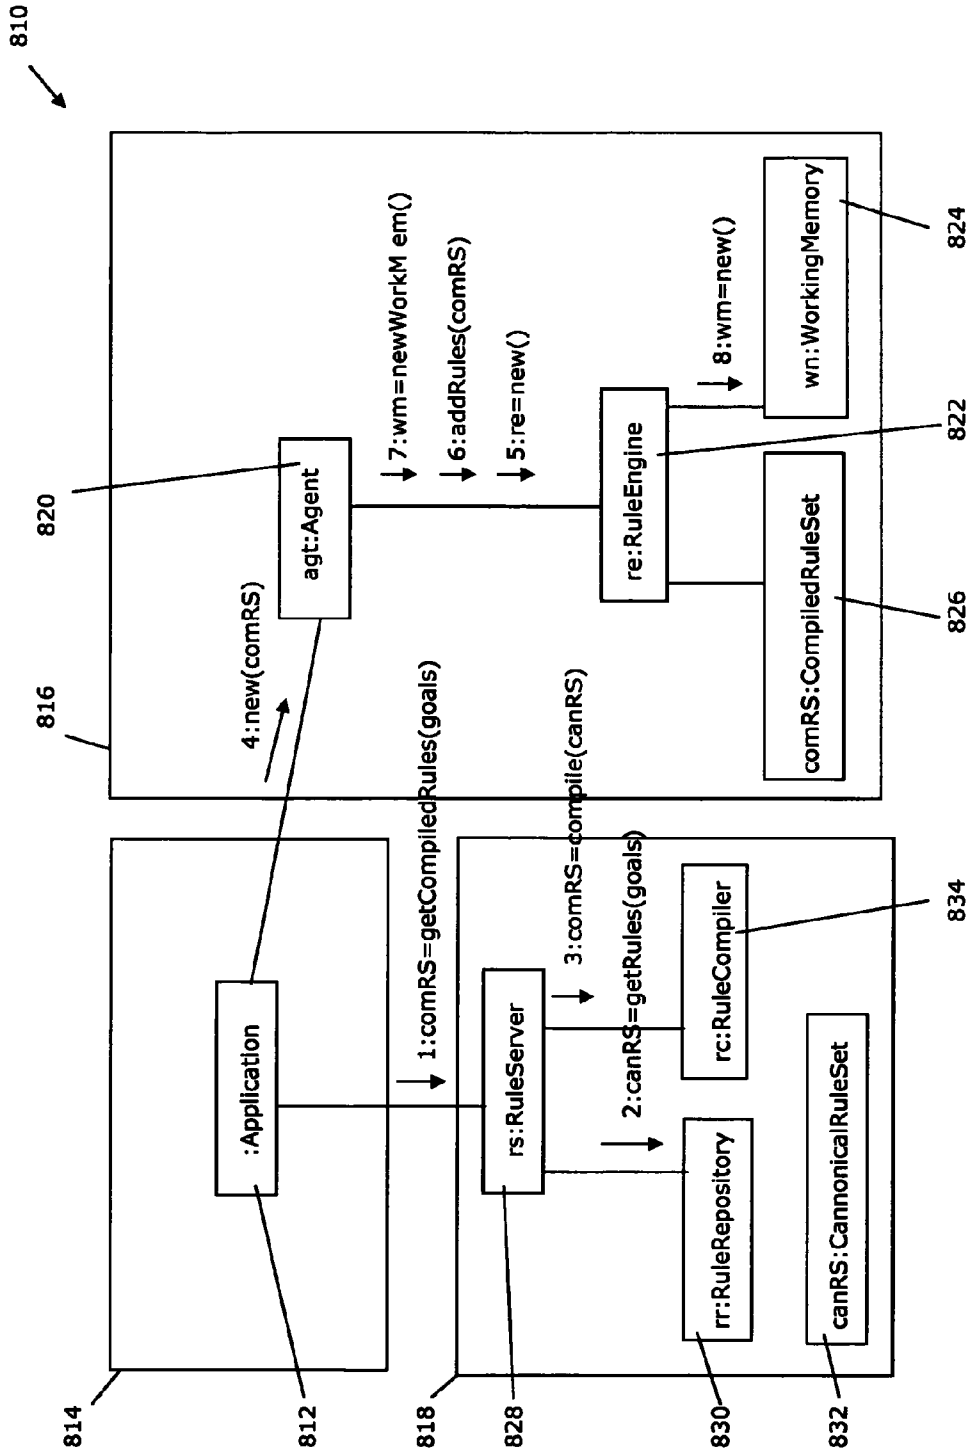


FIG. 8

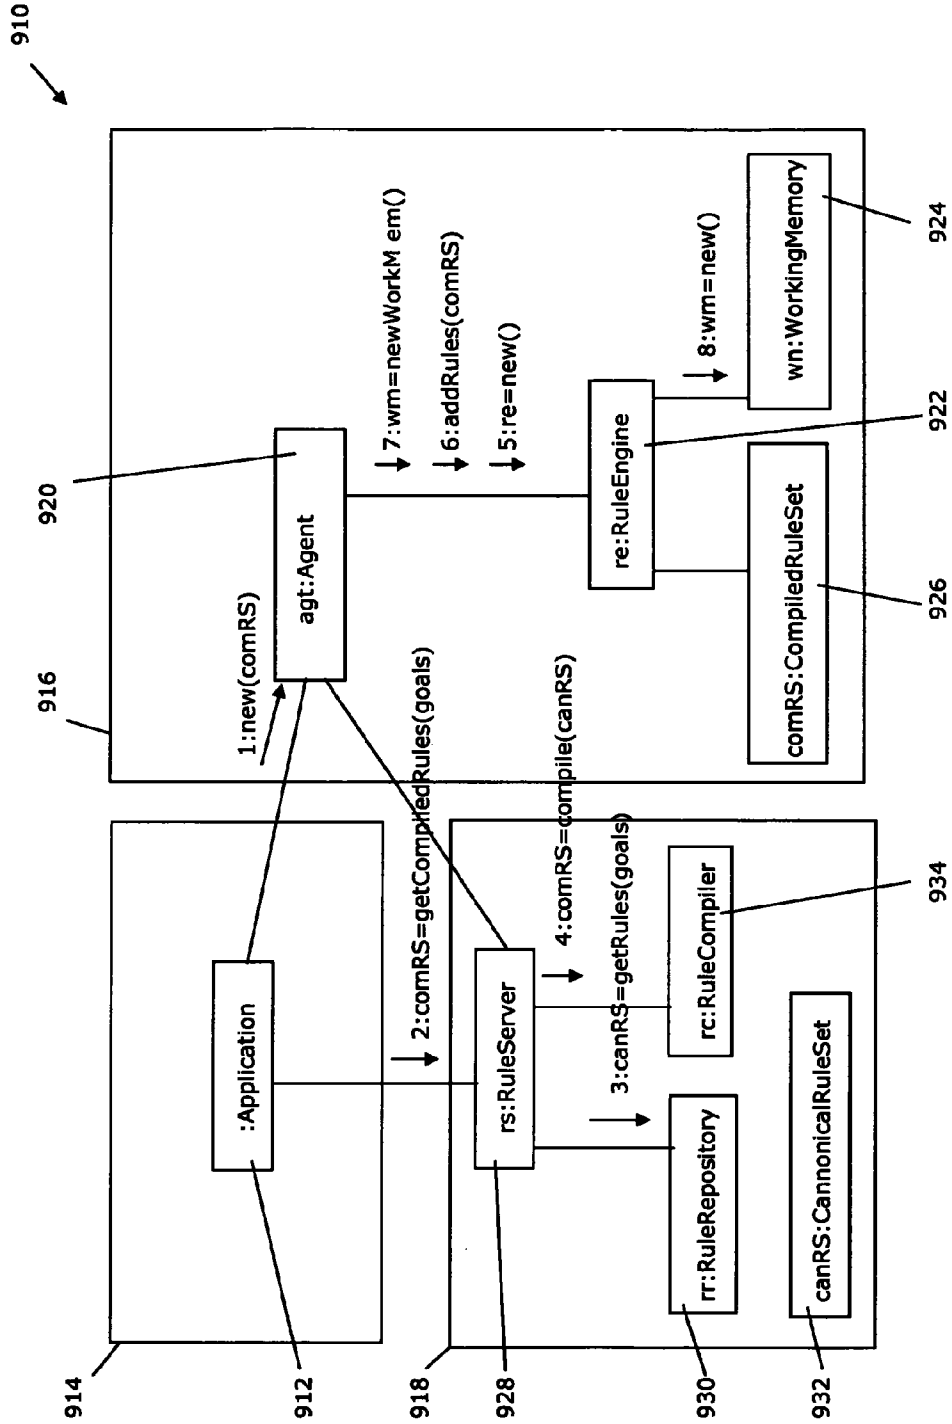


FIG. 9

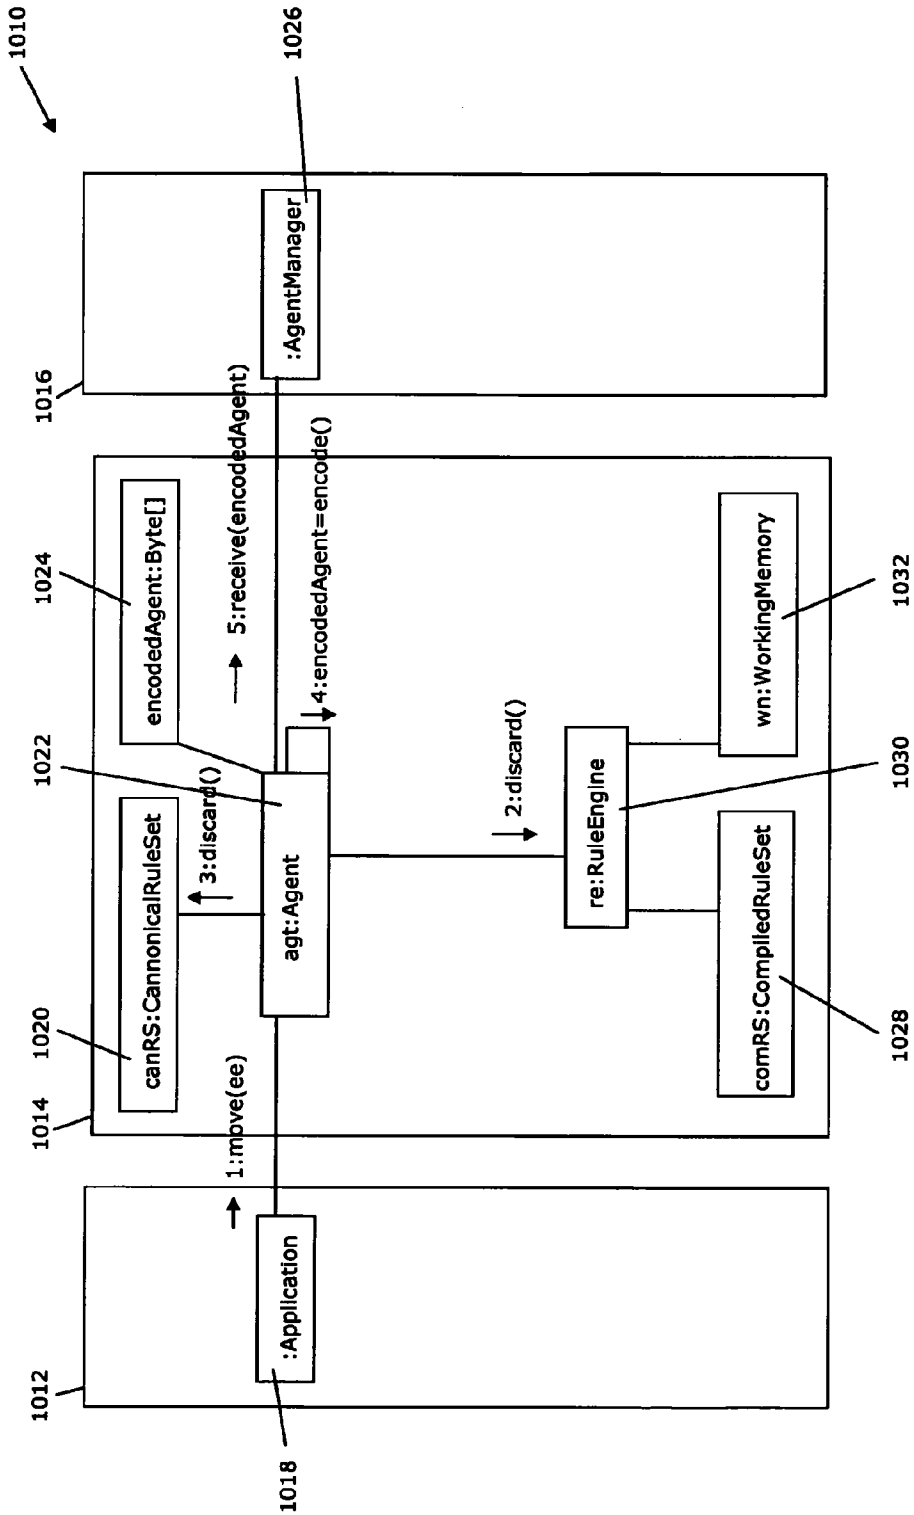


FIG. 10

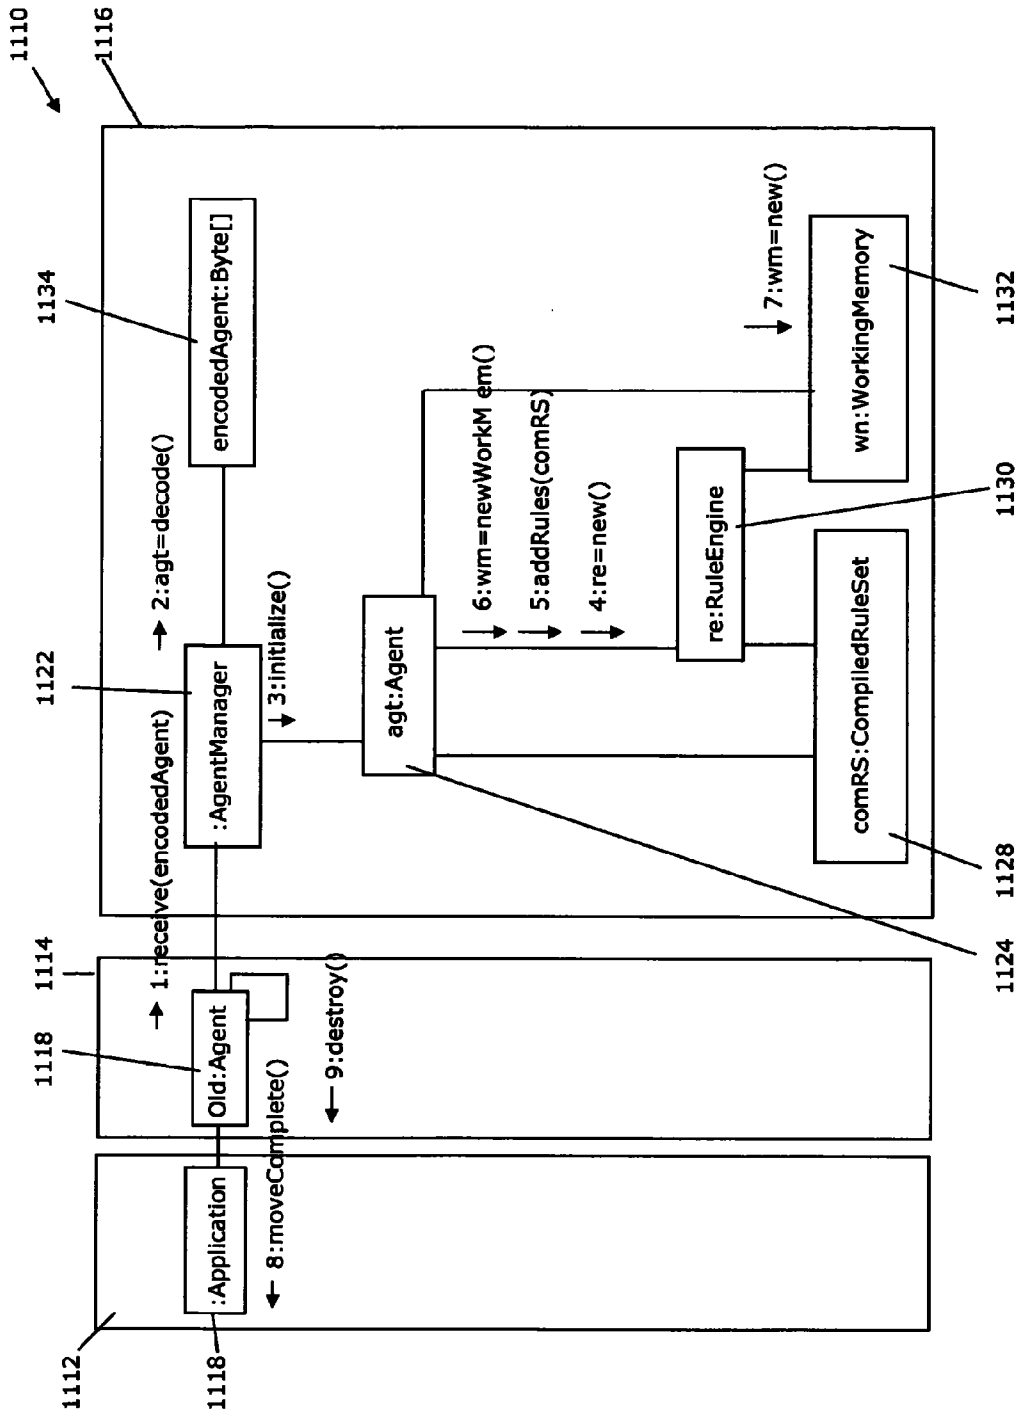


FIG. 11



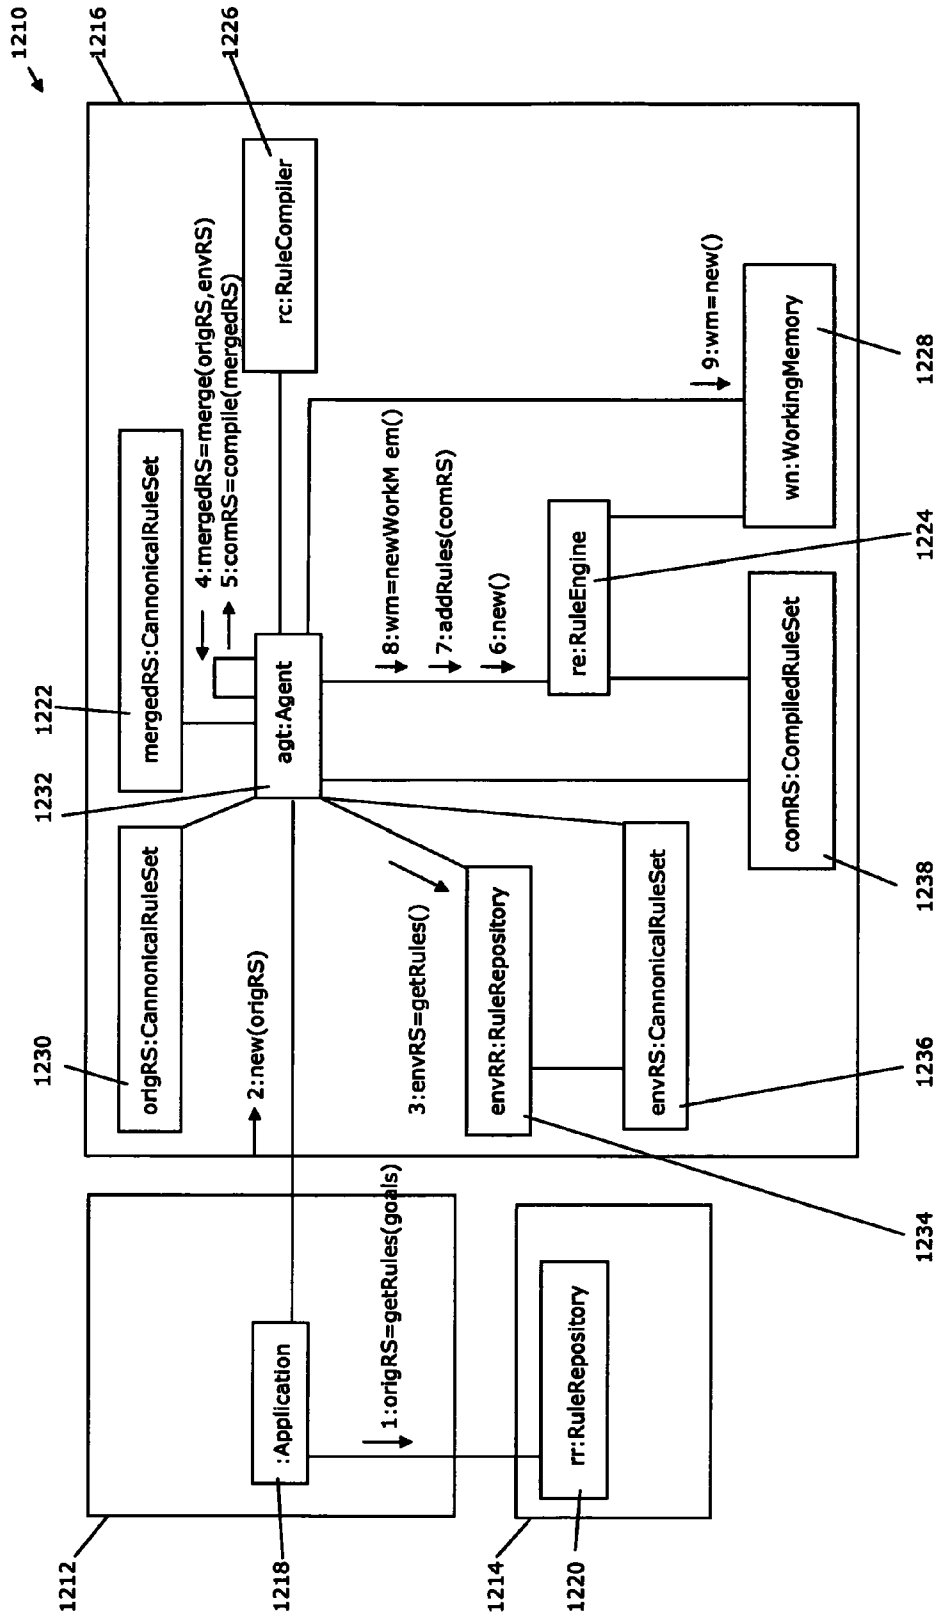


FIG. 12

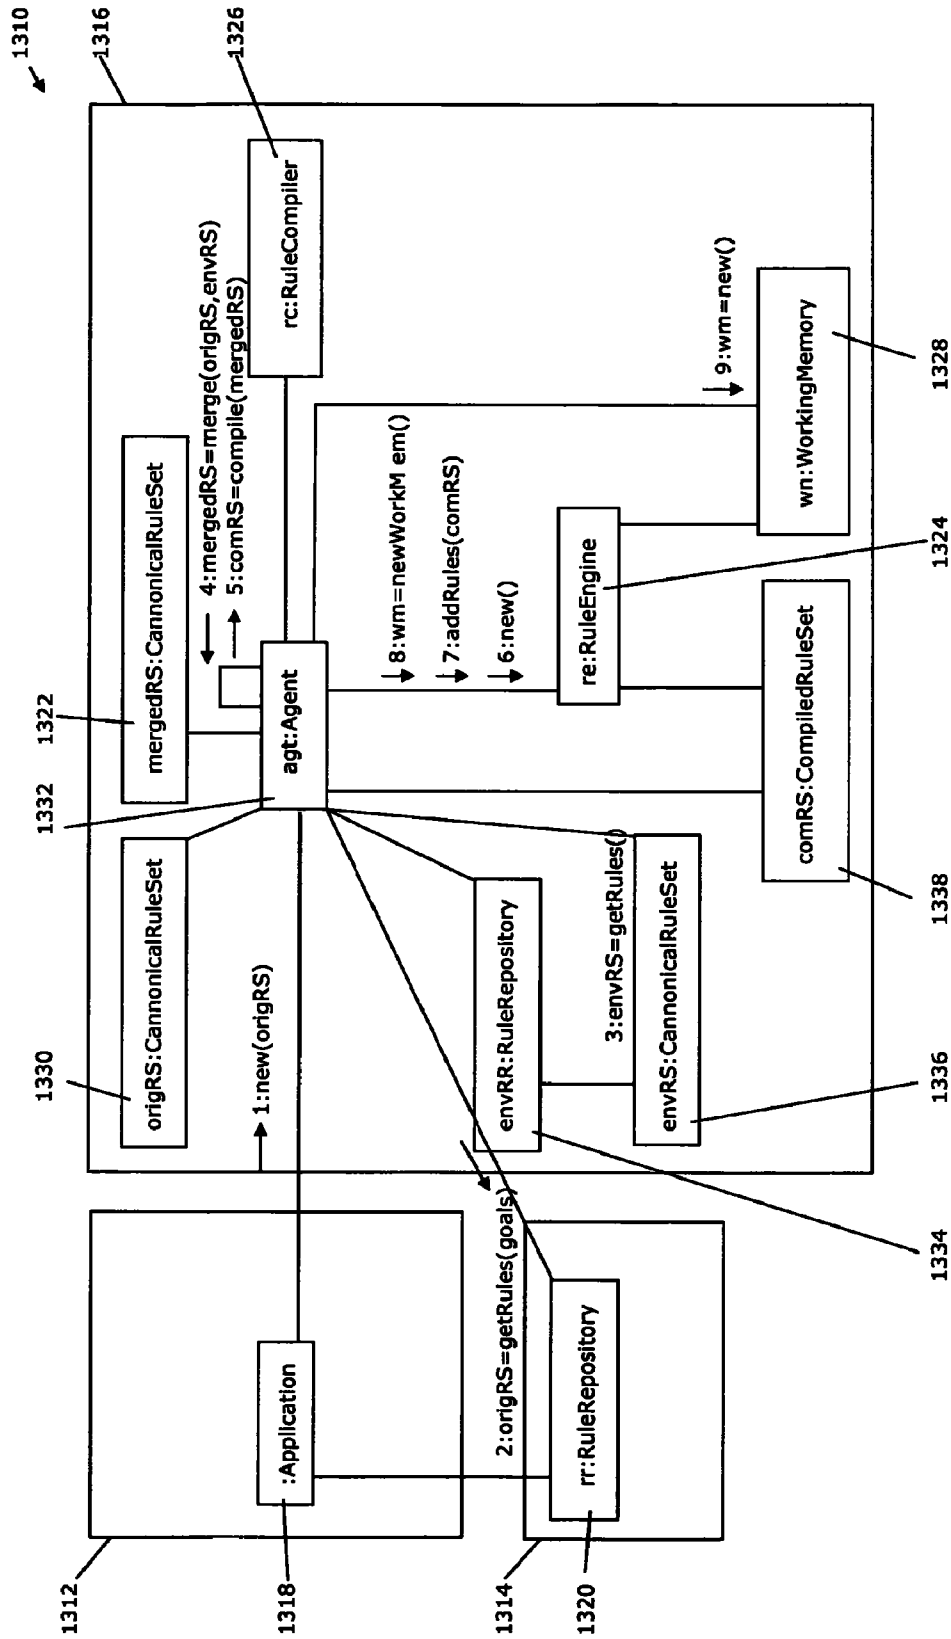


FIG. 13

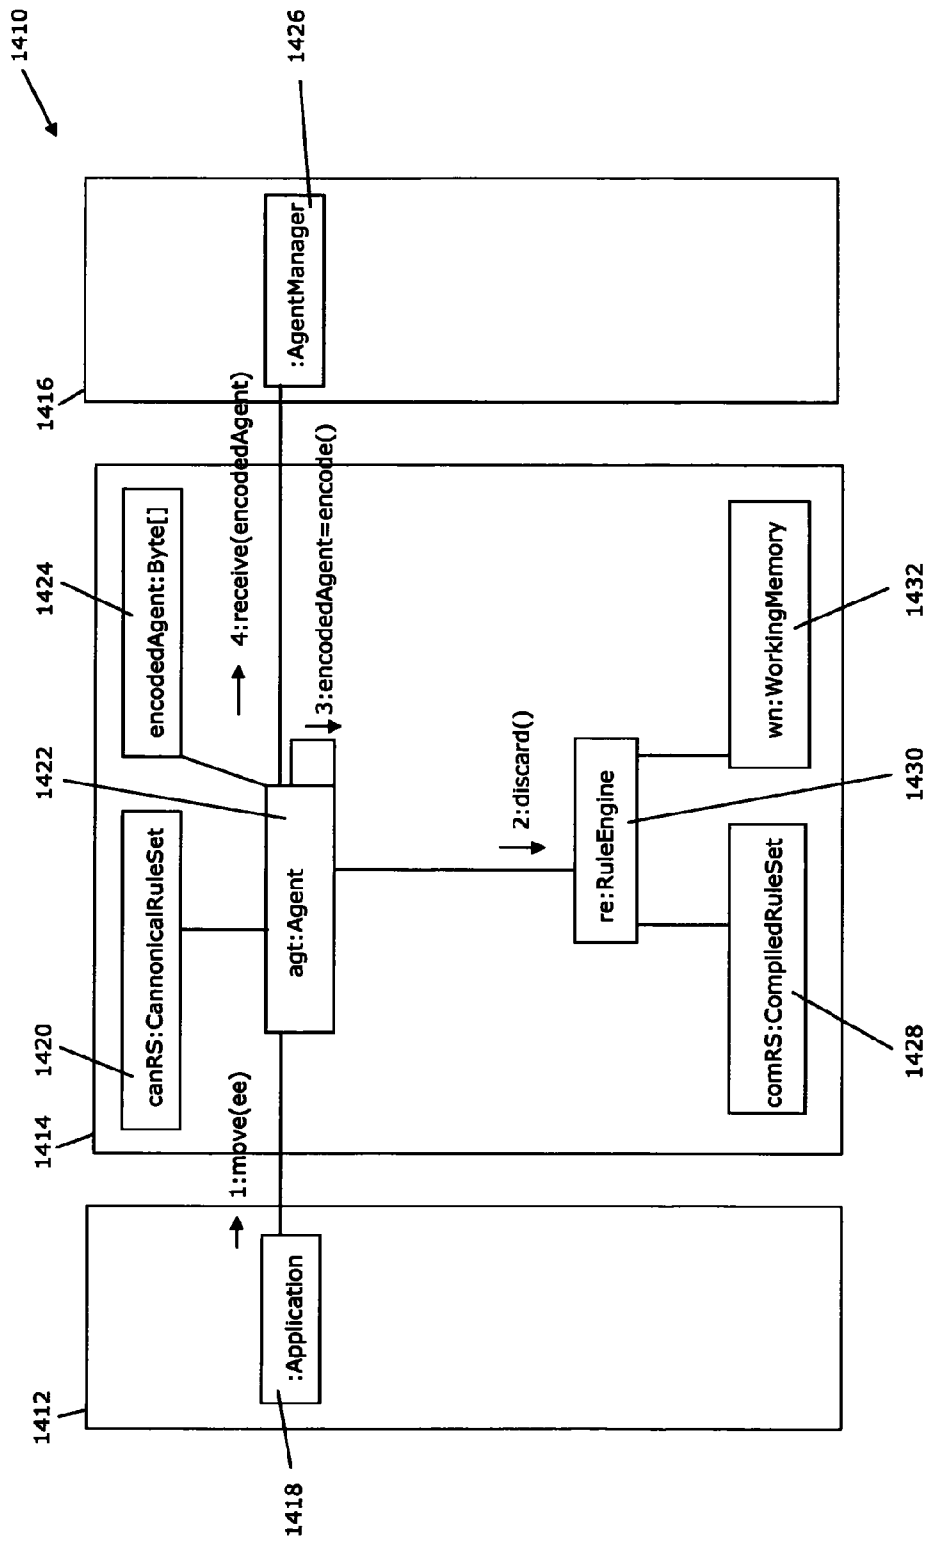


FIG. 14

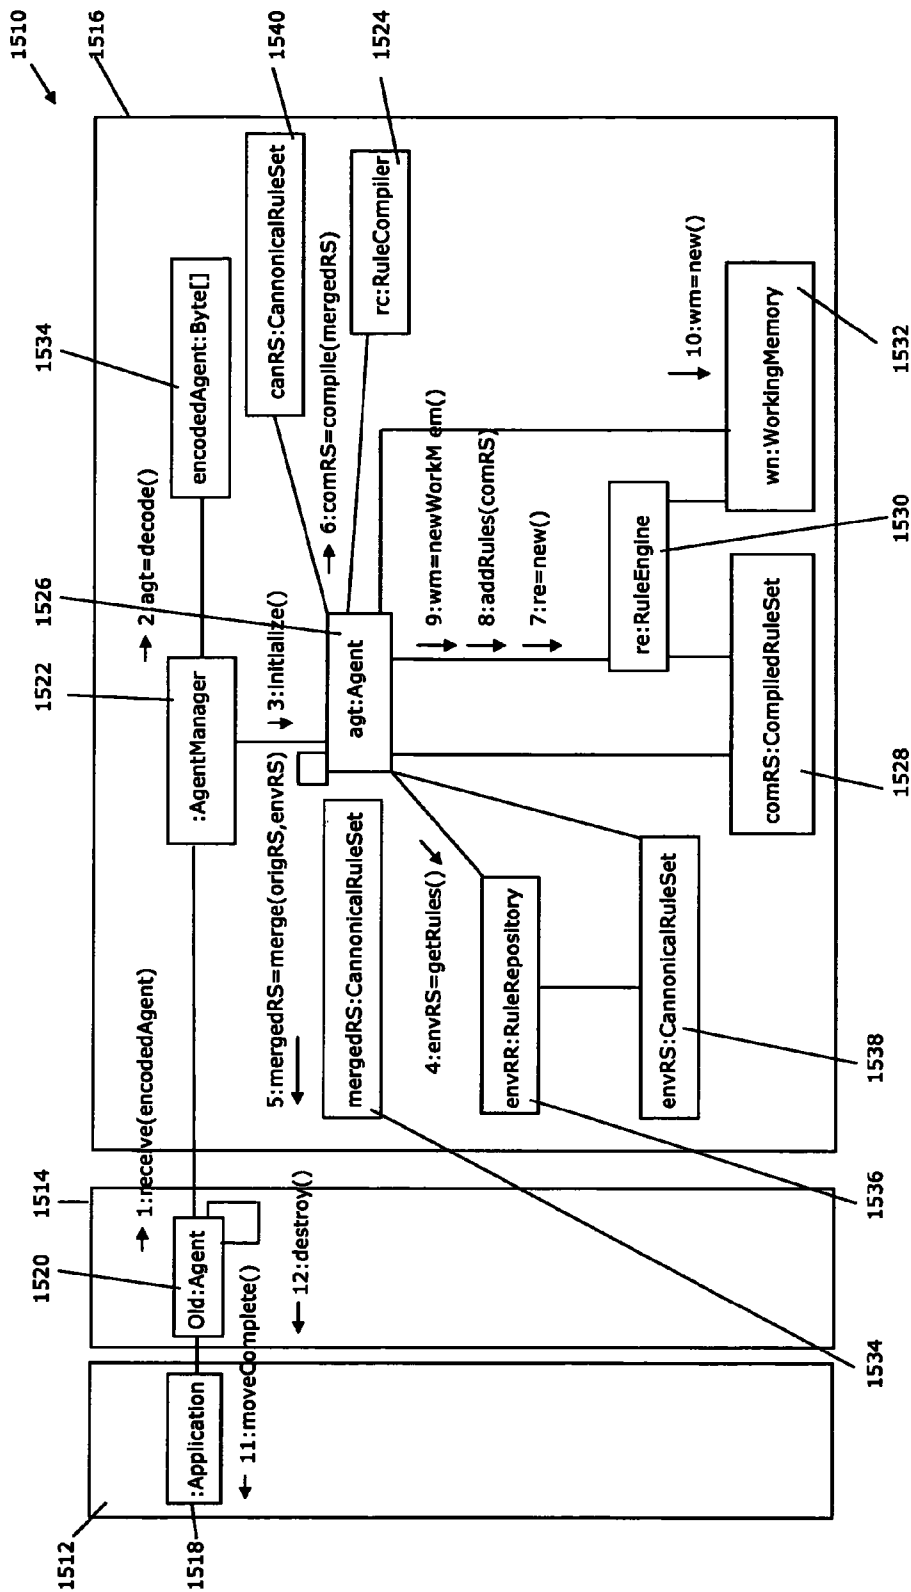


FIG. 15

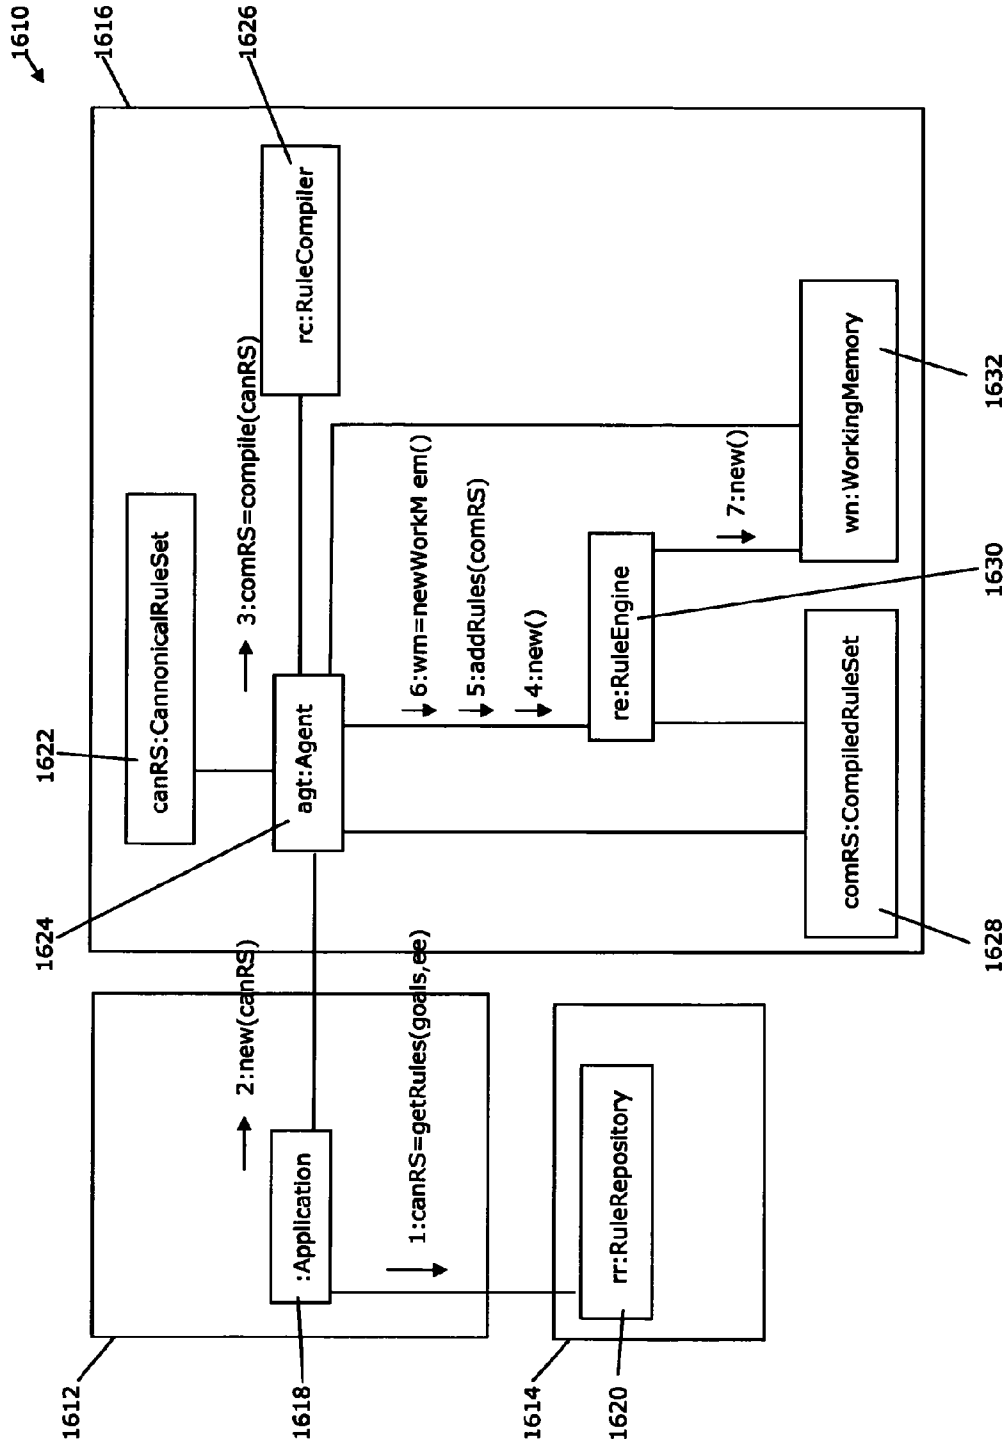


FIG. 16

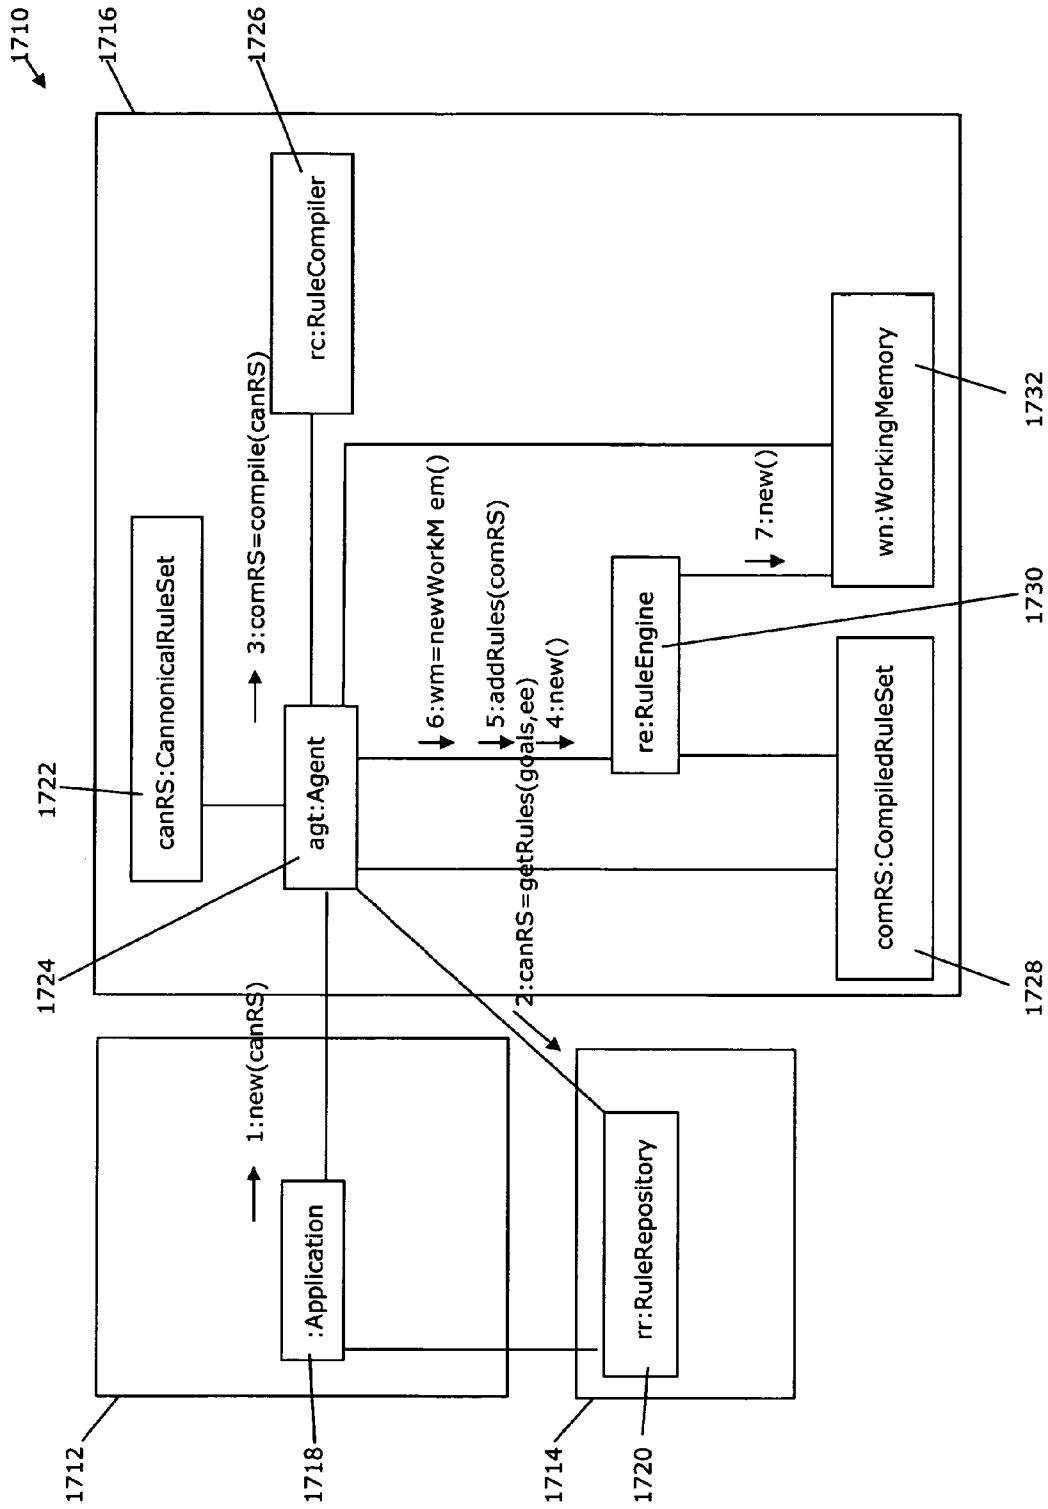


FIG. 17

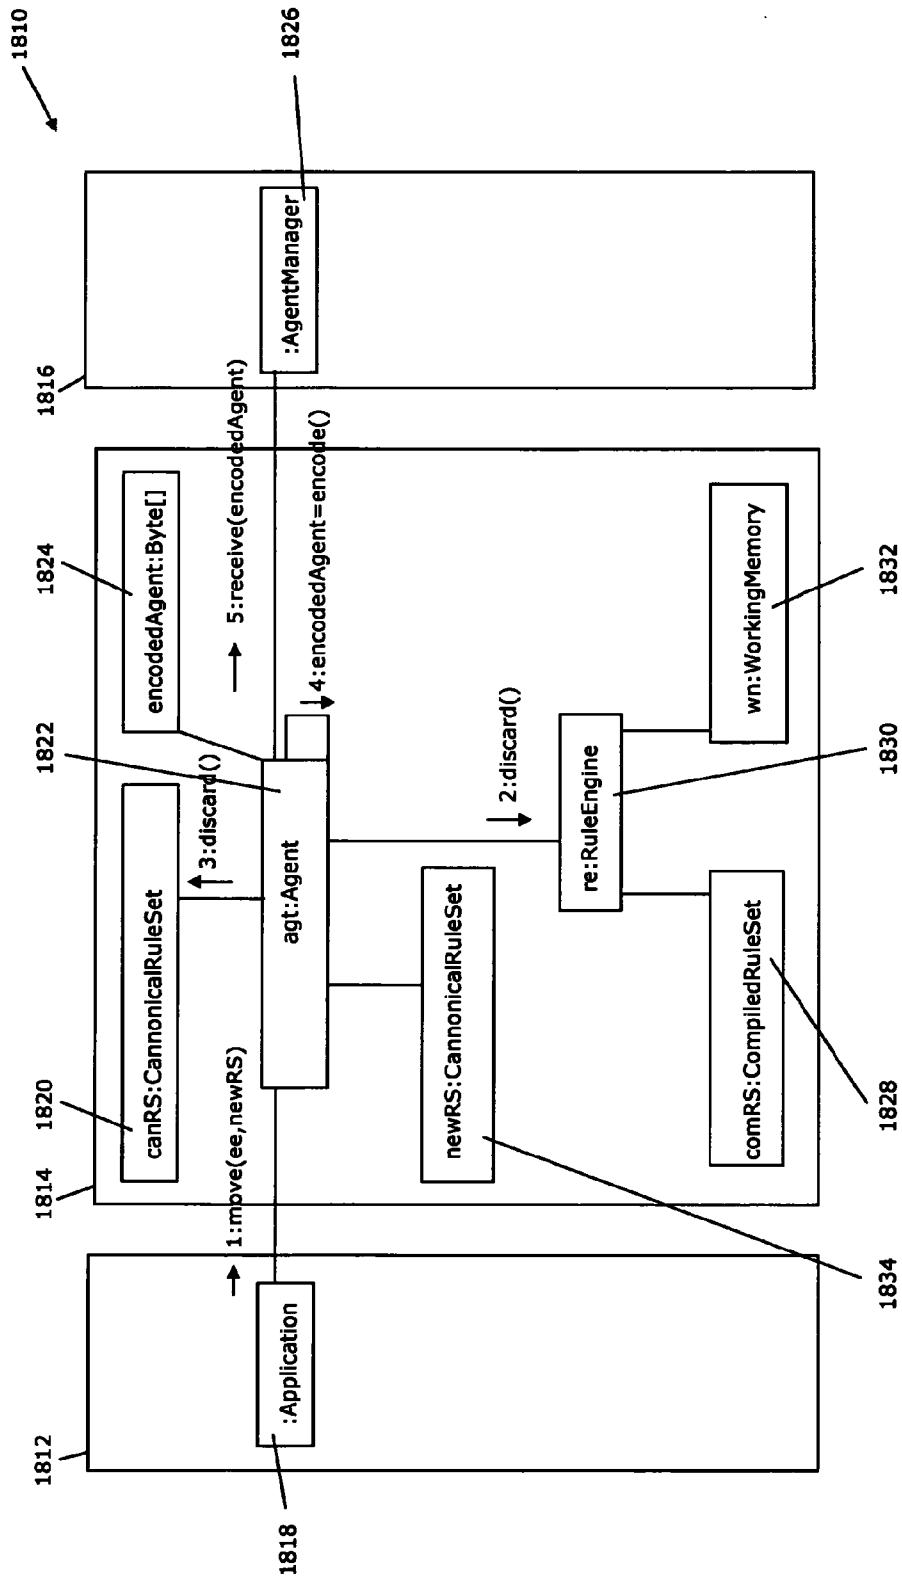


FIG. 18

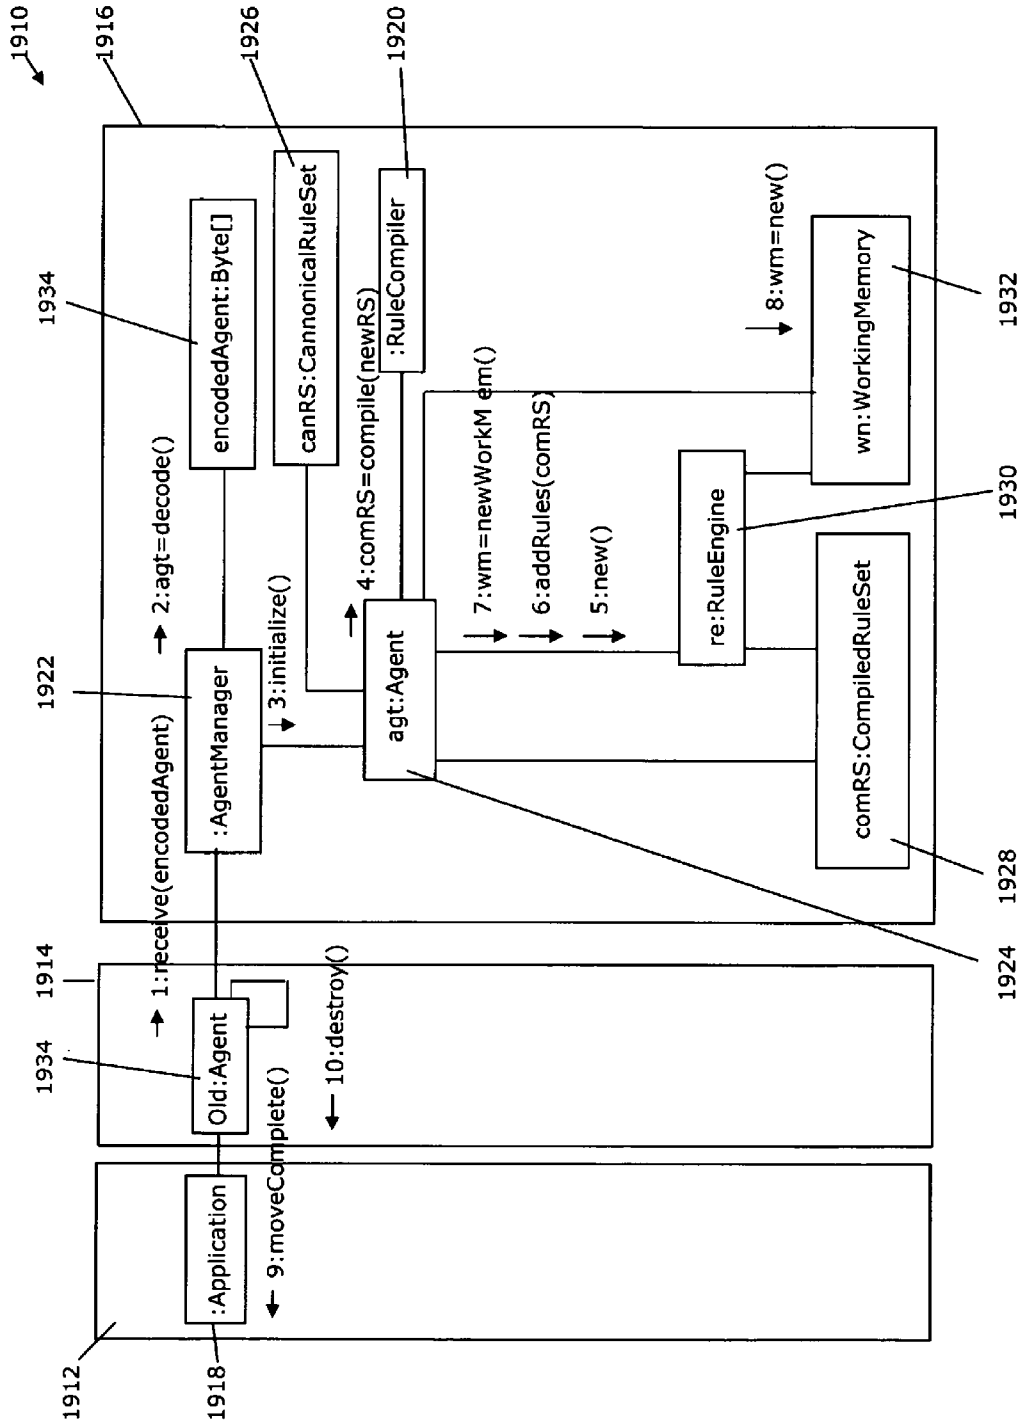


FIG. 19



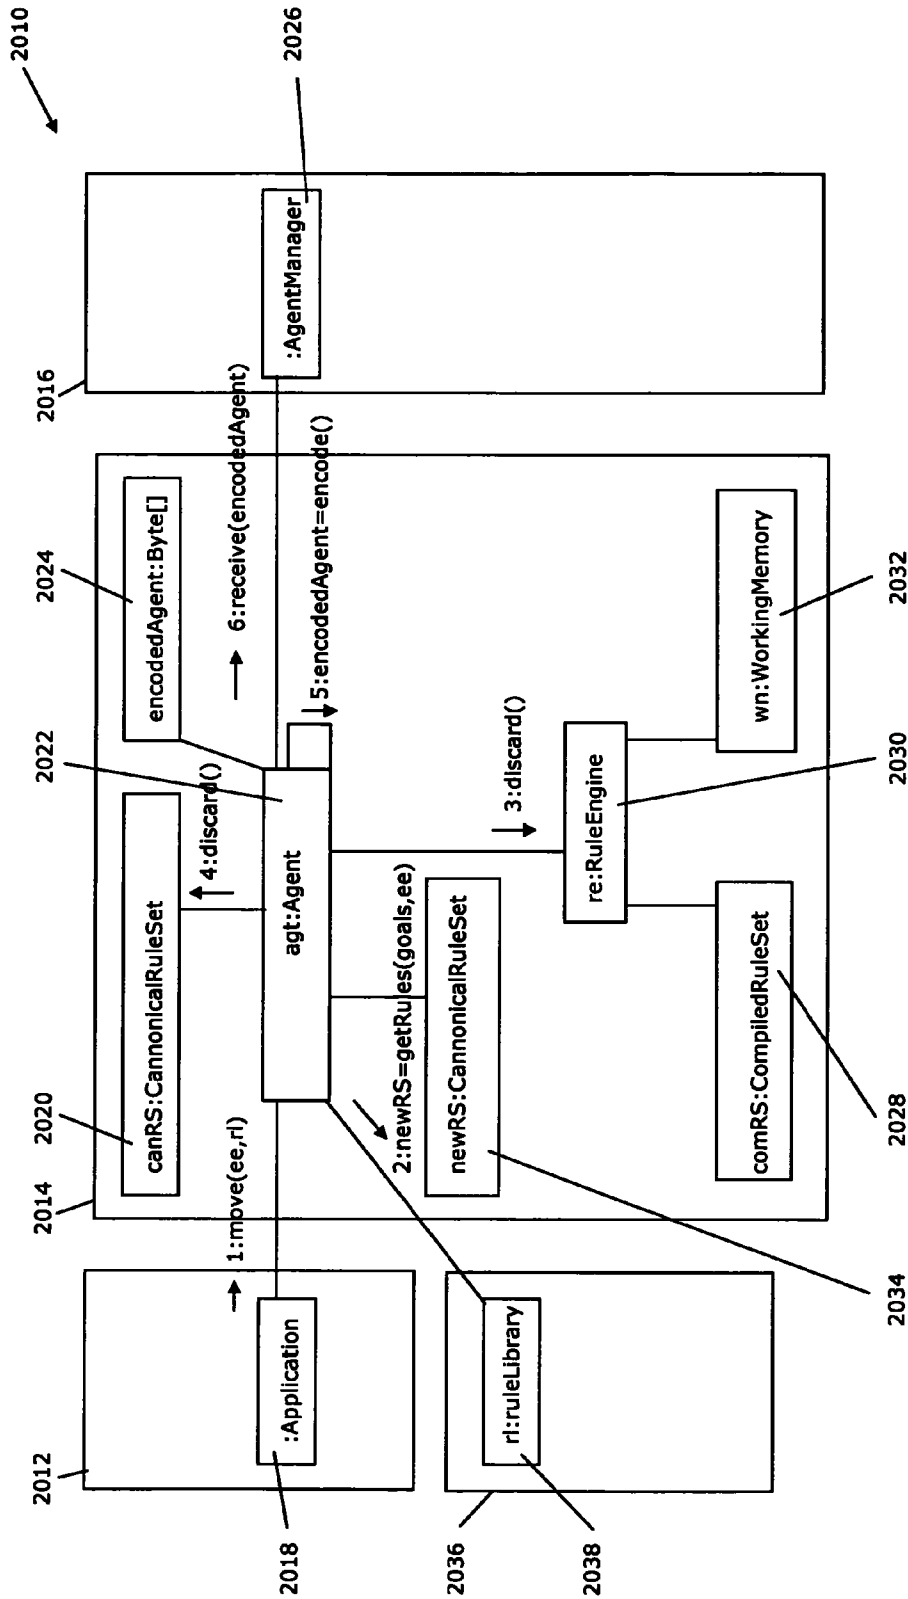


FIG. 20

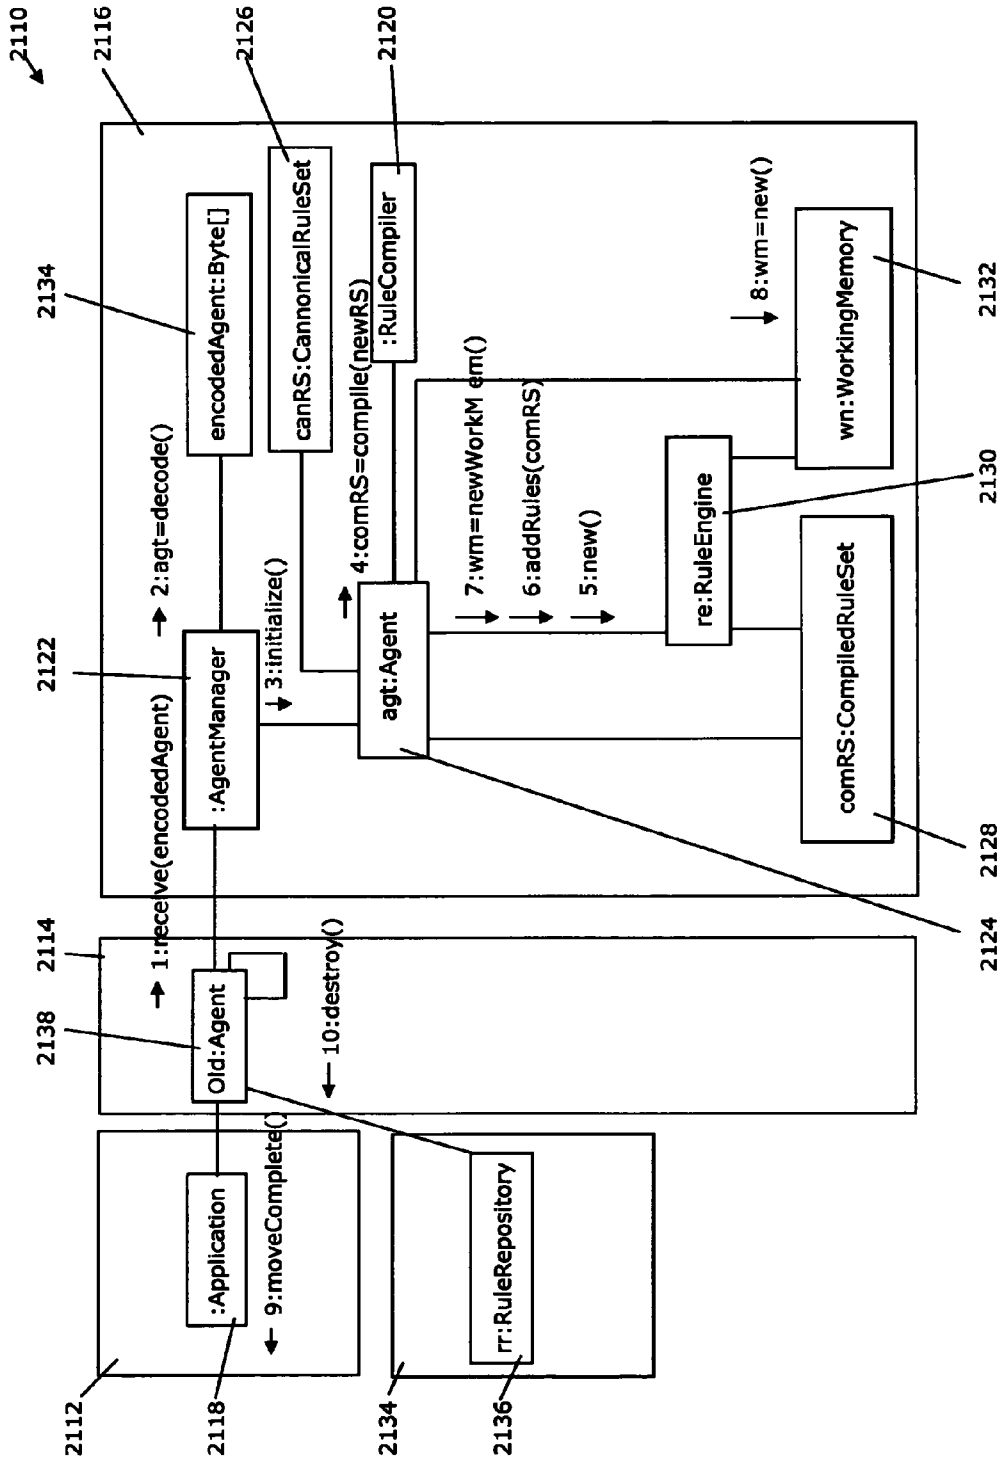


FIG. 21

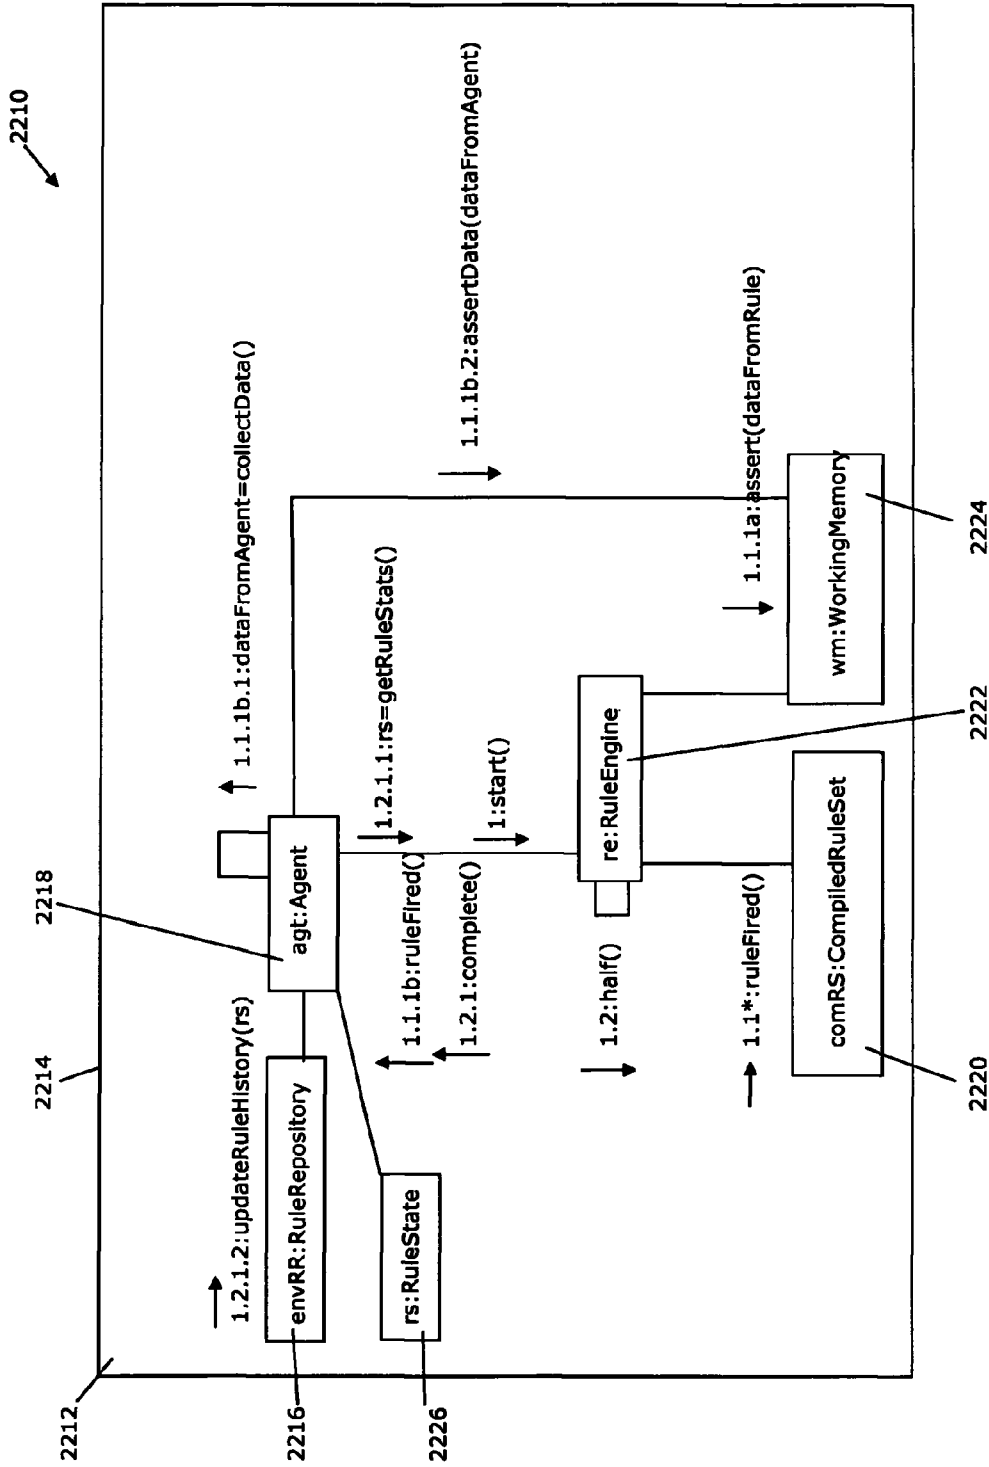


FIG. 22

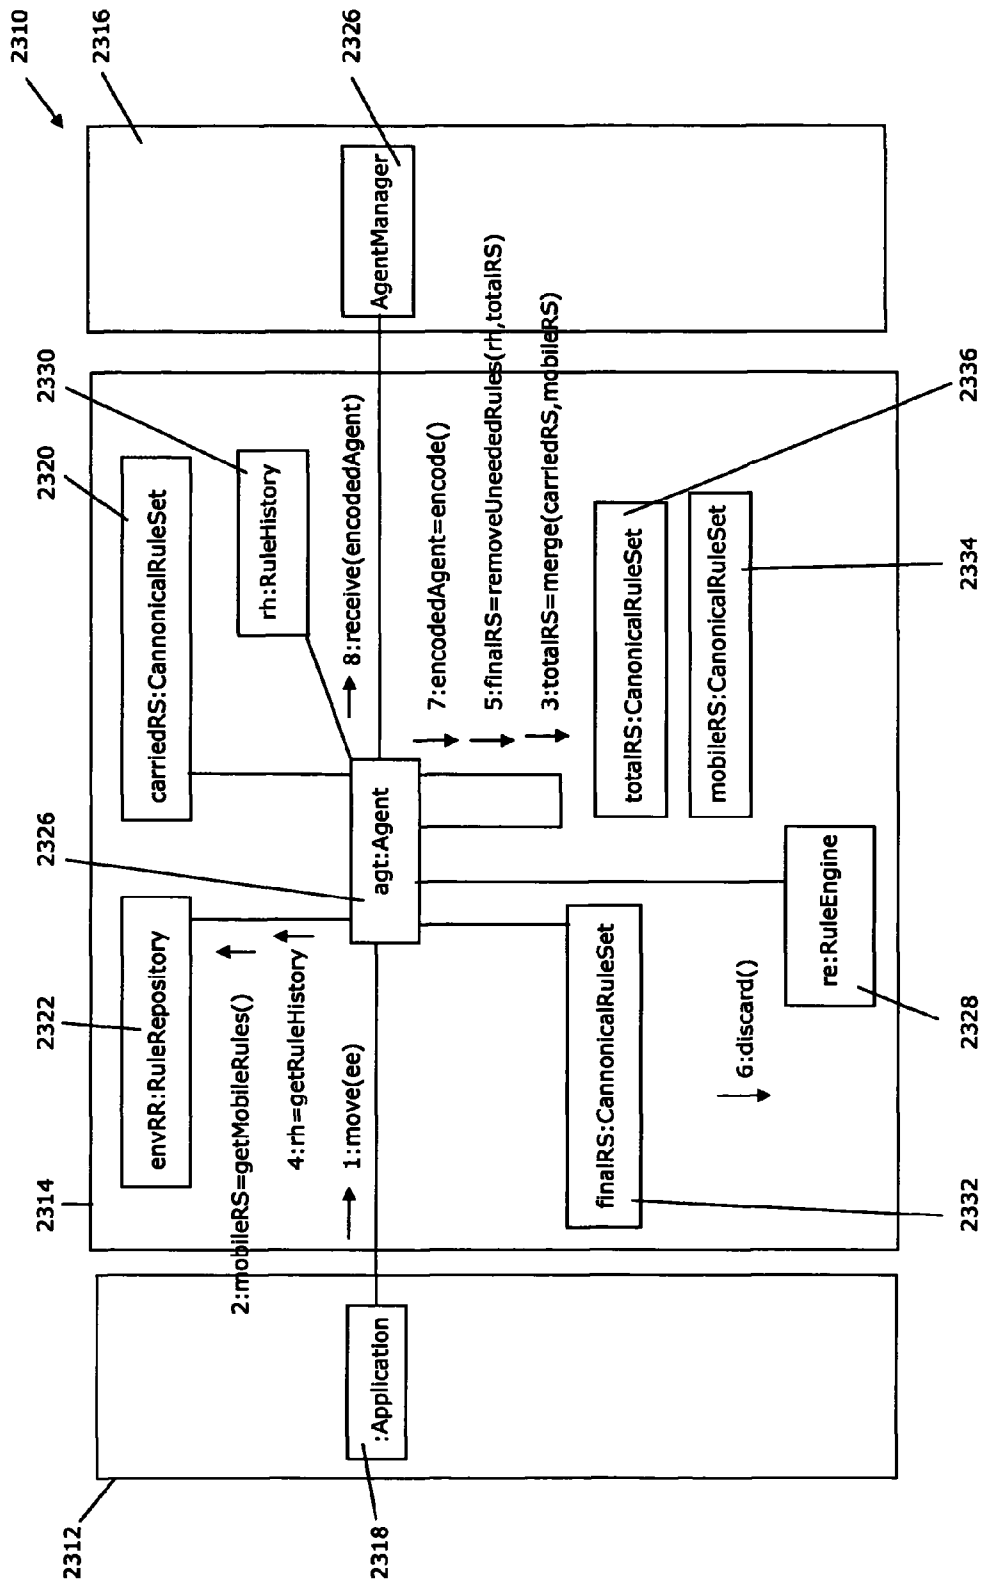


FIG. 23

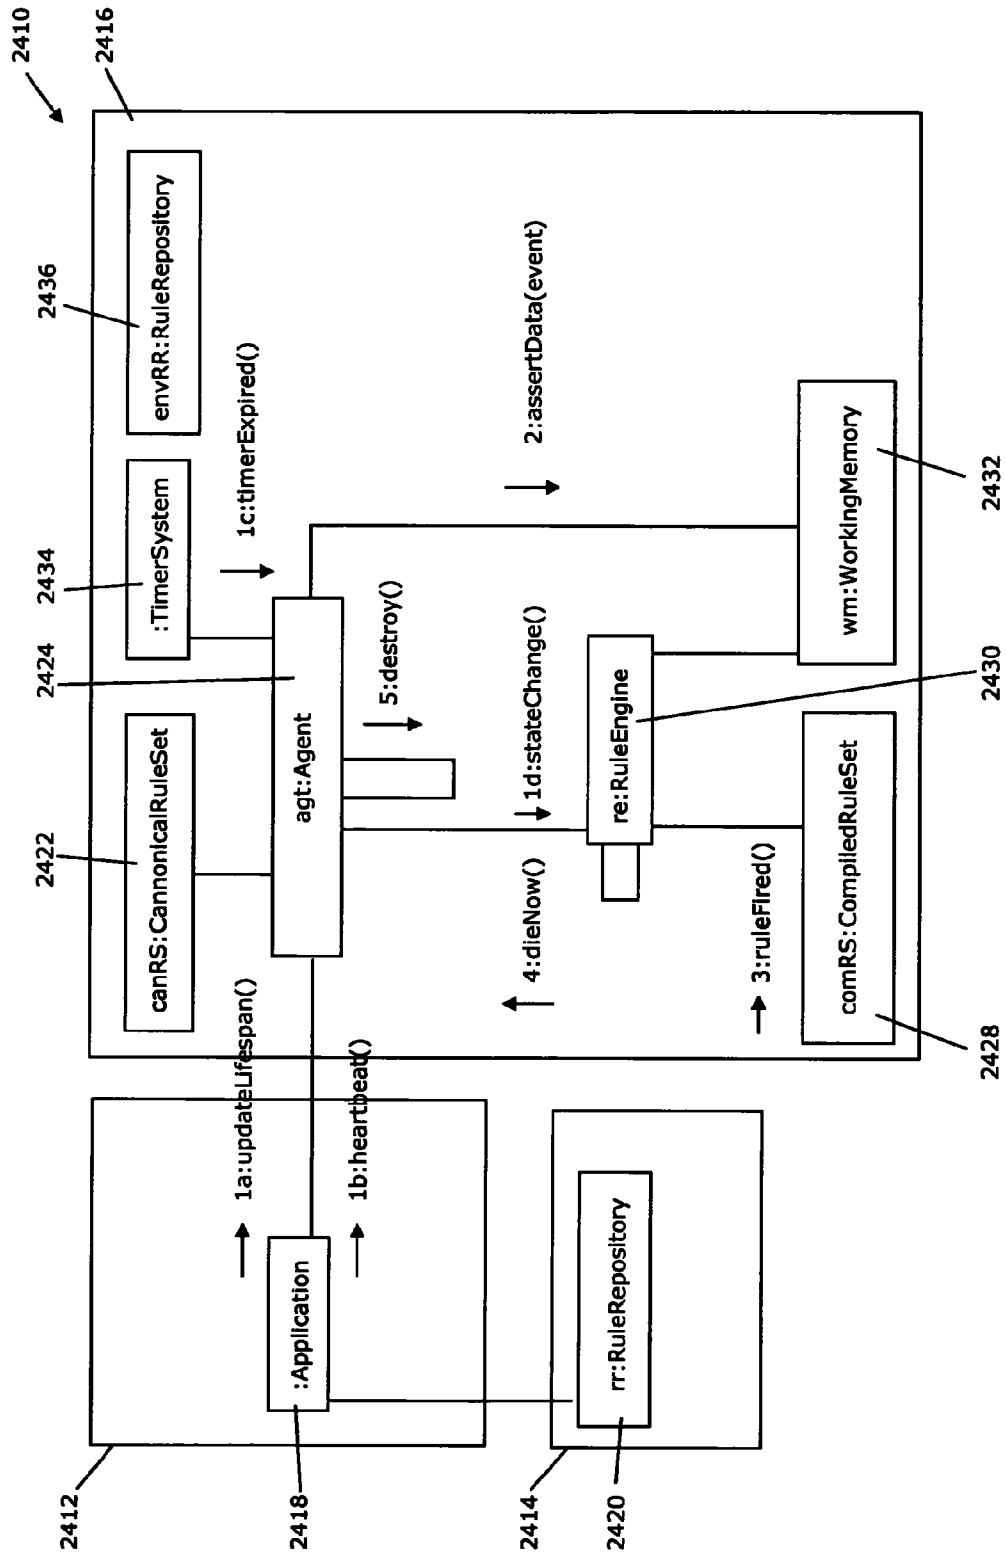


FIG. 24

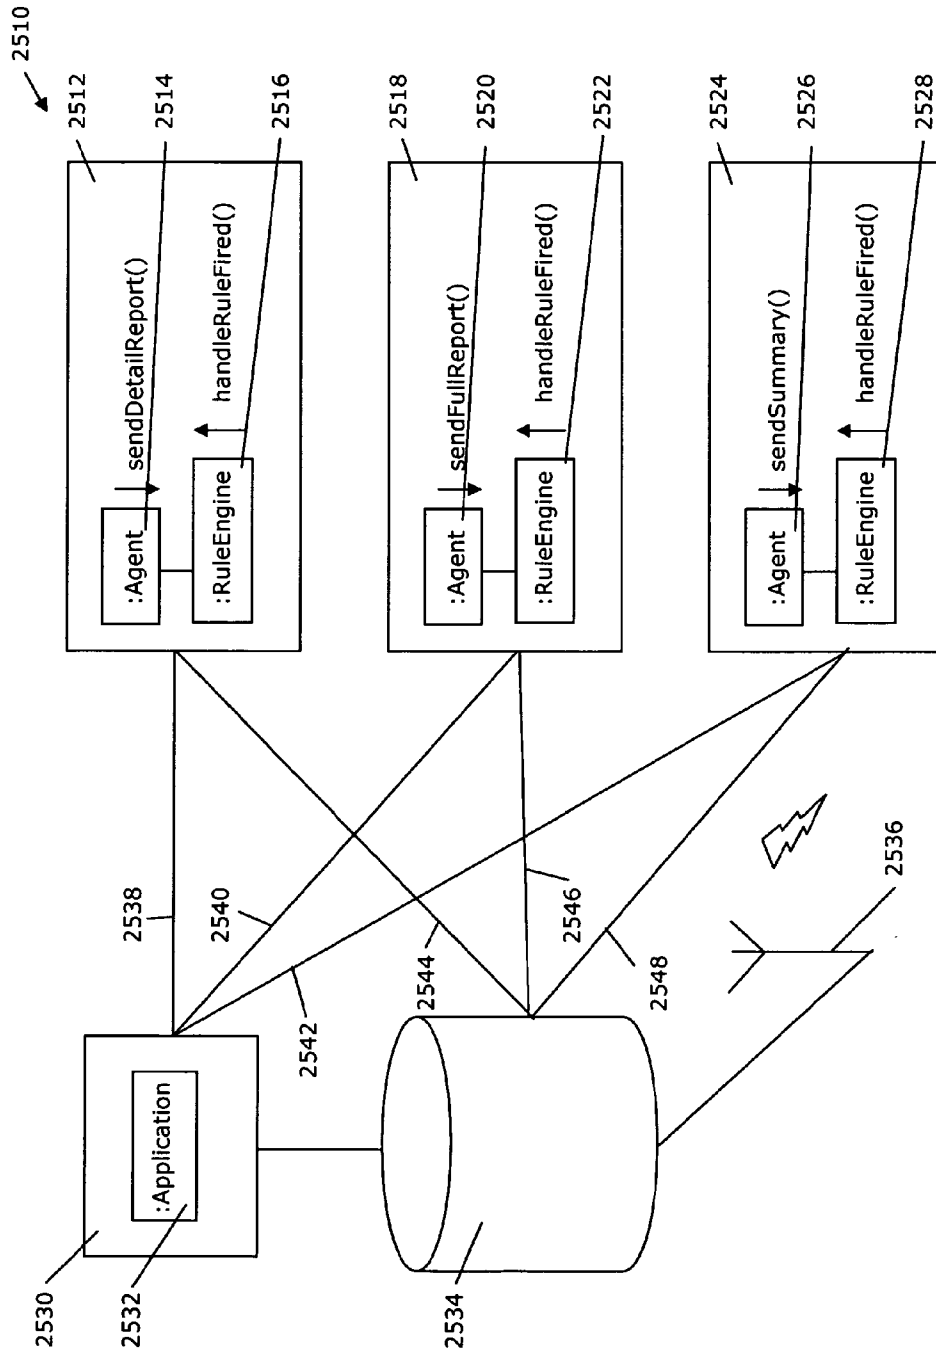


FIG. 25

## MOVEMENT OF AN AGENT THAT UTILIZES AS-NEEDED CANONICAL RULES

### RELATED APPLICATION

This is a continuation of and claims priority to U.S. patent application Ser. No. 11/645,190, entitled "Movement of an Agent that Utilizes As-Needed Canonical Rules," filed on Dec. 22, 2006, the disclosure of which is incorporated by reference herein.

### BACKGROUND

#### Agents

A software agent is a software abstraction, similar to the object-oriented programming concept of an object. The concept of an agent provides a convenient and powerful way to describe a complex software entity that is capable of acting with a certain degree of autonomy in order to accomplish tasks on behalf of its user. But unlike objects, which are defined in terms of methods and attributes, an agent is defined in terms of its behavior.

Various authors have proposed different definitions of agents, commonly including concepts such as:

**Persistence**—code is not executed on demand but runs continuously and decides for itself when it should perform some activity

**Autonomy**—agents have capabilities of task selection, prioritization, goal-directed behavior, decision-making without human intervention

**Social Ability**—agents are able to engage other components through communication and coordination, they may collaborate on a task

**Reactivity**—agents perceive the context in which they operate and react to it appropriately.

Agents may also be mobile. They can move from one execution environment to another carrying both their code and their execution state. These execution environments can exist in a variety of devices in a data network including, but not limited to, servers, desktops, laptops, embedded devices, networking equipment and edge devices such as PDAs or cell phones. The characteristics of these platforms may vary widely in terms of computational capacity, networking capacity, display capabilities, etc. An agent must be able to adapt to these conditions.

Historically, agents have been programmed in a procedural manner. That is, agents are programmed with a series of steps that will ultimately result in a goal being achieved. This approach has limitations though as the logic for each agent must be compiled into the agent software and is therefore static. Complex goals can also become intractable for a programmer as the set of rules the agent must follow grows.

#### Rule-Based Systems

In his tutorial, Introduction to Rule-Based Systems, James Freeman-Hargis defines a rule-based system to consist of a set of assertions and a set of rules for how to act on the assertion set. When a set of data is supplied to the system, it may result in zero or more rules firing. Rule based systems are rather simplistic in nature, consisting of little more than a group of if-then statements, but form the basis of many "expert systems." In an expert system, the knowledge of an expert is encoded into the rule-set. When a set of data is supplied to the system, the system will come to the same conclusion as the expert. With this approach there is a clear separation between the domain logic (a rule set) and the execution of the agent. As mentioned, the procedural agent approach tightly couples the two.

The rule-based system itself uses a simple technique. It starts with a rule-set, which contains all of the appropriate knowledge encoded into If-Then rules, and a working memory, which may or may not initially contain any data, assertions or initially known information. The system in operation examines all the rule conditions (IF) and determines a subset, the conflict set, of the rules whose conditions are satisfied based on the working memory. Of this conflict set, one of those rules is triggered (fired). The rule that is chosen is based on a conflict resolution strategy. When the rule is fired, any actions specified in its THEN clause are carried out. These actions can modify the working memory, the rule-set itself, or do just about anything else the system programmer decides to include. This loop of firing rules and performing actions continues until one of two conditions are met: there are no more rules whose conditions are satisfied or a rule is fired whose action specifies the rule engine execution should terminate.

Rule-based systems, as defined above, are adaptable to a variety of problems. In some problems, working memory asserted data is provided with the rules and the system follows them to see where they lead. This approach is known as forward chaining. An example of this is a medical diagnosis in which the problem is to diagnose the underlying disease based on a set of symptoms (the working memory). A problem of this nature is solved using a forward-chaining, data-driven, system that compares data in the working memory against the conditions (IF parts) of the rules and determines which rules to fire.

In other problems, a goal is specified and the system must find a way to achieve that specified goal. This is known as backward-chaining. For example, if there is an epidemic of a certain disease, this system could presume a given individual had the disease and attempt to determine if its diagnosis is correct based on available information. A backward-chaining, goal-driven, system accomplishes this. To do this, the system looks for the action in the THEN clause of the rules that matches the specified goal. In other words, it looks for the rules that can produce this goal. If a rule is found and fired, it takes each of that rule's conditions as goals and continues until either the available data satisfies all of the goals or there are no more rules that match.

The Rete algorithm is an efficient pattern matching algorithm for implementing forward-chaining, rule-based systems. The Rete algorithm was designed by Dr. Charles L. Forgy of Carnegie Mellon University in 1979. Rete has become the basis for many popular expert systems, including JRules, OPS5, CLIPS, JESS, Drools, and LISA.

A naive implementation of a rule-based system might check each rule against the known facts in the knowledge base, firing that rule if necessary, then moving on to the next rule (and looping back to the first rule when finished). For even moderate sized rules and fact knowledge-bases, this naive approach performs far too slowly.

The Rete algorithm (usually pronounced either 'REET' or 'REE-tee', from the Latin 'rete' for net, or network) provides the basis for a more efficient implementation of an expert system. A Rete-based expert system builds a network of nodes, where each node (except the root) corresponds to a pattern occurring in the left-hand-side of a rule. The path from the root node to a leaf node defines a complete rule left-hand-side. Each node has a memory of facts which satisfy that pattern.

As new facts are asserted or modified, they propagate along the network, causing nodes to be annotated when that fact matches that pattern. When a fact or combination of facts

causes all of the patterns for a given rule to be satisfied, a leaf node is reached and the corresponding rule is triggered.

The Rete algorithm is designed to sacrifice memory for increased speed. In most cases, the speed increase over naive implementations is several orders of magnitude (because Rete performance is theoretically independent of the number of rules in the system). In very large systems, however, the original Rete algorithm tends to run into memory consumption problems which have driven the design of Rete variants.

Therefore, what is needed is an ability to move an agent that utilizes as-needed rules from a first execution environment to a second execution environment. More specifically what is needed is movement of an agent that utilizes a supplied set of as-needed canonical rules from a first execution environment to a second execution environment.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram illustrating an example process of constructing an agent locally with a set of canonical rules supplied during construction in accordance with one or more embodiments;

FIG. 2 is a diagram illustrating an example process of constructing an agent remotely with a set of canonical rules supplied during construction in accordance with one or more embodiments;

FIG. 3 is a diagram illustrating an example process of constructing an agent in a remote execution environment during which a set of canonical rules is retrieved from outside the execution environment in accordance with one or more embodiments;

FIG. 4 is a diagram illustrating an example process of moving an agent carrying canonical rules from a first execution environment in accordance with one or more embodiments;

FIG. 5 is a diagram illustrating an example process of moving an agent carrying canonical rules to a second execution environment in accordance with one or more embodiments;

FIG. 6 process of an agent execution in accordance with one or more embodiments;

FIG. 7 is a diagram illustrating an example process of constructing an agent locally with a set of compiled rules supplied during construction in accordance with one or more embodiments;

FIG. 8 is a diagram illustrating an example process of constructing an agent remotely with a set of compiled rules supplied during construction in accordance with one or more embodiments;

FIG. 9 is a diagram illustrating an example process of constructing an agent remotely during which a set of compiled rules that are retrieved from outside the execution environment in accordance with one or more embodiments;

FIG. 10 is a diagram illustrating an example process of moving an agent carrying compiled rules from a first execution environment in accordance with one or more embodiments;

FIG. 11 is a diagram illustrating an example process of moving an agent carrying compiled rules to a second execution environment in accordance with one or more embodiments;

FIG. 12 is a diagram illustrating an example process of constructing an agent remotely with a set of canonical rules carried by the agent and a set of canonical execution environment rules resident in a remote environment in accordance with one or more embodiments;

FIG. 13 is a diagram illustrating an example process of constructing an agent remotely with a set of canonical rules fetched by the agent and a set of canonical execution environment rules resident in a remote environment in accordance with one or more embodiments;

FIG. 14 is a diagram illustrating an example process of moving an agent carrying canonical rules from a first execution environment that includes execution environment rules in accordance with one or more embodiments;

FIG. 15 is a diagram illustrating an example process of moving an agent carrying canonical rules to a second execution environment that includes a repository of canonical execution environment rules in accordance with one or more embodiments;

FIG. 16 is a diagram illustrating an example process of constructing an agent at a remote location with an as-needed set of canonical rules supplied during construction in accordance with one or more embodiments;

FIG. 17 is a diagram illustrating an example process of constructing an agent at a remote location with an as-needed set of canonical rules fetched during construction in accordance with one or more embodiments;

FIG. 18 is a diagram illustrating an example process of moving an agent with supplied as-needed canonical rules from a first execution environment in accordance with one or more embodiments;

FIG. 19 is a diagram illustrating an example process of moving an agent with supplied as-needed canonical rules to a second execution environment in accordance with one or more embodiments;

FIG. 20 is a diagram illustrating an example process of moving an agent from a first execution environment with a fetched as-needed set of canonical rules in accordance with one or more embodiments;

FIG. 21 is a diagram illustrating an example process of moving an agent to a second execution environment with a fetched as-needed set of canonical rules in accordance with one or more embodiments;

FIG. 22 is a diagram illustrating an example process of a rule-based agent updating rule history when rule processing is halted in an execution environment in accordance with one or more embodiments;

FIG. 23 is a diagram illustrating an example process of a rule-based agent identifying and carrying only needed canonical rules during as part of movement to another execution environment in accordance with one or more embodiments;

FIG. 24 is a diagram illustrating an example process of an agent using a set of survival rules to determine its lifespan in accordance with one or more embodiments; and

FIG. 25 is a diagram illustrating an example process of an agent using a set of data narrowing rules to determine how much data should be sent over the network in accordance with one or more embodiments.

#### DETAILED DESCRIPTION

##### Construction

Agents which utilize rule based systems may be constructed locally or remotely. In order to operate, these agents need an initial set of canonical rules that can be compiled and loaded into an associated rule engine. These rules can either be supplied at construction or a rule repository location can be supplied so that the rules may be fetched during construction or at a later time.

Referring now to FIG. 1, a diagram illustrating an example process of constructing an agent locally with a set of canoni-



cal rules supplied during construction is shown. An application 110, in an execution environment 112, requests a set of rules for an agent from a rule repository 116 based on the goals of the agent that is being created. The result is a collection of canonical rules, known as a rule set 118. The rule set 118 is passed to the agent 120 during construction. The agent 120 takes the rule set 118 and requests that it be compiled by the local rule compiler 122. This results in the creation of a compiled rule set 124. At this point the agent creates the rule engine 126 that will be used to execute the rule set. Note that if the execution environment 112 includes a rule engine, then one may not need to be created. After the rule engine 126 is created or located, the agent 120 supplies the engine 126 with the compiled rule set 124. Finally, the agent 120 requests a new working memory 128 from the rule engine 126. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 120 is ready to be moved to another execution environment or to execute the rule engine. Both of these processes are described in detail in later sections.

Referring now to FIG. 2, a diagram illustrating an example process of constructing an agent remotely with a set of canonical rules supplied during construction is shown. An application 218, in execution environment 212, requests a set of rules for an agent from a rule repository 220 in execution environment 214 based on the goals of the agent that is being created. The result is a collection of canonical rules, known as a rule set 222. The rule set 222 is passed to the agent 224 during construction in execution environment 216. The agent 224 in execution environment 216 takes the rule set 222 and requests that it be compiled by the local rule compiler 226. This results in the creation of a compiled rule set 228. At this point the agent creates the rule engine 230 that will be used to execute the rule set. Note that if execution environment 216 includes a rule engine, then one may not need to be created. After the rule engine 230 is created or located, the agent 224 supplies the engine 230 with the compiled rule set 228. Finally, the agent 224 requests a new working memory 232 from the rule engine 230. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 224 is ready to be moved to another execution environment or to execute the rule engine.

Referring now to FIG. 3, a diagram illustrating an example process of constructing an agent in a remote execution environment during which a set of canonical rules is retrieved from outside the execution environment is shown. An application 318, in execution environment 312, requests the creation of an agent 324 in execution environment 316. Agent 324 is passed the location of a rule repository 320 during construction. During construction, the agent 324 requests a set of rules based on its goals from the rule repository 320 in execution environment 314. The result is a collection of canonical rules, known as a rule set 322. The agent 324 in execution environment 316 takes the rule set 322 and requests that it be compiled by the local rule compiler 326. This results in the creation of a compiled rule set 328. At this point the agent creates the rule engine 330 that will be used to execute the rule set. Note that if execution environment 314 includes a rule engine, then one may not need to be created. After the rule engine 330 is created or located, the agent 324 supplies the engine 330 with the compiled rule set 328. Finally, the agent 324 requests a new working memory 332 from the rule engine 330. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 324 is ready to be moved to another execution environment or to execute the rule engine.

#### Movement

An agent may move from one execution environment to another. This process may be initiated by a variety of means including but not limited to an application, another agent, another object, the existing agent itself, a human interacting with the execution environment or a rule executing in the agent's rule engine.

Referring now to FIGS. 4 and 5, diagrams illustrating an example process of moving an agent carrying canonical rules from one execution environment to another are shown. An application 418 in execution environment 412 requests that an agent 424 in execution environment 414 move to execution environment 416. The location of execution environment 416 may be described in the move request by an IP address and port, Uniform Resource Locator (URL), or any other means of addressing. The agent 424 discards its rule engine 430 along with the associated compiled rule set 428 and working memory 432. The agent 424 then encodes itself along with its canonical rule set 422 into a transferable form 434. Though a byte array is shown, the encoded agent could take any form that can be transferred between the two execution environments. Once the agent 424 has created an encoded version of itself 434 in execution environment 414 it transfers the encoded version 434 to an agent manager 426 residing in execution environment 416.

Referring now to FIG. 5, the process continues with the agent manager 522 receiving the encoded agent 534. Upon receipt of the encoded agent 534, the agent manager 522 decodes the encoded agent 534 into a new version of the agent 524 and the agent's canonical rule set 526 in execution environment 516. Once the agent 524 and rule set 526 have been materialized, the agent manager 522 requests that the agent 524 initialize. This request prompts the agent 524 to go to the execution environment's rule compiler 520 and request compilation of its canonical rule set 526. The result is a compiled rule set 528. The agent then creates a new rule engine 530 and subsequently passes the compiled rule set 528 to it. As during construction, if the execution environment has a rule engine, then one may not need to be created. Once the engine 530 has been located/created and the compiled rule set 528 has been added to it, the agent 524 requests a new working memory from the rule engine. As before, the working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 524 is ready to execute the rule engine. Once the move operation completes, the old version of the agent 518 in execution environment 514 indicates to the requesting application 518 in execution environment 512 that the move operation has completed. Once the notification has been made, the old agent 534 is destroyed.

#### Execution

Once an agent has been initialized in an execution environment through either creation or movement, it can be sent requests to perform different tasks. These tasks may or may not require sending one or more responses. Recall that during construction an agent is associated with a newly created or resident rule engine and that a rule set is provided to that engine.

Referring now to FIG. 6, a diagram illustrating an example process of an agent utilizing a rule-based system engine for execution is shown. An application 616 in execution environment 612 sends a request to an agent 618 in execution environment 614. Upon receiving the request, the agent 618, collects an initial set of data and asserts it into its working memory 624 in order to accomplish the task requested. Note that this data may be collected from the local execution environment, from an accessible database, from other objects,

from other agents, from a human via a man machine interface, from a computer readable medium or any combinations of the above. With a provided compiled rule set 620, and an initial set of data in working memory 624, the rule engine 622 is then started by the agent 618.

When the engine 622 starts, it processes the objects in working memory against the rule set 620. This may result in one or more rules being fired by the engine 622. When a rule is fired it may add, modify or delete objects in working memory 624. Additionally, the engine 622 can inform the agent 618 which may result in a number of actions being taken by the agent 618 including, but not limited to, the collection and assertion of additional data into the working memory 624 (shown) and/or sending of a preliminary response back to the application. This sequence will continue until the task is completed, there are no more rules available to fire, or the agent receives an event, such as move or terminate, causing it to halt rule engine processing. Upon completion of the task, the agent 618 may send a response back to the application 616 that initiated the request (shown).

#### Pre-Compiled Agent Rule Set Usage

As noted above, the process of adding rules to the rule engine can be expensive in terms of CPU utilization on the execution environment in which the operation is performed. This can be problematic for less powerful hosts such as personal devices (cell phones, PDAs, etc.) and servers with limited available CPU resources. Therefore, another embodiment of the invention creates the compiled rule set in the execution environment of the application that creates an agent instead of in the environment in which the agent is constructed or moved.

Referring now to FIG. 7, a diagram illustrating an example process of constructing an agent locally with a set of compiled rules supplied during construction is shown. An application 712, in execution environment 714, requests a set of rules for an agent from a rule repository 720 based on the goals of the agent that is being created. The result is a collection of canonical rules, known as a rule set 724. The application 712 takes the rule set 724 and requests that it be compiled by the local rule compiler 722. This results in the creation of a compiled rule set 724. The rule set 724 is passed to the agent 718 during construction. At this point the agent creates the rule engine 726 that will be used to execute the rule set. Note that if the execution environment 714 includes a rule engine, then one may not need to be created. After the rule engine 726 is created or located, the agent 722 supplies the engine 726 with the compiled rule set 724. Finally, the agent 110 requests a new working memory 728 from the rule engine 726. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 718 is ready to be moved to another execution environment or to execute the rule engine.

Referring now to FIG. 8, a diagram illustrating an example process of constructing an agent remotely with a set of compiled rules supplied during construction is shown. An application 812, in execution environment 814, requests a set of rules for an agent from a rule server 828 in execution environment 818 based on the goals of the agent that is being created. The rule server 828 queries a rule repository 830 for the rules. The result is a collection of canonical rules, known as a rule set 832. The rule server 828 in execution environment 202 takes the rule set 832 and requests that it be compiled by the local rule compiler 834. This results in the creation of a compiled rule set 826. The compiled rule set 826 is passed to the agent 820 during construction in execution environment 204. At this point, the agent 820 creates the rule engine 822 that will be used to execute the rule set. Note that

if execution environment 816 includes a rule engine, then one may not need to be created. After the rule engine 822 is created or located, the agent 820 supplies the engine 822 with the compiled rule set 826. Finally, the agent 820 requests a new working memory 116 from the rule engine 822. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 820 is ready to execute the rule engine.

Referring now to FIG. 9, a diagram illustrating an example process of constructing an agent in a remote execution environment during which a set of compiled rules is retrieved from outside the execution environment is shown. An application 912, in execution environment 914, requests the creation of an agent 920 in execution environment 916. Agent 920 is passed the location of a rule server 928, resident in execution environment 918, during construction. During construction, the agent 920 requests a set of compiled rules based on its goals from the rule server 928 in execution environment 918. The rule server 928 queries a rule repository 930 for a set of rules. The result is a collection of canonical rules, known as a rule set 932. The rule server 928 in execution environment 918 takes the rule set 932 and requests that it be compiled by the local rule compiler 934. This results in the creation of a compiled rule set 926. At this point the agent 920 creates a rule engine 922 that will be used to execute the rule set. Note that if execution environment 916 includes a rule engine, then one may not need to be created. After the rule engine 922 is created or located, the agent 920 supplies the engine 922 with the compiled rule set 926. Finally, the agent 920 requests a new working memory 924 from the rule engine 922. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 920 is ready to execute the rule engine.

Referring now to FIGS. 10-11, diagrams illustrating an example process of moving an agent carrying compiled rules from one execution environment to another are shown. An application 1018 in execution environment 1012 request that an agent 1022 in execution environment 1014 move to execution environment 1016. The location of execution environment 1016 may be described in the move request by an IP address and port, Uniform Resource Locator (URL), or any other means of addressing. The agent 1022 discards its rule engine 1030 along with the associated working memory 1032. Subsequently, the agent 1022 discards its canonical rule set 1020 if it still has a reference to it. The agent 1022 then encodes itself along with its compiled rule set 1028 into a transferable form 1024. Though a byte array is shown, the encoded agent could take any form that can be transferred between the two execution environments. Once the agent 1022 has created an encoded version of itself 1024 in execution environment 1014 it transfers the encoded version 1024 to an agent manager 1026 residing in execution environment 1016.

Referring now to FIG. 11, the process continues with an agent manager 1122 receiving an encoded agent 1134. Upon receipt of the encoded agent 1134, the agent manager 1122 decodes the encoded agent 1134 into a new version of the agent 1124 and its compiled rule set 1128 in execution environment 1116. Once the agent 1124 and rule set 1128 have been decoded, the agent manager 1122 requests that the agent 1124 initialize. This request prompts the agent 1124 to create a new rule engine 1130 and subsequently pass the compiled rule set 1128 to it. As during construction, if the execution environment has a rule engine, then one may not need to be created. Once the engine 1130 has been located/created and the compiled rule set 1128 has been added to it, the agent 1124 requests a new working memory 1132 from the rule engine.

As before, the working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 1124 is ready to execute the rule engine. Once the move operation completes, the old version of the agent 1118 in execution environment 1114 indicates to the requesting application 1118 in execution environment 1112 that the move operation has completed. Once the notification has been made, the old agent 1118 is destroyed.

#### Execution Environment Rule Set Usage

Each execution environment may have access to a local rule repository which allow for the rules for a particular domain, domain rules, to be distributed, or partitioned, in any number of rule repositories. An agent may be configured to only use rules provided at construction essentially ignoring rules available from each execution environment's local rule repository. The more general case is for the agent to make use of the rules that it carries with itself along with the rules extracted from the execution environment's local rule repository. Local rule repositories may contain rules for several different domains and are usually specific to execution environment objects that will be asserted to working memory but may also apply to execution environment concerns such as security, resource usage, scheduling, or any other execution environment attribute.

Referring now to FIG. 12, a diagram illustrating an example process of constructing an agent remotely with a set of canonical rules carried by the agent and a set of canonical rules resident in a remote environment is shown. An application 1218, in execution environment 1212, requests a set of rules for an agent from a rule repository 1220 in execution environment 1214 based on the goals of the agent that is being created. The result is a collection of canonical rules, known as a rule set 1230. The rule set 1230 is passed to the agent 1232 during construction in execution environment 1216. During construction, the agent 1232 requests the set of rules from a local rule repository 1234 given the agent's domain (not shown). The result of which, canonical rule set 1236, is then merged with the construction supplied rule set 1230 to form a merged rule set 1222. This rule set contains all the domain and environment specific rules that the agents' rule engine will execute. The agent 1232 then takes the merged rule set 1222 and requests that it be compiled by the local rule compiler 1226. This results in the creation of a compiled rule set 1238. At this point the agent creates a rule engine 1224 that will be used to execute the rule set 1238. Note that if execution environment 1216 includes a rule engine, then one may not need to be created. After the rule engine 1224 is created or located, the agent 1232 supplies the engine 1224 with the compiled rule set 1238. Finally, the agent 1232 requests a new working memory 1228 from the rule engine 1224. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine.

Referring now to FIG. 13, a diagram illustrating an example process of constructing an agent remotely with a set of canonical rules fetched by the agent and a set of canonical local rules resident in a remote environment is shown. An application 1318, in execution environment 1312, requests the creation of an agent 1332 in execution environment 1316. Agent 1332 is passed the location of a rule repository 1320 during construction. During construction, the agent 1332 requests a set of rules based on its goals from the rule repository 1320 in execution environment 1314. The result is a collection of canonical rules, known as a rule set 1330. During construction, the agent 1332 requests the set of rules from a local rule repository 1334 that apply to its domain. The result of which, canonical rule set 1336, is then merged with

the fetched rule set 104 to form a merged rule set 1322. This rule set contains all the domain and environment specific rules that the agents' rule engine will execute. The agent 1332 then takes the merged rule set 1322 and requests that it be compiled by the local rule compiler 1326. This results in the creation of a compiled rule set 1338. At this point the agent creates a rule engine 1324 that will be used to execute the rule set 1338. Note that if execution environment 1316 includes a rule engine, then one may not need to be created. After the rule engine 1324 is created or located, the agent 1332 supplies the engine 1324 with the compiled rule set 1338. Finally, the agent 1332 requests a new working memory 1328 from the rule engine 1324. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine.

Referring now to FIGS. 14-15, diagrams illustrating an example process of moving an agent carrying canonical rules to an execution environment that includes a local repository of canonical rules are shown. Referring now to FIG. 14, an application 1418 in execution environment 1412 requests that an agent 1422 in execution environment 1414 move to execution environment 1416. The location of execution environment 1416 may be described in the move request by an IP address and port, Uniform Resource Locator (URL), or any other means of addressing. The agent 1422 discards its rule engine 1430 along with the associated compiled rule set 1428 and working memory 1432. The agent 1422 then encodes itself along with its canonical rule set 1420 into a transferable form 1424. Though a byte array is shown, the encoded agent could take any form that can be transferred between the two execution environments. Once the agent 1422 has created an encoded version of itself 1424 in execution environment 1414 it transfers the encoded version 1424 to an agent manager 1426 residing in execution environment 1416.

Referring now to FIG. 15, the process continues with the agent manager 1522 receiving the encoded agent 1534. Upon receipt of the encoded agent 1534, the agent manager 1522 decodes the encoded agent 1534 into a new agent 1526 and its canonical rule set 1540 in execution environment 1516. Once the agent 1526 and rule set 1540 have been decoded, the agent manager 1522 requests that the agent 1526 initialize. This request prompts the agent 1526 to request the set of rules applicable to the agent's domain from a local rule repository 1536. The result of which, canonical rule set 1538, is then merged with the carried rule set 1540 to form a merged rule set 1534. This rule set contains all the domain and environment specific rules that the agents rule engine will execute. The agent 1526 then takes the merged rule set 1534 and requests that it be compiled by the local rule compiler 1524. The result is a compiled rule set 1528. The agent then creates a new rule engine 1530 and subsequently passes the compiled rule set 1528 to it. As during construction, if the execution environment has a sharable rule engine, then one may not need to be created. Once the engine 1530 has been located/created and the compiled rule set 1528 has been added to it, the agent 1526 requests a new working memory 1532 from the rule engine. As before, the working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. Once the move operation completes, the old version of the agent 1520 in execution environment 1514 indicates to the requesting application 1518 in execution environment 1512 that the move operation has completed. Once the notification has been made, the old agent 1520 is destroyed.

#### As-Needed Rules

As there is a cost of carrying around unnecessary rules in terms of both CPU and memory usage, it is desirable in many

cases to supply an agent with a subset of its total potential rule set. This can be done in a context-specific manner based on the goals and execution environment of the agent. For example, if each device upon which an agent will be executing only contains a small screen, then there is no need to carry the rules for display on a standard computer monitor. As another example, an agent who moves progressively further in a single direction, perhaps among GPS enabled fixed location devices, need not carry rules that only apply to previous GPS locations.

Referring now to FIG. 16, a diagram illustrating an example process of constructing an agent at a remote location with an as-needed set of canonical rules supplied during construction is shown. An application 1618, in execution environment 1612, requests a set of rules for an agent from a rule repository 1620 in execution environment 1614 based on the goals and initial execution environment of the agent that is being created. When supplied with a target execution environment, the rule repository 1620 can filter out rules that do not apply to that type of environment. The result is a collection of canonical rules, known as a rule set 1622. The rule set 1622 is passed to the agent 1624 during construction in execution environment 1616. The agent 1624 in execution environment 1616 takes the rule set 1622 and requests that it be compiled by the local rule compiler 1626. This results in the creation of a compiled rule set 1628. At this point the agent creates the rule engine 1630 that will be used to execute the rule set. Note that if execution environment 1616 includes a rule engine, then one may not need to be created. After the rule engine 1630 is created or located, the agent 1624 supplies the engine 1630 with the compiled rule set 1628. Finally, the agent 1624 requests a new working memory 1632 from the rule engine 1630. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 1624 is ready to be moved to another execution environment or to execute the rule engine.

Referring now to FIG. 17, a diagram illustrating an example process of constructing an agent at a remote location with an as-needed set of canonical rules fetched during construction is shown. An application 1718, in execution environment 1712, requests the creation of an agent 1724 in execution environment 1716. Agent 1724 is passed the location of a rule repository 1720 during construction. During construction, the agent 1724 requests a set of rules based on its goals and execution environment from the rule repository 1720 in execution environment 1714. When supplied with the target execution environment, the rule repository 1720 can filter out rules that do not apply to that type of environment. The result is a collection of canonical rules, known as a rule set 1722. The agent 1724 in execution environment 204 takes the rule set 1722 and requests that it be compiled by the local rule compiler 1726. This results in the creation of a compiled rule set 1728. At this point the agent creates the rule engine 1730 that will be used to execute the rule set. Note that if execution environment 1714 includes a rule engine, then one may not need to be created. After the rule engine 1730 is created or located, the agent 1724 supplies the engine 1730 with the compiled rule set 1728. Finally, the agent 1724 requests a new working memory 1732 from the rule engine 1730. The working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. At this point, the agent 1724 is ready to be moved to another execution environment or to execute the rule engine.

Referring now to FIGS. 18-19, diagrams illustrating an example process of moving an agent from one execution environment to another with a supplied as-needed set of

canonical rules are shown. An application 1818 in execution environment 1812 requests that an agent 1822 in execution environment 1814 move to execution environment 1816. The location of execution environment 1816 may be described in the move request by an IP address and port, Uniform Resource Locator (URL), or any other means of addressing. The move request includes a new as-needed canonical rule set 1834 based on the agent's goals and target execution environment. The agent 1822 discards its rule engine 1830 along with the associated compiled rule set 1828 and working memory 1832. In addition the agent 1822 discards its old canonical rule set 1820. At this point, the agent 1822 encodes itself along with its new as-needed canonical rule set 1834 into a transferable form 1824. Though a byte array is shown, the encoded agent could take any form that can be transferred between the two execution environments. Once the agent 1822 has created an encoded version of itself 1824 in execution environment 1814 it transfers the encoded version 1824 to an agent manager 1826 residing in execution environment 1816.

Referring now to FIG. 19, the process continues with the agent manager 1922 receiving an encoded agent 1934. Upon receipt of the encoded agent 1934, the agent manager 118 decodes the encoded agent 1934 into a new version of the agent 1924 and its new canonical rule set 1926 in execution environment 1916. Once the agent 1924 and rule set 1926 have been materialized, the agent manager 1922 requests that the agent 1922 initialize. This request prompts the agent 1922 to go to the execution environments' rule compiler 1920 and request compilation of its canonical rule set 1926. The result is a compiled rule set 1928. The agent then creates a new rule engine 1930 and subsequently passes the compiled rule set 1928 to it. As during construction, if the execution environment has a rule engine, then one may not need to be created. Once the engine 1928 has been located/created and the compiled rule set 1926 has been added to it, the agent 1922 requests a new working memory from the rule engine. As before, the working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. Once the move operation completes, the old version of the agent 1918 in execution environment 1914 indicates to the requesting application 1918 in execution environment 1912 that the move operation has completed. Once the notification has been made, the old agent 1934 is destroyed.

Referring now to FIGS. 20-21, diagrams illustrating an example process of moving an agent from one execution environment to another with a fetched as-needed set of canonical rules are shown. An application 2018 in execution environment 2012 requests that an agent 2022 in execution environment 2014 move to execution environment 2016. The location of execution environment 2016 may be described in the move request by an IP address and port, Uniform Resource Locator (URL), or any other means of addressing. The move request includes a reference to a rule repository 2038 from which the agent should fetch a new as-needed rule set. Upon receiving the move request, the agent 2022 requests a new as-needed rule set from the supplied rule repository 2038 based on its goals and target execution environment 2016. After receiving the new canonical rule set 2034, the agent 2022 discards its rule engine 2030 along with the associated compiled rule set 2028 and working memory 2032. In addition the agent 2022 discards its old canonical rule set 2020. At this point, the agent 2022 encodes itself along with its new as-needed canonical rule set 2034 into a transferable form 2024. Though a byte array is shown, the encoded agent could take any form that can be transferred between the two execution environments. Once the agent 2022 has created an

encoded version of itself **2024** in execution environment **2014** it transfers the encoded version **2024** to an agent manager **2026** residing in execution environment **2016**.

Referring now to FIG. **21**, the process continues with the agent manager **2122** receiving an encoded agent **2134**. Upon receipt of the encoded agent **2134**, the agent manager **2122** decodes the encoded agent **2134** into a new version of the agent **2124** and its new canonical rule set **2126** in execution environment **204**. Once the agent **2124** and rule set **124** have been materialized, the agent manager **2122** requests that the agent **2124** initialize. This request prompts the agent **2124** to go to the execution environment's rule compiler **2120** and request compilation of its canonical rule set **2126**. The result is a compiled rule set **2128**. The agent then creates a new rule engine **130** and subsequently passes the compiled rule set **2128** to it. As during construction, if the execution environment has a sharable rule engine, then one may not need to be created. Once the engine **2130** has been located/created and the compiled rule set **2126** has been added to it, the agent **2124** requests a new working memory from the rule engine. As before, the working memory will hold all of the data the agent chooses to assert before and during execution of the rule engine. Once the move operation completes, the old version of the agent **2138** in execution environment **2114** indicates to the requesting application **2118** in execution environment **2112** that the move operation has completed. Once the notification has been made, the old agent **2138** is destroyed.

#### Dynamic Determination of Needed Rules

Large rule sets, even with efficient algorithms such as Rete, are often expensive in computation and bandwidth. The process of dynamically removing rules considered unlikely to be useful has a benefit to performance and also, combined with mobile agents, provides an efficient method for utilizing large rule sets that can be partitioned across many repositories. This method also allows an agent to dynamically change the rules to meet the execution environment processing task.

Each constructed agent has a unique identifier for itself and this identifier is also known to the agent's originator. At the point of origination, this identifier will be associated with the agent's outcome. An example outcome is successfully attaining an end goal and sending the results back to the application. Another example outcome is the loss or death of the agent. An agent that is determined to be lost or dead may cause a replacement agent to be launched. The replacement agent will have a unique identifier that differs from the original agent. In addition to a unique agent identifier, an agent also carries with it an indicative subset of the set of previously completed agent outcomes for the given domain. This is a set of unique identifiers and outcomes for agents that have previously executed in the domain of the current agent.

In each execution environment, the local rule repository not only stores rules, but is also the location for agents to record statistics about rule engine activity for the rules in the rule set given to the rule engine. These instrumented rules include agent carried rules and rules for the domain that were retrieved from the local rule repository. Alternately, only the locally acquired domain rules may be instrumented.

Referring now to FIG. **22**, a diagram illustrating an example process of a rule-based agent updating rule statistics when rule processing has completed in an execution environment is shown. As before, an agent **2218** starts its associated rule engine **2222** to process its compiled rule set **2220**. During the course of execution, the rule engine **2222** may successfully match part of the condition (left hand side) of a rule, may match the condition of a rule and activate it, or may match and activate and fire a rule (perform the consequences of the rule). A rule engine may provide for collection of the statistics for

the phases of rule activity mentioned. Alternately, the agent may integrate listener code to monitor these phases of rule execution and collect the statistics as the rule engine executes. A rule being fired may result in the rule asserting new data into the working memory **2224** and/or the agent **2218** collecting more data and asserting that into the working memory **2224**. Once an end goal terminates rule processing, or the agent receives a move event, a termination event, a timeout or some other event, then the rule engine is halted. At this point, the agent **2218** requests rule statistics from the rule engine **2222** or collects the statistics from the agent's rule engine listener. These statistics may include, but are not limited to the number of times a rule was fired, the number of times a rule was activated, the number of times a goal in the condition of a rule was matched, the number of times a part of the condition of a rule was matched, or any combination of the above. The statistics **2226** are then added to aggregate rule history stored in the local rule repository **2216**. These stored statistics may include statistics for rules that are not available in the local rule repository since an agent can carry rules with it as it moves.

When the agent prepares to move to another execution environment it dynamically determines to remove unnecessary rules by consulting the rule history associated with some or all of the rules in its current rule set in conjunction with the indicative subset of previously completed agent outcomes that the agent carries. Referring now to FIG. **23**, a diagram illustrating an example process of a rule-based agent dynamically removing unnecessary rules as part of movement to another execution environment is shown. An application **2318** requests that an agent **2326** in execution environment **2314** move to execution environment **2316**. The agent **2326** requests a set of rules from the local rule repository **2322** that are allowed to be carried to other platforms. The result is a canonical rule set **2334**. This rule set is then merged with the set of rules **2320** that the agent **2326** carried with it to execution environment **2314**. The result is canonical rule set **2336**.

At this point the agent consults the local rule repository **2322** to get the rule history **2330** of the rules in set **2336**. The agent **2326** then uses the rule history **2330** with its carried set of previous agent outcomes to remove rules from rule set **116** that are unlikely to participate in a desired outcome. The statistics are used in aggregate form. As an example consider an agent that carries the results of **2318** previously executed agents and their outcomes, 50 of which were desirable outcomes. The agent examines the metrics for a particular rule named "A" which shows that it was never activated. The agent then removes rule "A" from its agent carried rule set. As another example consider rule "B" which has been activated and fired in one-third of previous desirable outcomes but also has been active and fired in nearly all negative outcomes. Rule "B" remains in the agent carried rule set. Finally, a rule, "C", which never activates for any as yet recorded desired outcomes but has been active in almost all negative outcomes can be considered a computational burden and removed from the agent carried rule set. Although activation is a criterion above, finer grained partial left-hand side matching statistics can be used as well. Since rule removal requires an aggregate of previous runs a threshold is provided so that no rule deletion is permitted until a requisite number of outcomes has been obtained.

Once the pruned rule set **2332** has been created, the agent **2326** encodes itself along with its pruned rule set **2332** into a transferable form in execution environment **2314**. The agent **2326** then transfers the encoded version of itself in execution environment **2314** to an agent manager **2346** resident in the

target execution environment **2316**. The remainder of the move process follows that of FIG. **5**.

#### Survivability Rules

All agents have a lifespan; but that lifespan need not be pre-determined if a set of rules around survivability of an agent is put in place. These rules may be agent specific or execution environment specific. They may be carried with the agent or resident in a rule repository for the execution environment. As these rules are like any other declarative rules, they may be any combination of the above according to the teachings of this invention. In addition, these rules may be used in conjunction with more typical survivability mechanisms such as heartbeats between the application and the agent.

Referring now to FIG. **24**, a diagram illustrating an example process of an agent using a set of survival rules to determine its lifespan is shown. Agent survivability is controlled by the rules loaded in the local compiled rule set **2428**. As before, the local rule set may be comprised of rules supplied or fetched from rule repository **2420** during construction, rules carried from other visited execution environments and/or execution environment specific rules retrieved from rule repository **2426**. Many sources of data that may be asserted into the working memory and, combined with the local rule set **2428**, affect the agent's **2424** lifespan. Examples include lifespan update events from application **2418**, heartbeat events from application **2418**, timer events from the execution environment's timer system **2434**, and even state change events from the agent **2424** itself. As data is asserted into the working memory, the rules engine guarantees that applicable rules are fired. Any number of rules might result in the agent **2424** taking actions that affect its survivability. This includes death of the agent **2424** which is shown. When an agent **104** dies it halts rule engine processing, records any collected historical statistics for the local rule set and stores these in the rule repository **2436**.

#### Data Narrowing Rules

Agent may visit many execution environments each with differing levels of network connectivity or an execution environment with multiple levels/types of network connectivity. Given this, it is important that an agent take this into consideration when responding to application requests, sending periodic reports, and determining how much data to carry with it when moving. As per the teachings of this invention, execution environment specific rules are an ideal method for insuring the appropriate agent behavior. If the networking capabilities of the execution environment are static, then rules for this may be maintained in the rule repository on the execution environment running the application that launched the agent. In many cases though, the capabilities may be more dynamic in which case the rules regarding network bandwidth are better kept on the remote execution environment.

Referring now to FIG. **25**, a diagram illustrating an example process of the of an agent using a set of data narrowing rules to determine how much data should be sent over the network is shown. This diagram shows the same agent in three different scenarios. As before, each agent is communicating with an application **2532** that in this case is hosted on server **2530** which is connected to a high-speed data network, **2534**. In the first scenario, the agent **2514** has been constructed on or moved to server execution environment **2512**, which is connected to the high speed data network directly via a gigabit ethernet link **2544**. The agent **2514** utilized a rule-based system that is driven by the associated rule engine **2516**. This engine **2516** has been loaded with execution environment specific rules about the current network bandwidth capabilities of the execution environment **2512**. In this example the

agent **106** completes a task which will ultimately generate a report back to the application **2532** on execution environment **2530**. When that task completes, that event causes a rule to fire in the engine **2516**, which instructs the agent **2514** to send a detailed report. In this case, a detailed report is appropriate because a high bandwidth connection is available between the agent **2514** and the application **2532**.

In the second scenario, that same agent now labeled **114** has moved to a home computer **2518** which is connected to the network via a DSL connection **2546**. As before, the engine **2522** is loaded with the execution environment specific rules regarding bandwidth available to the execution environment. As the agent **2520** completes its task, the event causes a rule to fire, which instructs agent **2520** to send a full report, which contains less data than the detailed report described previously. Note, that the agent **2520** is not compressing the same data, but sending a different data-set back—a subset of the data to fit the bandwidth available.

In the final scenario, the agent, now labeled **2526** has moved to the mobile device **2524**. The mobile device is connected to the high speed data network via a relatively low speed cellular data network **2536**. As before, the agent **2526** completes its task which results in the rule engine **2528** firing a rule. This firing causes the agent **2526** to dispatch a much smaller summary report to the application **2532** in order to accommodate the low bandwidth connection.

Methods, computer readable media and systems have been shown and/or described in the above embodiments for moving an agent that utilizes supplied rules and rules resident in an execution environment. Although the above descriptions set forth embodiments, it will be understood that there is no intent to limit the invention by such disclosure, but rather, it is intended to cover all modifications and alternate implementations falling within the spirit and scope of the invention. For example, the present invention should not be limited to a single agent, or to a particular programming language for the execution environment. Furthermore, the association of agent to execution environments is not limited to the topology depicted. Lastly, the embodiments are intended to cover capabilities and concepts whether they be via a loosely couple set of components or they be converged into one or more integrated components, devices, circuits, and/or software programs.

What is claimed is:

1. A computer-implemented method, comprising: receiving an encoded agent in an execution environment, the encoded agent being received from a different execution environment, the encoded agent including an as-needed canonical rule set; decoding the encoded agent to create a decoded agent; compiling the as-needed canonical rule set; searching to locate a rule engine; creating a rule engine in response to a failure to locate the rule engine; supplying a created or a found rule engine with a compiled as-needed canonical rule set; and requesting a working memory from the rule engine.

2. The computer-implemented method of claim **1**, wherein creating the rule engine comprises creating the rule engine using the decoded agent.

3. The computer-implemented method of claim **1**, wherein receiving the encoded agent comprises receiving the encoded agent using an agent manager residing in the execution environment that receives the encoded agent.

4. An article of manufacture including a computer-readable medium having instructions stored thereon that, responsive to

17

execution by a computing device, cause the computing device to perform operations comprising:

receiving an encoded agent in an execution environment, the encoded agent being received from a different execution environment, the encoded agent including an as-needed canonical rule set;

decoding the encoded agent to create a decoded agent;

compiling the as-needed canonical rule set;

searching to locate a rule engine;

creating a rule engine in response to a failure to locate the rule engine;

supplying a created or found rule engine with a compiled as-needed canonical rule set; and

requesting a working memory from the rule engine.

5. The article of manufacture of claim 4, wherein creating the rule engine comprises creating the rule engine by the decoded agent.

6. The article of manufacture of claim 4, wherein receiving the encoded agent comprises receiving the encoded agent by an agent manager residing in the execution environment that receives the encoded agent.

7. An article of manufacture including a computer-readable medium having instructions stored thereon that, responsive to execution by a computing device, cause the computing device to perform operations comprising:

moving an agent that utilizes a first as-needed canonical rule set in a first execution environment embodied on a first device to a second execution environment embodied on a second device, where the agent utilizes a second as-needed canonical rule set, by at least:

discarding a rule in the first execution environment that will not be needed in the second execution environment;

retrieving an additional rule that will be needed in the second execution environment; and

sending the agent including the additional rule from the first execution environment to the second execution environment.

8. The article of manufacture of claim 7, wherein a discarded rule is specific to a context of the first execution environment.

9. The article of manufacture of claim 7, wherein a retrieved additional rule is specific to a context of the second execution environment.

10. The article of manufacture of claim 7, wherein the operations further comprise discarding the first as-needed canonical rule set in the first execution environment.

11. A system comprising:

a tangible computer-readable storage medium;

an agent, embodied on the tangible computer-readable storage medium and configured to utilize a first as-needed canonical rule set in a first execution environment embodied on a first device, the agent further being configured to, responsive to a request by an application to move the agent to a second execution environment embodied on a second device, utilize a second as-needed canonical rule set by at least:

discarding a rule in the first execution environment that will not be needed in the second execution environment;

retrieving an additional rule that will be needed in the second execution environment; and

sending the agent including the additional rule from the first execution environment to the second execution environment.

18

12. The system as recited in claim 11, wherein the second as-needed canonical rule set is supplied in the request to move the agent.

13. The system as recited in claim 11, wherein the agent is further configured to retrieve the second as-needed canonical rule set from a rule repository based on goals of the agent and destination execution environment.

14. A computer-implemented method, comprising:

moving an agent that utilizes a first as-needed canonical rule set in a first execution environment embodied on a first device to a second execution environment embodied on a second device by at least:

requesting a second as-needed canonical rule set based on a goal and an execution environment of the agent; requesting movement of the agent from the first execution environment to the second execution environment;

encoding the agent with the second as-needed canonical rule set; and

sending an encoded agent with the second as-needed canonical rule set from the first execution environment to the second execution environment, wherein the sending causes the encoded agent to be decoded in the second execution environment.

15. The computer-implemented method as recited in claim 14, wherein the requesting the second as-needed canonical rule set is performed by an application requesting the second as-needed canonical rule set from a rule repository.

16. A computer-implemented method as recited in claim 15, wherein the rule repository is in a third execution environment.

17. The computer-implemented method as recited in claim 14, further comprising supplying the second as-needed canonical rule set as part of the request for movement of the agent.

18. The computer-implemented method as recited in claim 14, wherein the request includes a location of a rule repository that can supply the second as-needed canonical rule set.

19. The computer-implemented method as recited in claim 18, wherein the agent is configured to cause the second as-needed canonical rule set to be fetched from the rule repository when the agent arrives in the second execution environment.

20. An article of manufacture including a computer-readable medium having instructions stored thereon that, responsive to execution by a computing device, cause the computing device to perform operations comprising:

moving an agent that utilizes a first as-needed canonical rule set in a first execution environment to a second execution environment where the agent utilizes a second as-needed canonical rule set, by at least:

discarding the first as-needed canonical rule set;

retrieving the second as-needed canonical rule set;

encoding the agent including the second as-needed canonical rule set;

sending an encoded agent with the second as-needed canonical rule set to the second execution environment; and

destructing an original version of the agent in the first execution environment.

21. The article of manufacture of claim 20, wherein a discarded rule is specific to a context of the first execution environment.

22. The article of manufacture of claim 20, wherein the second as-needed canonical rule set is retrieved from a move request.

23. The article of manufacture of claim 20, further comprising compiling the second as-needed canonical rule set.

24. A computer-implemented method, comprising:

moving an agent that utilizes a first as-needed canonical rule set in a first execution environment to a second execution environment where the agent utilizes a second as-needed canonical rule set, by at least:

discarding the first as-needed canonical rule set;

retrieving the second as-needed canonical rule set;

encoding the agent including the second as-needed canonical rule set;

sending an encoded agent with the second as-needed canonical rule set to the second execution environment; and

destructing an original version of the agent in the first execution environment.

25. The computer-implemented method as recited in claim 24, further comprising retrieving the second as-needed canonical rule set from a rule repository given goals of the agent and destination execution environment.

26. The computer-implemented method as recited in claim 24, further comprising compiling the second as-needed canonical rule set and supplying a compiled as-needed canonical rule set to a rule engine for execution.

27. The computer-implemented method as recited in claim 24, further comprising supplying a location of a rule repository that can supply the second as-needed canonical rule set as part of a request for movement of the agent.

\* \* \* \* \*



UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,904,404 B2  
APPLICATION NO. : 12/647964  
DATED : March 8, 2011  
INVENTOR(S) : Patoskie

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Page 4, item (56), under "Other Publications", in Column 1, Line 50, delete "Universit Collese" and insert -- University College --.

Page 4, item (56), under "Other Publications", in Column 2, Line 16, delete "Framw" and insert -- Frame --.

Page 4, item (56), under "Other Publications", in Column 2, Line 46, delete "Heterogenous" and insert -- Heterogeneous --.


Page 4, item (56), under "Other Publications", in Column 2, Line 46, delete "Teschischen" and insert -- Technischen --.

Column 16, line 50, in Claim 1, delete "set;" and insert -- set adapted from the different execution environment for the execution environment; --.

Column 17, line 6, in Claim 4, delete "set;" and insert -- set adapted from the different execution environment for the execution environment; --.

Column 18, line 30, in Claim 16, delete "A" and insert -- The --.

Signed and Sealed this  
Ninth Day of August, 2011



David J. Kappos  
*Director of the United States Patent and Trademark Office*