




(86) Date de dépôt PCT/PCT Filing Date: 1997/02/25
 (87) Date publication PCT/PCT Publication Date: 1997/11/27
 (45) Date de délivrance/Issue Date: 2008/06/10
 (85) Entrée phase nationale/National Entry: 1998/01/02
 (86) N° demande PCT/PCT Application No.: US 1997/002721
 (87) N° publication PCT/PCT Publication No.: 1997/044253
 (30) Priorité/Priority: 1996/05/17 (US649,364)

(51) Cl.Int./Int.Cl. *B65D 71/30* (2006.01),
B65D 5/46 (2006.01)
 (72) Inventeur/Inventor:
FOGLE, JAMES C., US
 (73) Propriétaire/Owner:
GRAPHIC PACKAGING INTERNATIONAL, INC., US
 (74) Agent: MACRAE & CO.

(54) Titre : CARTONNAGE DE TRANSPORT D'ARTICLES DOTE D'UNE POIGNEE MONOBLOC
 (54) Title: ARTICLE CARRIER WITH INTEGRAL HANDLE

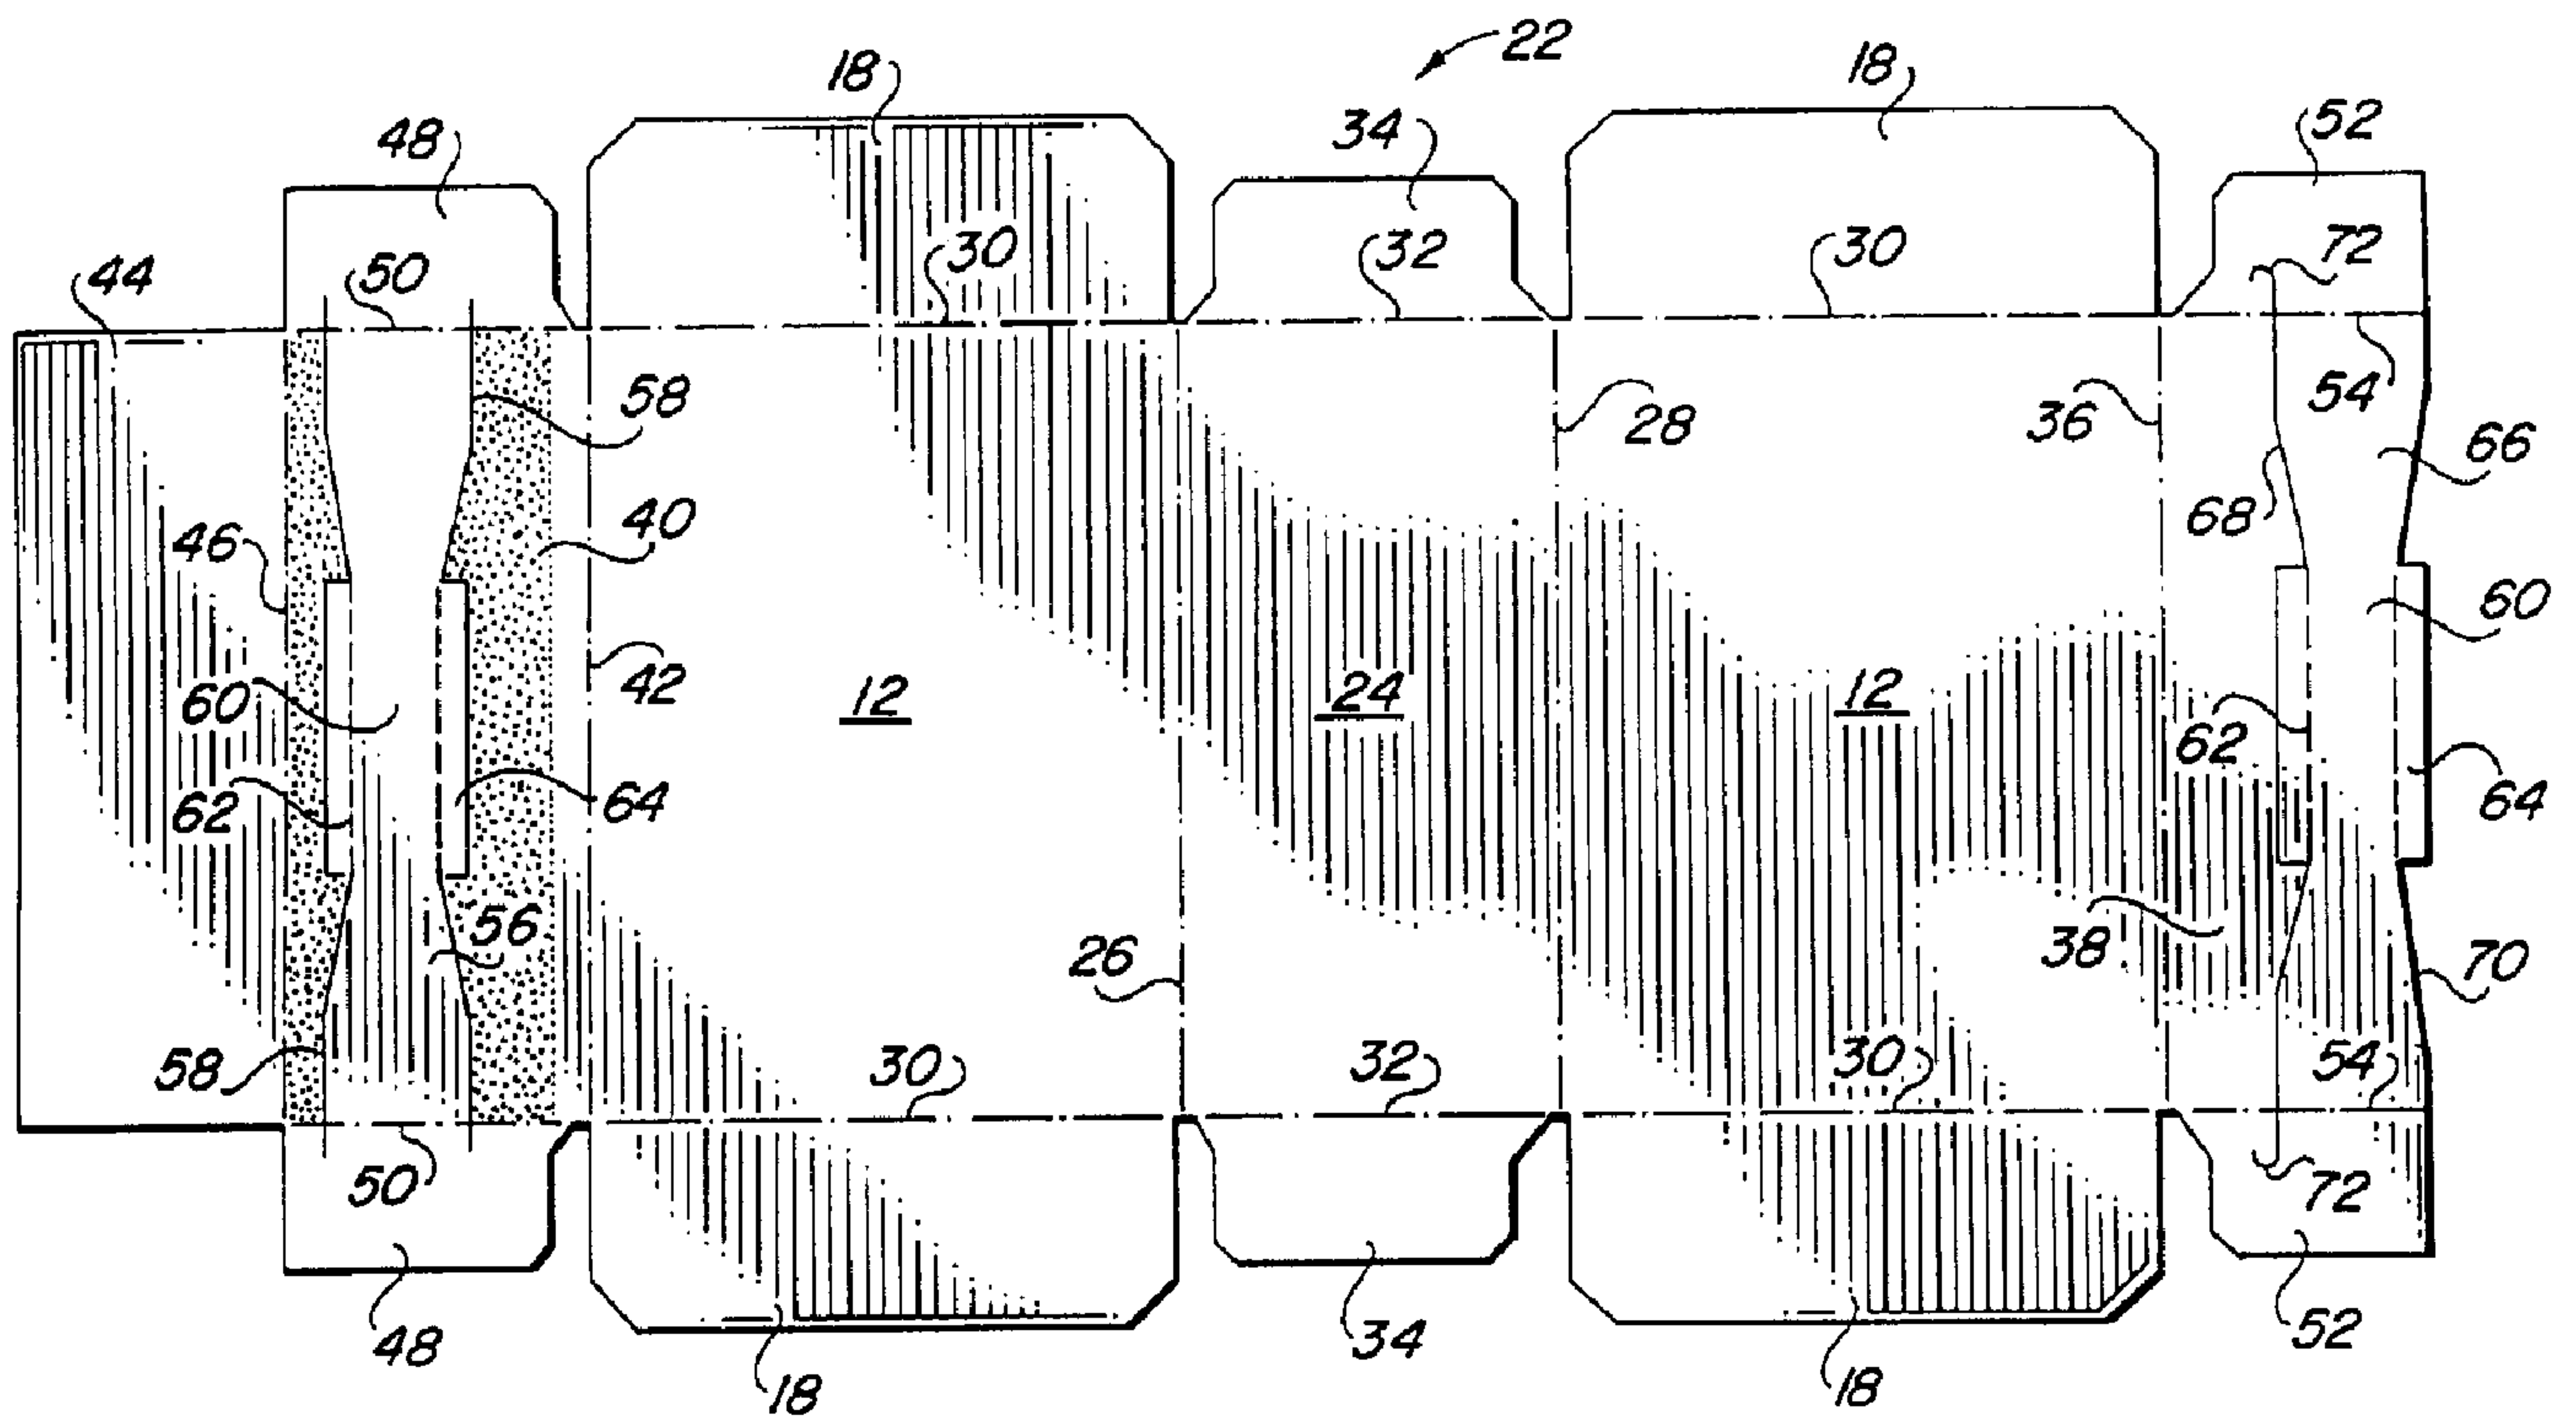

(57) Abrégé/Abstract:

A carrier (10) having an integral handle (20) extending from one end panel to the other. The top panel is formed by overlapping flaps (38, 40) extending from the side panels (12). A handle strap (60) extending along the length of the carrier (10) is defined by slits (58, 60) in each of the top panel flaps (38, 40) and a reinforcing flap (44) is adhered to the overlapped top panel flap (40). The handle straps (60) overlies and are adhered to each other to form a two-ply handle (20). The reinforcing flap (44) spans the opening vacated by the handle straps (60) when the carrier (10) is lifted.




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65D 5/462	A1	(11) International Publication Number: WO 97/44253 (43) International Publication Date: 27 November 1997 (27.11.97)
<p>(21) International Application Number: PCT/US97/02721</p> <p>(22) International Filing Date: 25 February 1997 (25.02.97)</p> <p>(30) Priority Data: 08/649,364 17 May 1996 (17.05.96) US</p> <p>(71) Applicant: RIVERWOOD INTERNATIONAL CORPORATION [US/US]; Suite 1400, 3350 Cumberland Circle, Atlanta, GA 30339 (US).</p> <p>(72) Inventor: FOGLE, James, C.; 4239 Coveway, Marietta, GA 30067 (US).</p> <p>(74) Agent: MCLARY, Steve, M.; Riverwood International Corporation, Suite 1400, 3350 Cumberland Circle, Atlanta, GA 30339 (US).</p>	<p>(81) Designated States: AU, BR, CA, JP, NZ, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: ARTICLE CARRIER WITH INTEGRAL HANDLE

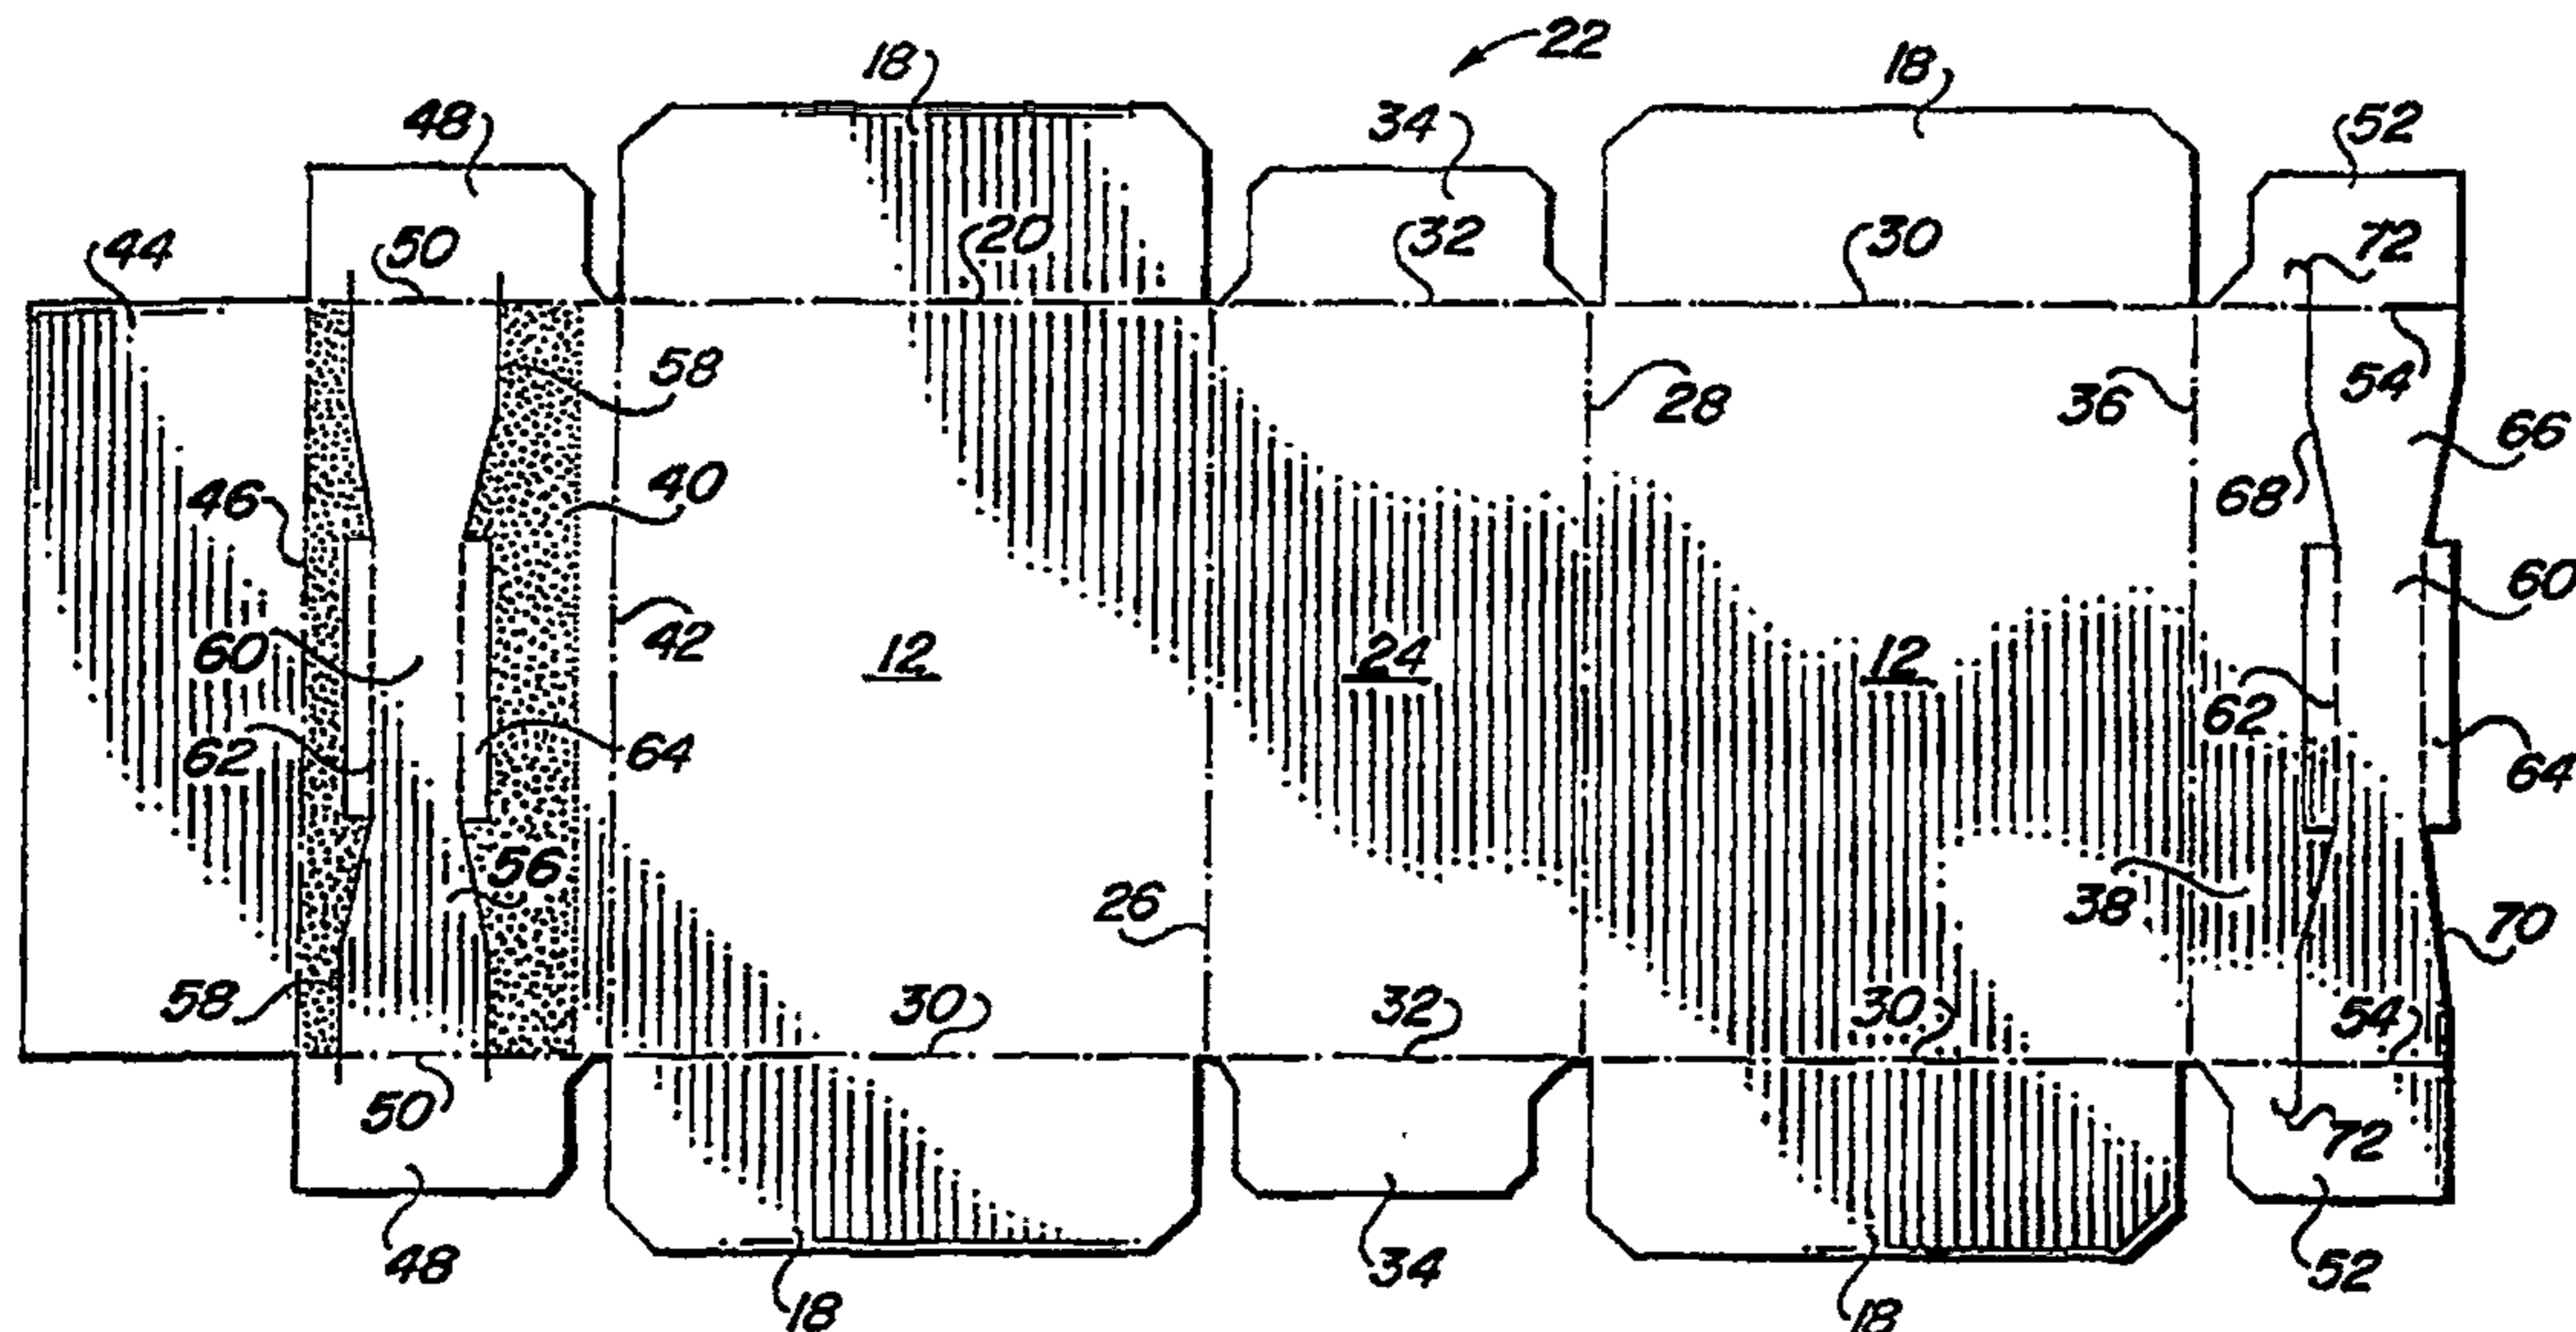

(57) Abstract

A carrier (10) having an integral handle (20) extending from one end panel to the other. The top panel is formed by overlapping flaps (38, 40) extending from the side panels (12). A handle strap (60) extending along the length of the carrier (10) is defined by slits (58, 60) in each of the top panel flaps (38, 40) and a reinforcing flap (44) is adhered to the overlapped top panel flap (40). The handle straps (60) overlie and are adhered to each other to form a two-ply handle (20). The reinforcing flap (44) spans the opening vacated by the handle straps (60) when the carrier (10) is lifted.

-1-

ARTICLE CARRIER WITH INTEGRAL HANDLE

Field of the Invention

This invention relates to article carriers which
5 incorporate integrally formed handles. More particularly,
it relates to a carrier of this type which has a handle
extending the length of the carrier.

Background of the Invention

Article carriers are normally provided with a handle
10 for convenient lifting. Although it may take many forms
depending on the type of carrier involved, a satisfactory
handle should be designed so as to be readily grasped,
comfortable to the hand and capable of lifting the carrier
without tearing. For carriers containing heavy loads, such
15 as beverage cans or bottles, it is often necessary to
reinforce the handle by making it of multi-ply
construction. For example, in fully enclosed sleeve-type
carriers the top panel is often formed by overlapping top
panel flaps located at the ends of a blank. Each flap
20 contains a handle opening arranged so that the top panel
of the carrier includes two spaced openings. This
arrangement is sometimes referred to as a "suitcase handle"
since the strap portion of the top panel between the handle
openings is gripped in the manner of a suitcase handle.
25 Although the strap is made stronger by this two-ply
construction, lifting stresses are still concentrated
within a small area at the ends of the short strap and the
edges of the handle openings.

An alternative to the suitcase type of handle is an
30 elongated strap extending from one end panel to the other.
This has the advantage of distributing lifting stresses to
the ends of the carrier where they are more readily
disseminated with less risk of tearing the carrier. Such
an arrangement, however, can introduce other problems. If
35 the handle is formed as an integral part of the top panel,
it separates from the top panel when lifted, leaving an
opening in the top panel through which dirt and dust can

-2-

enter. If the handle is attached as a separate unit the top panel can remain intact but the carrier fabrication process is made more complicated.

5 One attempt to provide an integral handle which leaves the top panel substantially intact is disclosed in U.S. Patent No. 5,328,081. In the disclosed design the carrier is formed from a blank in which the top panel section is an interior part of the blank and the handle is formed from portions of the top panel which are folded accordion
10 fashion and glued together. The handle is of two-ply construction extending along the full length of the carrier, and the top panel remains intact when the handle is raised during lifting. The problem with this design, however, is that it requires extra folding and gluing steps
15 to form the handle from the top panel section.

It would be highly desirable to be able to provide a carrier with an integral multi-ply handle which extends from one end of the carrier to the other, leaves the top panel intact when in use and does not require the interior
20 of the top panel section to be folded and glued as in the carrier of U.S. Patent No. 5,328,081. It is therefore an object of the invention to provide an integral handle which meets these objectives.

Brief Summary of the Invention

25 The invention is incorporated in a carrier comprising opposite side panels connected to a top panel, a bottom panel and opposite end panels. The top panel is comprised of overlapping top panel flaps which are adhered to each other in the overlapping area. Each flap includes a handle
30 strap in the overlapping area connected at its ends but separable from the flap between the handle ends. In addition, a reinforcing sheet is adhered to the inner face of the inner top panel flap on opposite sides of the handle strap but not to the inner face of the handle strap.

35 With this arrangement, when the carrier is lifted by the handle the adhered handle straps separate from their top panel flaps. However, because the reinforcing sheet

-3-

adhered to the inner top panel flap spans the opening left by the separated handle straps, the top panel continues to provide a closed covering for the articles packaged in the carrier.

5 Preferably, the handle straps extend into the upper end panel flaps connected to the top panel flaps, and the reinforcing sheet is a flap foldably connected to the inner top panel flap. Also, the handle may be further reinforced to make it of three-ply construction, if desired. The
10 carrier is simple to fabricate and does not make use of handle straps formed from a continuous top panel section as in the prior art, thereby avoiding problems caused by such design.

The features of the invention which enable it to
15 provide the desired results are brought out in more detail in the description of the preferred embodiments, wherein the above and other aspects of the invention, as well as other benefits, will readily become apparent.

Brief Description of the Drawings

20 FIG. 1 is a pictorial view of a sleeve-type carrier which incorporates the handle of the present invention;

FIG. 2 is a plan view of a blank for forming the carrier of FIG. 1;

25 FIG. 3 is a partial plan view of the blank of FIG. 2 after an initial folding and gluing step;

FIG. 4 is a plan view of the blank after a second folding step;

FIG. 5 is a plan view of a collapsed carrier formed as a result of a third folding step;

30 FIG. 6 is an enlarged transverse sectional view of the top panel of the carrier taken on line 6-6 of FIG. 1;

FIG. 7 is a partial pictorial view of the carrier of FIG. 1, showing the handle in operative condition;

35 FIG. 8 is an enlarged transverse sectional view of the top panel of the carrier taken on line 8-8 of FIG. 7;

FIG. 9 is a partial end view of the carrier shown in FIG. 7;

-4-

FIG. 10 is a partial plan view of a blank for forming a modified handle; and

FIG. 11 is an enlarged transverse sectional view similar to that of FIG. 6, but showing the top panel of the modified carrier.

Detailed Description of the Preferred Embodiments

Referring to FIG. 1, a carrier 10 is comprised of side panels 12 connected to top panel 14 and to a bottom panel which is hidden in this view. The carrier also includes end panels 16 formed of end panel flaps connected to the top, side and bottom panels. The major end flaps 18, which are connected to the side panels, are visible in this view. Included in the top panel is handle 20, which extends between the end panels and is of multi-ply construction as described in more detail below.

Referring now to FIG. 2, a generally rectangular blank 22 from which the carrier is formed is comprised of bottom panel section 24 connected by opposite fold lines 26 and 28 to side panel sections 12. Fold lines 30 connect the side panel sections 12 to the end panel flaps 18, while fold lines 32 connect the bottom panel section 24 to lower end panel flaps 34. Connected by fold line 36 to the side panel section at the right of the blank is top panel flap 38. Another top panel flap 40 is connected to the side panel section at the left of the blank by fold line 42, and reinforcing flap 44 at the end of the blank is connected to the top panel flap 40 by fold line 46. Upper end panel flaps 48 are connected to the top panel flap 40 by fold lines 50. Similarly, upper end panel flaps 52 are connected to the top panel flap 38 by fold lines 54. The fold lines 30, 32, 50 and 54 are aligned and form continuous fold lines.

Located in the top panel flap 40 is handle strap 56, which is defined by spaced slits 58. The slits are parallel at the end portions of the handle strap and converge to a central handle grip portion 60 where in conjunction with parallel fold lines 62 they define handle

-5-

grip flaps 64. The spaced parallel end portions of the slits extend a short distance into the upper end panel flaps 48.

5 The top panel flap 38 incorporates handle strap 66 which is similar in size and shape to handle strap 56 except that only one side is defined by slit 68, the other side being defined by the edge 70 of top panel flap 38. As in the handle strap 56, fold lines 62 are provided in the handle grip portion 60 to form handle grip flaps 64. 10 The slit 68 extends into the upper end panel flaps 52, preferably terminating in arcuate end portions 72.

To form a carrier from the blank the reinforcing flap 44 is first folded about fold line 46 and glued to the stippled area of top panel flap 40, resulting in the 15 interim form of blank illustrated in FIG. 3. The side panel section 12 at the left of the blank and the connected top panel flap 40 are then pivoted as a unit about fold line 26 to form the interim configuration shown in FIG. 4. The final step is to apply glue to the stippled area of the 20 handle strap 66 shown in FIG. 4 and fold the top panel flap 38 about fold line 36. This causes the handle strap 66 to overlie handle strap 56, adhering the handle straps together. The result is the flattened tube or collapsed carrier of FIG. 5.

25 Typically, collapsed carriers are shipped to a packaging facility where they are erected, loaded with the articles being packaged and their ends closed by means well known in the industry to form the finished carrier of FIG. 1. As shown in FIG. 6, the handle strap 66 of the outer 30 top panel flap 38 is adhered to and overlies the handle strap 56 of the inner top panel flap 40, and the reinforcing flap 44 is adhered to the top panel flap 40 but not to the adjacent handle strap 56.

To utilize the two-ply handle 20, it is first 35 separated from the top panel flaps 38 and 40 along the slits 58 and 68 and grasped. When the carrier is lifted the user's hand folds the handle grip flaps 64 down and the

-6-

weight of the carrier causes the handle to bow upwardly, as illustrated in FIGS. 7 and 8. The contents of the carrier remain completely covered by virtue of the reinforcing flap 44 which remains in place when the handle is raised. The result is a strong two-ply handle which extends from one end of the carrier to the other, thus distributing lifting stresses to the relatively strong end panels rather than to the top panel. The reinforcing flap 44 also provides the top panel with a two-ply construction at opposite sides of the handle opening. As seen in the partial end view of FIG. 9, the arcuate end 72 of the slit 68 prevents tearing of the upper end panel flap 52. The risk of tearing is further lessened by the two-ply construction of the upper end panel flaps. Further, there is little or no risk of tearing at the opposite edge of the strap since that edge corresponds to the edge 70 of handle strap 66.

If the packaged load requires even more handle strength a third ply can be added. Referring to FIG. 10, the blank 73 is identical to the blank 22 except for the illustrated end portion. In this embodiment handle reinforcing strap 74 is connected to the outer edge of the handle strap 66 by fold lines 76, which correspond to the outer edge of the widest part of the strap 66. The reinforcing strap 74 is recessed at 78 to make the width of the central portion of the strap 74 substantially equal to the width of the central portion of the strap 66. When fabricating a carrier from the blank 73 glue is applied to the reinforcing strap 74, as shown in stipple in FIG. 10, and the strap is folded about the fold lines 76 and glued to the handle strap 66. Other than this difference, fabrication proceeds in the same manner as described in connection with the blank 22.

The top panel of the resulting modified carrier is shown in FIG. 11 to be similar to the top panel of the first embodiment except for the handle being of three-ply construction instead of two-ply construction. When the

-7-

carrier is lifted, the three-ply handle separates from the top panel in the same manner as the handle in the first embodiment, leaving the flap 44 in place to cover the opening formed by the vacated handle strap 56. It may be desirable to omit at least some of the handle flaps 64 in the handle strap 56 in this embodiment due to the three-ply construction of the handle. Although it is preferred to include handle flaps on at least the outer handle strap to protect a user's hand from the edge of the handle, the flaps 64 may be omitted entirely if desired.

It should now be apparent that the invention provides an integral multi-ply handle of sufficient strength to lift heavy loads with little or no risk of tearing. Because the top panel is formed from connected flaps, the handle structure can be made part of the flaps, thereby avoiding the interior folding and gluing steps required by the carrier disclosed in U.S. Patent No. 5,328,081. Moreover, the top panel is reinforced by the reinforcing flap 44, which in addition to strengthening the top panel also provides for a fully enclosed top panel even after the handle has been separated from the top panel flaps and has been raised during lifting.

The invention is not intended to be limited to the specific carrier design described, but may be incorporated in other carrier designs in which the top panel is formed from connected top panel flaps. Because the invention is not necessarily limited to all the specific details described in connection with the preferred embodiments, except as they may be within the scope of the appended claims, changes to certain features of the preferred embodiments which do not alter the overall basic function and concept of the invention are contemplated.

CLAIMS

1. An article carrier, comprising:
 - opposite side panels connected to a top panel, a bottom panel and opposite end panels;
 - the top panel being comprised of a first top panel flap foldably connected to one of the side panels and a second top panel flap foldably connected to the opposite side panel, each top panel flap having outer and inner faces;
 - at least a portion of the first top panel flap overlapping and being adhered to at least a portion of the second top panel flap;
 - each of the first and second top panel flaps including a handle strap having opposite ends and outer and inner faces, each handle strap being connected at the ends thereof to the associated top panel flap and being separable from the associated top panel flap between the ends thereof;
 - the handle strap in the first top panel flap overlying and being adhered to the handle strap in the second top panel flap; and
 - a reinforcing sheet, adhered to the inner face of the second top panel flap on opposite sides of the handle strap in the second top panel flap, the reinforcing sheet being adjacent but unconnected to the inner face of the handle strap in the second top panel flap, wherein the reinforcing sheet is a flap foldably connected to the second top panel flap.
2. An article carrier as defined in claim 1, wherein the first top panel flap terminates at an edge of the handle strap included therein.
3. An article carrier as defined in claim 1, wherein each of the end panels is comprised of end panel flaps connected to the side panels and an upper end panel flap connected to the top panel by a fold line, the adhered handle straps extending to at least the fold line connecting the top panel to the upper end panel flaps.
4. An article carrier as defined in claim 3, wherein the handle straps are defined in the top panel flaps by slits, the slits extending into the upper end panel flaps.

- 9 -

5. An article carrier as defined in claim 1, wherein the handle strap in the first top panel flap includes a reinforcing strap adhered to the inner face of the handle strap in the second top panel flap.

6. An article carrier as defined in claim 5, wherein the reinforcing strap is a flap foldably connected to the handle strap in the first top panel flap.

7. A blank for forming an article carrier, comprising:

a bottom panel section connected by fold lines to opposite side panel sections;

one of the side panel sections being connected to a first top panel flap by a fold line and the opposite side panel section being connected to a second top panel flap by a fold line;

end panel flaps connected by fold lines to opposite ends of the side panel sections and the first and second top panel flaps;

each of the first and second top panel flaps including a handle strap having opposite ends, each handle strap being connected at the ends thereof to the associated top panel flap and being separable from the associated top panel flap between the ends thereof; and

a reinforcing flap connected to the second top panel flap by a fold line, the reinforcing flap extending beyond the handle strap associated with the second top panel flap when folded about said connecting fold line;

the dimensions of the top panel flaps and the handle straps being such that at least a portion of the first top panel flap overlaps at least a portion of the second top panel flap in a carrier formed from the blank, the handle strap in the first top panel flap overlies the handle strap in the second top panel flap in such a carrier, and the reinforcing flap being configured to be adhered to the inner face of the second top panel flap on opposite sides of the handle strap in the second top panel flap.



8. A blank as defined in claim 7, wherein the first top panel flap terminates at an edge of the handle included therein.

9. A blank as defined in claim 7, wherein the handle straps extend to at least the fold line connecting the top panel flaps to the upper end panel flaps.

- 10 -

10. A blank as defined in claim 7, wherein the handle straps are defined in the top panel flaps by slits, the slits extending into the upper end panel flaps.

11. A blank as defined in claim 8, wherein the handle strap in the first top panel flap includes a reinforcing flap foldably connected to said first handle strap.

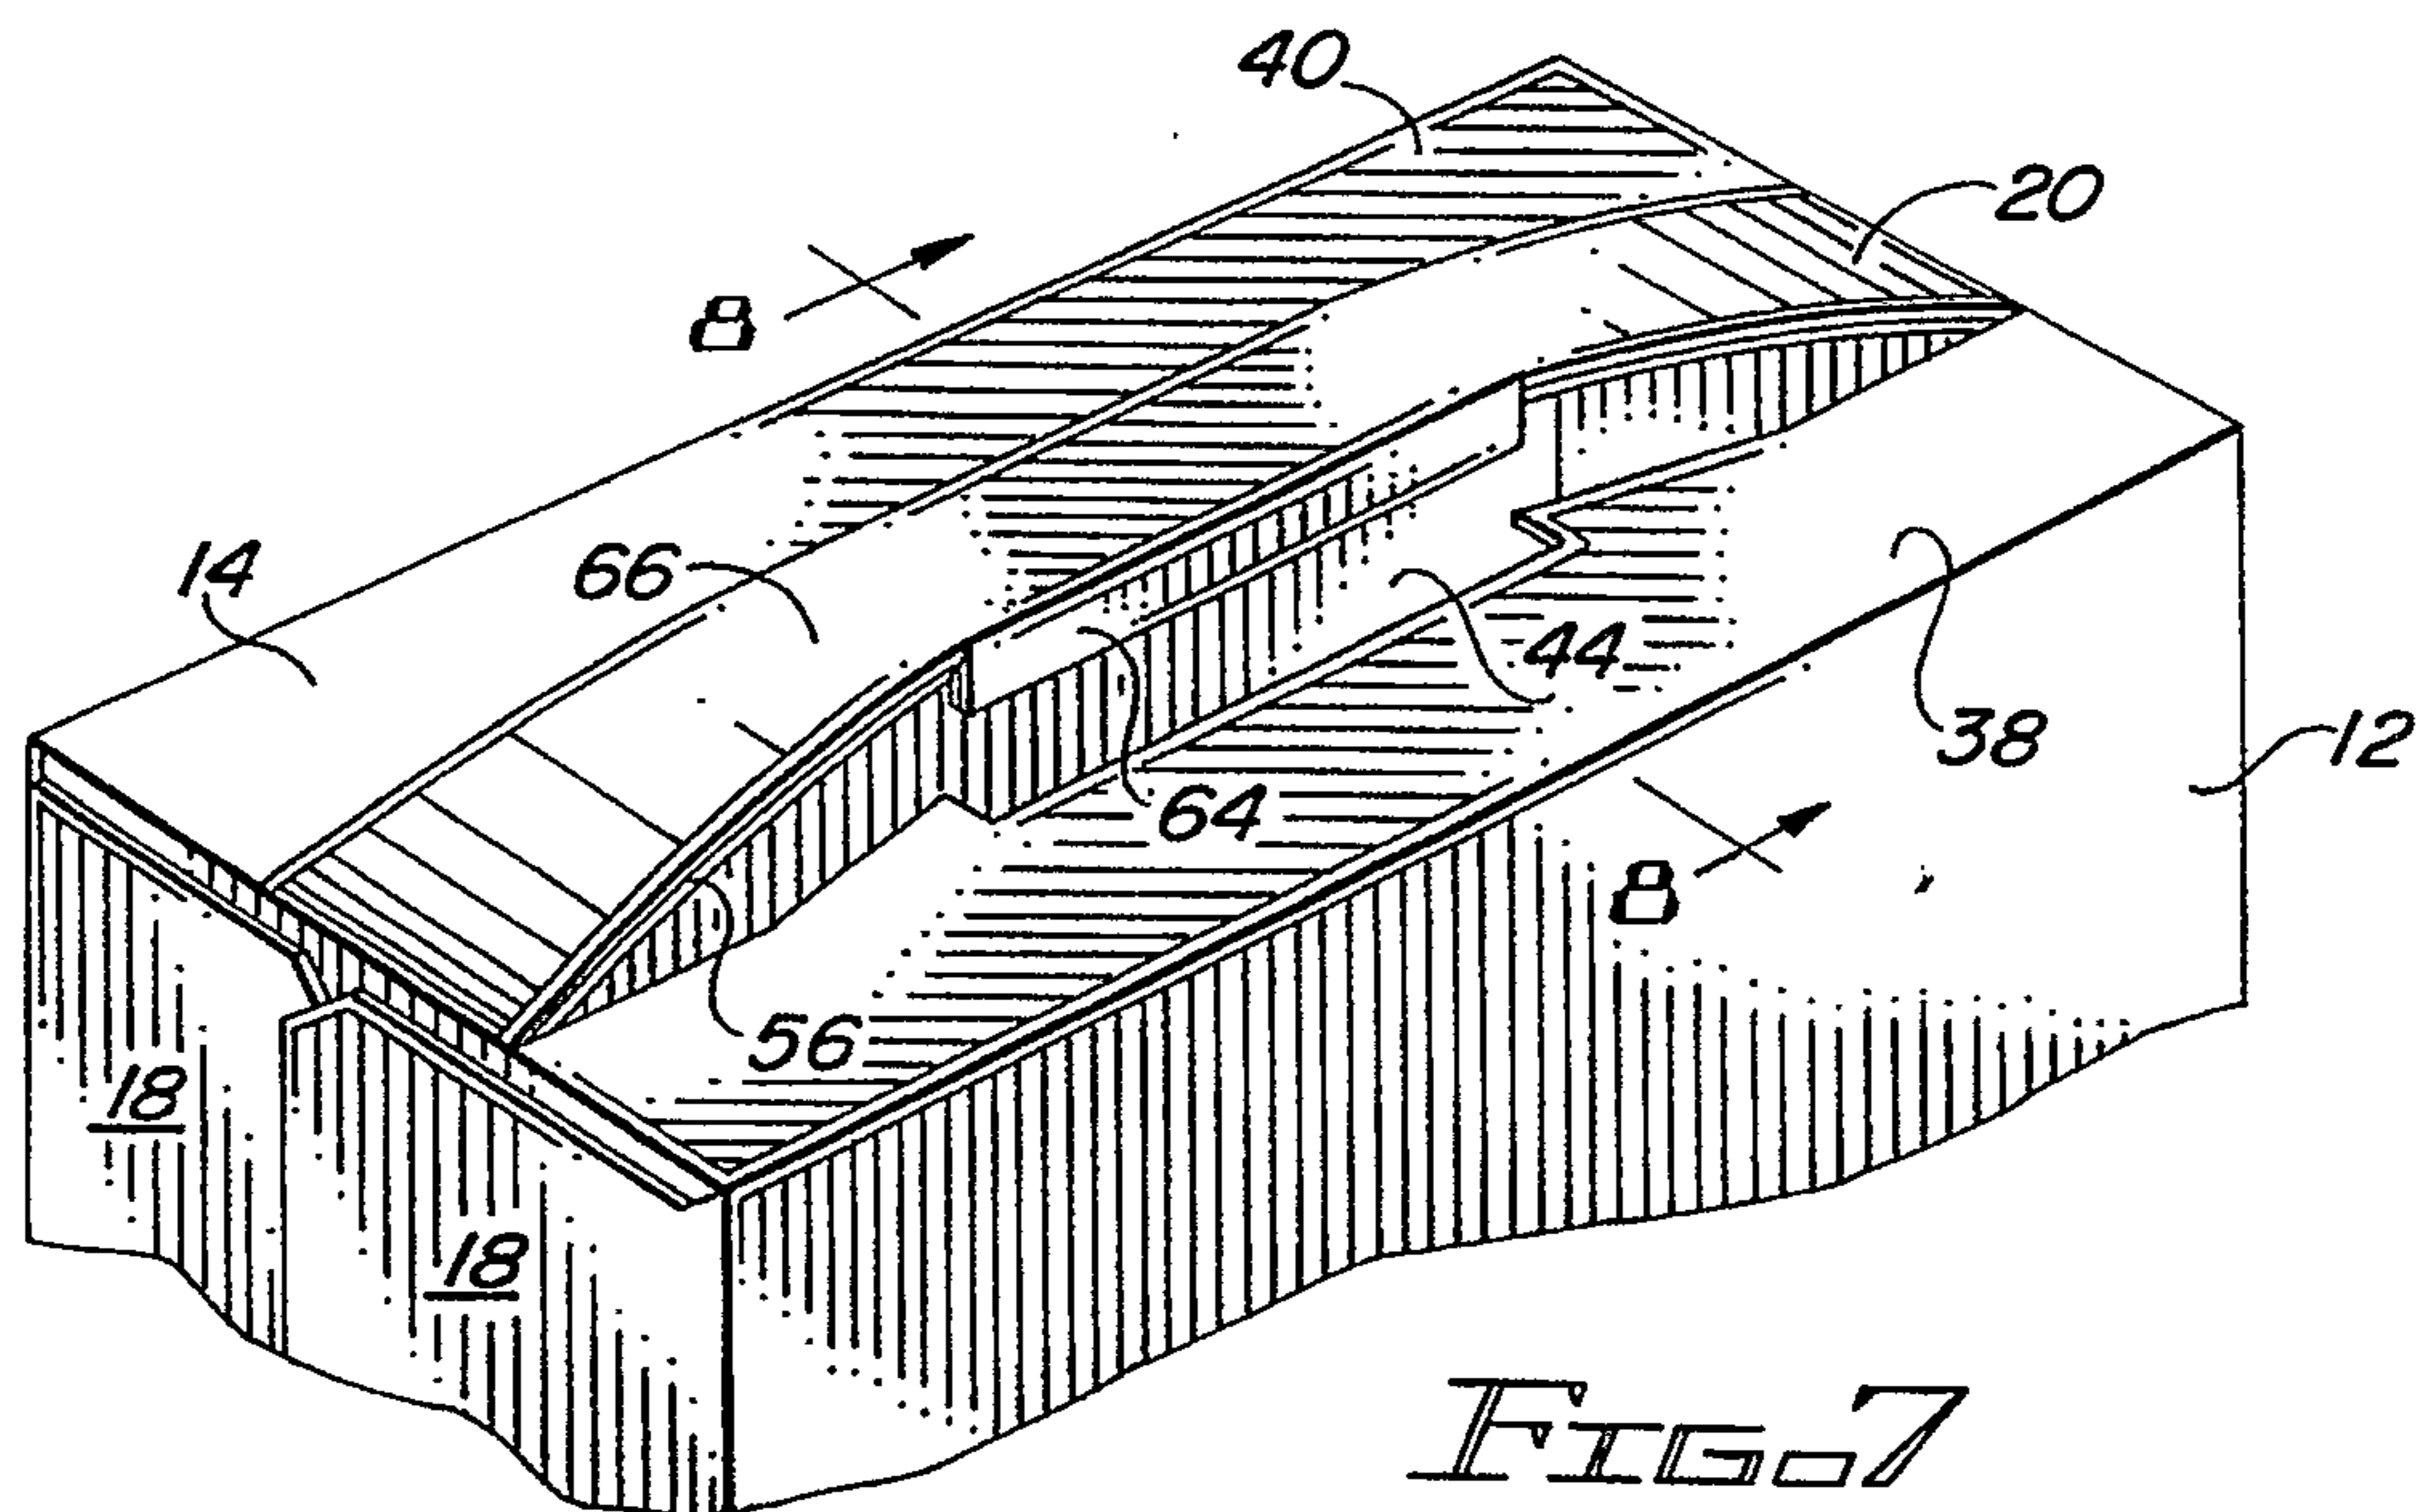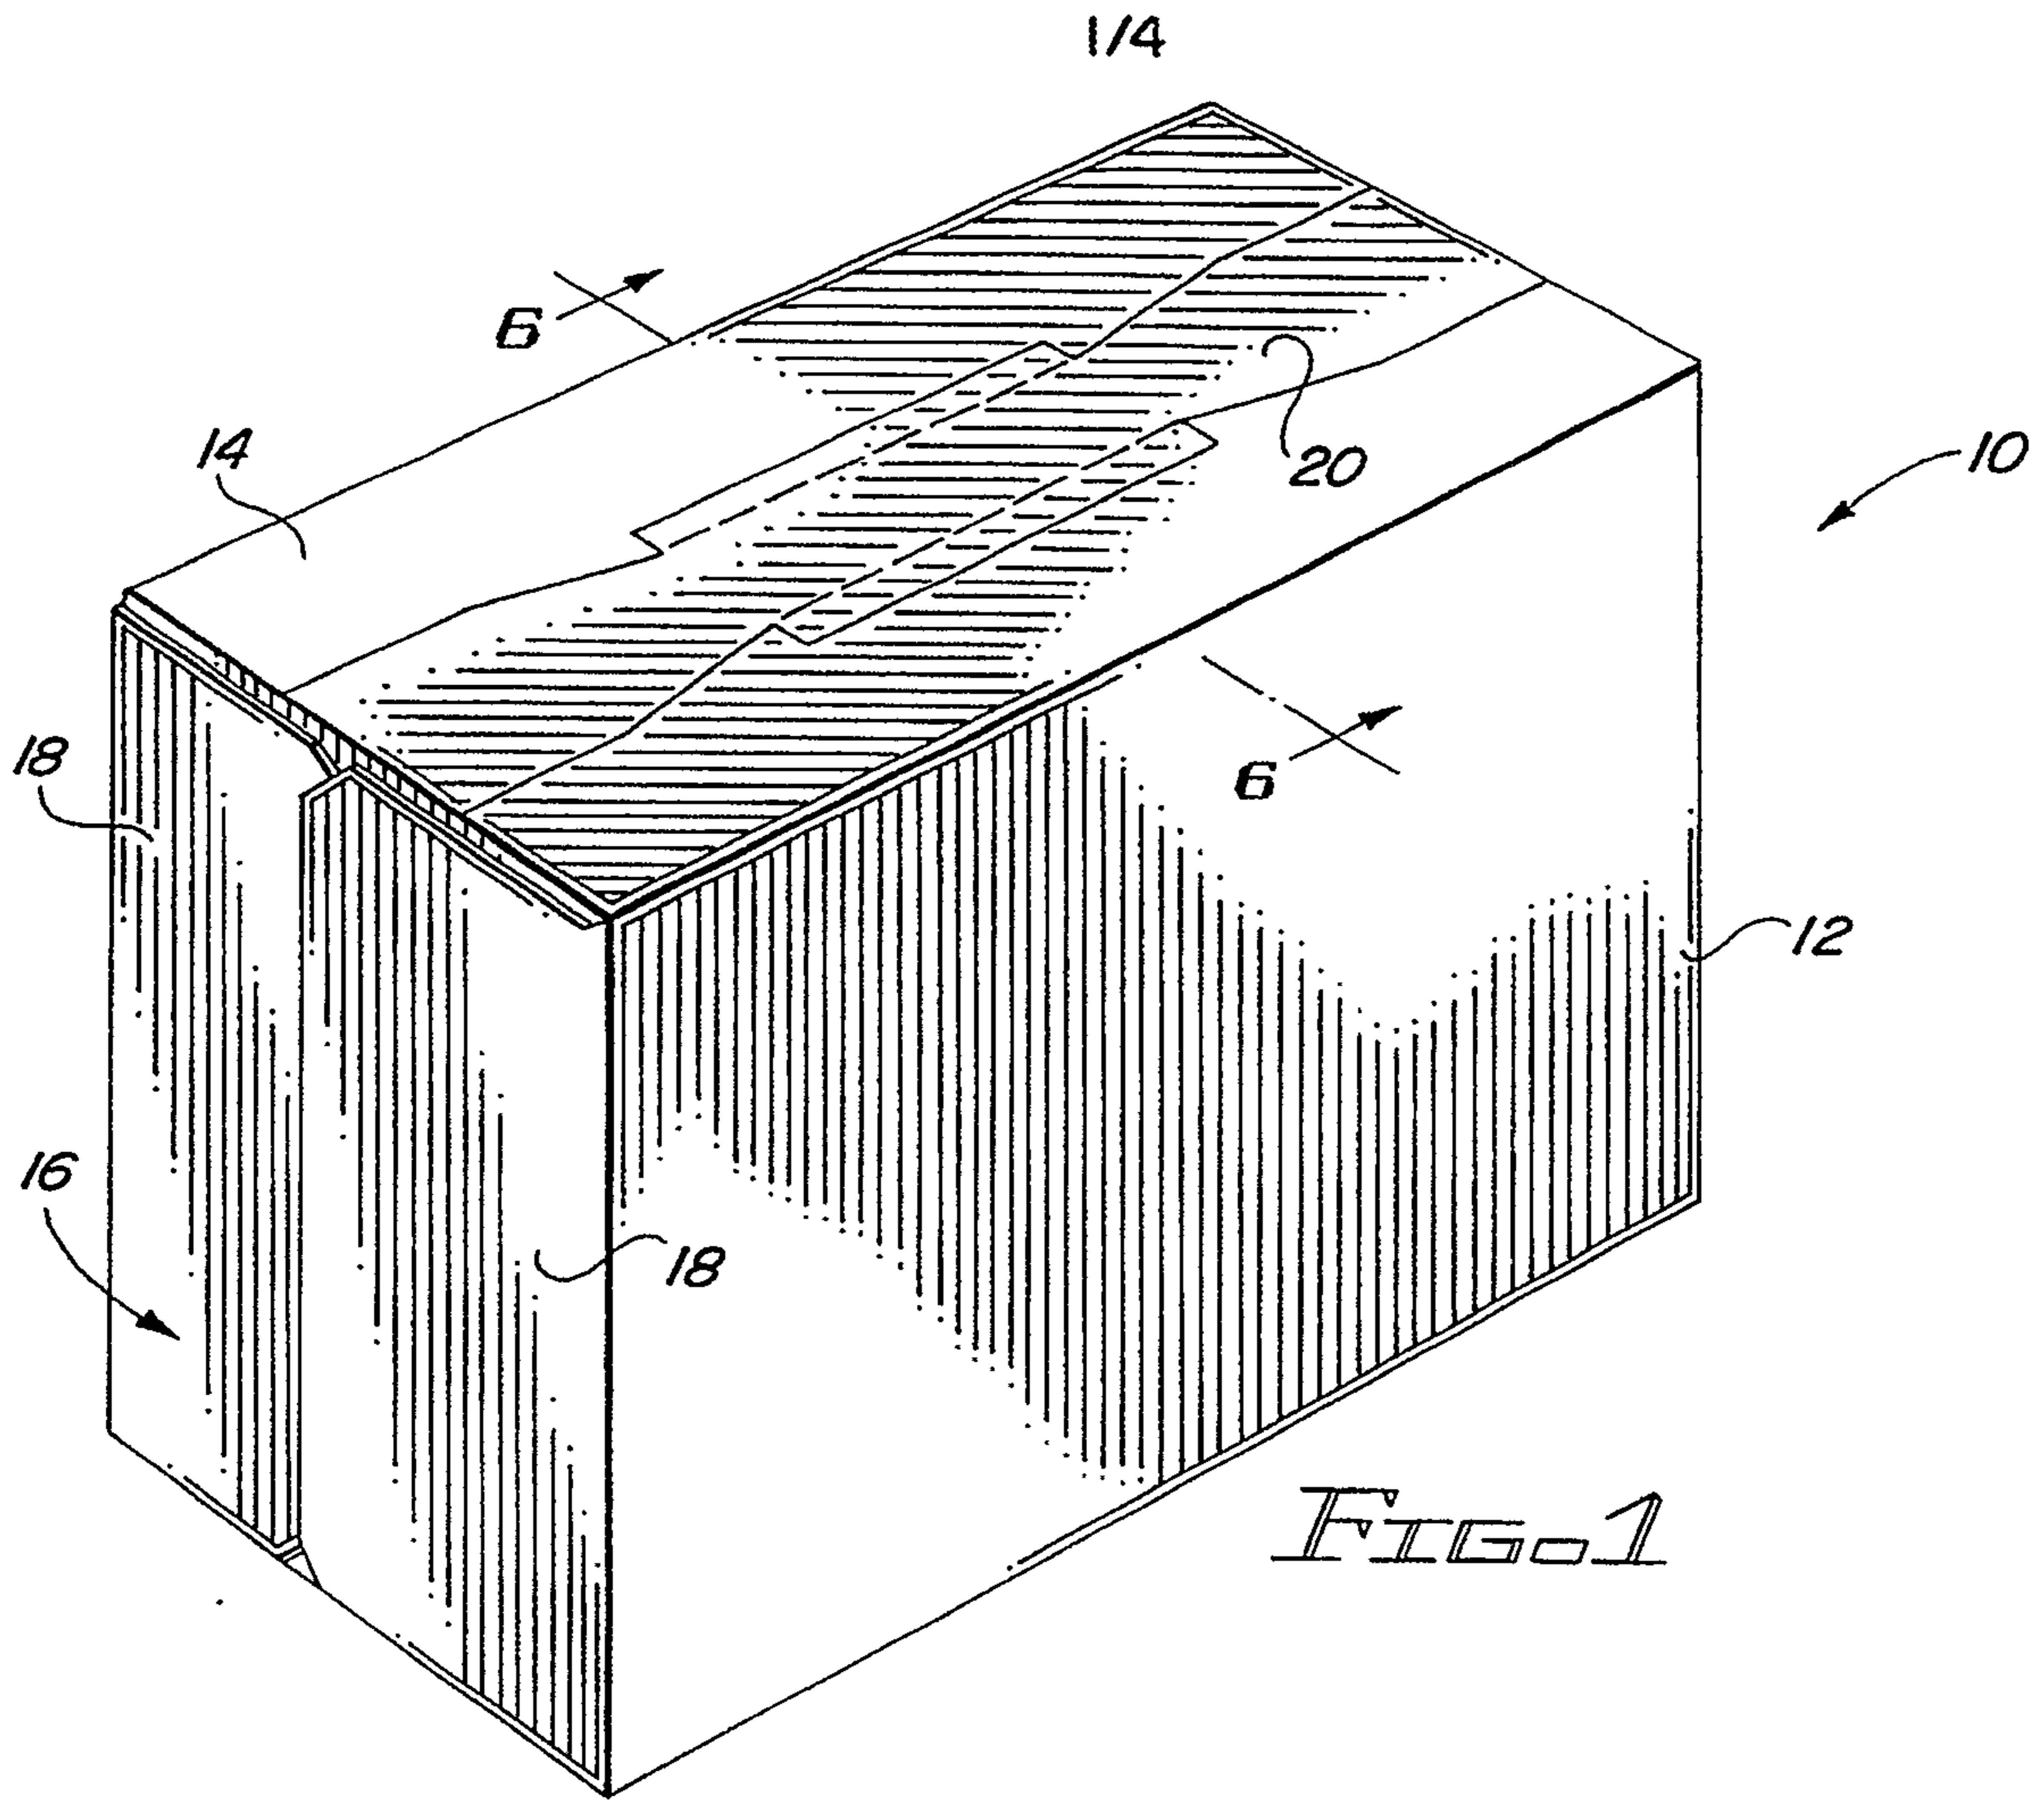

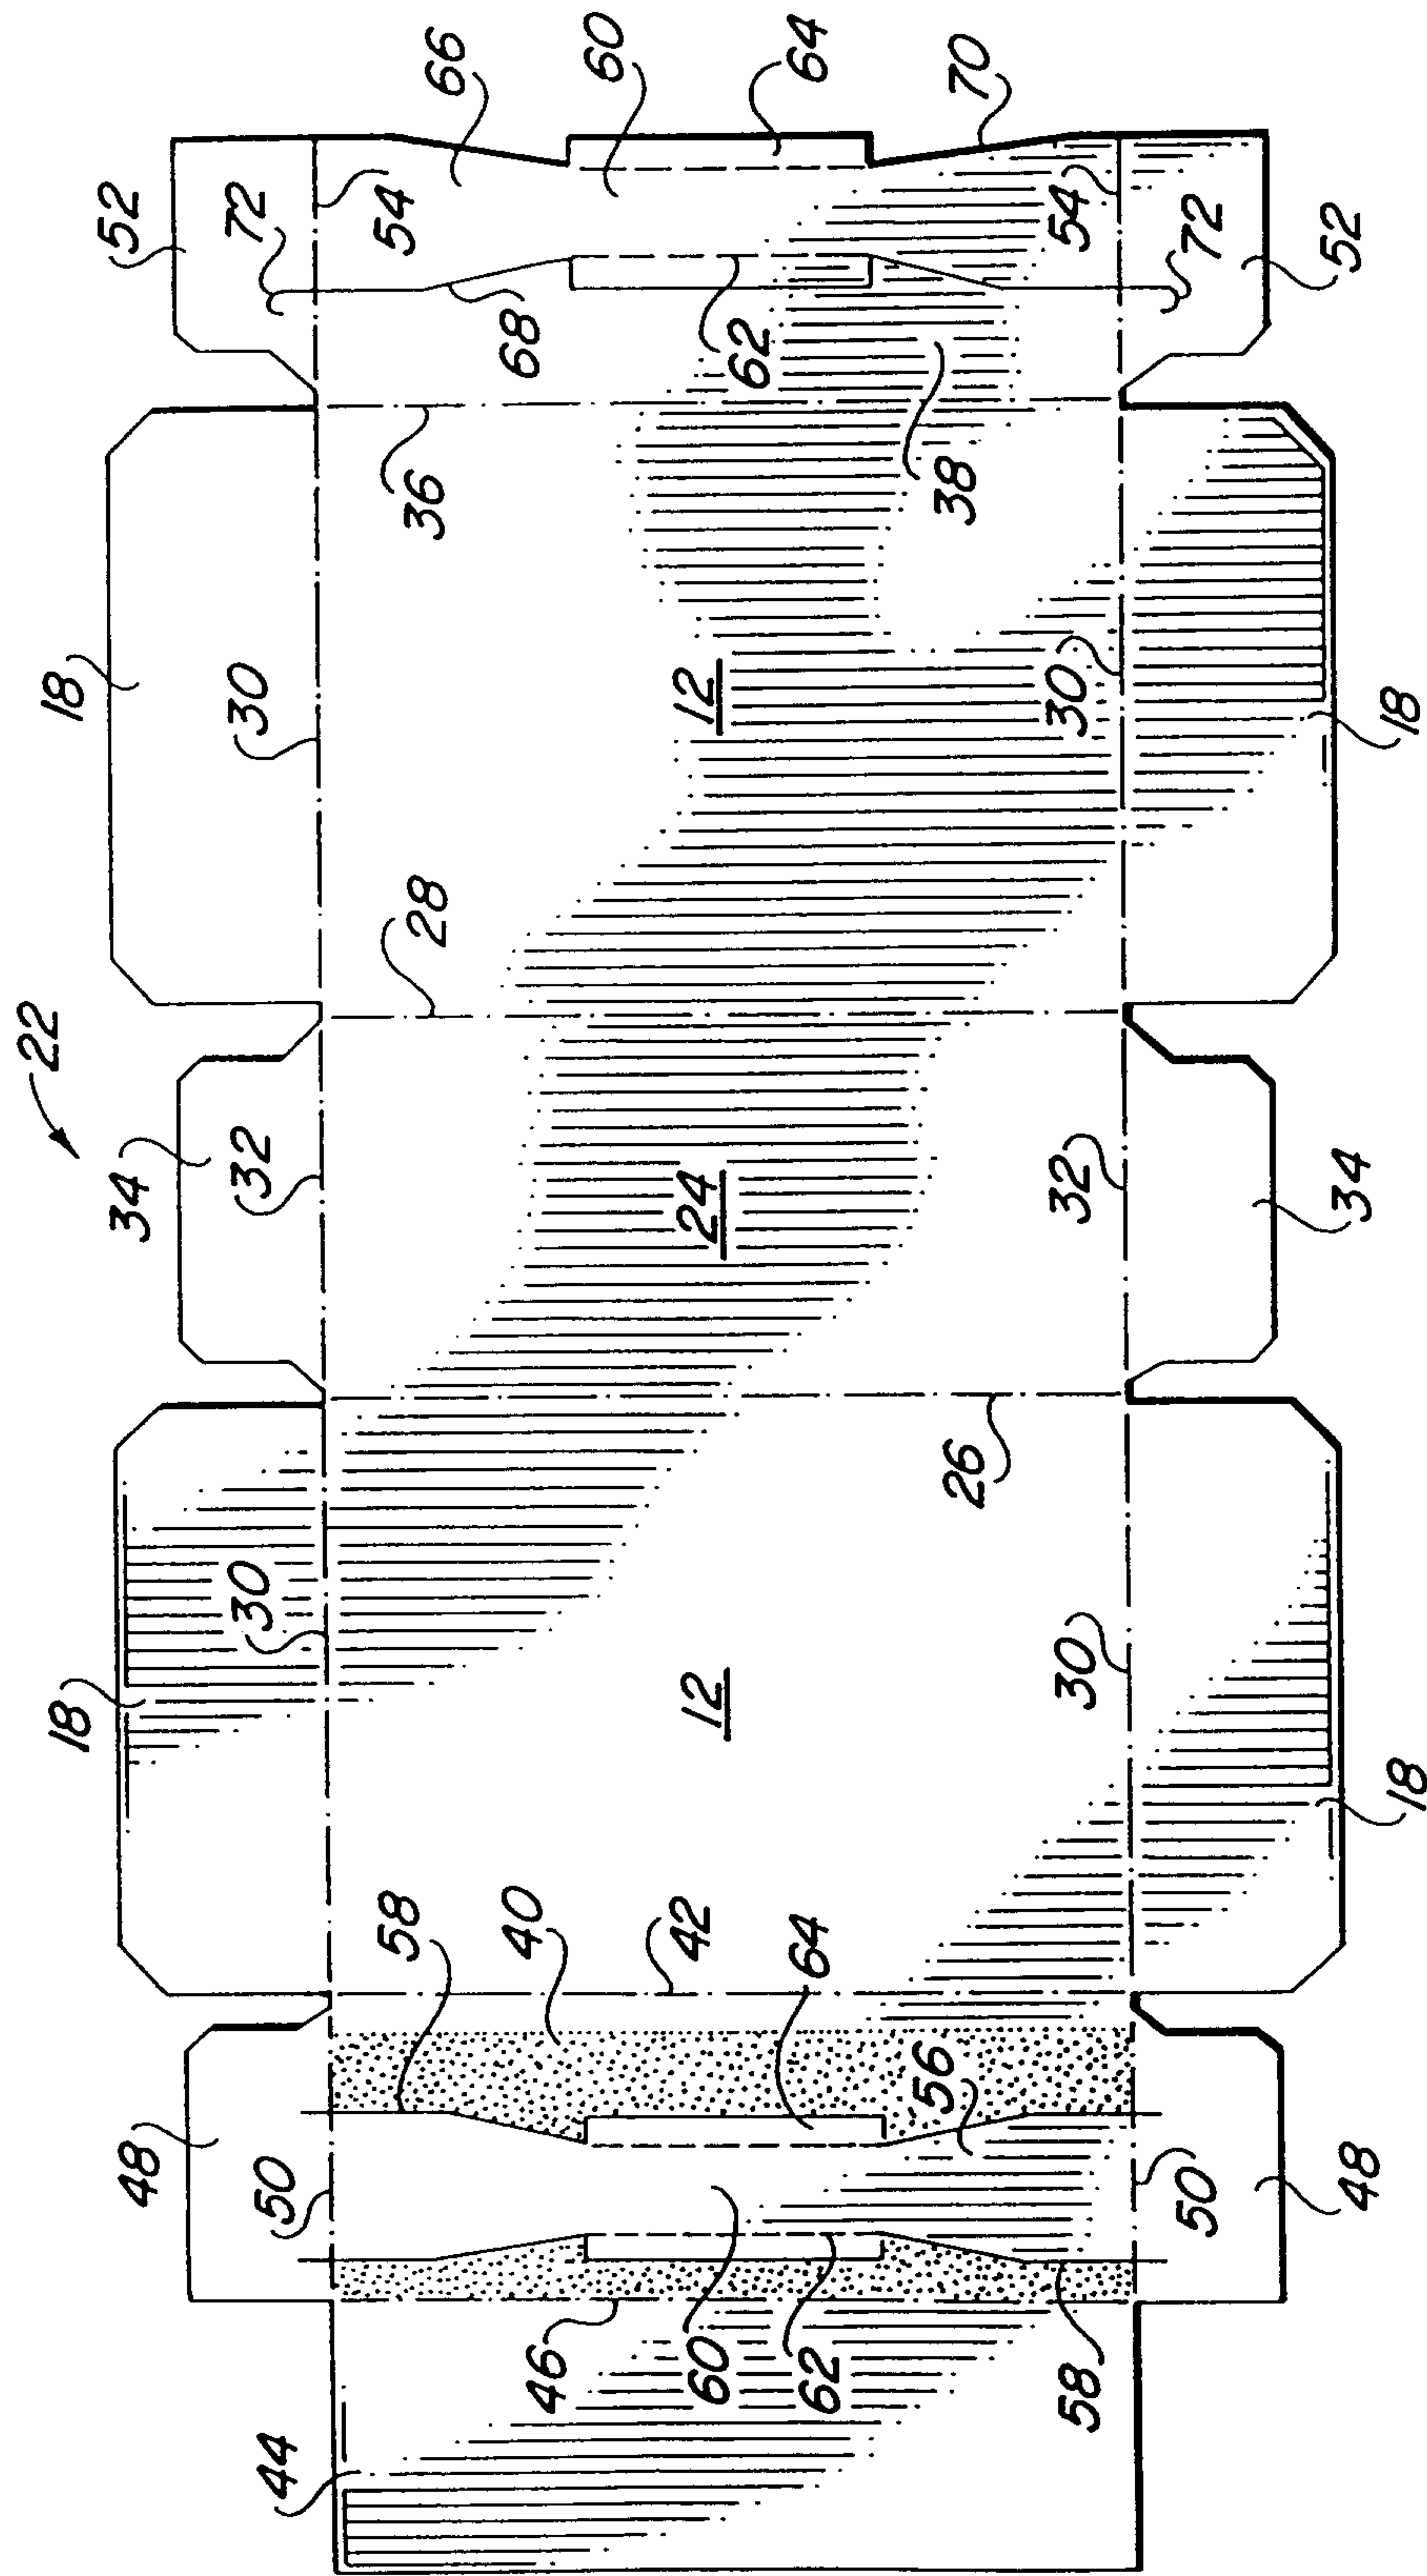


FIG 2

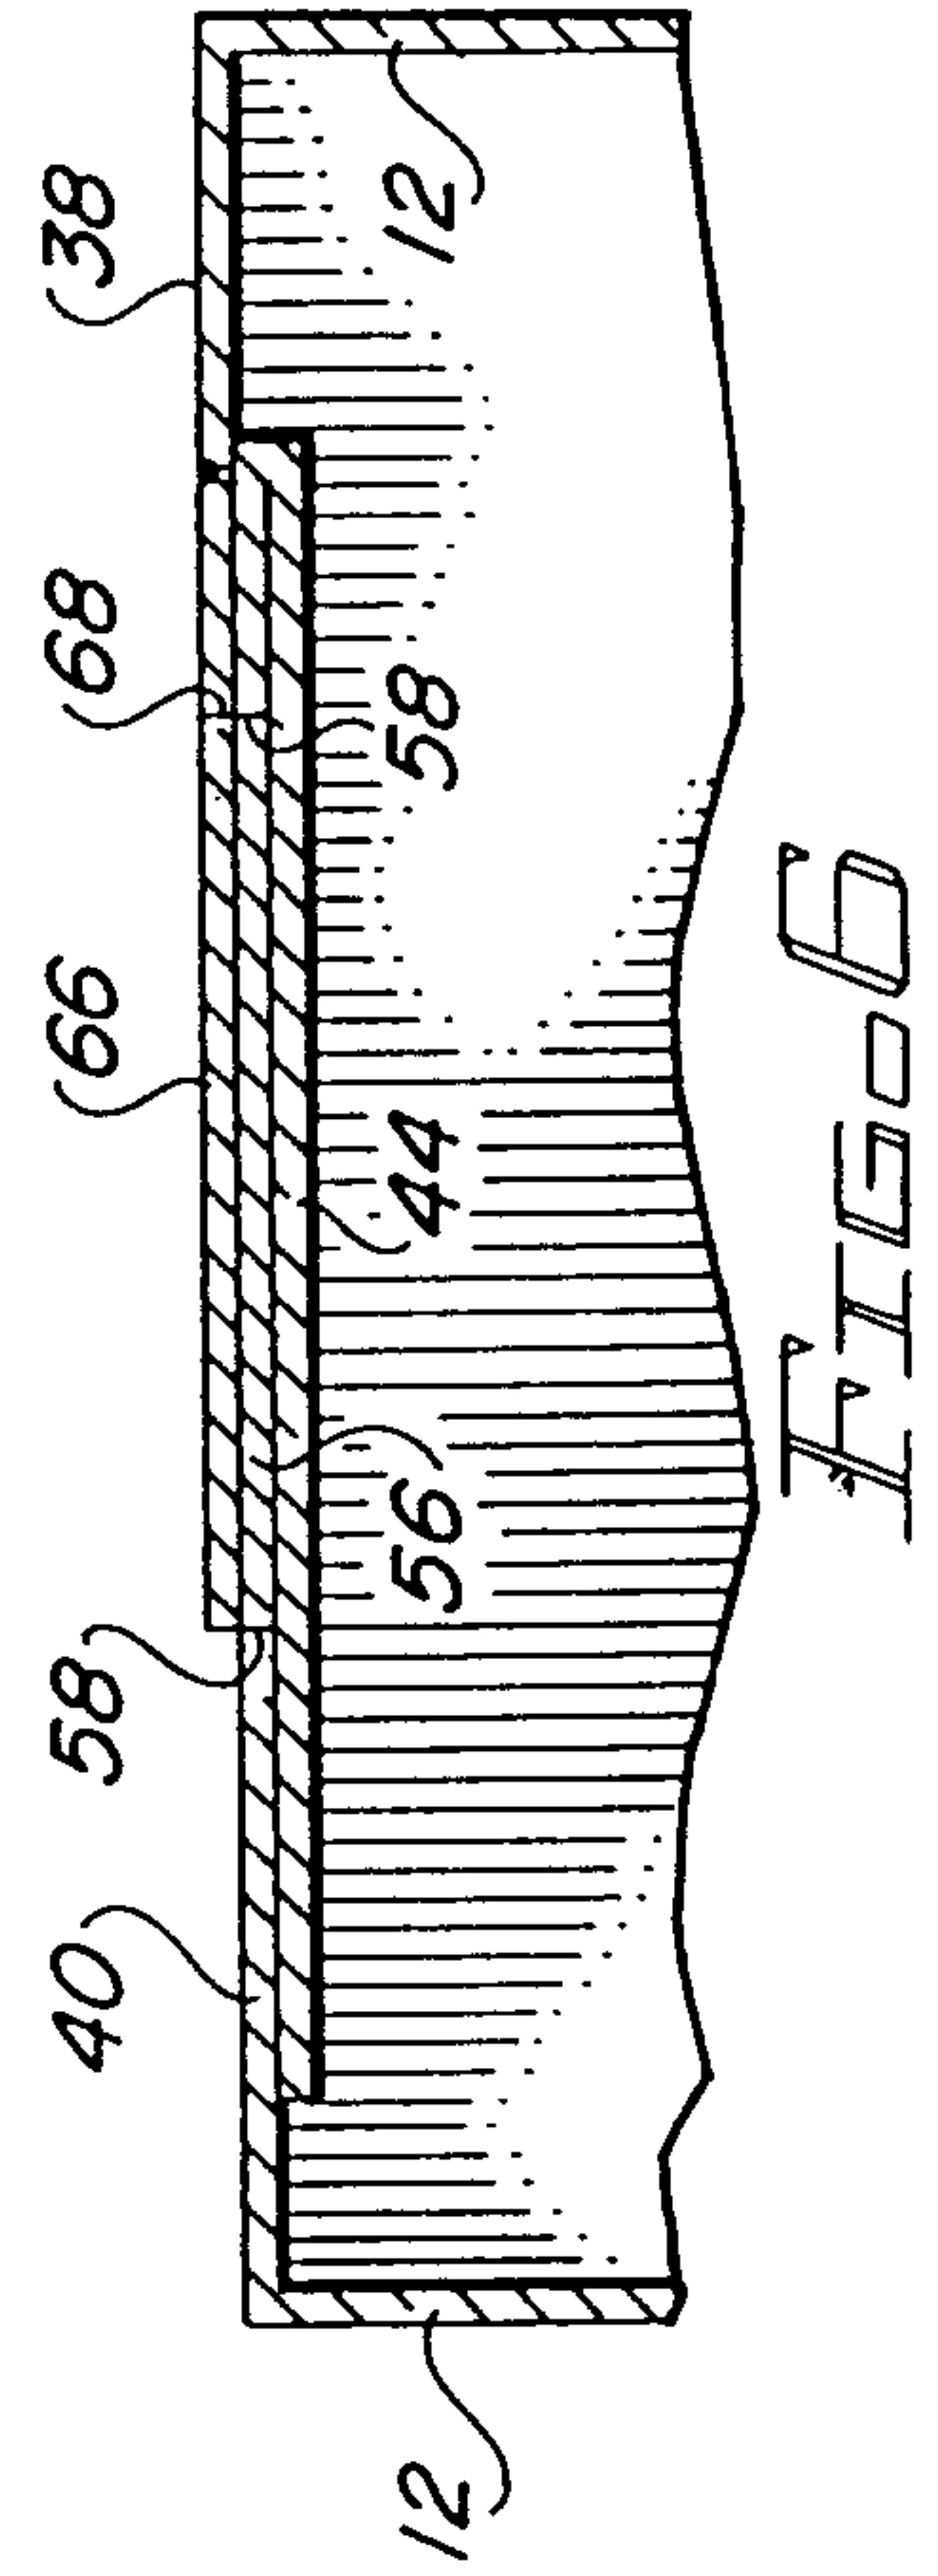


FIG 6

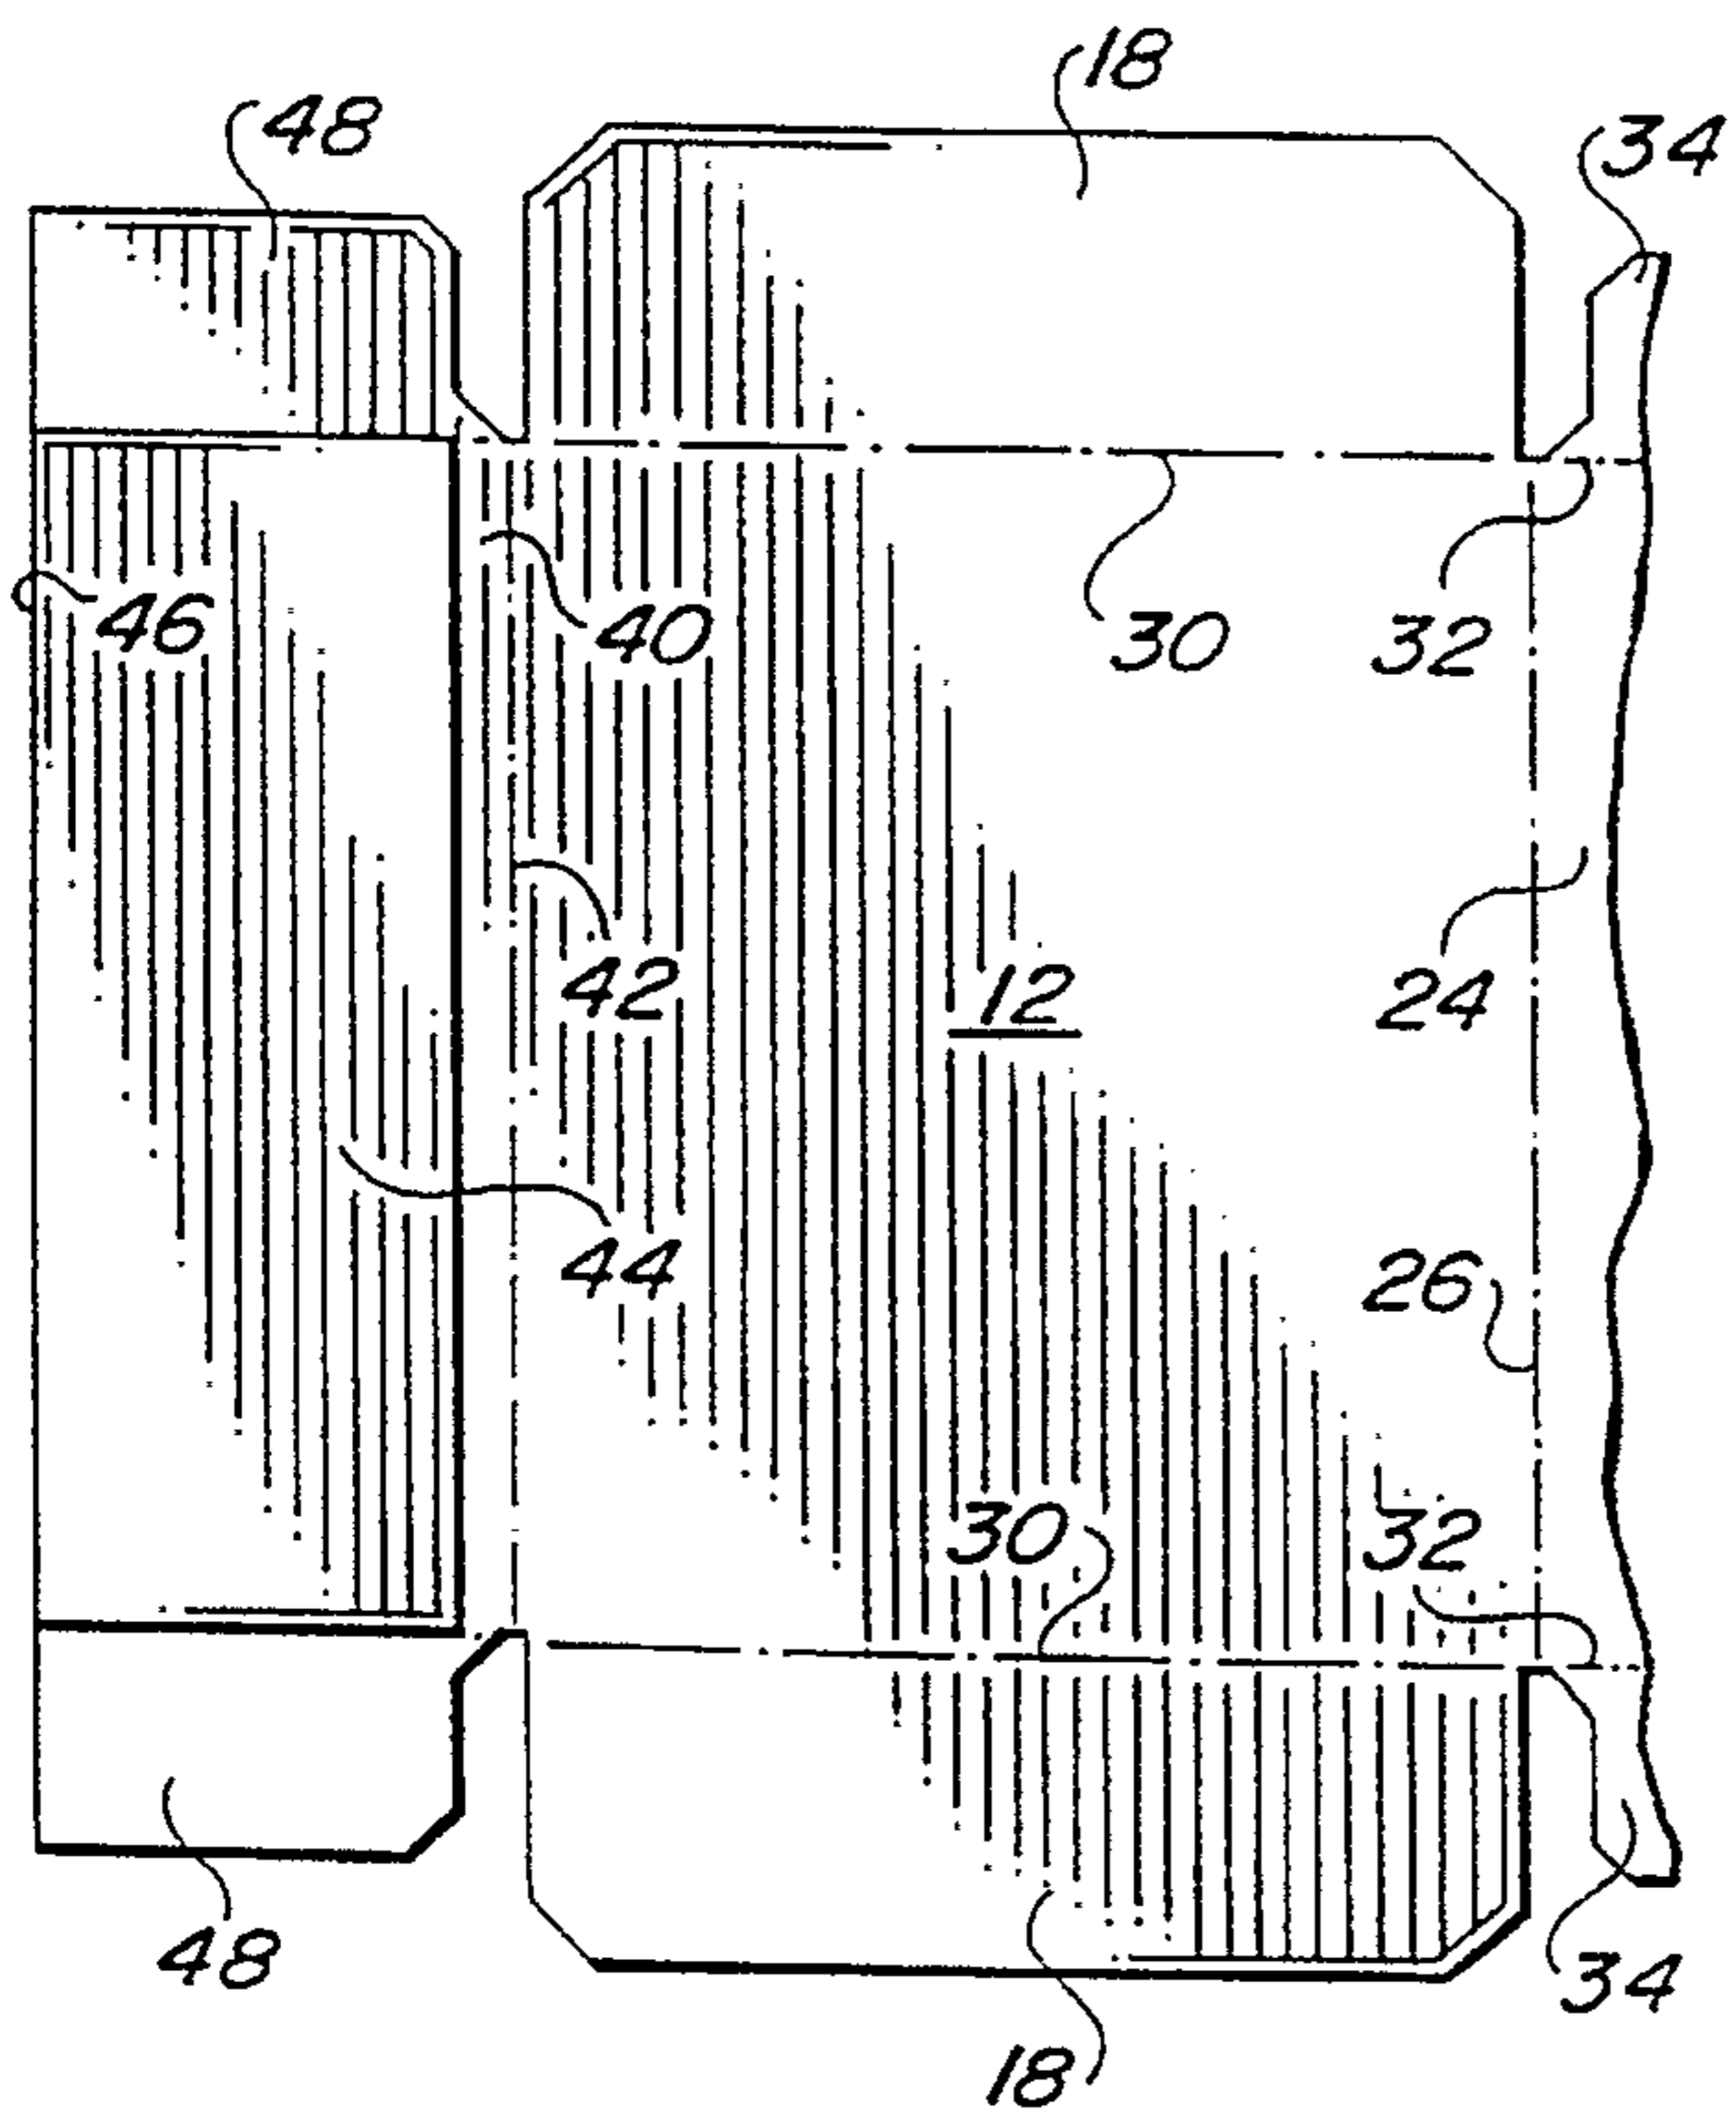
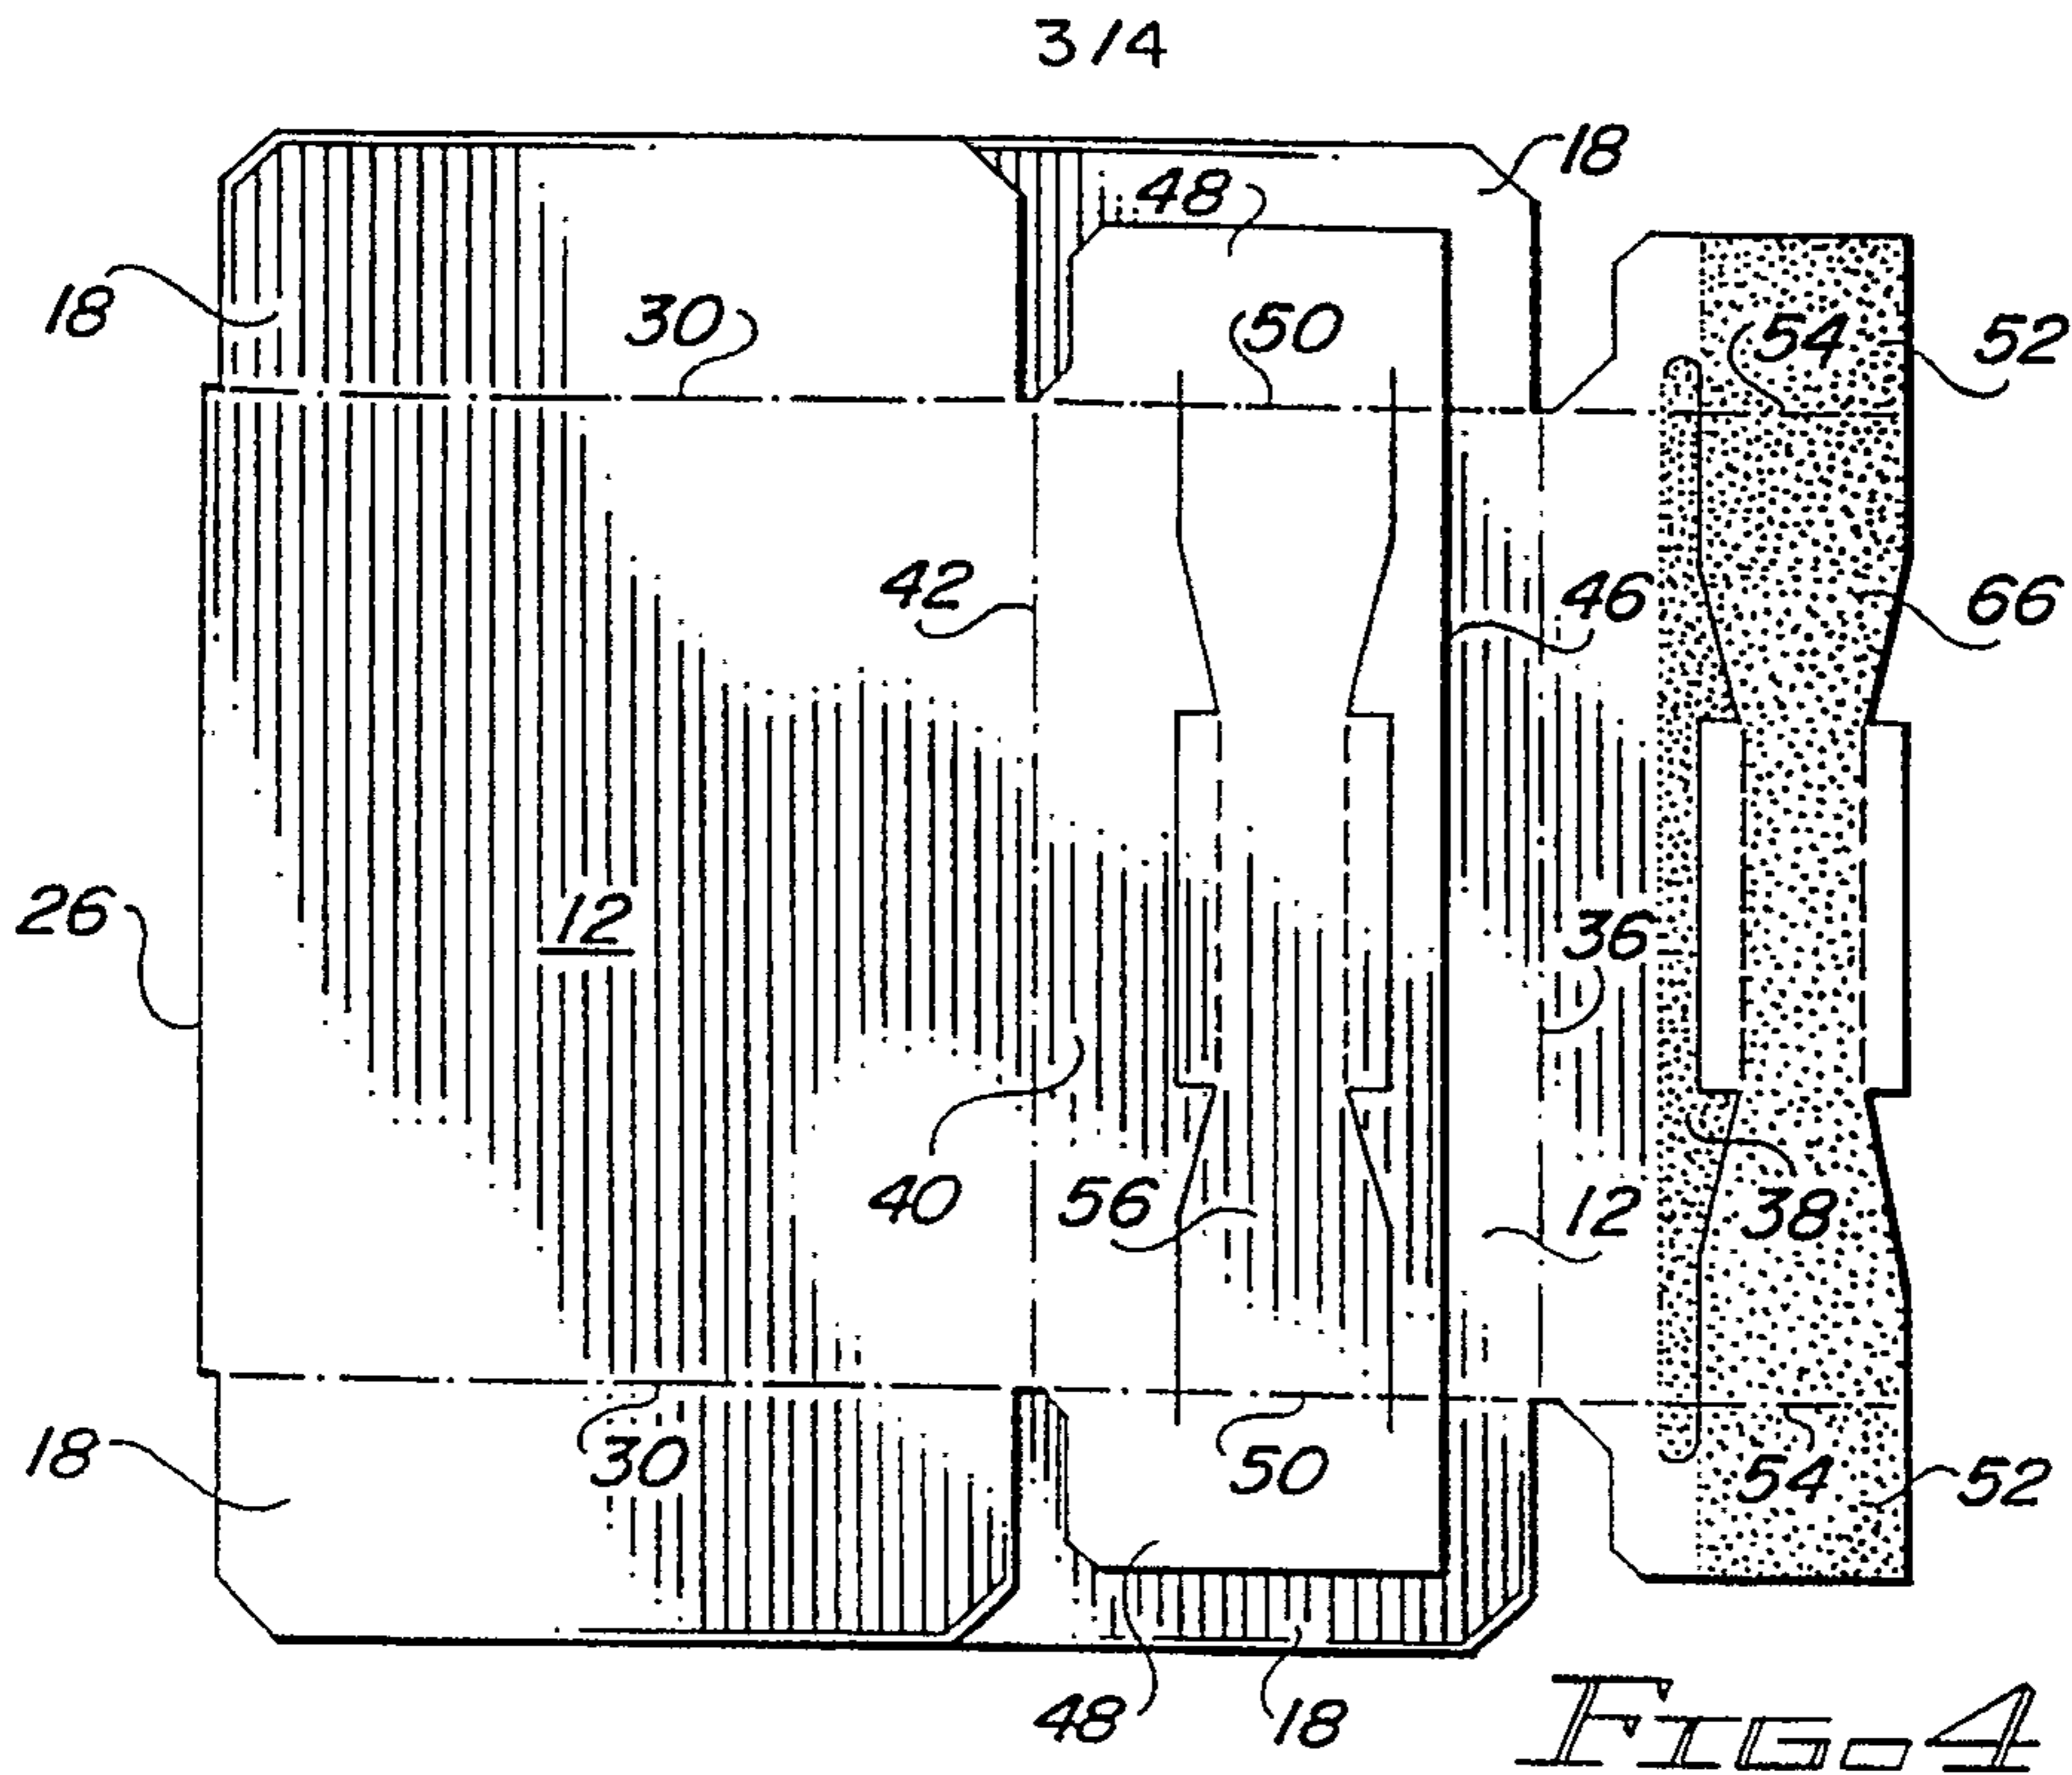


FIG. 3

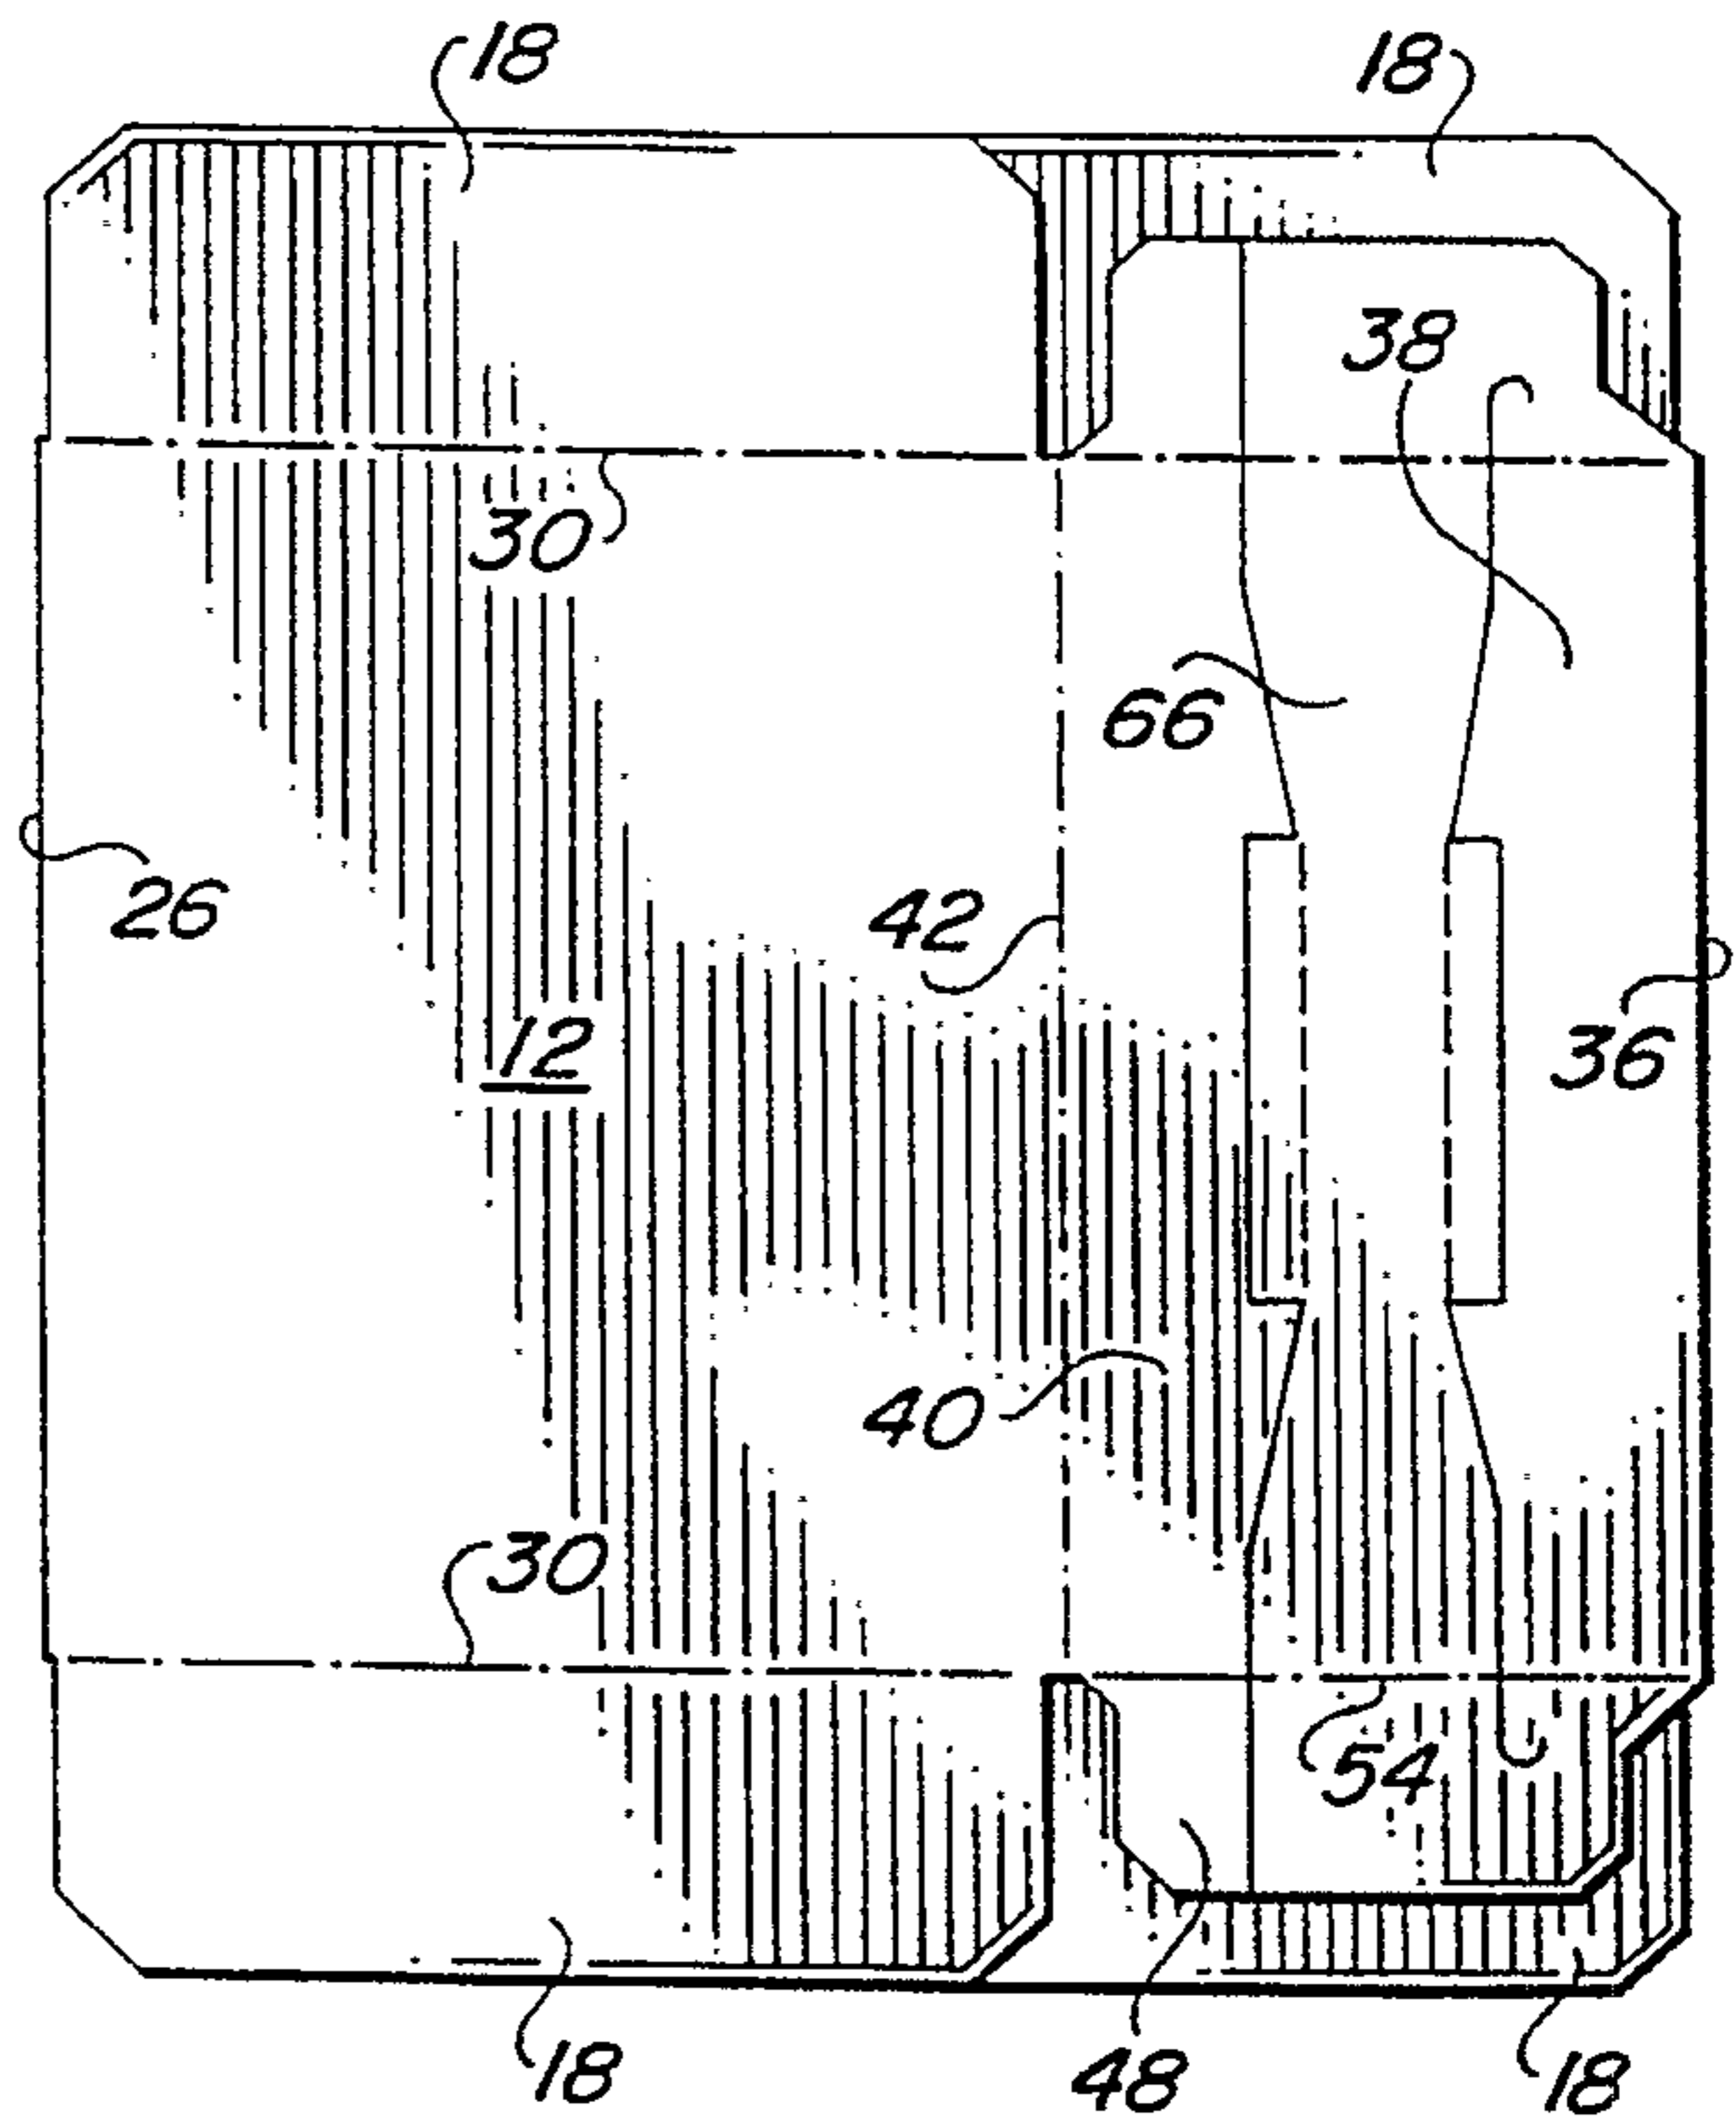


FIG. 5

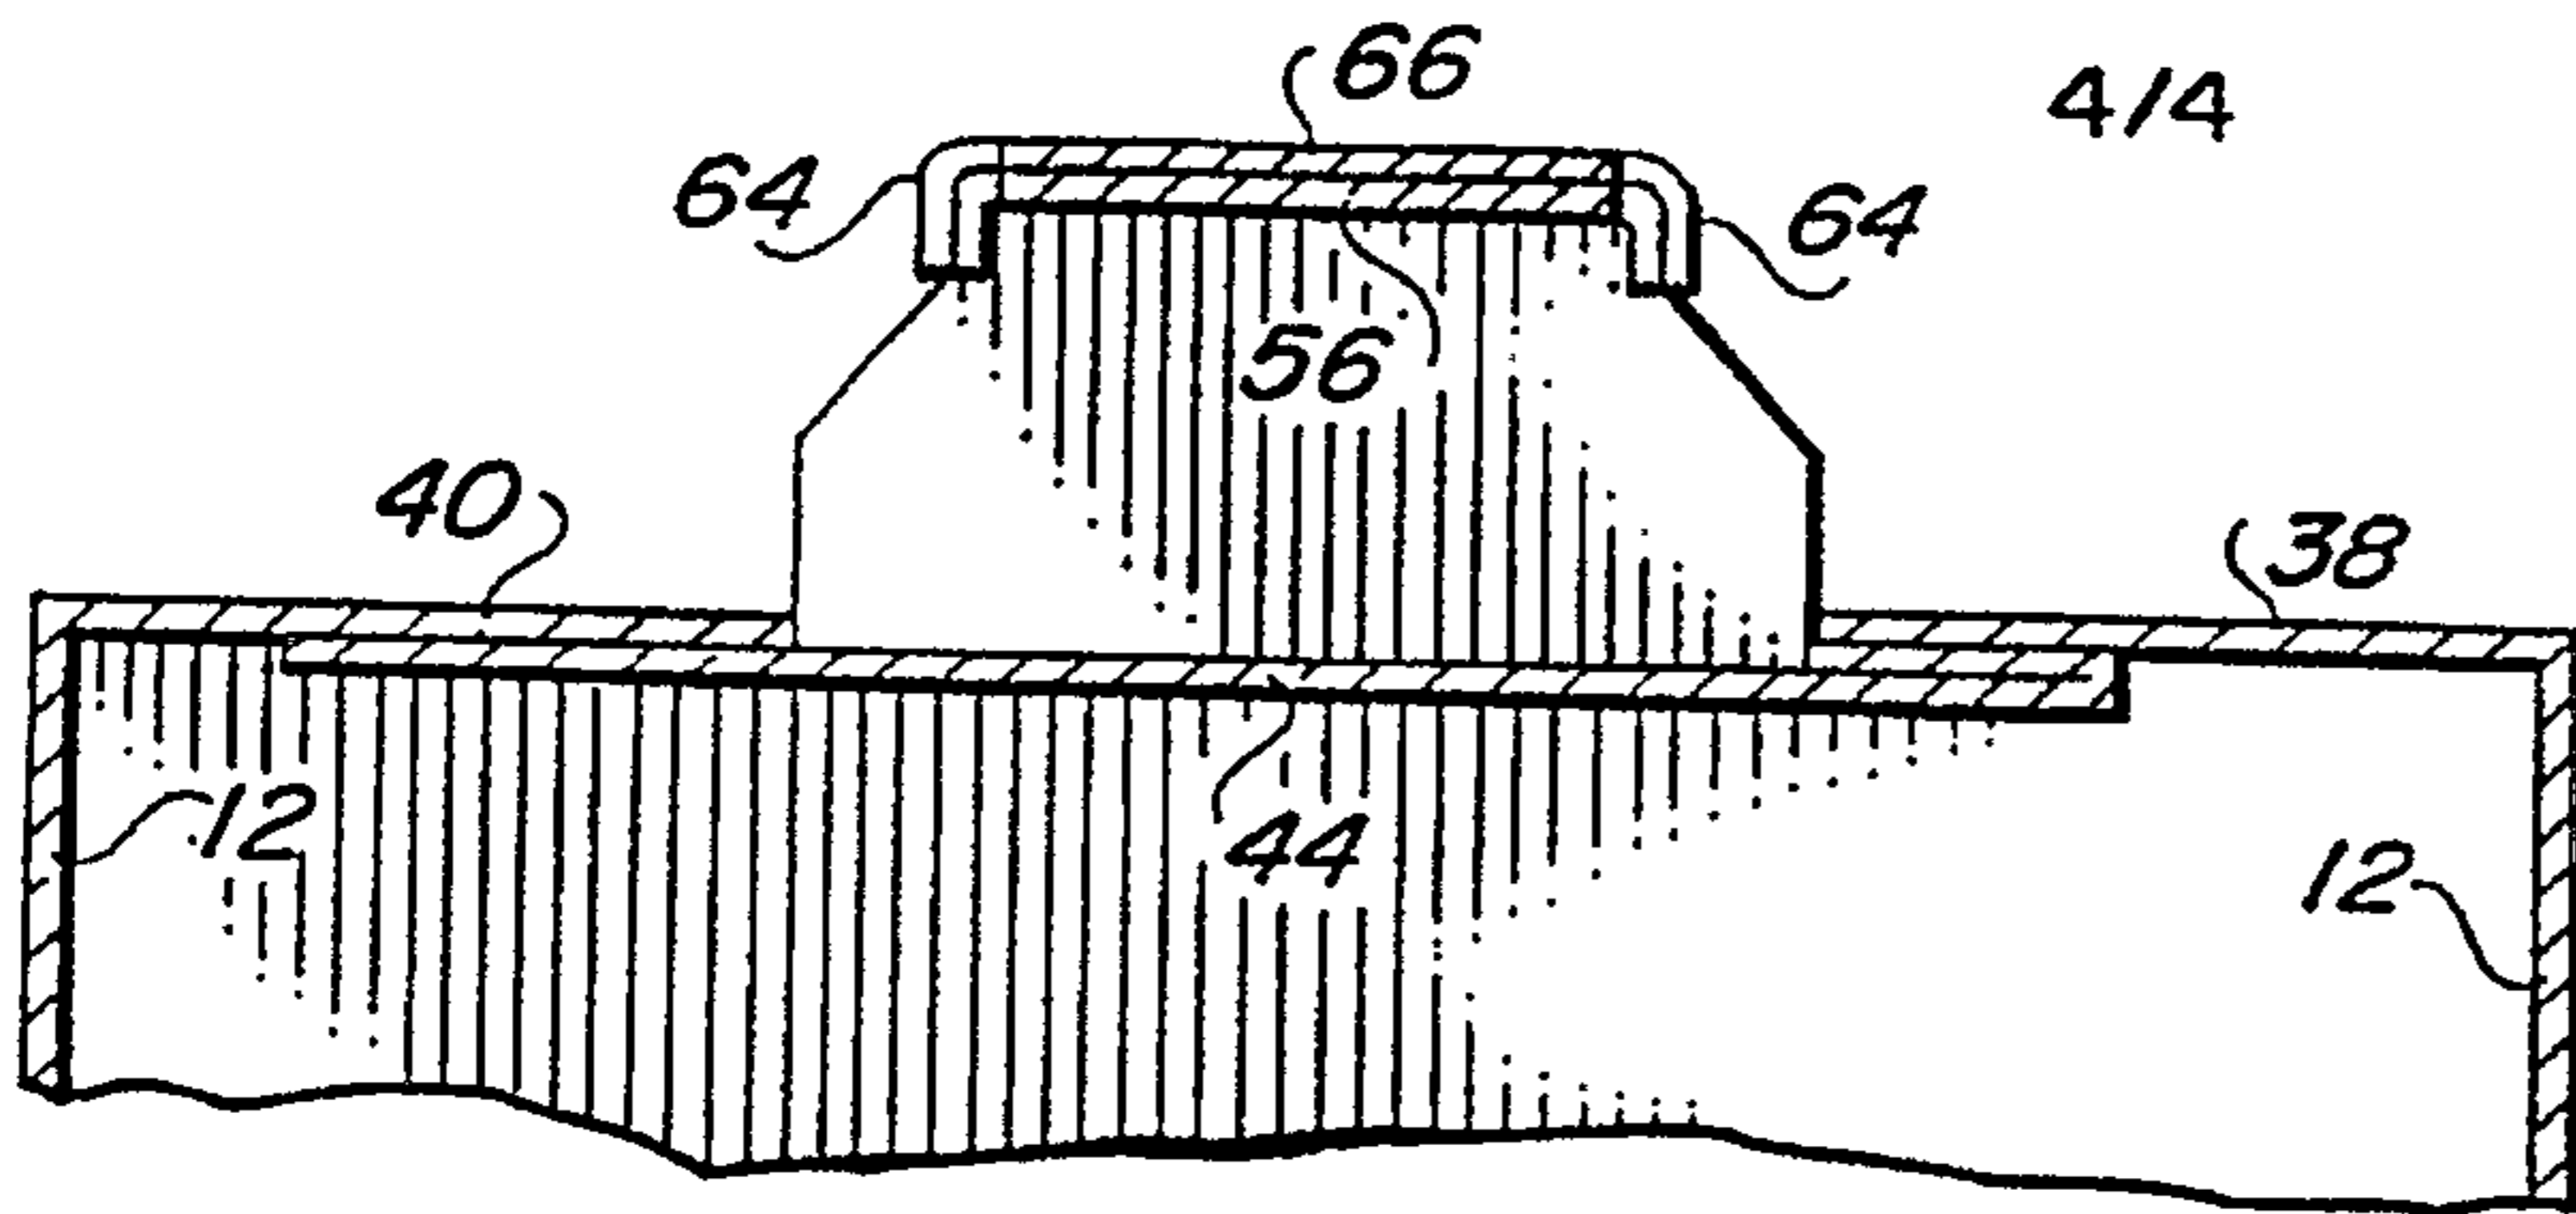


FIG. 8

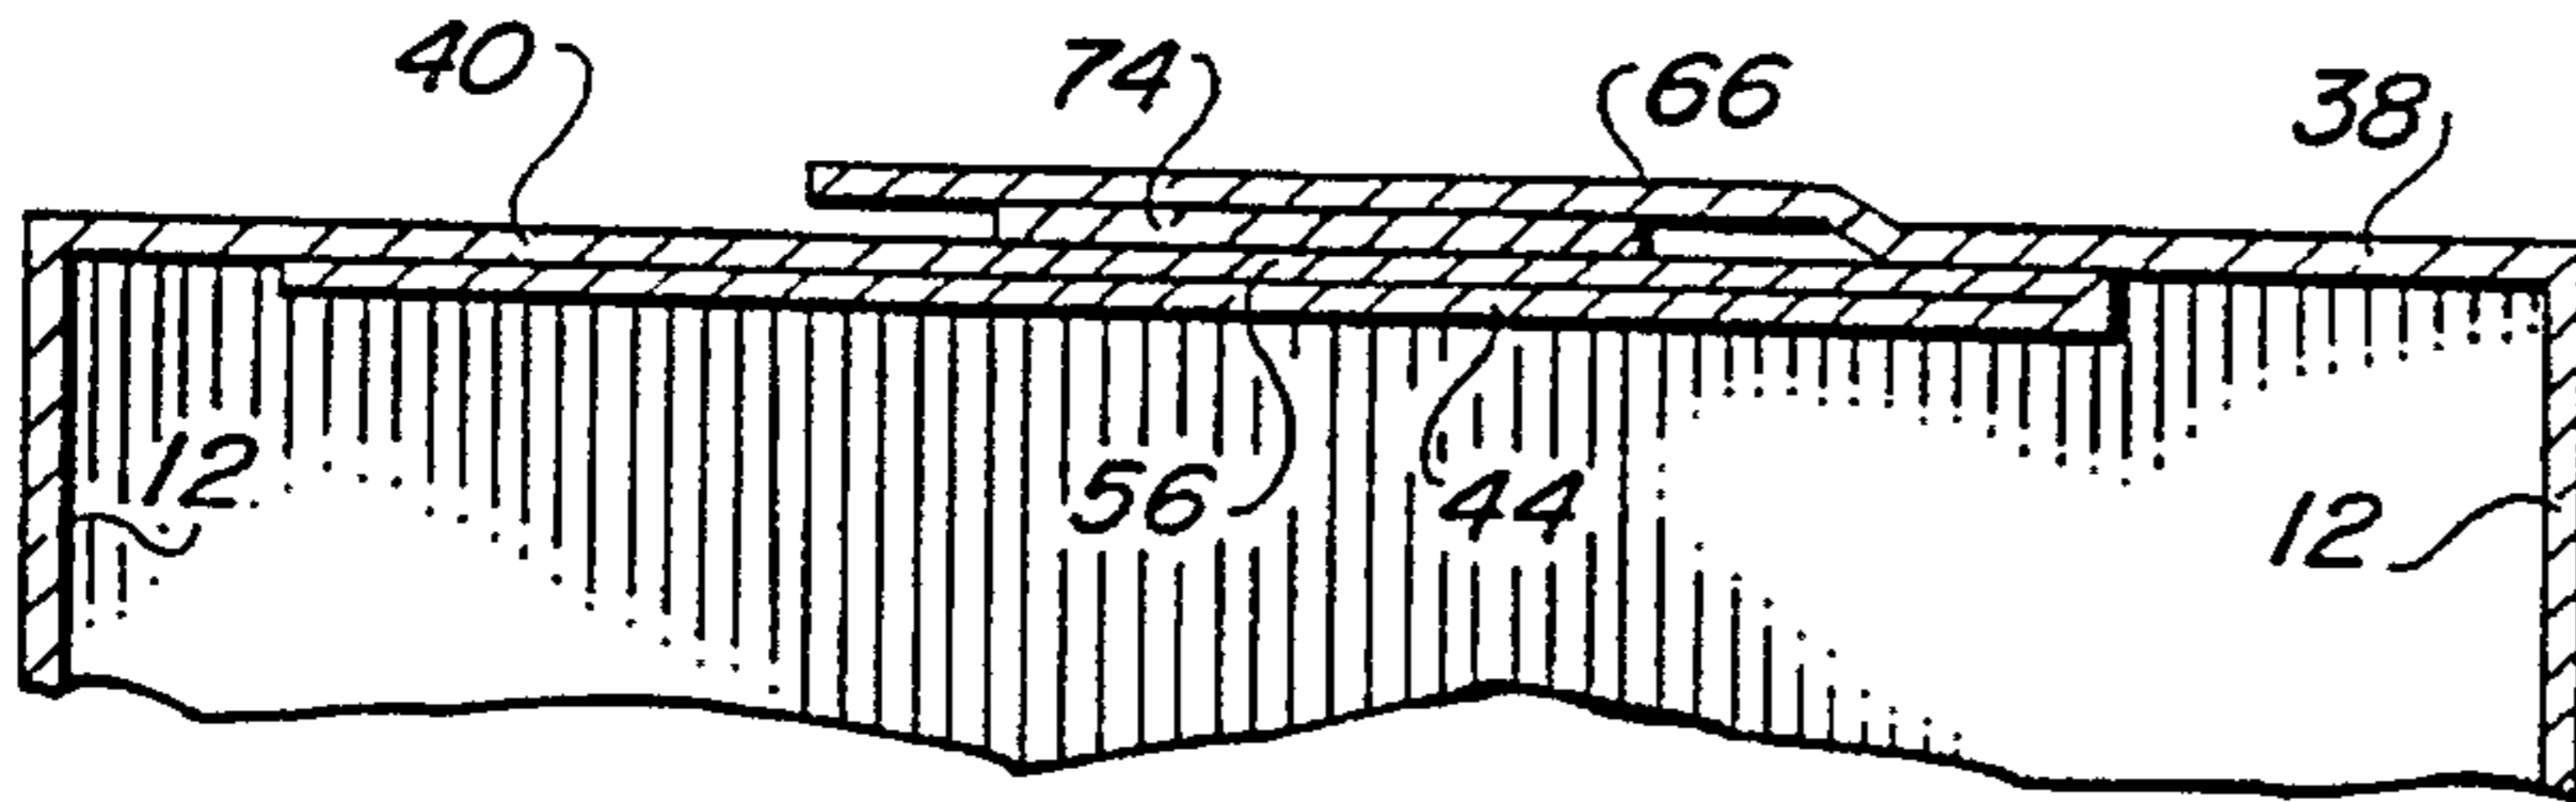


FIG. 11

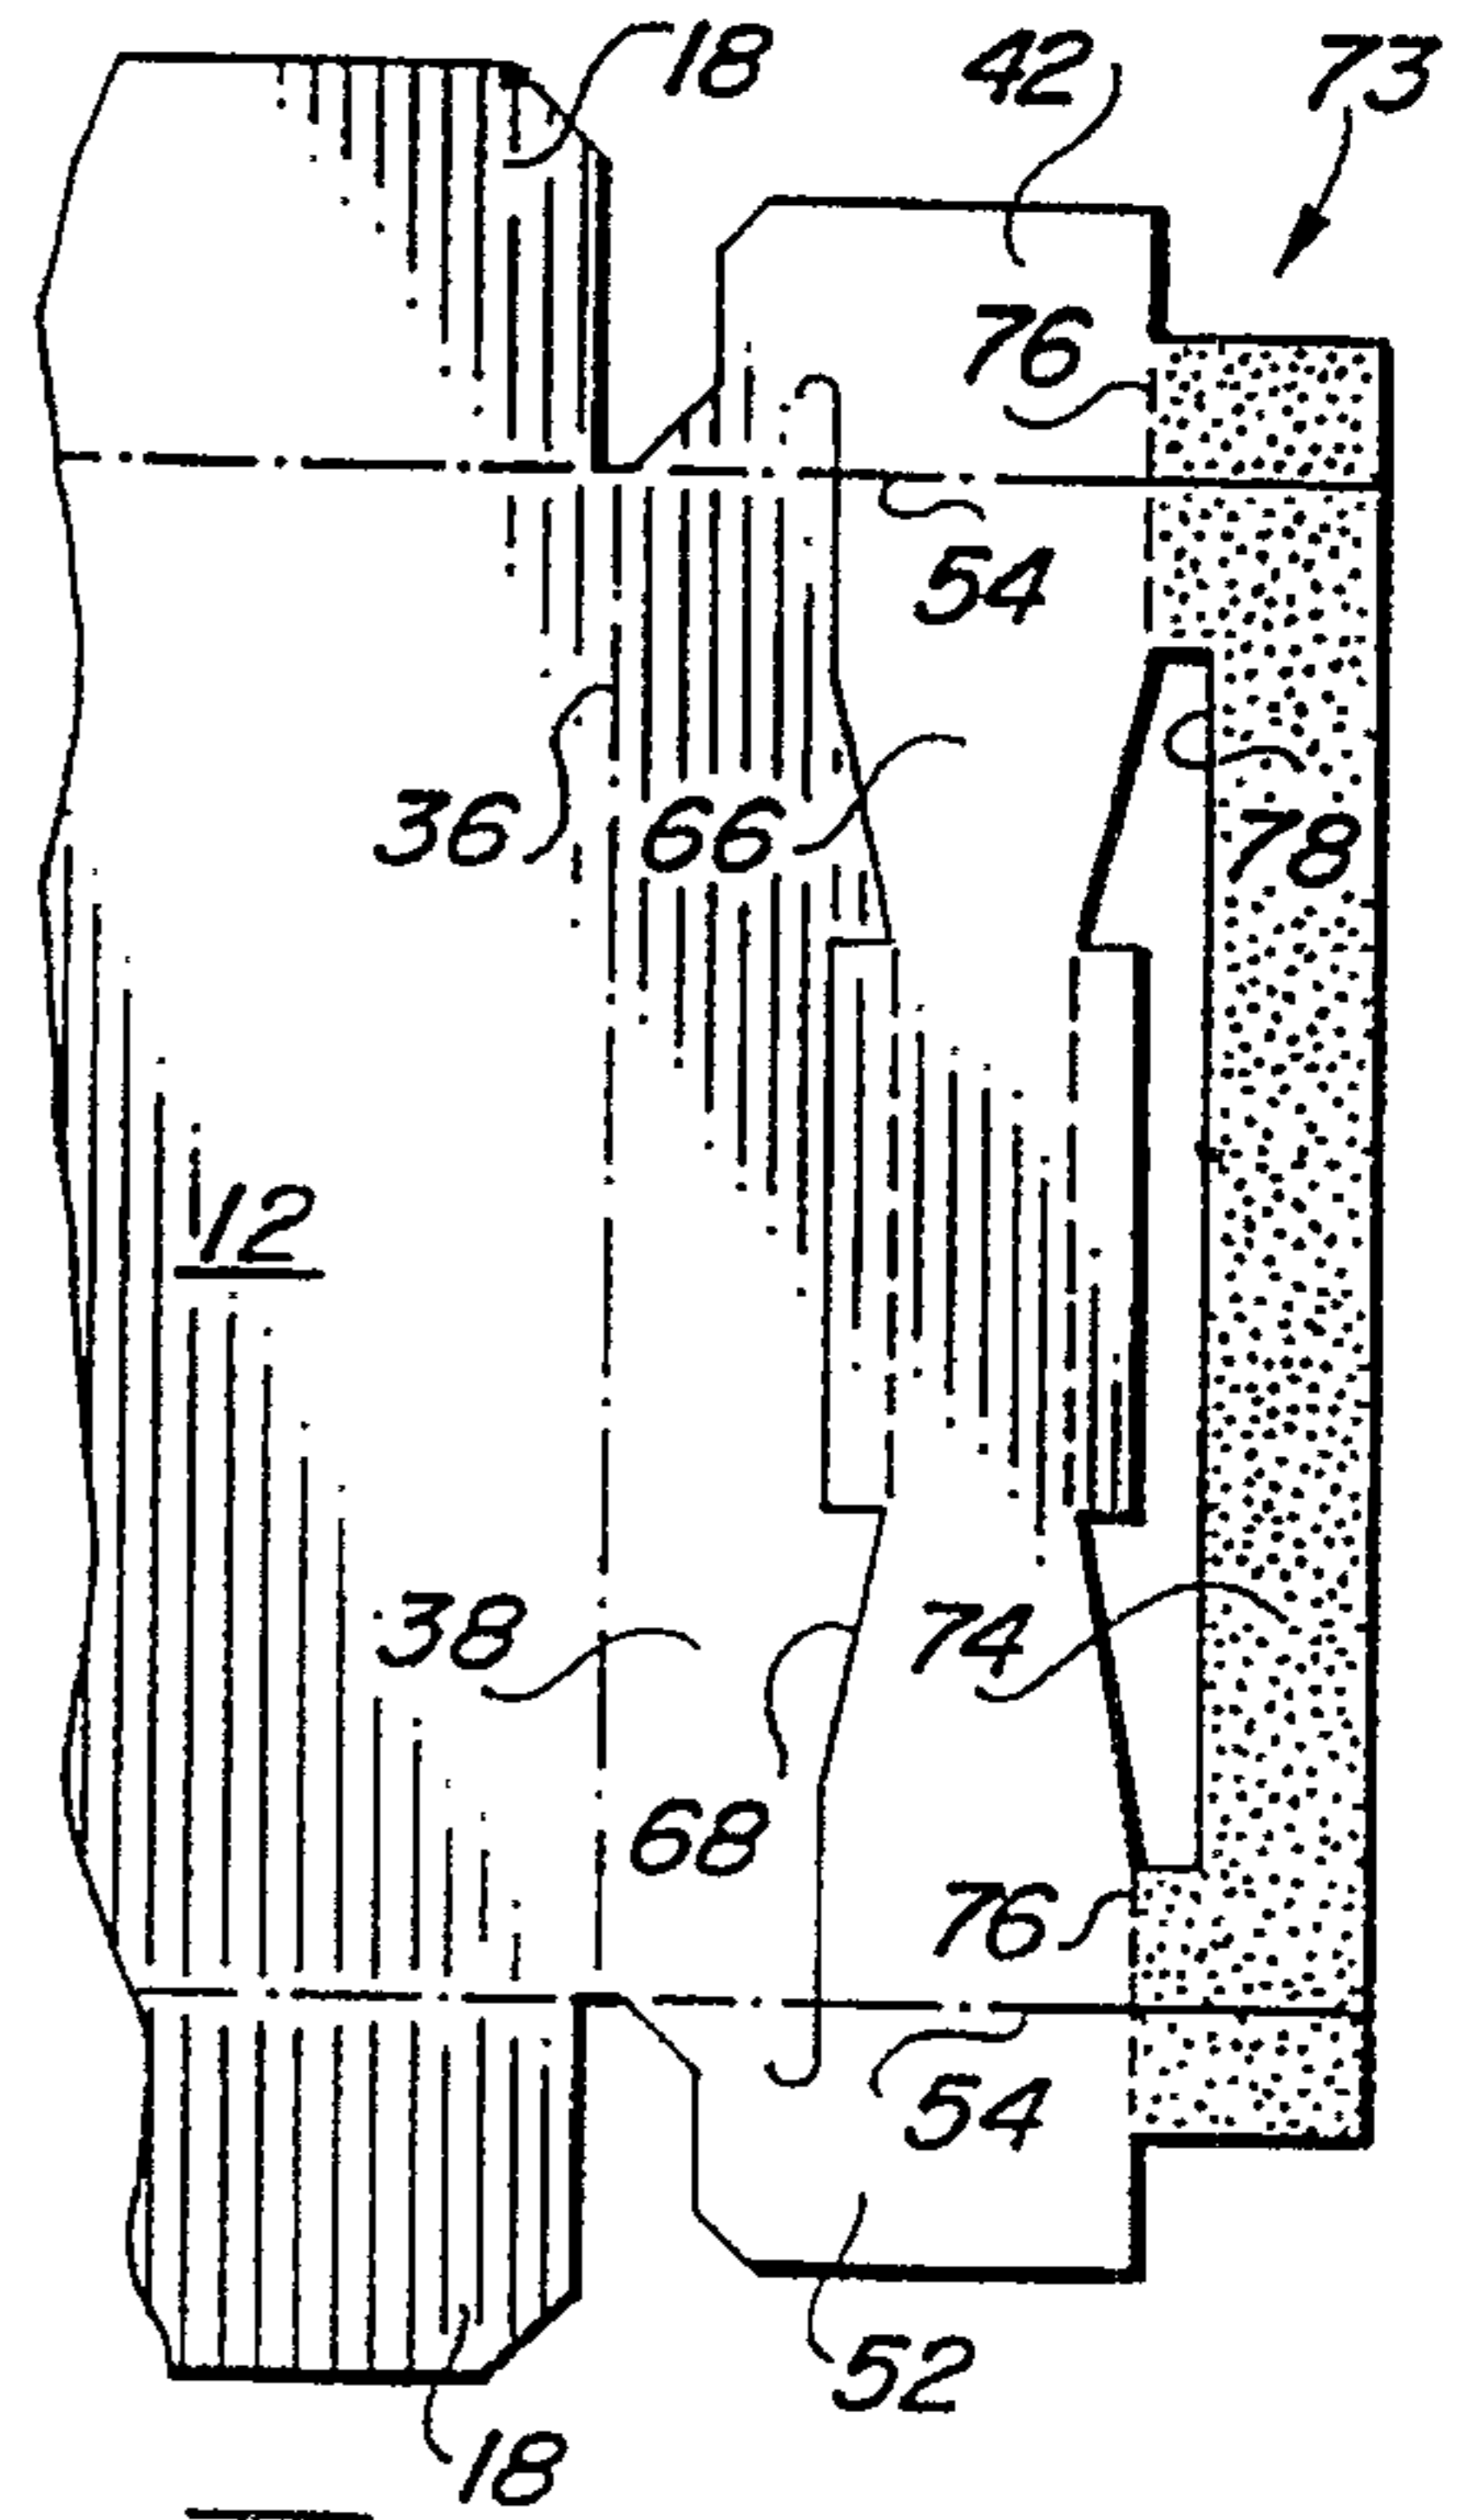


FIG. 10

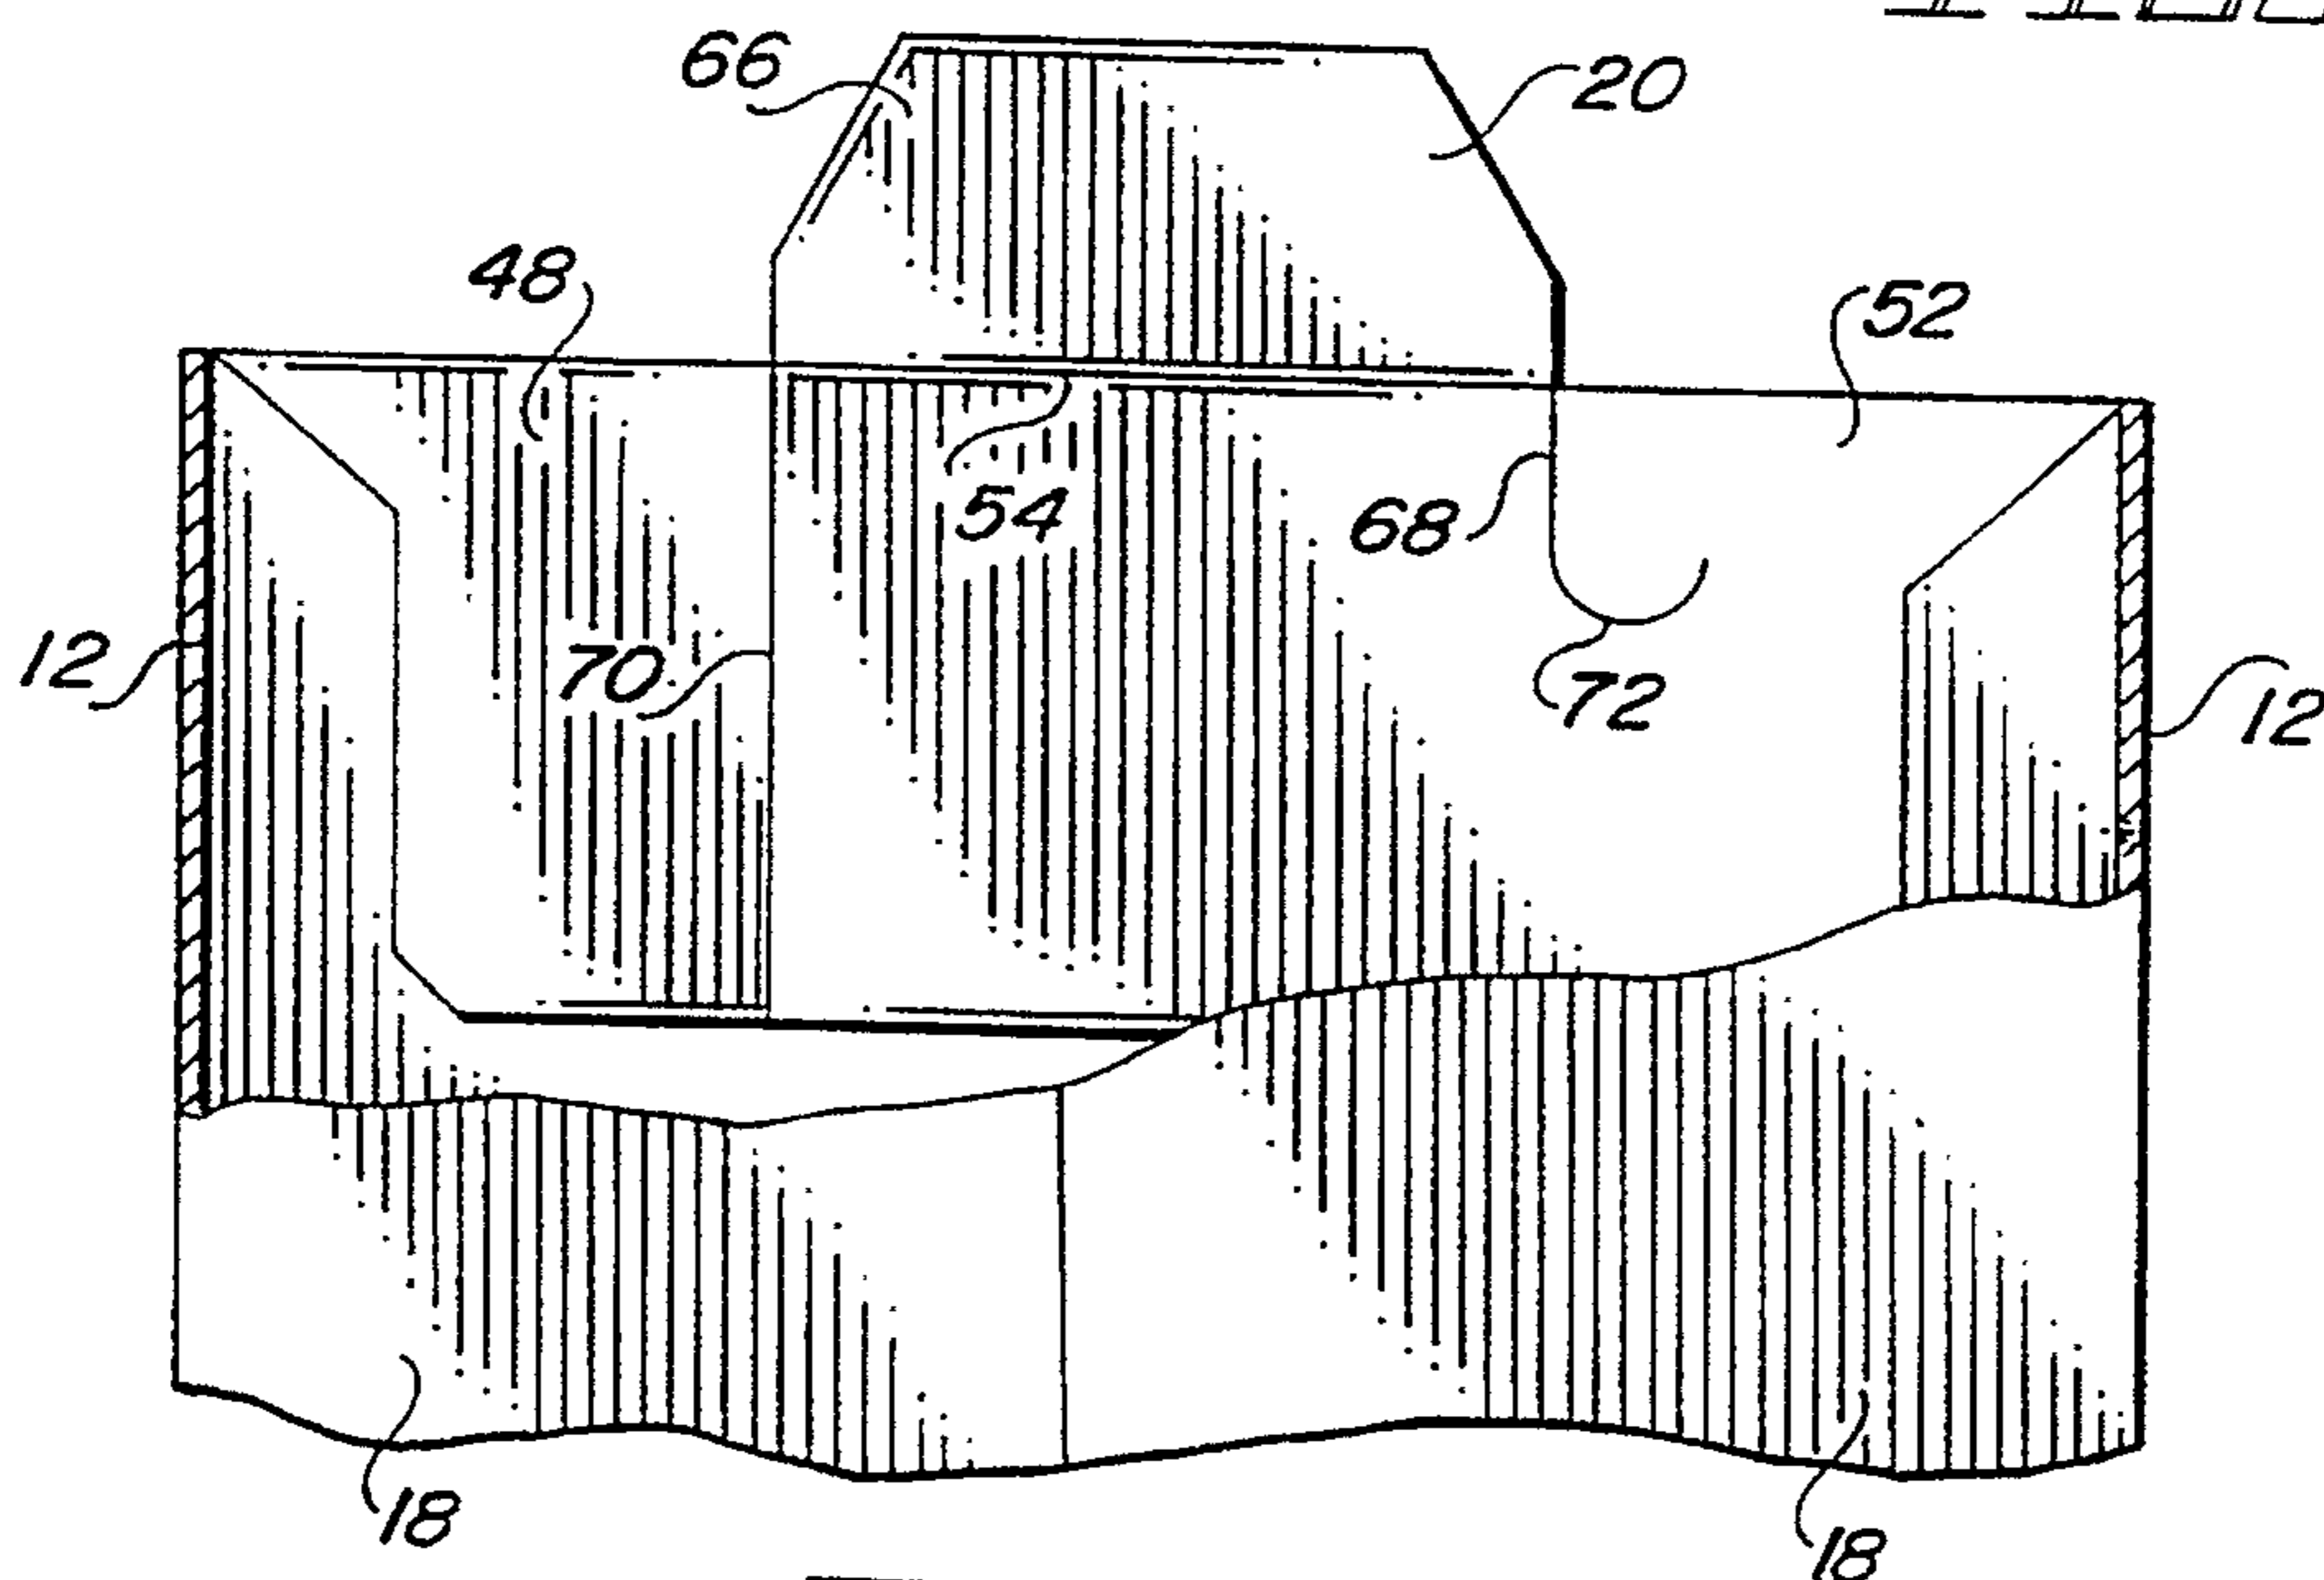


FIG. 9

